NIKKEN

NC TOTAL TOOLING SYSTEM

E

NIKKEN KOSAKUSHO WORKS, LTD.
CAT.NO.303N

NIKKEN

NIKKEN KOSAKUSHO WORKS, LTD. OSAKA, JAPAN.

5-1, 1-chome, Minamishinden, Daito-shi, Osaka-fu, Japan. Telephone：072-869-5820 Telefax：072-869-6220

U.S.A
CA, CT, IL, NC, TX, WA
LYNDEX-NIKKEN Inc
1468 Armour Boulevard,
Mundelein, ILLINOIS 60060
Tel.+1-847-367-4800 Fax.+1-847-367-4815

MEXICO
(From 2014.09)
HERRAMIENTAS LYNDEX-NIKKEN S.A.de C.V.
Av. Hercules #401-13, Fracc. Poligono 3
Santa Rosa Jauregui, Queretaro 76220
Tel.+52-55-8421-8421

FRANCE
PROCOMO-NIKKEN S.A.S
6, avenue du 1er Mai-Z.A.E.Les Glaises 91127
Palaiseau Cedex
Tel.+33-(0)-1-69.19.17.35 Fax.+33-(0)-1-69.30.64.68

UK
NIKKEN KOSAKUSHO EUROPE LTD.
Advanced Manufacturing Park, Brindley Way,
Rotherham S60 5FS
Tel.+44-(0)-1709-366306 Fax.+44-(0)-1709-376683

GERMANY
NIKKEN DEUTSCHLAND GMBH
CARL-ZEISS-STRASSE 11 NEU-ULM 89231
Tel.+49-731-963397-0 Fax.+49-731-963397-60

ITALY
VEGA INTERNATIONAL TOOLS S.P.A
Via Asti N・9 10026-Santena(TORINO)
Tel.+39-011-9497911 Fax.+39-011-9456380

SCANDINAVIA
SWEDEN
NIKKEN SCANDINAVIA AB
Malmövägen 14 331 42 Värnamo Sweden
Tel.+46-(0)-303-440-600 Fax.+46-(0)-303-58177

SPAIN & PORTUGAL
CUTTING TOOL S.L
Portuetxe 16, Barrio Igarra
E-20018 Donostia-san Sebastian
Tel.+34-(0)-902-820090 Fax.+34-(0)-902-820099
UTILLAJES OLASA,S.L.
Tel.+34-(0)-943-107177

TURKEY
NIKKEN KESICI TAKIMLAR SAN. VE ULUSLARARASI TIC. A. S
E5 Uzeri Kucukyali Yanyol Irmak Sok.
Kucukyali Sanayi Sitesi A Blok No:5 Maltepe 34852 Istanbul
Tel.+90-(0)-216-518-1010 Fax.+90-(0)-216-366-1414

KOREA
KOREA NIKKEN LTD.
90B-11L, Namdong Industrial Complex, 170,
Namdong-Daero, Namdong-Gu, Incheon, Korea 405-819
Tel.+82-(0)-32-763-4461 Fax.+82-(0)-32-763-4464

P.R.CHINA
SHANGHAI ZHONG YAN TRADING CO., LTD.
Room 321, Building 5, No. 456 Hongcao Road,
Xuhui District, Shanghai China
Tel.+86-(0)-216210-2506 Fax.+86-(0)-216210-2083

SINGAPORE
NIKKEN KOSAKUSHO ASIA PTE, LTD.
186,Woodlands Industrial Park E5 #04-01
M Singapore 757515
Tel.+65-6362-7980 Fax.+65-6362-7980

THAILAND
SIAM NIKKEN Co., LTD.
127 Moo5 Gauwungsai-Bangturie Road Tambon Tanokkard
Ampher Muangnakhonpathom Nakhonpathom 73000 Thailand
Tel.+66(02)178-0503 Fax.+66(02)178-0504

INDONESIA
PT.NIKKEN KOSAKUSHO INDONESIA
JALAN BIZPARK 3 JABABEKA INNOVATION CENTER A NO.16,
KEL.MEKARMUKTI, KEC. CIKARANG UTARA, KAB.
BEKASI PROP. JAWA BARAT
TEL:+62-(0)21-5702071 MAIL:zefry.i@nikken-kosakusho.co.jp

http://www.nikken-kosakusho.co.jp/en
e-mail : export@nikken-kosakusho.co.jp

■Please give your order to the following agent.

D.TK.1

●Specifications are subject to change without notice.

NIKKEN's Proposal for Improved Quality and Productivity.

Total management of M/C manufacturing methods & technologies.

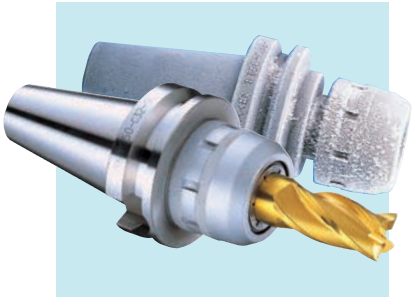

HUMANWARE

The effective utilization of M/C depends upon the insight and skill of shop floor people. Harmonization in the selection of machine, tooling, fixtures, peripherals, cutting tools under a coordinated shop floor management is the key to success.

COMBAT Z DRILL
☞ P.303

REAMER SERIES
☞ P.301

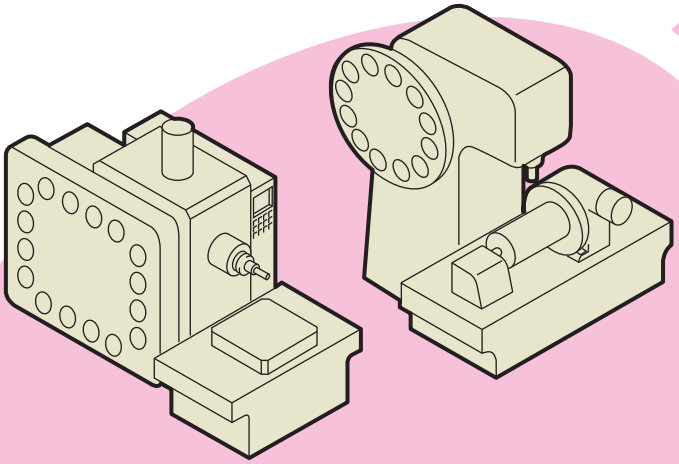

M/C OFFERS INVALUABLE OPPORTUNITIES FOR AUTOMATED, UNATTENDED MACHINING, when proper tooling, work holding and fixtures technologies are applied all in HARMONY.

CUTTING TOOLS

Relatively simple tools like drills and face mills also need careful attention for stable and effective swarf making. For instance, high speed steel tools can be more effective than carbide tools with certain work pieces and materials.

For another instance, why not a reamer for inspection/proof after boring?

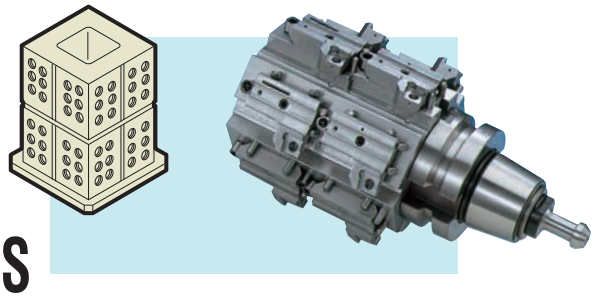

FIXTURES

Work holding fixtures and power clamping systems for a variety of large or small batch work pieces.

Well designed fixtures can achieve cost effective parts manufacture. Fixtures (as shown above) effectively reduce ATC operations and drastically reduce cycle time.

TOOLING

MORE THAN 80% TAPER CONTACT is needed for this vital linkage between machine and workpiece. ;

① NIKKEN holders protect the spindle. (They eliminate "dance" in the spindle.)



② NIKKEN milling chucks are SUB-ZERO TEMPERATURE (-90℃) TREATED for stable particle composition : Heat treated to HRC60.

The Next Generation Tool Interface NC5 TOOLING SYSTEM

☞ P.207

This newly developed Tool Interface featured. A Double Contact 1/10 Short Taper for improved High Speed & High Precision Machining and High Stock Removal Machining. Please refer to NC5 TOOLING SYSTEM catalogue.

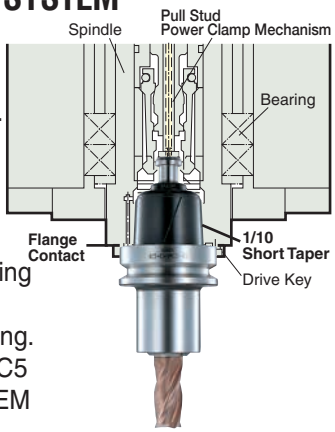

PERIPHERALS

MULTI JIG HOLDER SYSTEM

Enables quick jig exchange and work exchange Out-of-the-box setup significantly increases machine operation rate.

CNC ROTARY TABLES

Precision worm screw made of solid tungsten carbide drives hardened and ionnitrided worm wheel made of steel.
THE ONE AND ONLY SOLUTION FOR ELIMINATING SPOT WEAR.

KOKORO = Human Heart

Our company's name, "NIKKEN," is derived from our desire to "always maintain the willingness to study patiently on a daily basis and contribute to future industry with technology and ideas."
Pursuing the development and production of tools for **50** years, we have developed peripheral instruments such as NC tooling systems, reamers, CNC rotary tables and controllers (NIKKEN-AR21 series), etc. conforming to customers' demands.
Today's effort and study bear tomorrow's fruits.
NIKKEN wishes to provide you with original products of the highest quality founded in **everyday study and research.**


The photo shows a completed rendering.

OSAKA·DAITO NEW OFFICE & FACTORY
LAND:55,000m²
BUILDING:28,500m²

OSAKA·DAITO Office & Factory

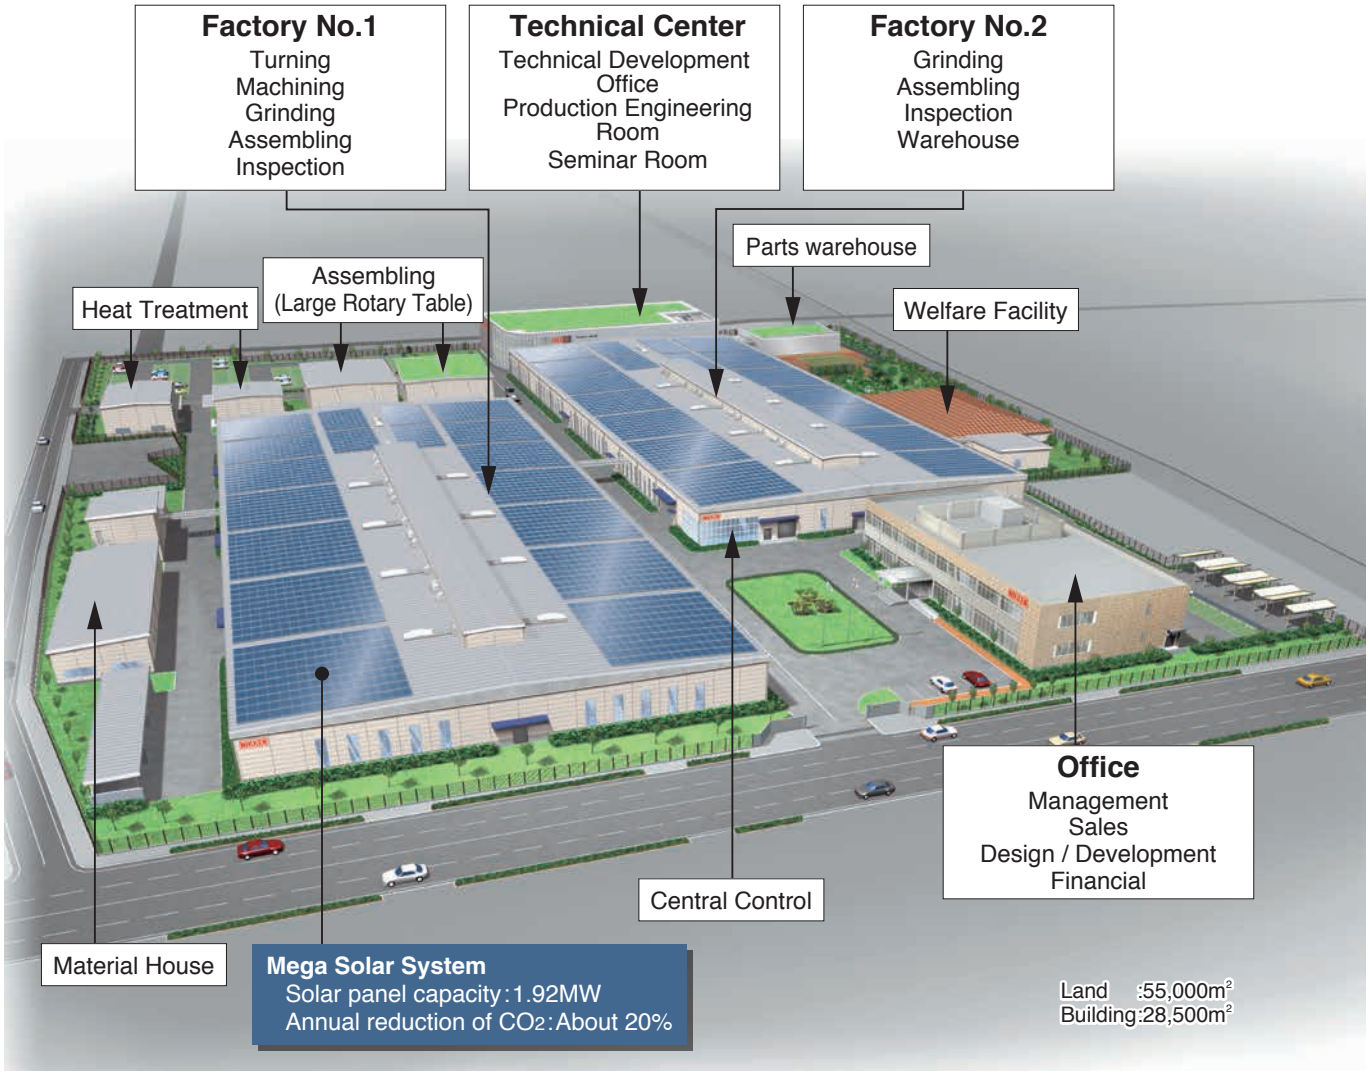

Carbonizing & Sub-Zero Treatment

NIKKEN is the only tooling product manufacturer which performs sub-zero treatment for tooling. This refers to a technique where -90 deg. ultra-low-temperature processing is performed after carbonizing and quenching in order to eliminate the residual austenite and to form 100% martensite compositions to prevent deterioration over time. This technique has been applied for block gauges and for bearings of the highest grade in the past. It is an example of how **NIKKEN** pays attention to those aspects which are often hidden from view and how we put our hearts and souls into each and every tooling product.

Ion Nitriding

Ion nitriding refers to a nitriding process where glow discharges are generated in a vacuum of a nitrogen-mixed gas atmosphere to heat the workpieces at a low temperature of 450 deg. while at the same time nitriding them by a sputtering action. This processing improves both the wear resistance and sliding performance.(It reduces the surface friction coefficient.)The experience and know-how of ion nitriding have been utilized in a large number of **NIKKEN**'s products, including worm wheels for CNC Rotary Tables and Tough-Cut Skill Reamers.

NC Lathe Line

NIKKEN Oil Jetter System and **Combat Z Drill** ☞ **P.303** resolved the problems from the cooling of the cutting edge and the swarf removal, then, night time un-manned operation could be done.

M/C Line

The M/Cs with **3Lock** spindle and **NC5** spindle are working with high accuracy and high productivity through the night.

Tool Grinding Line

More than 80% Taper Contact is needed for this vital linkage between M/C and workpiece.

NIKKEN holders protect the spindle.
(They eliminate"dance"in the spindle.)



Reamer Grinding Line

Reamer grinding line to seek the ultimate unmanned operation with high accuracy and high productivity.

RADICAL MILL REAMER

CNC Rotary Table Assembling Line

NIKKEN builds the most rigid, precise and durable CNC Rotary Table for the worldwide manufacturing market.

INDEX

NIKKEN is keeping the manufacturing not only the quality, but also the safety in mind.
Please be careful for the content maked ⚠. e.g. ☞ P.328 CAUTION

FEATURES

DIMENSIONS

DIMENSIONS

NIKKEN NC TOOLING SYSTEM

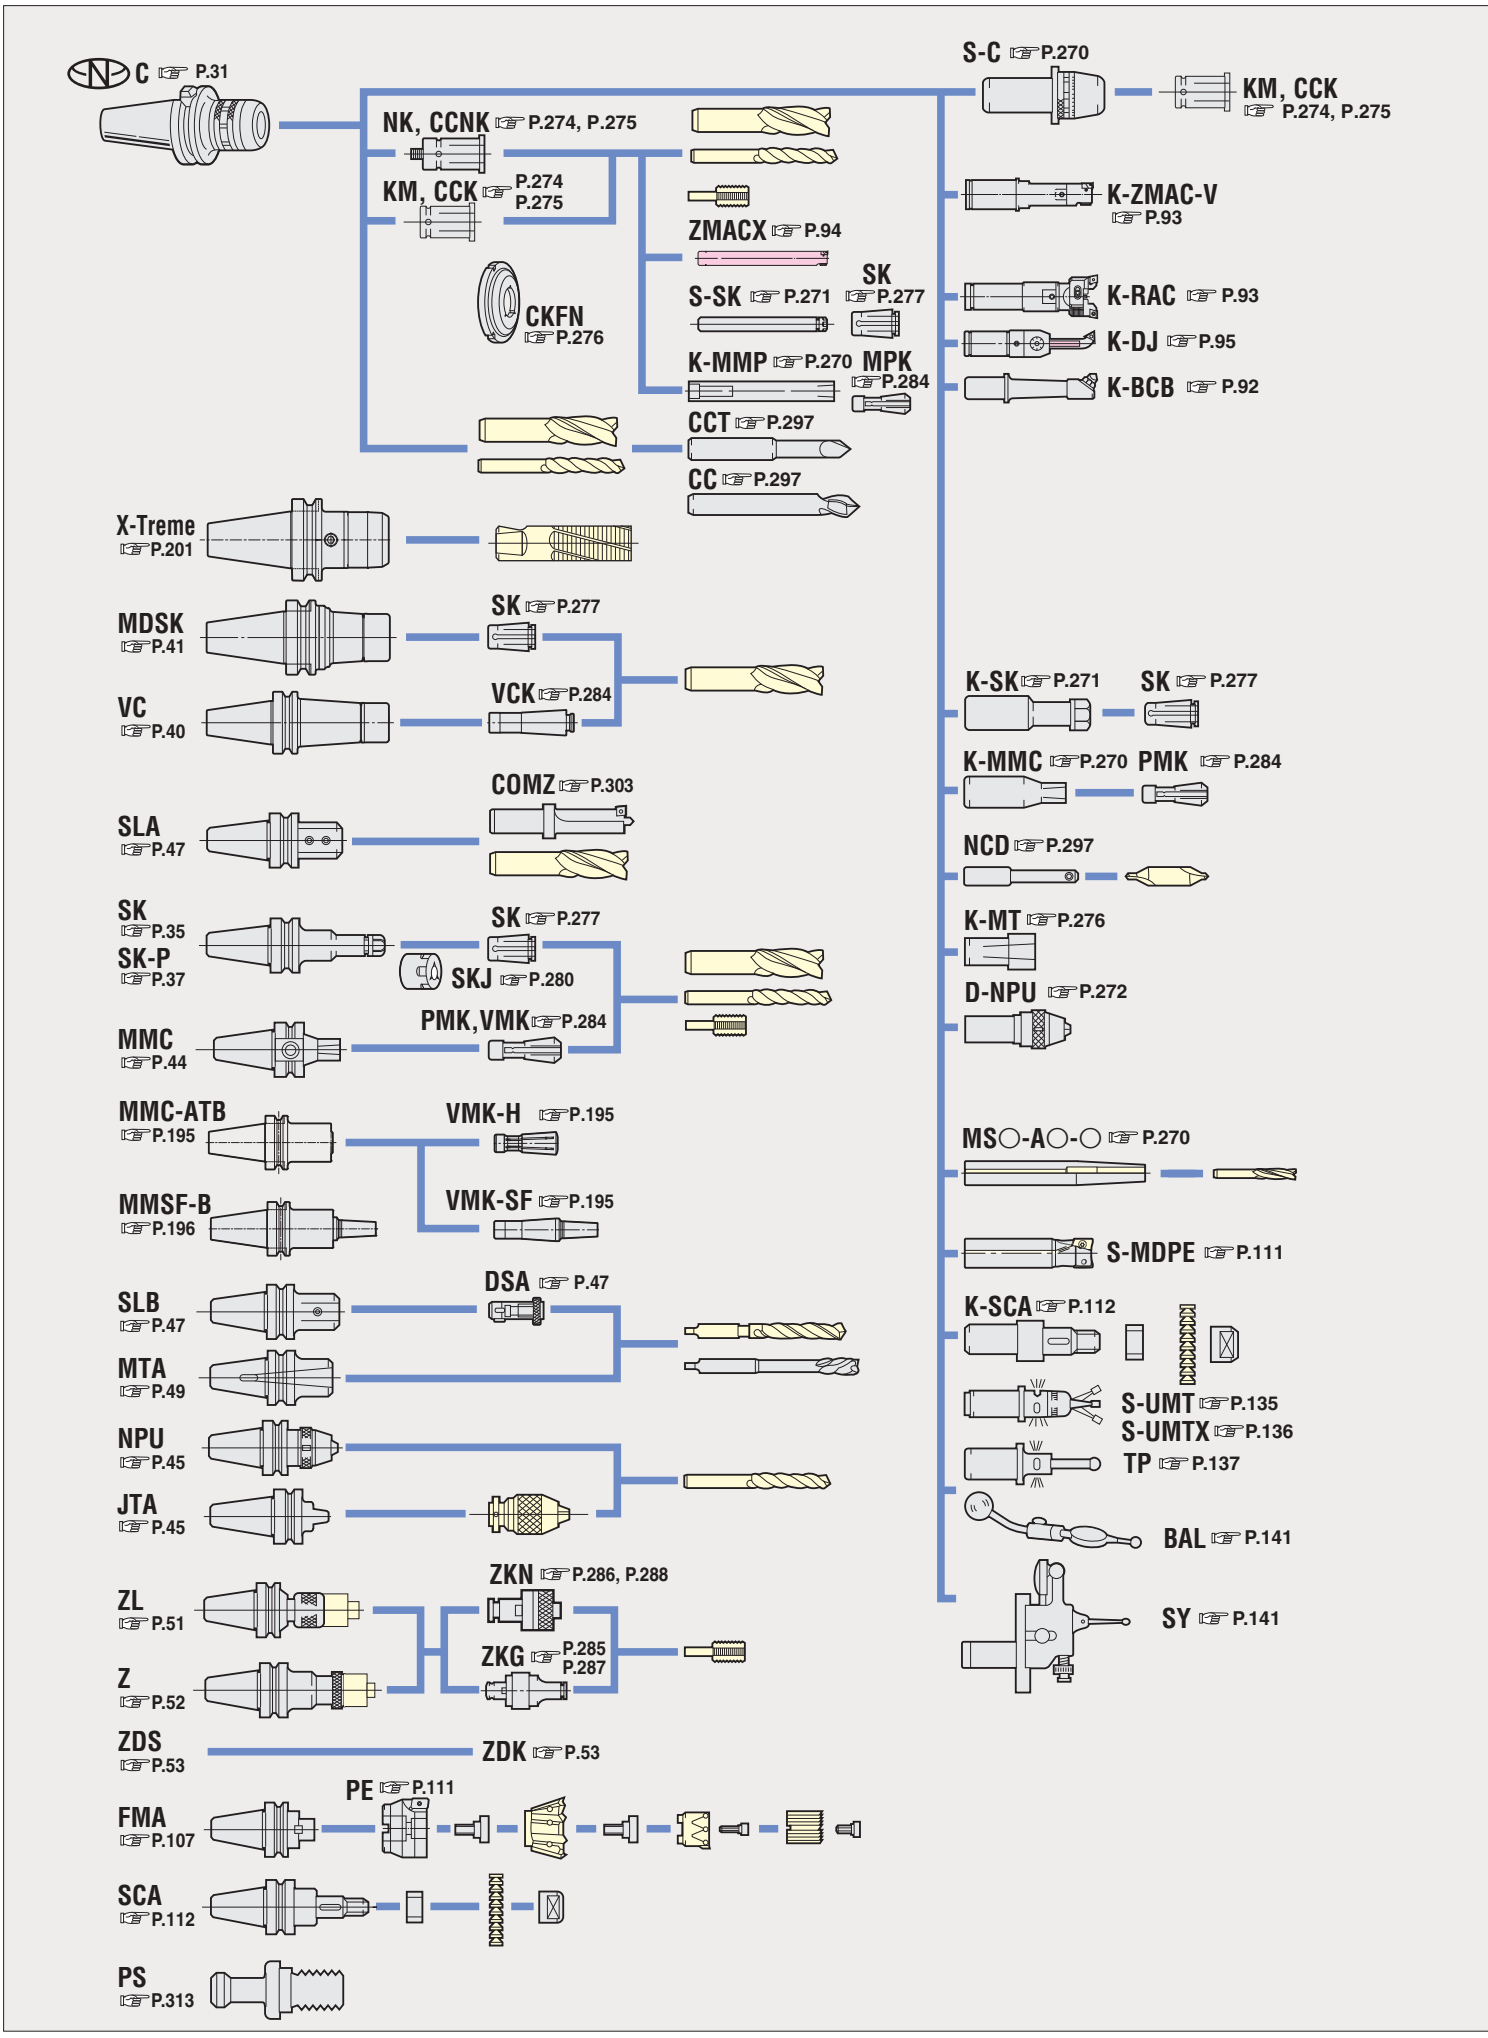

NEXT GENERATION TOOL INTERFACE





3LOCK SYSTEM ☞ P.147

2LOCK SYSTEM ☞ P.167

NC5 TOOLING SYSTEM ☞ P.207

ISO•DIN/CAT

IT TOOLING SYSTEM ☞ P.129
CAT TOOLING SYSTEM ☞ P.268

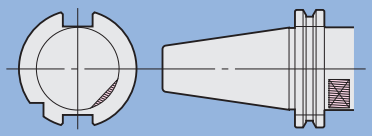

HSK TOOLING SYSTEM ☞ P.221

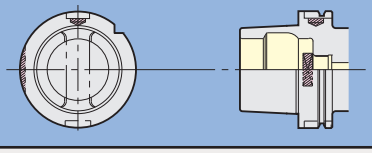

DJ ☞ P.87



J ☞ P.88



ZMAC-V ☞ P.71



RAC ☞ P.59



BAC-V ☞ P.79
BACα-V ☞ P.85



NX, PX, ☞ P.117



MO ☞ P.113



OZL ☞ P.114



AH ☞ P.118



UMTX ☞ P.136
UMT ☞ P.135



TP ☞ P.137



UDS ☞ P.138



HP ☞ P.139

Q HOLDER ☞ P.89



SP ☞ P.90



RAC ☞ P.67
ZMAC-V ☞ P.75
BCB ☞ P.92
DJ ☞ P.87

RAC ☞ P.69
RACα-V ☞ P.83



Insert Tip ☞ P.103 ~P.104



AF ☞ P.127



ZP ☞ P.161



REAMER ☞ P.300

E ☞ P.143



COMBAT Z DRILL ☞ P.303



CLP-P ☞ P.297



Spanner ☞ P.293
GH Haandle ☞ P.293

CENTRE THROUGH COOLANT HOLDER ☞ P.34



FLANGE THROUGH COOLANT HOLDER ☞ P.34



CLE ☞ P.161



CZF, SZF ☞ P.125, P.126





CNC ☞ P.309



NIKKEN "ANNIVERSARY" type

MULTI LOCK MILLING CHUCK

It has been 60 years since NIKKEN developed the MULTI-LOCK MILLING CHUCK, NIKKEN's technology has developed the new generation universal chuck.
We call this MULTI -LOCK MILLING CHUCK "ANNIVERSARY"type. 松本政一

Sub-zero Treatment
NIKKEN Toolings are all subjected to ultra-low temperature treatment of -90˚C after carburizing, as shown. This treatment removes residual austenite to prevent from deformation for many years. Thus all of our NIKKEN toolings are produced one by one with greatest possible care of NIKKEN spirits.

1 Chucking Torque and Durability

All the NIKKEN MULTI-LOCK Milling Chucks incorporate the multi-roller system including **140% more needle rollers** than the other imitations. Besides, the retainer is not made of phosphor bronze but of special steel which will never break.

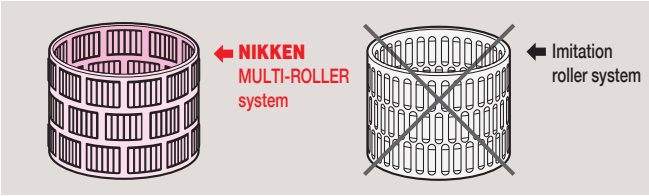

As seen from the cross sectional view, the needle rollers are arranged in perfect order with a dense production, but they are arranged to be scattered in the imitations.

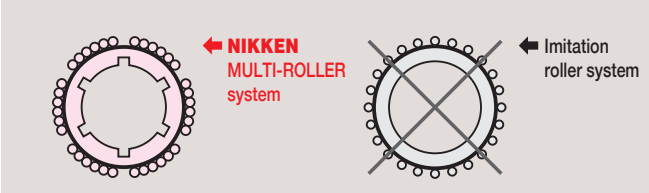

The larger quantity of needle rollers enables the moving of the same load with a small force and less damage on the bearing surface, thus providing a stronger chucking torque without creating even rolling when tightening.

2 Rigidity and Chucking Torque

Internal slots together with thickened wall of chuck body ensure no distortion even at heavier milling. Thus, smooth milling work is attained without the vibration or slipping of end mill.

Effects of Internal Slots

Thanks to internal slots, even if oil remains on the end mill shank, there is no decreasing of chucking torque. In case of imitations without slots, chucking torque is largely reduced by oil, causing the shank to slip down.

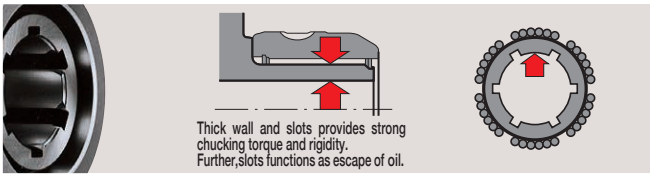

Chucking Torque Test Data(C42)

		When oil is removed completely with thinner	When a little oil is adhered.	%
NIKKEN	With Slots	5,000Nm	4,800Nm	Only 5% Down
Others ➡	Without Slots	3,500Nm	1,250Nm	67%Down

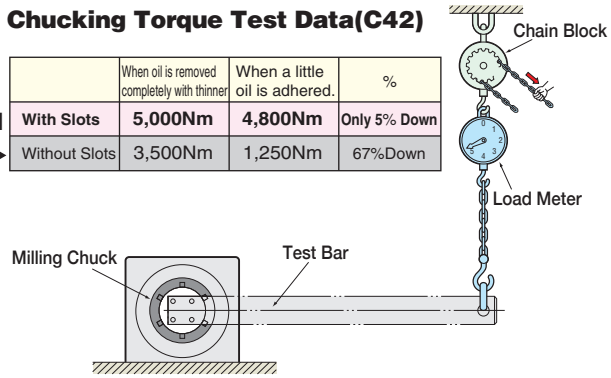

MULTI LOCK MILLING CHUCK

P.31

Same Appearance, but a Remarkable Improvement can be found when cutting.

The cutting chips show us the actual machining capability

Quiet, high speed heavy milling

Stable finishing

3 New Clamping at Root & Anti-Vibration Mechanism

Cutting Data **HSS** Endmill·**Carbide** Endmill

CHUCK	ENDMILL	CUTTING CONDITION	AdxRd
BT50-C32-90	HSS Coating 32Φ4t	V 38m/min S 380r/min F 152mm/min	S55C 60mm OIL 12mm
BT50-C42-95	HSS Roughing 42Φ 45Φ6t	V 30m/min S 210r/min F 130mm/min	S55C 110mm OIL 20mm
BT50-C20-135 KM20-16	Carbide Coating 16Φ4t	V 176m/min S 3,500r/min F 2,000mm/min	S55C 35mm 3mm
BT40-C25-70	HSS Coating 25Φ4t	V 38m/min S 480r/min F 192mm/min	S55C 50mm OIL 8mm
BT40-C16-60	Carbide Coating 16Φ4t	V 200m/min S 4,000r/min F 2,000mm/min	S55C 30mm 3mm
BT30-C12-55 KM12-10	Carbide Coating 10Φ4t	V 160m/min S 5,000r/min F 2,000mm/min	S50C 15mm 3mm
BT30-C12-55	HSS Non Coating 12Φ4t	V 30m/min S 800r/min F 250mm/min	S50C 18mm WATER 4mm
		V 228m/min S 6,000r/min F 3,600mm/min	ALUMINIUM 20mm WATER 3mm

The End Mill can perform at 100% of their capability by using the cutting data. If cutting condition is exceeded, they may cause tool failure. For the M/C with ball guide mechanism, **MAJOR DREAM HOLDER** might perform better than MULTI-LOCK milling chuck.

4 Clamping at Nose Mechanism

Clamping at nose - key Condition for Precise Milling.

Surface Finish and Tool Life are decided by Clamping at Nose, Rigidity and Run-Out Accuracy. Only our mechanism performs real clamping at nose, never rivalled by imitations : ideal for heavy milling to fine finishing. Only the NIKKEN MULTI-LOCK Milling Chuck perfectly clamps even at 3mm from chuck nose.

NIKKEN MULTI-LOCK Milling Chuck



Other imitation chuck

5 Stable Milling with Stopper

Easy for "anyone to attain a stable torque."

Wear of the bearing surface is only 1～2microns even after practical use of 4～5years owing to the use of 140% more needle rollers than imitations, the use of special material (steel) of NIKKEN own. and the know-how of hardening. The stopper is therefore located to the MULTI-LOCK Milling Chuck where the maximum efficiency of chucking torque is exerted. Tightening the chuck close to the flange face gives a sign of"MILLING OK"to ensure smooth, stable and reliable milling work.

(Important : Good production with Assurance!!)

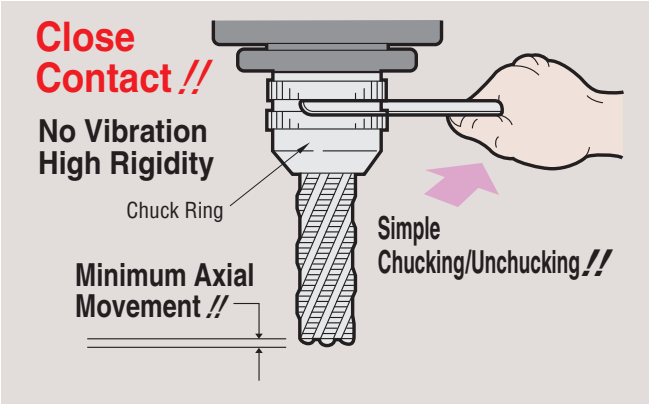

6 Fine Run-Out Accuracy

Only NIKKEN MULTI-LOCK Milling Chuck can obtain the run-out accuracy within 5μm(T. I. R)at the position 100mm apart from the nose.(C32 Style)

Within 5μm

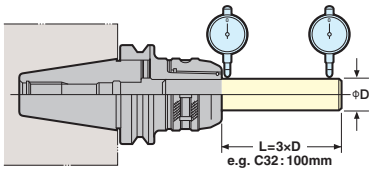

NIKKEN MINI-MINI CHUCK ADVANCED ALPHA

P. 43

JAPAN PAT.

High Speed•High Precision
Best Chuck for Small Diameter Cutting Tool

Standard Type

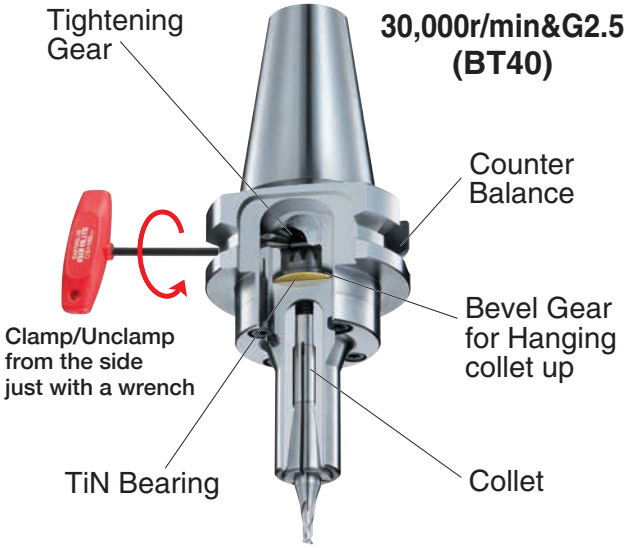

Direct Screw Type

Please add **"-AT "** at the end of Code No. **e.g. HSK63A-MMC8C-107-AT**

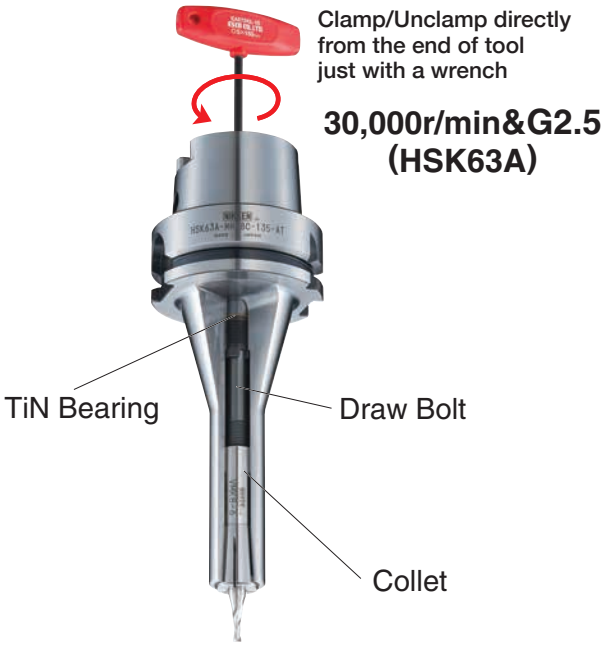

Slim & Compact

ΦD : **MMC 4 : Φ15mm**
MMC 8 : Φ20mm
MMC12 : Φ30mm

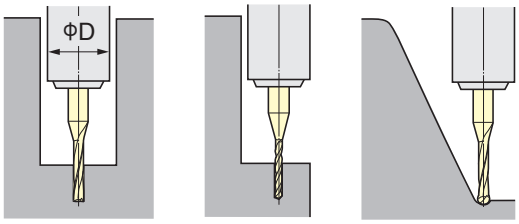

Gripping from Front Nose

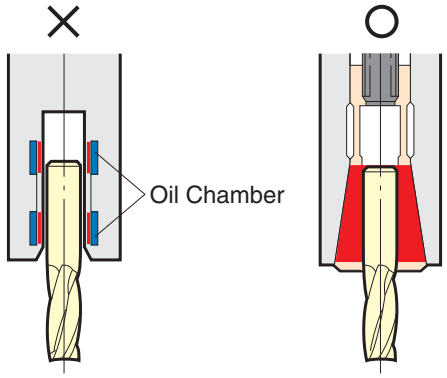

HYDRAULIC CHUCK
No Gripping at Front Nose
Gripping Torque?

MINI-MINI CHUCK
Gripping from Front Nose
Powerful Gripping Torque/3times

High Speed

MAX. 30,000r/min&G2.5

Coolant Through Tool Capability

J type Collet + End Mill
High Pressure Coolant Through Jet Spread Groove

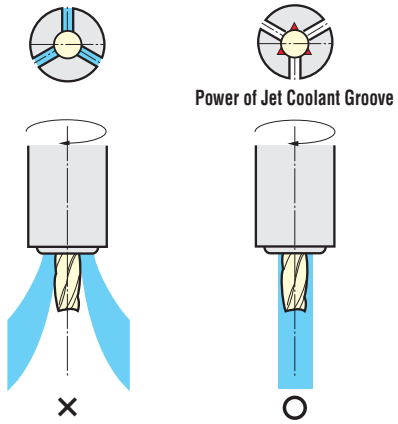

Coolant will be spread out through the Slit at high rpm

Oil Jet Coolant System No Coolant Spreading out even at high rpm

Standard Collet

J type Collet



NIKKEN SLIM CHUCK with TiN BEARING NUT

P. 35

HIGH SPEED ROTATION•HIGH ACCURACY•HIGH PRESSURE COOLANT THROUGH

Power of TiN BEARING NUT

TiN Bearing Nut is used for Nikken Slim Chuck, MAJOR DREAM Holder and VC Holder with great popularity.

High Speed Slim Chuck MAX. 40,000r/min&G2.5

Power of TiN Bearing Nut

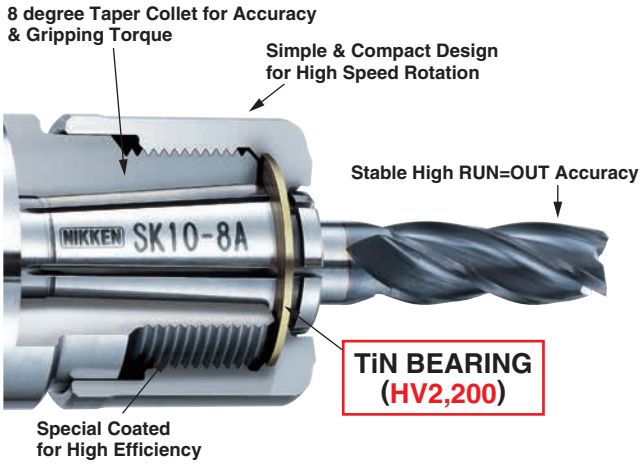

J nut is the best solution for the centre through coolant application, and strongly recommended to use for the high accuracy and the high productivity.

SLIM CHUCK COOLANT SOLUTION

WITH OIL HOLE DRILL		JET COOLANT SYSTEM
 Image	 Image	 Image

☞ P279~P281

When SK J type nut is used, the total chuck length will be extended by 6mm.

Flat Shoulder Pushing & Taper Pushing

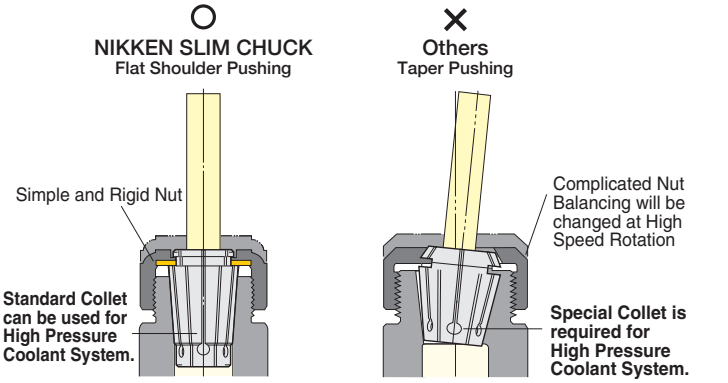

- High Run-out Accuracy due to Flat Shoulder Pushing.
- High Gripping Torque of 8° taper

- Unstable Run-out Accuracy due to Taper Part Pushing?
- Poor Gripping Torque of 12° ,16° taper

The Secret of strong gripping power and high rigidity... 8°Taper

8°Taper and Wedge Principle is the Answer.
The smaller the Taper Angle,the better Concentricity is obtained. Besides, thanks to Wedge principle, Strong Gripping Power is generated with small torque.



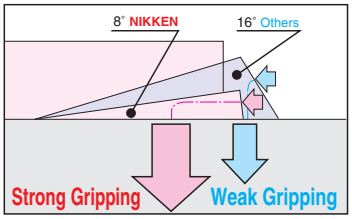

P Class Concentric Accuracy

Run-out within 3μ

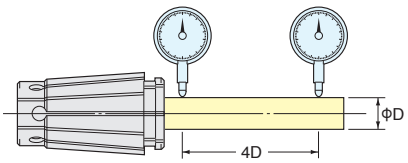

NIKKEN 2LOCK MAJOR DREAM HOLDER

P. 41
P.177

Internal Dampening Mechanism is built-in to the MAJOR DREAM Holder.

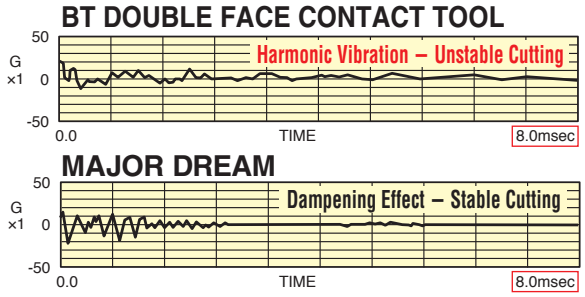

Difference due to Dampening Technique and Effect

Excellent Machining on { Linear Guide M/C / Box Guide M/C

End Mill Life
Carbide : 3 times
HSS : 1.5 times

Powerful heavy cutting and high speed high feed cutting , excellent high precision and surface finish and extended tool life with the dampening effect.

Damping Effect & Power of TiN Bearing Nut

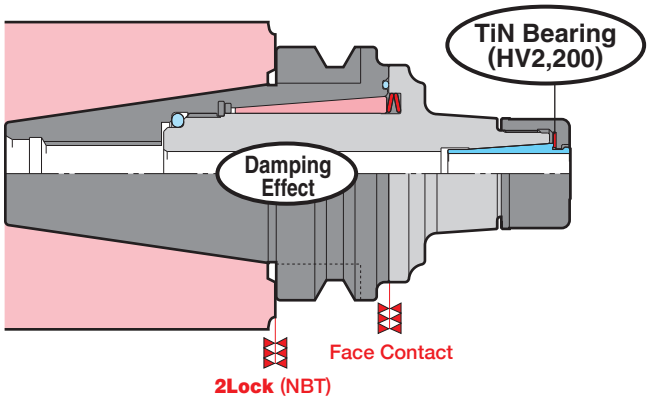

Slim Collet with 8 degree taper to satisfy the accuracy and the high gripping torque.

Simple design without the flats for the hook spanner. The GH handle is used to tighten / loosen precisely. The external diameter is more compact than the external diameter of the ball bearing nut.

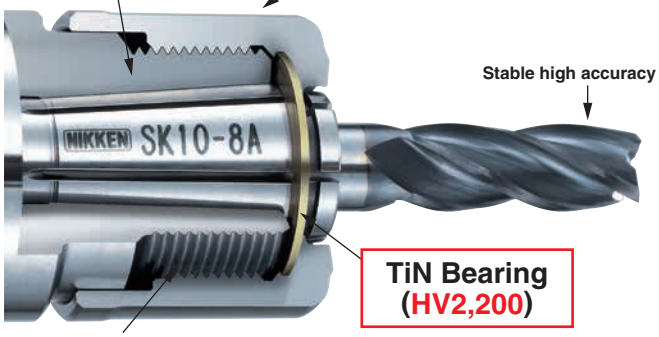

The molybdenum is coated to the internal thread of the nut, then the efficiency of the thread is highly improved.

J nut is the best solution for the centre through coolant application, and strongly recommended to use for the high accuracy and the high productivity.

Great Popularity of MAJOR DREAM 3 Brothers

- MAJOR DREAM SHRINK FIT HOLDER ☞P.182
- MAJOR DREAM PRO ENDMILL ☞P.181

NIKKEN VC HOLDER with TiN BEARING NUT

P. 40
P.179

This is the Mighty End Mill Holder from the series of Tin Bearing Nut type collet chuck to satisfy the gripping torque, run-out accuracy, cutting rigidity, high precision finish and high speed rotation.

2LOCK tooling can be used as the BT double face contact tooing on the machine with the BT double face contact spindle. It can be also used as the BT tooling on the machine with BT standard spindle.

◇ Power of TiN Bearing Nut

Good sliding effect due to the surface hardness of HV2,200.
More efficient than conventional ball bearing built-in nut.

Unstable accuracy caused by tightening torque and the possibility of rust.

The Tin coated bearing plate reduced friction. This is the best for the thrust load.



Competitors **NIKKEN**

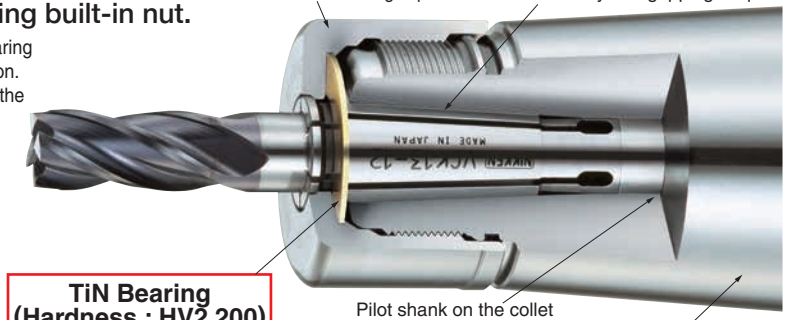

◇ Less micron vibration due to the collet flange contact

Improves the cutting capability and tool life.

◇ Run-out accuracy : Less than 3 microns at 4XD

Better stability on run-out accuracy
Improves the surface finish
Suitable for finish on die-mould machining.

Less than 3 microns

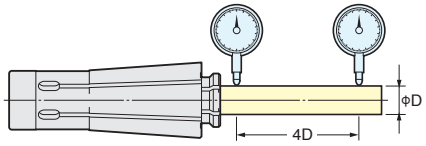

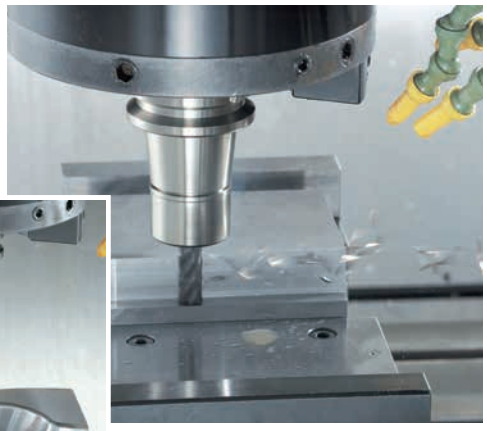

12mm, 4teeth Carbide Endmill
Material : Mild Steel
V=220m/min
S=6,000r/min
F=3,000mm/min



Power of TiN Bearing

Cutting Rigidity

High Precision Finish

◇ Jet coolant splash with **J** type Nut.

J type Nut

Cap with triangular grooves
The jet coolant pressure creates a tornado effect.

Cap with O-ring
For oil hole cutting tool

◇ High Speed Rotation MAX.40,000r/min&G2.5

◇ Easy, safe and reliable handling with **GH Handle**

JAPAN, USA, KOREA, TAIWAN PAT.

The nut has no notches for high speed rotation and **GH Handle** can tighten the nut with half of the tightening torque of the conventional C type spanner, thus, substantial improvement for quality of safety, reliability and operational efficiency will be obtained.

NIKKEN NC DRILL CHUCK

P.45

"Solid"means Compact, Precision, Rigidity and Safety.

Such troubles will not only hinder an unmanned oper-ation in FMS but cause successive occurrence of detective products to obstruct the rationalization of factory.

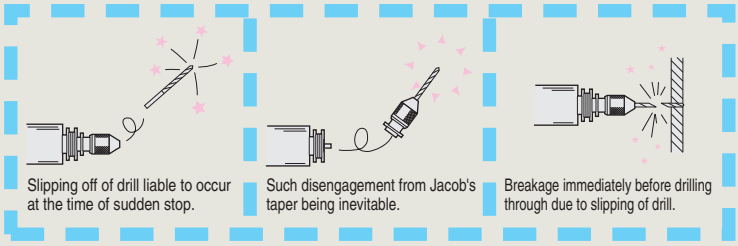

Solid design eliminates the slipping off.

The keyless drill chuck is tightened by the solidifying bolt to the shank, so that there is no possibility of slipping off during rotation or drilling.



Run-out Accuracy of MAX. 0.04mm.

3 Times Larger Chucking Power

Even Carbide Drill does not occur Slipping.

Centre through tool coolant

NPU13 can be used as centre through tool coolant holder for the shank diameter bigger equal to ϕ6mm.(Option)

Compact Design with Small Head

— - - — line illustrates the ISO or conventional drill chuck.

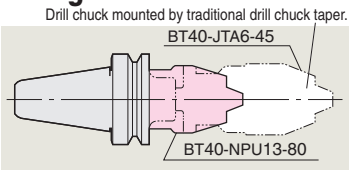

NIKKEN TAPPER CHUCK

P.52

Rotary Bearing Cam ensuring Precision, Sensitivity & Long Tap Life.

Rotary Bearing Cam

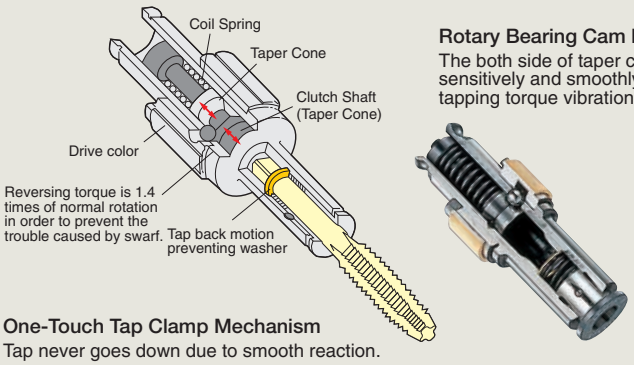

Rotary Bearing Cam Mechanism
The both side of taper cones act sensitively and smoothly to the tapping torque vibration.

One-Touch Tap Clamp Mechanism
Tap never goes down due to smooth reaction.

Slim Body & Fine Floating

External Diameter as small as ever. Only **NIKKEN** Tapper Chuck performs even big size Tapping with slim body. The floating part is not a simple slide key, but plural preloaded balls are arranged in V-shape. That is why the tap slides smoothly without chattering accompanied.

Torque Life Curve

The bearing cam with no sliding friction has been developed for the tap collet to protect the tap from breakage. The principle of this collet is fundamentally different from that of the conventional brake system utilizing a rubber reaction or a friction resistance as shown by the following graphs (A) & (B) , so that constant torque characteristic as illustrated is obtainable to secure safety of tapping semipermanently.

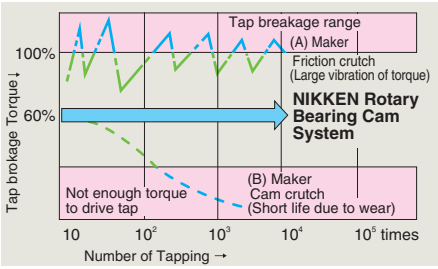

NIKKEN DJ BORING HEAD with DJ BORING BITS P.87

φ3～50 Developed with all of NIKKEN Knowhows-Best Help of Fine Boring

Photo shows new **DJ8** series.

Easy to Set Micron Accuracy

Easy operation with big dial graduations together with a wide adjusting range for fine boring of dia.3～50mm.

Dial Graduation
1 Graduation:dia.0.01mm
Vernier reading:dia. 0.005mm
Smooth and High Precision Boring is ensured.

Micron accuracy can be obtained easily



Special Carbide Indexable Insert for φ5mm Boring

Now Special Carbide Indexable Inserts for Φ5～15mm are avail-able for DJ Bit. No more regrinding and the **shank is solid Carbide.** Fine boring of Φ5mm from 4.5mm drilled hole can be done without vibration and without bending. Fine boring of Safety and Sureness by DJ Boring Head.

No Vibration and Least Wearing of Carbide Insert.

4 pcs of DJ Boring Bits are provided as standard accessories. Even 1mm stock removal on diameter can be done with maintaining fine surface finish without vibration.

New Byte Series for DJ8 ☞P.88

High Pressure Coolant Through Type

- Cutting Speed ····· 100m/min.
- Feed ····· 0.05mm/rev
- Stock Removal ····· 0.5mm(on Dia.)
- Boring dia. ····· Φ30mm
- Material ····· SKD11

NIKKEN BALANCE CUT BORING ARBOR P.59

ϕ25～580 Scram Type Cartridge Power & Smooth Boring with 250% Productivity

Double Cutting Capability

From ϕ25～580mm, all Balance Cut Boring Bars execute boring in 2 Carbide Inserts. One side cutting will not occur, and vibration is absorbed each other. The faster the feed rate (0.2～0.4mm/rev.) , the better swarf ejection. Ideal for Rough and Medium Boring.



2 Stepped Balance Cut

Approx. double removal of standard cutting condition is possible by **-0.3mm Cartridge**.



BCB-W
☞ P.80



Various Cartridges & Inserts ☞ P.67

Good Chip Ejection ensures no trouble Heavy Boring. Standard carbide insert is suitable both for Steel and Cast Iron. Besides, optional cartridges for steel, for Aluminium, through hole or multi-sheets are available.

RAC-E

RAC-A

RAC-K

Power of Scram Type Cartridge

Cutting force is supported by the shoulders of both cartridges. This is the secret of heavy and powerful boring even at the intermittent bore.



High Pressure Coolant Through Tool

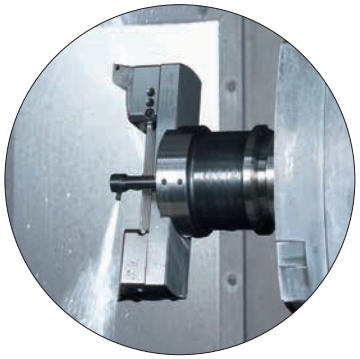

- Cutting Speed ····· 150m/min
- Feed Rate ····· 0.4～0.6mm/rev
- Stock Removal ····· 6～10mm(on dia.)
- Boring Dia ····· ϕ60mm
- Material ····· SNCM420 (Ni, Cr, Mo Alloy Steel)

Precision Ground Serration

High Precision Serration is the base of high accurate performance of BALANCE CUT Boring Bar.

- Even strong cutting force is accepted by High Precision Serration, resulting in smooth boring without micro vibration.
- All slides are finished by precision grinding. Even micro adjustment can be done smoothly as you desire.



Precision Ground = Basic Serration

BALANCE-CUT RACα BORING ARBOR for LARGE DIA ☞ P83, P259 ULTRA LIGHT WEIGHT

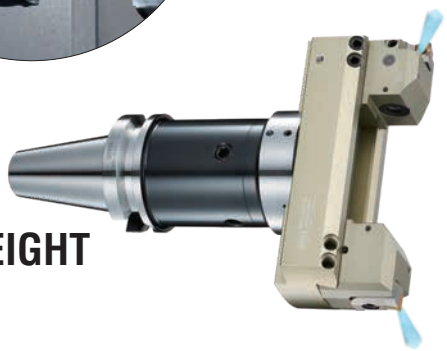

NIKKEN ZMAC ADVANCED BORING HEAD

P.71

JAPAN PAT.

ϕ16～180 The World Leading Boring Head

Various types of Insert Tips





Steel, cast iron, and stainless steel can be machined by the same coated insert tip. Specifications that support insert tips which are widely circulating on the market are also available. ☞ P.78 ZMAC-V-I

Application

NIKKEN makes use of its abundant experiences and results to provide special boring bars, which are suited for various work shapes as part of the solutions to streamline production.

Available for Multi-Stage Boring Bar ☞ P.82, P95

High rigidity Double-contact support

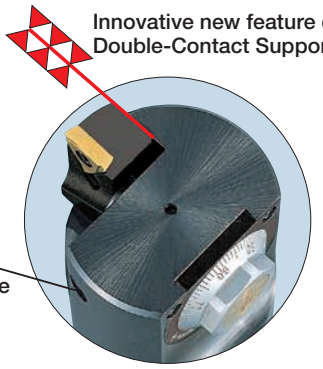

High Speed Boring 12,000r/min, Deep Hole Boring



ZMACα-V

Special Hardened Light Alloy Metal Head with Balancing for Anti-Vibration.

High-precision / Easy micro-adjustment / High durability



New lock flanges reduce dial torque and increase visibility. ZMAC25-V and larger also have a sub scale for easier and more accurate diameter adjustments.

Coolant Specifications for All Sizes

All sizes from ø16 to ø180 have coolant holes positioned so that the coolant is applied directly to the cutting edge.
ZMAC70-V and larger use a variable nozzle system.

BALANCE-CUT BACα BORING ARBOR for LARGE DIA ULTRA LIGHT WEIGHT

☞ P85, P260

NIKKEN SYNCHRONIZED TAPPING INFORMATION (for 100% synchronied Feed)

■ Synchronized (Rigid or Direct) Tapping Feed Function is one of recent machining function to feed 1 pitch of tap per 1 revolution of machine spindle.
Please use High Run-Out Accuracy & Powerful Gripping of **SLIM CHUCK** or **MULTI LOCK Milling Chuck** for this application.

∗Synchro taps are recommended for use with machines with a synchronous feed mechanism and fixed holders such as collet chucks.

Tapping holder & Collet for 100% Synchronized Tapping

■For JIS TAP Shank

Metric Tap	Tap Shank Dia.	SLIM CHUCK	SLIM COLLET	MILLING CHUCK	KM COLLET
M 2	3.0	**SK10**	**SK10-** 3		
M 3	4.0		**SK10-** 4		
M 4	5.0		**SK10-** 5		
M 5	5.5		**SK10-** 5.5	**C20**	**KM20-** 5.5
M 6	6.0		**SK10-** 6		**KM20-** 6
M 8	6.2		**SK10-** 6.5		**KM20-** 6.2
M10	7	**SK13**	**SK13-** 7		**KM20-** 7
M12	8.5		**SK13-** 8.5		**KM20-** 8.5
M14	10.5		**SK13-**10.5		**KM20-**10.5
M16	12.5	**SK16**	**SK16-**12.5		**KM20-**12.5
M18	14		**SK16-**14		**KM20-**14
M20	15		**SK16-**15		**KM20-**15
M22	17			**C32**	**KM32-**17
M24	19				**KM32-**19
M27	20				**KM32-**20
M30	23				**KM32-**23

★Tap Collet for Tap with Oil Hole is also available.
★At use of MILLING CHUCK, please use tap with shank tolerance h7.
★By compatibility with tap, material, cutting condition and so on, the cutting resistance may increase and slip even when gripped with a collet chuck.
In that case, please contact us separately.

■For SYNCHRONIZED TAP Shank

Metric Tap	Tap Shank Dia.	SLIM CHUCK	SLIM COLLET	MILLING CHUCK	KM COLLET
M 2	3.0	**SK10**	**SK10-** 3		
M 3	4.0		**SK10-** 4		
M 4	6.0		**SK10-** 6	**C20**	**KM20-** 6
M 5	6.0				
M 6	6.0				
M 8	8.0	**SK13**	**SK13-** 8		**KM20-** 8
M10	8.0				
M12	10.0		**SK13-**10		**KM20-**10
M14	12.0		**SK13-**12		**KM20-**12
M16	16.0	**SK16**	**SK16-**16		**KM20-**16
M18	16.0				
M20	16.0				
M22	20.0			**C32**	**KM32-**20
M24	20.0				
M27	20.0				
M30	25.0				**KM32-**25

★Tap Collet for Tap with Oil Hole is also available.
★At use of MILLING CHUCK, please use tap with shank tolerance h7.
★By compatibility with tap, material, cutting condition and so on, the cutting resistance may increase and slip even when gripped with a collet chuck.
In that case, please contact us separately.

■Example of RIGID TAP cycle

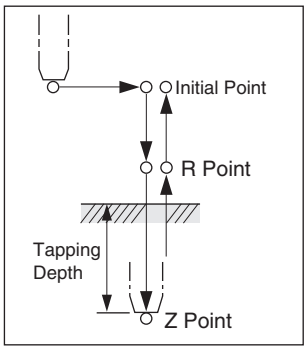

No.1 MO3 S ··· ; Spindle Rotation
No.2 G84.2 X ··· Y ··· Z ··· R ··· F ··· ;

Rigid Tap Cycle — Initial point — Z point — R point — ★Feed

★F is calculated by Pitch of Tap and Spindle Rotation Speed.
For example, in case of M10×P1.5 and S400r/min (Cutting Speed 12.6m/min.)
then F = 1.5mm×400r/min = 600 mm/min.

■When using the Dream Syncro Tap Holder. ☞ P.53

- Recommended combination.
- The Dream Synchro Tap Holder with micro float should be used on machines with a synchronization function, and rolling taps or general-purpose taps should be used.

⚠ Do not use a synchro tap with "Dream syncro tap holder" that has minute float.

NIKKEN X-Treme CHUCK

P.201,266

Industry Proven to Eliminate Pull-Out

PATENT

JAPAN, USA, EU, CHINA PAT.

Excellent Run-out & Powerful Gripping

Exclusively developed for demanding Applications and materials associated With the aircraft and energy industry.





Material: Ti6Al4V Titanium 25mm, 6teeth Carbide Roughing Endmill 25 X Depth 50mm 1 Path Milling Never Pull-Out

NIKKEN 2LOCK MINI-MINI MASTER CHUCK / HYBRID SHRINK-FIT HOLDER

P.195,196

High rigidity, high efficiency machining / damping effect for effective machining of moulds

MINI-MINI MASTER CHUCK

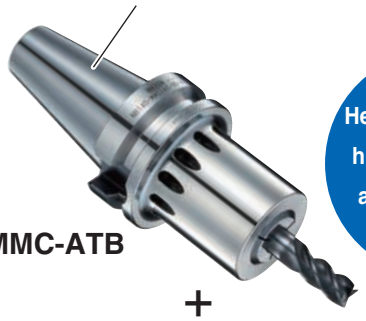

MMC-ATB

Heavy cutting with high rigidity body and high torgue VMK-H Collet

+

High torgue specification VMK-H Collet

MINI-MINI MASTER CHUCK + VMK-SF shrink Fit Holder HYBRID SHRINK-FIT HOLDER

MMSF-B

Aspecial structure damps the vibration of the cutting edge

VMK-SF shrink Fit Holder

NIKKEN ZERO FIT HOLDER "0" Fit with Accurate, Quick and Simple Operation.

P.125,126

When the machine has been used for 2～3 years, the run-out accuracy of the spindle will be declining with accuracy of 0.01mm～0.04mm at 100mm from the gauge line, the Zero Fit Holder allows correction of this error back to the run-out of 0.001～0.002mm.

At Machine Spindle

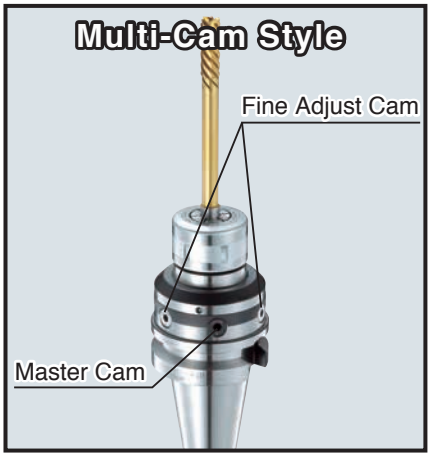

Multi-Cam Style

The minute run-out after adjusting by a master cam can be adjusted by fine adjust cams at the same position.
e.g. BT40-SZF16-90-C3 (3 Cams)
The multi-cam style can not be made for all zero fit holders.

CF-CZF
☞P.125

FLANGE STYLE ZERO FIT TYPE MILLING CHUCK

- Ideal for adjusting cutter run-out on an NC grinding machine or universal grinding machine
- 3-point cam as a standard feature makes it easy to adjust run-out on a grinding machine!

With "0" Fitting the Tool Run-out Accuracy;

The milling surface finish and quality can be improved.

Materials : Pre-Hardened Steel NAK55 (HRC39)
End Mill : 10mm, 2 teeth Carbide Ball End Mill
Cutting Speed : V =200m/min
Spindle Rotation : S =6,366r/min
Feed per tooth : f =0.15mm/min
Feed : F =1,910mm/min
Dry Cutting with Air blow

Before Zero Fitting :
Run-out at cutter front edge = 20 microns

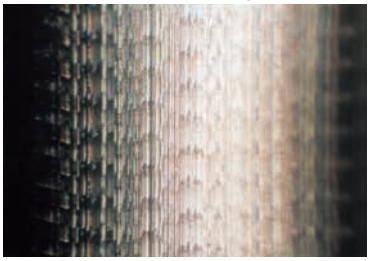

After Zero Fitting :
Run-out at cutter front edge = 1 micron

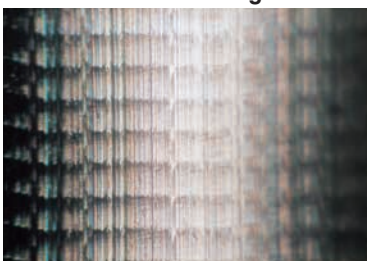

For better and stable finish tolerance for machining holes

…The variation at finish tolerance can be minimized, thus the finish size tolerance can be reduced.

Materials : Tempered Steel (HRC25～30)
Tool :φ13mm CBN Reamer
Cutting Speed : V=80m/min
Spindle Rotation: S=2,000r/min
Feed per tooth : f=0.1mm/min
Feed : F=200mm/min
External coolant supply : Water soluble



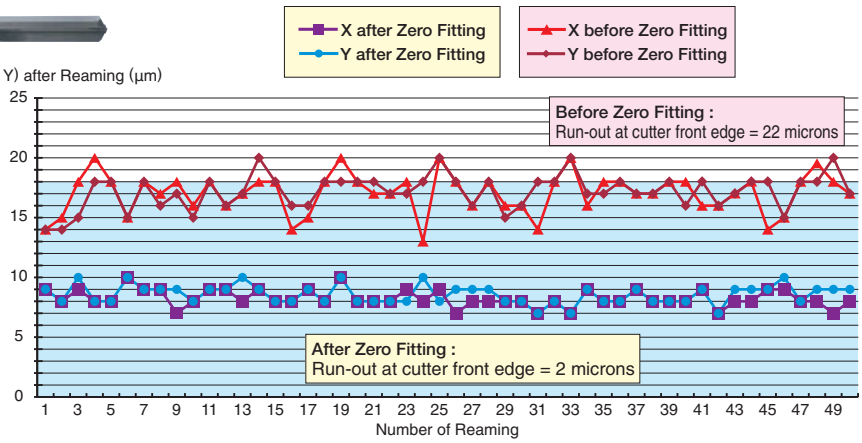

The tool life can be extended.

Fig.1 shows the relation between run-out accuracy and tool life, and when the run-out accuracy of 21 microns is reduced to 3 microns, the tool life can be improved by approximately 5 times.

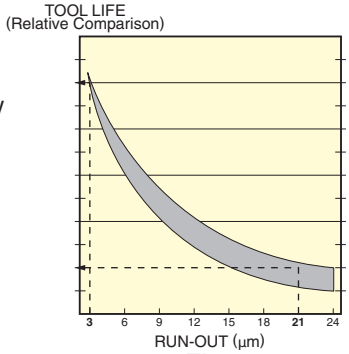

Fig.1

Zero Fit Holder has wide adjustment range compared with competitors equivalent, and its mechanism performs simple, quick and secured operation.

The choice of the Slim Chuck style "SZF" & the Anniversary type Milling Chuck style "CZF" can be selected depending on your cutter.

NIKKEN DOUBLE FACE CONTACT TOOLING SYSTEM

Min. Z Displacement
ATC Repeatability

7/24 Taper

For BT Double Face Contact Spindle ☞P.148

Tool Life 3~5 times
Cutting Power

3LOCK Tooling System JAPAN.PAT ☞P.147

When the tool is clamped, the gentle taper of main body internally expands to create a dead lock of the taper connection, then it results in maximizing the pulling force. The ideal clamping ratio of taper : flange = 90% : 10% is achieved.

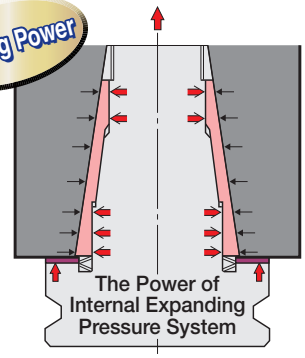

2LOCK Tooling System ☞P.167

2LOCK Tooling System is not the simple double face contact system of taper and flange, but the system with dampening effect and the excellent front chucking system.

2LOCK MAJOR DREAM Holder

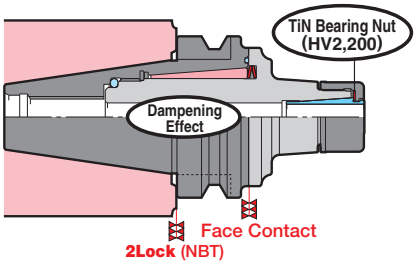

1/10 short Taper & Polygonal Taper

Tool Life 3~5 times
Cutting Power
Rigidity
Dampening Effect

NC5 Tooling System ☞P.207

Since the launch of the **Nikken NC5 Tooling System** at JIMTOF'94 OSAKA, the system has proven its outstanding capability is a wide cross-sector of Japanese industry, with ever-increasing expectation of its being adapted as the next generation tooling interface.
Unique tool construction is built-in NC5 tooling system. The slotted taper cone which is pre-loaded by a disc spring increases its vibration dampening effect, then finally adjusting the minute gauge line error completely.
Chattering Stability = Static Stiffness X Dampening Ratio
Thus, the advantage of NC5 tooling system is clearly demonstrated.

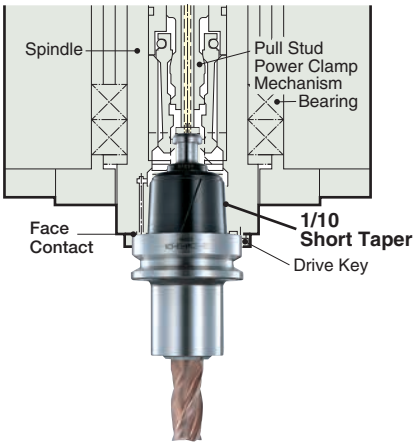

HSK Tooling System ☞P.221

HSK-A shank is the hollow shank with 1/10 taper, and taper & flange contact system. This is based on **ISO 12641-1 (DIN69893-1)**. It's not well balanced due to the unsymmetrical shape, but Nikken HSK-A shank has a hole and a flat for mass balancing as standard.
HSK-E & HSK-F shank are the shank without drive key slot and U groove. This is based on DIN69893-5, 6. This is used for high speed application.

HSK40A, 50A, 63A, 100A
HSK25E, 32E, 40E, 50E, 63E
HSK63F
} are available.

Polygonal Taper C6 Tooling

C6 tooling system is used for the tooling of the integrated machine.

Please refer
☞**NIKKEN NC TOOLING SYSTEM for MULTI-TASKING MACHINE Catalogue**



NIKKEN FACTORY AUTOMATION SERIES

Spindle Speeder ☞ P. 117

NX, PX

Air Cylinder for Cooling

Quick Change type Angular Head ☞ P.119

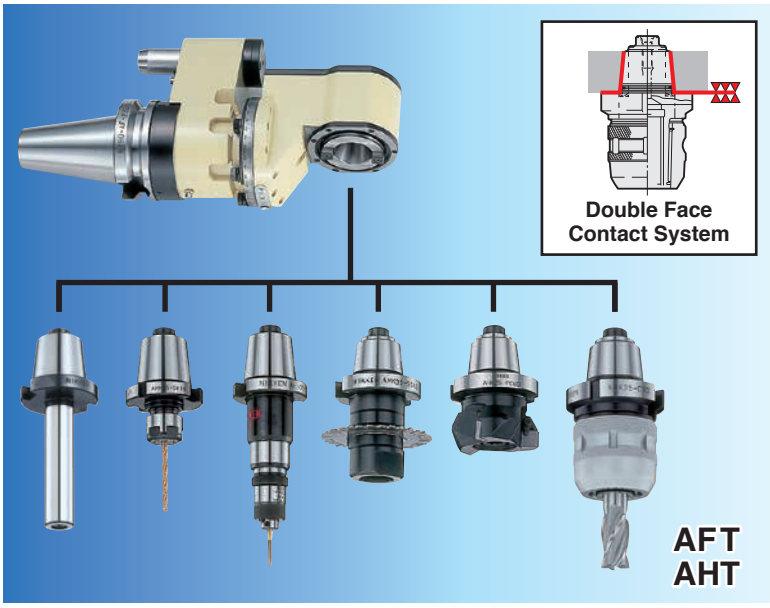

Modular type Angular Head ☞ P.121

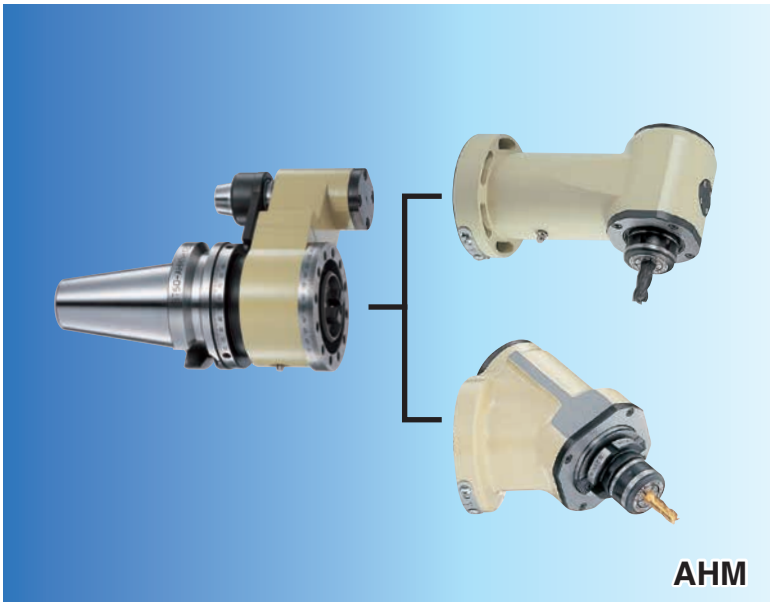

Solid type Angular Head ☞ P.122

Direct Mount Flange type Angular Head ☞ P.123

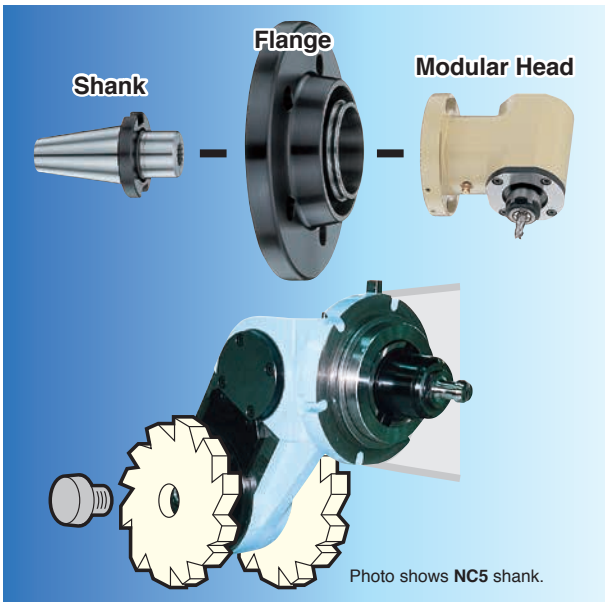

Compact type Angular Head for Deep Hole ☞ P.121

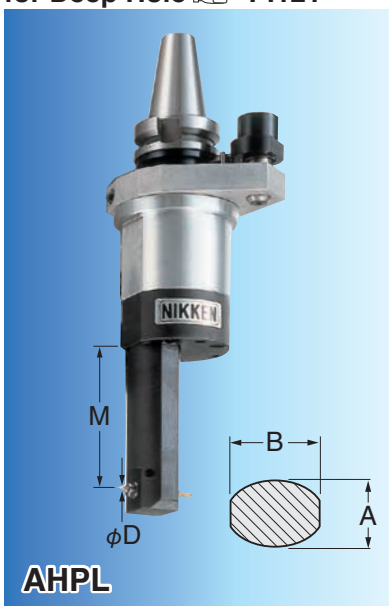

NIKKEN FACTORY AUTOMATION SERIES

Centre Through Coolant
☞ P.34, P.39
P.46, P.48

Flange Through Coolant
☞ P.34, P.39
P.46, P.48

RP Treatment ☞ P.296

The RP treatment creates a fine film of the contents (Fe_2O_4) and (Fe_2O_3) , and penetrates into the tool holder 1～2 micron deep. This fine film inhibits the rust and corrosion of your tool holder taper and stops it from being transmitted to your machine spindle. The RP treatment will not effect the accuracy and the hardness of your tool holder.

Multi Spindle Drill Head ☞ P.123

Multi Spindle Tapper Head ☞ P.123

Automatic/Manual Back Spot Facing Arbor ☞ P.127

Oil Piaster ☞ P.161

Spindle Taper Cleaner ☞ P.161

Spindle Flange Cleaner ☞ P.161

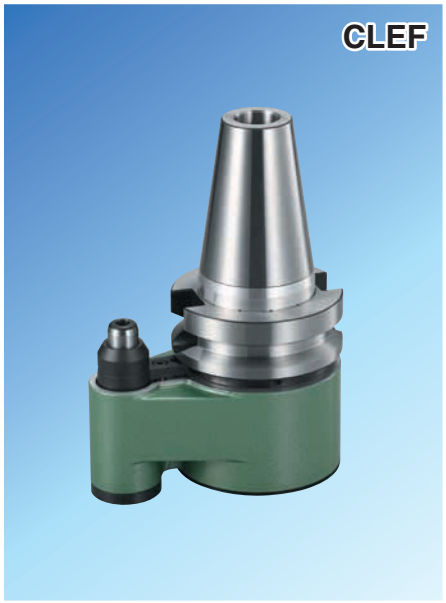

NIKKEN MULTI OIL HOLE HOLDER

P.113

Conventional Oil Hole Holder ⊕ Multi Coolant Nozzles

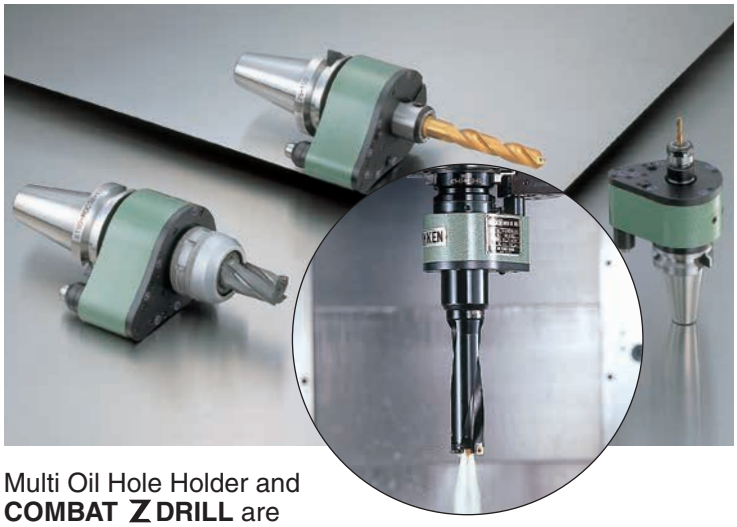

Multi Oil Hole Holder and **COMBAT Z DRILL** are recommended for drilling on M/C to increase productivity.

Combination of Coolant Through Tool Type and Outside Nozzle Type

Can be used to both oil hole cutter and normal cutter without oil hole. When normal cutter (drill, end mill, tap etc.) is used, coolant is fed as Jet Streams exactly to cutting point.

Oil Hole Drill

⊕

Multi-Nozzles

- Standard MT Drill & Reamer
- Standard Straight Drill & Reamer
- Tap
- End Mill
- Boring Bar

Zero Fit Type Oil Hole Holder ☞ P.116

Zero Fit Holder for Side Through

NIKKEN COMBAT Z DRILL

P.303

ϕ16～80mm Power of Pilot Drill & 3 Phases Heat Treatment

NC Lathe

M/C

Power of Pilot Drill

No Vibration with Pilot Drill

L/D=3 and 4 times as standard

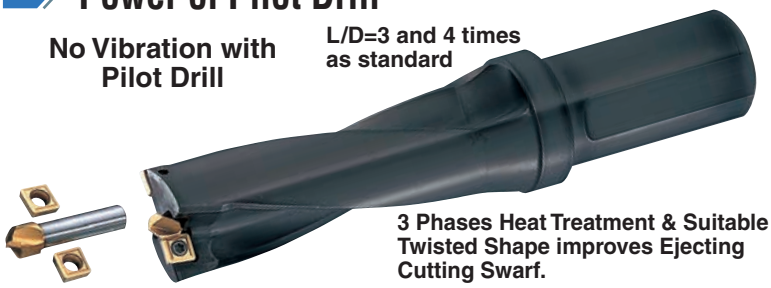

3 Phases Heat Treatment & Suitable Twisted Shape improves Ejecting Cutting Swarf.

3 Phases Heat Treatment

- It significantly improves Rigidity and Ejecting Cutting Swarf by suitable twisted shape and special surface treatment. Tool life of Insert and Drill grows 3 times longer.
- Pilot Drill prevents Inserts from chipping by reducing vibration.
- Powerful drilling speed of 120～150m/min. with small torque.
- Less cutting resistance with Rhomboid Inserts.

PN Treatment (Ejecting Cutting Swarf)

IN Treatment (HV900)

3 Phases Heat Treatment

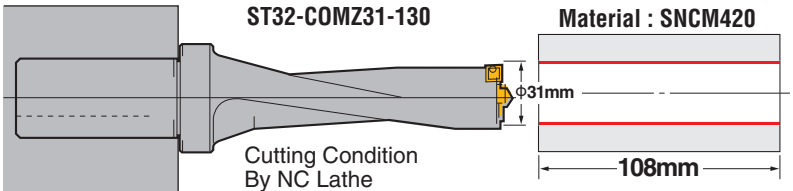

Cutting Condition
By NC Lathe
V =126m/min
S =1,300r/min
f =0.15mm/rev.
F =195mm/min
Water Soluble Coolant

(In Factory NIKKEN) Machining Time = 35sec.

It can be used after total cutting length = 65mm.

NIKKEN REAMER SERIES

P.300

Carbide Reamer Series

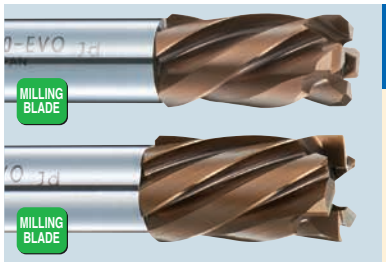

For difficult-to-cut materials evolution series

- RMSS-EVO, PF-RMSS-EVO
- RFSS-EVO, PF-RFSS-EVO

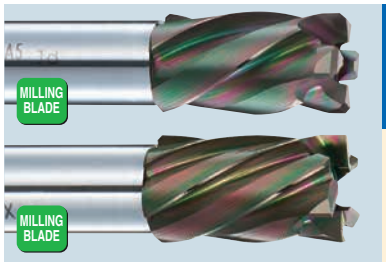

For aluminium, aluminium casting Spectrum Reamer Series

- RMSS-SPX, PF-RMSS-SPX
- RFSS-SPX, PF-RFSS-SPX

PF Radical Reamer Series

- RMSS, PF-RMSS
- RFSS, PF-RFSS
- RRSS-F

Carbide Radical Mill Reamer DLC Coating

- HMS-DLC, RMSS-DLC
- FMS-DLC, RFSS-DLC
- RXS-F-DLC, RRSS-F-DLC

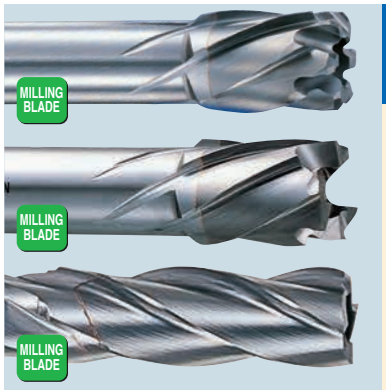

Carbide Mill Reamer

- HMS, HMM
- FMS, FMM
- RXS-F

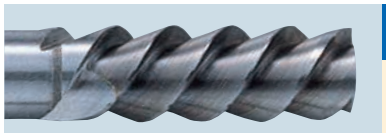

Carbide Broach Reamer

- SX, MX

HSS Reamer Series

NC Sensor Reamer

- NCS, NCM
- NCS-F, NCM-F
- RNS-F

Tough-Cut Skill Reamer

- SRS, SRM
- SRS-F, SRM-F
- RSS-F

Turning Skill Reamer

- SRST-F, RSST-F

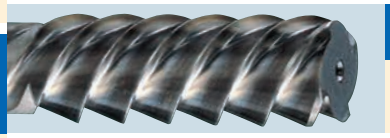

Broach Reamer

- BRS, BRM

Long Type Reamer

- SRS-L
- SRS-F-L
- BRS-L
- BRM-L

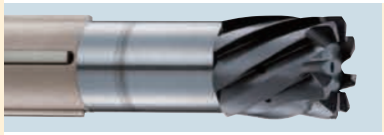

Recommended Cutting Conditions and Special Made Reamer/ Technical Information

■Various Application - Through Hole, Stepped Hole and Blind Hole

Through Hole series



Excellent Circularity and Straightness

Stepped Hole series



Excellent Circularity and Straightness

Blind Hole series



Excellent Circularity and Straightness

☞ Please refer to **REAMER SERIES** Catalogue.

NIKKEN MEASURING ATTACHMENT

P.135

Pioneer for Work Preparation

Height Presetter

No need of test cut! Basic position of workpiece can be measured quickly without damaging tool teeth.

The distance from reference surface to tool end can be measured very quickly and accurately. This is a MUST for M/C, NC Lathe and NC Milling Machine.

3D Sensor

Micro-Touch

This is 3D sensor enabling instantaneous detection of position, measurement and alignment of center by means of Red Lamp and Electric Beep.

The Red Lamp lights the moment when the stylus touches a measurement part. Owing to the conductive detection system, a time delay caused by a relay etc. is eliminated and a highly sensitive measurement can be made.

Small Measuring Tool, but Great Time-Saver

Micro-Stand

Free flexing with single knob, no dead angle and long reach.

Two arms incorporating ball joint mechanism at both ends provide free movement in any direction such as vertical, lateral, longitudinal or rotational etc. If stretched horizontally, a reach as long as 300mm can be attached. Measurements of inside dia., outside dia., end face and back face etc. can be made at will.

Easy Micron Check

Touch Point

Highly sensitive electronic edge finder.

Ideal for Milling Machine, Boring Machine, Drilling Machine as well as Machining Center. Instant indication by LED lamp at very light contact of sensor ball with workpiece.
Easy location of work face, O.D., I.D.

NIKKEN TOOL PRESETTER

P.143

NIKKEN's Tool Presetter increasing Cost Performance of High Price Machining Centre.

E236+ P.143
Spindle can be exchanged.
(BT, HSK, POLYGONAL TAPER)

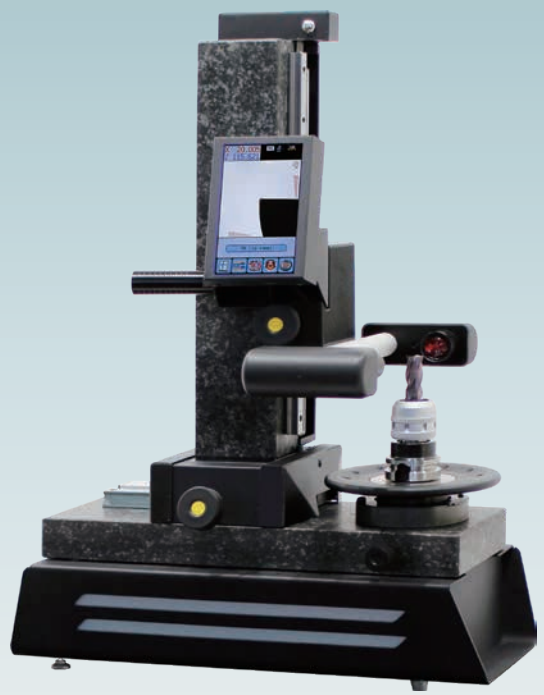

E346BV P.144
Spindle can be exchanged.

E46BA P.145

E46CA P.145

P.309

CNC ROTARY TABLE for Full Automation

Carbide Worm System

For heavy duty capability and high speed rotation with maintaining the high accuracy, the carbide worm screw is used for the hardened worm wheel. The wearing of the worm wheel is reduced and rotary table is used for more years comparing with the conventional worm system of soft material. For better impact capability, the special alloy steel worm screw is used for the worm screw of the small tooth module.

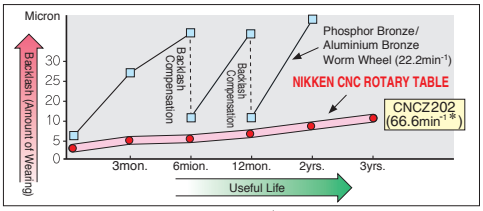

* Rotation speed of motor = 3,000min^{-1}

Worm Wheel

Material is special NIKKEN order made steel. Specially hardened and furthermore ion-nitro treated on teeth. Thus, the problem of sliding friction is solved.



Work Sample

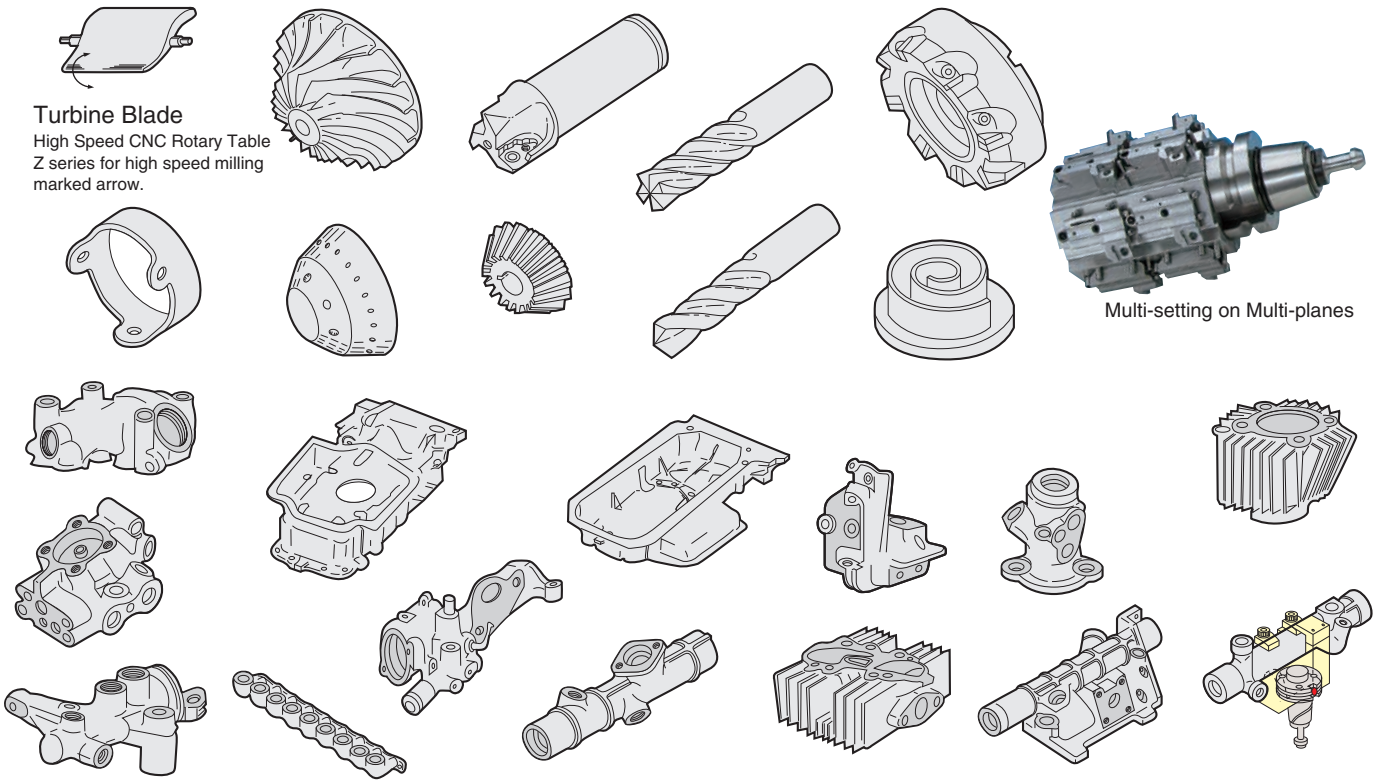

Please refer to CNC ROTARY TABLE Catalogue.

NIKKEN CNC ROTARY TABLE

HIGH SPEED ROTATION Z SERIES
HIGH PRESSURE OIL FILM EFFECT

●CNC 105, CNCZ 105 P.309

●CNC 180, CNCZ 180 P.309

●CNC 202, CNCZ 202 P.309

●CNC 205, CNCZ 205 P.309



●NCT 200, NCTZ 200 P.309

●CNC 260, 302, CNCZ 260, 302 P.309

●CNC 321,401,501,601,802
CNCZ 321,401 P.310



●CNC 1000, 1200, 1201, 1600 P.310

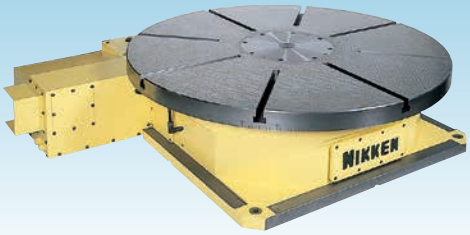

●NSVX400, 500 NSVZ180, 300



●NST 250, 300, 500

●5AX-130, -201 P.311

●5AX-250, -350, -550, -800, -1200 P.311

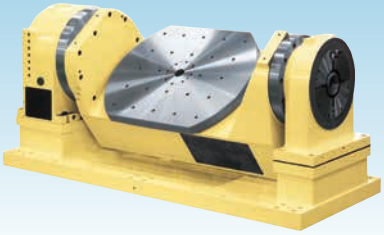

●CNC100-2W, -3W, -4W, -120

●5AX-2MT-105, -170, -200
5AX-4MT-120

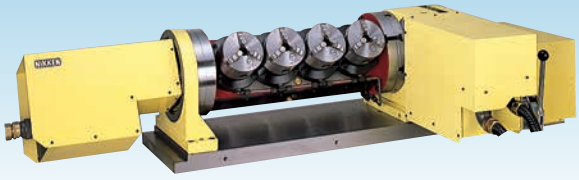

☞ Please refer to **CNC ROTARY TABLE** Catalogue.

MILLING CHUCK

NIKKEN

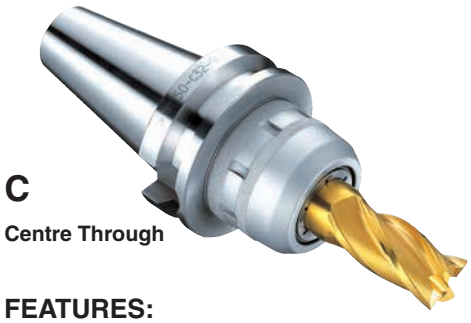

C

Centre Through

FEATURES:

- Doubled rigidity & increased cutting ability!
- Run-out Accuracy: 5μm at 3×D

C12

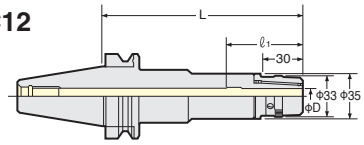

C16～C42



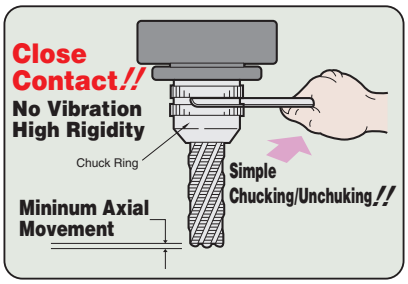

TAPER	Code No.	D	C_1	L	ℓ_1	Suitable Collet	Weight(kg)
No.30	BT30-C12- 55	12	33	58	58	KM12 CCK12	0.6
	-C16- 55	16	44	57	65	KM16 CCK16	0.7
	-C20- 65*1	20	52	67	80	KM20 NK20 CCK20 CCNK20	1.0
	- 75			75			1.1
	-C25- 75*2	25	55*4	75	68	KM25 NK25 CCK25 CCNK25	1.2
	- 80			82			1.3
	-C32- 90*3	32	64*4	90	68	KM32 NK32 CCK32 CCNK32	1.4
	-100			100	76		1.5
No.35	BT35-C12- 60	12	33	60	58	KM12 CCK12	1.0
	-C16- 60	16	44		65	KM16 CCK16	1.1
	-C20- 70	20	52	70	80	KM20 NK20 CCK20 CCNK20	1.3
	-C25- 75	25	60	75	68	KM25 NK25 CCK25 CCNK25	1.5
	-C32- 85	32	64*4	85	77	KM32 NK32 CCK32 CCNK32	1.8
No.40	BT40-C12- 65	12	33	65	58	KM12 CCK12	1.3
	- 90			90	65		1.6
	-120			120	65		1.9
	-C16- 60	16	44	63	65	KM16 CCK16	1.4
	- 90			90			1.7
	-120			120			2.0
	-C20- 70	20	52	71	80	KM20 NK20 CCK20 CCNK20	1.6
	- 90			90			1.8
	-105			105			2.0
	-120			120			2.2
	-C25- 70	25	60	70	80	KM25 NK25 CCK25 CCNK25	1.8
	- 90			90			2.1
	-120			120			2.5
	-C32- 85	32	69	85	77	KM32 NK32 CCK32 CCNK32	2.1
	-105			105	90		2.5
	-120			120	105		2.8
No.45	BT45-C12-105	12	33	105	58	KM12 CCK12	3.0
	-C16-105	16	44		65	KM16 CCK16	3.2
	-C20-105	20	52		80	KM20 NK20 CCK20 CCNK20	3.5
	-C25-105	25	60			KM25 NK25 CCK25 CCNK25	3.8
	-C32- 85	32	69	85	105	KM32 NK32 CCK32 CCNK32	3.3
	-C42-110	42	86	110	125	KM42 NK42 CCK42 CCNK42	4.5

MILLING CHUCK

NIKKEN

BT

TAPER	Code No.	D	C_1	L	ℓ_1	Suitable Collet	Weight(kg)
No.50	BT50-C12-105	12	33	105	58	KM12 CCK12	4.0
	-135			135			4.3
	-165			165			4.6
	-C16-105	16	44	105	65	KM16 CCK16	4.2
	-135			135			4.5
	-165			165			4.8
	-C20-105	20	52	105	80	KM20 NK20 CCK20 CCNK20	4.5
	-135			135			4.8
	-165			165			5.1
	-180			180			5.4
	-C25-105	25	60	105	80	KM25 NK25 CCK25 CCNK25	4.8
	-135			135			5.2
	-165			165			5.6
	-C32- 90	32	69	90	105	KM32 NK32 CCK32 CCNK32	4.3
	-105			105			4.6
	-120			120			5.1
	-135			135			5.6
	-165			165			6.4
	-200			200			7.8
	-250			250			9.2
	-300			300			10.6
	-400			400			13.4
	-500			500			16.2
	-C42-*5 95	42	86	95	125	KM42 NK42 CCK42 CCNK42	5.5
	-105			105			5.8
	-120			120			6.6
	-135			135			7.2
	-165			165			8.6
	-200			200			9.5
	-250			250			11.7
	-300			300			14.0
	-400			400			18.4
	-500			500			22.8

★**MULTI LOCK Milling Chuck is a Base Holder for machining centre.**
The following straight shank tooling to suit Milling Chucks are available.

[**S-C**] Milling Chuck (Extension Type) ☞ **P.270**
[**K-MMP**] MINI-MINI Chuck ☞ **P.44**
[**K-MMC**] MINI-MINI Chuck ☞ **P.44**
[**K-SK**] Slim Chuck ☞ **P.271**
[**S-SK**] Long Size Slim Chuck ☞ **P.271**
[**D-NPU**] NC Drill Chuck ☞ **P.45**
[**NZ**] Tapper Chuck ☞ **P.270**
[**K-MT**] Morse Taper Socket ☞ **P.49**
[**K-ZMAC-V**] ZMAC-V Boring Bar ☞ **P.93**
[**K-RAC**] RAC Boring Bar ☞ **P.93**
[**S-ZMACX-V**] ZMAC-V Boring Bar for Deep Hole ☞ **P.94**
[**K-DJ**] DJ Boring Bar ☞ **P.95**
[**K-SCA**] Stub Arbor ☞ **P.112**
[**S-MDPE**] PRO-END MILL ☞ **P.111**
[**MS○-A○-○**] Straight shank shrink fit holder ☞ **P.270**

Explanation of the Code No.

BT40 – **C32** – **85** – ☐
- NONE : Standard / FS : Face Sealed
- Nominal Gauge Length
- Chucking capacity
- Symbol of milling chuck
- Shank No.

FS type
For machining of aluminum
JAPAN PAT.

★Please refer ☞ **P.175** for heavy duty type milling chuck with larger arbor diameter.
★Please refer ☞ **P280**, **P281** for **KM**, **NK**, **CCK**, **CCNK** collet.
★**CKFN-D** and **CKFN-DC** (With O-ring) can be used for the direct chucking application, when centre through tool coolant. **CCK** collet and **CKFN** nut can be used for collet application.
★For "**L**" dimension of centre through coolant type milling chuck is same as the above standard, however , refer ☞ **P.34** for Code No.
★For "**L**" dimension of flange through coolant type milling chuck is same as the above standard, however , refer ☞ **P.34** for Code No.
★Spanner is available as an option. **C12 : 9HC12A, C16: 9HC16, C20: 9HC22, C25 (ϕC1=55mm) : 9HC22, C25 (ϕC1=60mm) , C32 (ϕC1=64mm) : 9HC25, C32 (ϕC1=69mm) : 9HC32, C42: 9HC42**
∗4 C25(ϕC1=55mm): 9HC22, ∗4 C32(ϕC1=64mm): 9HC25.

★Please note the acceptable shank tolerance is h7.
★The milling chucks marked ∗1, ∗2 and ∗3 may not be used by the restriction of the diameter under V flange of your M/C.
★**FS** (Face Seal) types are available for **C25～C42** of BT40/BT50. There are 2 types; **FSJ**: With J groove, **FS**: Without J groove
★∗5 **C42** Milling Chuck is High Pressure Centre Coolant Through type as standard.

HIGH SPEED MILLING CHUCK

NIKKEN

C-G
High Pressure Centre Through
(MAX. 7MPa)

High Speed



GFS type
For machining of aluminum
JAPAN PAT.

TAPER	Code No.	D	D_1	C_1	L	ℓ_1	ℓ_2	ℓ_3	MAX. r/min	Suitable Collet	Weight(kg)
No.30	BT30-C12- 55G	12	12	33	58	48	53	58	40,000	KM12 CCK12	0.5
	-C16- 55G	16	16	40	57	50	58	65		KM16 CCK16	0.6
	-C20- 65G*1	20	20	48	67	57	66	80	30,000	KM20 NK20 CCK20 CCNK20	0.9
	- 75G				75						1.0
	-C25- 75G*2	25	25	55	75	56	65	68	25,000	KM25 NK25 CCK25 CCNK25	1.2
	- 80G				82						1.3
	-C32- 90G*3	32	32	62	90	67	66	68	10,000	KM32 NK32*5 CCK32 CCNK32*5	1.4
	-100G				100		73	76			1.5
No.40	BT40-C12- 65G	12	12	33	65	48	53	58	30,000	KM12 CCK12	1.1
	- 90G				90						1.3
	-C16- 60G	16	16	40	63	50	58	65	25,000	KM16 CCK16	1.2
	- 90G				90						1.5
	-C20- 70G	20	20	48	71	57	66	80		KM20 NK20 CCK20 CCNK20	1.4
	- 90G				90						1.7
	-C25- 70G	25	25	55	70	60	72		20,000	KM25 NK25 CCK25 CCNK25	1.6
	- 90G				90						2.0
	-C32- 85G	32	32	68	85	67	73	77		KM32 NK32 CCK32 CCNK32	1.9
	-105G				105	70	82	90			2.3
No.50	BT50-C12-105G	12	12	33	105	48	53	58	20,000	KM12 CCK12	3.9
	-135G										4.2
	-C16-105G	16	16	40		50	58	65		KM16 CCK16	4.1
	-135G										4.4
	-C20-105G	20	20	48	135	57	66	80		KM20 NK20 CCK20 CCNK20	4.4
	-135G										4.8
	-C25-105G	25	25	55		60	72		15.000	KM25 NK25 CCK25 CCNK25	4.6
	-135G										5.2
	-C32- 90G	32	32	68	90	70	97	105		KM32 NK32 CCK32 CCNK32	4.3
	-105G				105						4.7
	-120G				120						5.2
	-135G				135						5.7
	-165G				165						6.5
	-C42- 95P*4	42	42	86	95	73	110	125	12.000	KM42 NK42 CCK42 CCNK42	5.5
	-105P*4				105						5.8
	-120P*4				120						6.6

★**GH handle** is available as an option. ☞ **P.293**
★All high speed type milling chuck are centre through coolant type. Please use a stopper or **CCK**, **CCNK** collet, when endmill shank length is shorter than "ℓ_1" dimension. The Code No. of stopper for direct chucking
C20: 9MC20H, C25: 9MC25H (BT30-C25-75G: 9MC25HSB) , C32: 9MC32HD (BT40-C32-85G: 9MC32HDA, BT40-C32-105G: 9MC32HDB) , C42: 9MC42H
★The milling chucks marked *1, *2 and *3 may not be used by the restriction of the diameter under V flange of your M/C.
★*4 : The Code No. of the wrench for **C42** is **9HC42**.
★**GFS**(Face Seal)types are available for **C25～C42** of **BT40/BT50**. There are 2 types;
GFSJ: With J groove, **GFS**: Without J groove
★The milling chucks marked *1, *2 and *3 may not be used by the restriction of the diameter under V flange of your M/C.
★*5 **NK32** and **CCNK32** collet can not be used on **BT30-C32-90.**

GH Handle
☞**P.293**

Explanation of the Code No.

BT40 - C16 - 60 G

- G: NONE : High Speed / GFS : High Speed and Face Sealed
- 60: Nominal Gauge Length
- C16: Chucking Capacity
- C16: Symbol of Milling Chuck
- BT40: Shank No.

CENTRE THROUGH COOLANT TYPE HOLDER

NIKKEN

MAX.7MPa

MILLING CHUCK for Centre Through

High Pressure Centre Through (MAX. 7MPa)

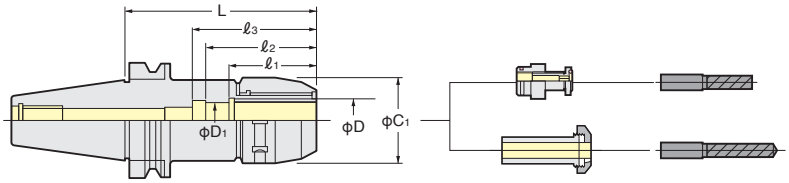

TAPER	Code No.	C1	D	D1	ℓ1	ℓ2	ℓ3	Stopper(Option)	Collet	Weight (kg)
No.40	BT40 -C20C- 70, 90,105	52	20	20	58	66	80	9MC20H	CCK20 CCNK20	1.6, 1.8, 2.0
	(IT40) -C25C- 70, 90	60	25	25	61	72		9MC25H	CCK25 CCNK25	1.8, 2.1
	-C32C- 85,105,120	69	32		64,70,70	77,81,81	107	9MC32HS, 9MC32H, 9MC32H	CCK32 CCNK32	2.1, 2.5, 2.8
No.50	BT50 -C20C-105,135	52	20	20	58	66	80	9MC20H	CCK20 CCNK20	4.5, 4.9
	(IT50) -C25C-105,135	60	25	25	61	72		9MC25H	CCK25 CCNK25	4.8, 5.2
	-C32C- 90,105,135,165	69	32		70	81	107	9MC32H	CCK32 CCNK32	4.3, 4.6, 5.5, 6.4
	-C42*- 95,105,135	86	42	42	74	115	125	9MC42H	CCK42 CCNK42	5.5, 5.8, 7.1

Stopper for Direct Chucking

Direct chucking means that chucking φ32mm shank tool into φ32mm ID chuck.
If tool shank length is longer than R_1, the stopper is not required.

Chuck	Stopper	H1	C2
C20C	9MC20H	42～47	17
	9MC20HS		
C25C	9MC25H	50～55	22
C32C	9MC32H	49～59	24
	9MC32HS	55～60	
C42	9MC42H	57～67	24



★For heavy milling, please insert the cutter shank longer than ℓ_1 into the chuck body. Do not use the stopper.
★When the oil hole pitch of the back end is larger than the dia. of O-ring, please contact with us.

★Spanner is available as an option. **C20 : 9HC22, C25 : 9HC25 C32 : 9HC32, C42 : 9HC42**
★Shank of High Speed Milling Chuck (G) is **2LOCK**. (Centre through tool coolant is standard.) **☞P.169 e.g. NBT40-C32-105G GH handle ☞P.293** is necessary for High Speed Milling Chuck.
★Please note the acceptable shank tolerance is h7.
★Please refer **☞P.276**. for **CCK** Collet and **CCNK** Collet.
★Please add **"RP"** at the end of Code No. for Rust Proof Treatmeant Milling Chuck. **e.g. BT40-C32C-85-RP**.
★*C42 Milling Chuck is Center Coolant Through type as standard.
★Stopper for Direct Chucking is available as an option.
★In case of Heavy End Milling operation, please chuck the End Mill longer than ℓ_1 without using Stopper.

★GH Handle

FLANGE THROUGH COOLANT TYPE HOLDER

NIKKEN

MILLING CHUCK for Flange Through

High Pressure Flange Through (MAX. 7MPa)

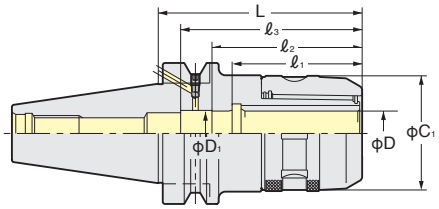

TAPER	Code No.	C1	D	D1	ℓ1	ℓ2	ℓ3	Stopper (Option)	Collet	Weight (kg)
No.40	BT40-C20F- 90,105	52	20	20	58	66	80	9MC20H	CCK20 CCNK20	1.9, 2.0
	(IT40)-C25F- 90,105	60	25	25	61	70		9MC25H	CCK25 CCNK25	2.0, 2.2
	-C32F-105,120	69	32		70	81	107	9MC32H	CCK32 CCNK32	2.5, 2.8
No.50	BT50-C20F-105,135,165	52	20	20	58	66	80	9MC20H	CCK20 CCNK20	4.2, 4.4, 4.8
	(IT50)-C25F-105,135,165	60	25	25	61	72		9MC25H	CCK25 CCNK25	4.5, 5.1, 5.7
	-C32F-105,120,135,165	69	32		70	81	107	9MC32H	CCK32 CCNK32	4.6, 5.1, 5.5, 6.4
	-C42F-120,135,165	86	42	42		105, 115, 115	125	9MC42H	CCK42 CCNK42	5.8, 6.1, 6.8

★Spanner is available as an option. **C20 : 9HC22, C25 : 9HC25 C32 : 9HC32, C42 : 9HC42**
★Shank of High Speed Milling Chuck (G) is **2LOCK**. **e.g. NBT40-C20F-105G GH Handle ☞P.293** is necessary for High Speed Milling Chuck.
★Please refer **☞P.275** for **CCK** Collet and **CCNK** Collet. ★In case of Heavy End Milling operation, please chuck the End Mill longer than ℓ_1 without using stopper. **☞P.34**
★Please add **"RP"** at the end of Code No. for Rust Proof Treatment Milling Chuck. **e.g. BT40-C20F-75-RP**. ★Please note the acceptable shank tolerance is h7.

★GH Handle

- **The special pull stud with O-ring is required for the M/C with flange through coolant capability.**
- **When the stroke of the coolant nozzles at the spindle flange on the M/C with flange through coolant capability is shorter, it may be a collision between flange of 2LOCK tool and the nozzles. Please check the specification on your M/C.**

SLIM CHUCK HIGH SPEED ROTATION • HIGH ACCURACY

NIKKEN

SK
Photo shows **SK10** type.
Centre Through

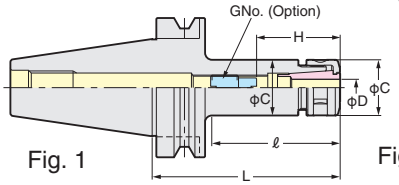

Fig. 1

Fig. 2



Fig. 3



- **When SK J type nut is used, the total chuck length will be extended by 6mm.**
- **When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shorter by about 3 mm. Please be careful when you check the interference.**

TAPER	Code No.	D	L	ℓ	ℓ₁	C	C₁	H	G No. (Option)	Weight (kg)	Fig	SK Collet
No.30	BT30-SK 6- 60	0.7 ～ 6.0	60	33	33	19.5	19.5	21～35	SKG- 8	0.7	1	SK 6
	- 90		90	56	65		32			0.7	2	
	-120		120	62	95					0.8		
	-SK10- 45	1.75～10.0	45	22	22	27.5	27.5	30～50	SKG-12S	0.8	1	SK10
	- 60		60	35	35				SKG-12L	0.9		
	- 75		75	50	50					1.0		
	- 90		90	65	65					1.0		
	-120		120	95	95					1.1		
	-SK13- 60	2.75～13.0	60	35	35	33	33	31～50	SKG-15	1.0		SK13
	- 75		75	50	50			31～65		1.1		
	- 90		90	65	65					1.1		
	-120		120	95	95					1.2		
	-SK16- 60	2.75～16.0	60	37	37	40	40	45～60	SKG-12L	1.1		SK16
	- 75		75	52	52			45～65		1.2		
	- 90		90	67	67				SKG-12	1.2		
	-120		120	97	97			40～70	SKG-18L	1.3		
	-SK20- 60	3.5～20.0	60	37	37	48.5	48.5	65～70	SKG-12S	0.7		SK20
	- 75		75	52	52			70～75	SKG-12L	0.9		
	- 90		90	67	67			65～75	SKG-12	1.2		
	-SK25- 90	7.5～25.4				55	55	55～75		1.5		SK25
No.40	BT40-SK 6- 60	0.7 ～ 6.0	60	30	30	19.5	19.5	21～35	SKG- 8	1.0	1	SK 6
	- 90		90	51	60		32			1.1	2	
	-120		120	60	90					1.4		
	-150		150		120		25			1.5	3	
	-SK10- 60	1.75～10.0	60	32	32	27.5	27.5	30～50	SKG-12L	1.1	1	SK10
	- 75		75	45	45					1.2		
	- 90		90	48	60		40			1.2	2	
	-120		120	73	90					1.4		
	-150		150		118		34.5			1.6	3	
	-180		180		148		39			1.6		
	-200		200		168					1.8		
	-250		250		218					2.1		
	-SK13- 60	2.75～13.0	60	28	28	33	33	31～65	SKG-15	1.2	1	SK13
	- 75		75	43	43					1.3		
	- 90		90	58	58					1.4		
	-120		120	88	88					1.6		
	-150		150	88	118		40			1.8	3	
	-180		180		148					1.8		
	-200		200		168					2.0		
	-250		250		218					2.4		
	-SK16- 60	2.75～16.0	60	32	32	40	40	50～65	SKG-18S	1.3	1	SK16
	- 75		75	43	43			40～67	SKG-18L	1.4		
	- 90		90	58	58			40～70		1.5		
	-120		120	88	88					1.7		
	-150		150	118	118					1.9		
	-180		180	148	148					2.0		
	-200		200	168	168					2.2		
	-250		250	218	218					2.7		
	-SK20- 60	3.5～20.0	60	32	32	48.5	48.5	47～60	SKG-22	1.3		SK20
	- 75		75	45	45			47～70		1.4		
	- 90		90	60	60			47～80		1.6		
	-120		120	90	90					2.0		
	-SK25- 75	7.5～25.4	75	47	47	55	55	55～75	SKG-12	1.7		SK25
	- 90		90	61	61				SKG-28	1.8		
	-120		120	91	91			55～85		2.0		

SLIM CHUCK HIGH SPEED ROTATION • HIGH ACCURACY

NIKKEN

SK
Photo shows **SK16** type.
Centre Through

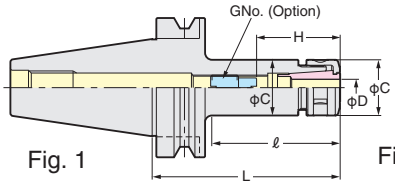

Fig. 1



Fig. 2



Fig. 3

- **When SK J type nut is used, the total chuck length will be extended by 6mm.**
- **When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shorter by about 3 mm. Please be careful when you check the interference.**

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	Weight (kg)	Fig	SK Collet
No.50	**BT50-SK 6-105**	0.7 ～ 6.0	105	55	64	19.5	32	21～35	SKG- 8	3.8	2	SK 6
	-135		135	60	92					3.9		
	-165		165		114					4.0		
	-200		200		151		30			4.2	3	
	-SK10-105	1.75～10.0	105	57	57	27.5	27.5	30～50	SKG-12L	4.2	1	SK10
	-135		135	70	92		32			4.4	2	
	-165		165	75	114					4.6		
	-200		200		151		36			4.8	3	
	-225		225		178		40			5.0		
	-250		250		203					5.2		
	-300		300		253		60			5.6		
	-SK13-105	2.75～13.0	105	62	62	33	33	31～65	SKG-15	4.5	1	SK13
	-135		135	92	92					4.7		
	-165		165		122		45			4.9	2	
	-200		200		157					5.2	3	
	-250		250		207					5.7		
	-300		300		257					6.2		
	-SK16-105	2.75～16.0	105	62	62	40	40	40～70	SKG-18L	4.7	1	SK16
	-135		135	92	92					4.9		
	-165		165	90	122		50			5.1	2	
	-200		200		157		52			5.5	3	
	-250		250		207					6.0		
	-300		300		257		60			6.5		
	-SK20-105	3.5～20.0	105	62	62	48.5	48.5	47～80	SKG-22	4.3	1	SK20
	-135		135	92	92					4.6		
	-165		165	122	122					5.0		
	-200		200	157	157					5.4		
	-250		250	207	207					6.1		
	-300		300	257	257					6.8		
	-SK25-105	7.5～25.4	105	62	62	55	55	50～85	SKG-28	5.2		SK25
	-135		135	92	92					5.4		
	-165		165	122	122					5.6		
	-200		200	157	157					6.0		
	-250		250	207	207					6.7		
	-300		300	257	257					7.4		

★Please refer ☞ **P.54 for use as Tap Holder for Synchronized Tapping.**
★Collet, adjust screw (G No.) and spanner are available as an option. **Please refer ☞P.277 for SK Collet.**
The Code No. of the spanner is **SK6 (C=φ18) : SKL-6, SK6 (C=φ19.5) : SKL-6W, SK10: SKL-10, SK13: 9HC12A, SK16: 9HC16, SK20: 9HC22, SK25: 9HC22**

★**Please refer ☞P.37, P.38 for High Speed Slim Chuck (40,000r/min)**
★All Slim Chucks can be used for Centre Through Coolant type. Please refer ☞ **P.282** for Centre Through Coolant Adjust Screw and ☞ **P.314** for Centre Through Pull Stud.
★Please refer ☞ **P.39** for High Pressure (MAX.7MPa) Centre Through Coolant type. ★Please refer ☞ **P.39** for Flange Through Coolant type.
★**BT40-SK10-200, 250 BT50-SK10-250, 300** are also available as semi-standard.
-SK16-200, 250 -SK16-250, 300
★Please add "**-RP**" at the end of Code No. for Rust Proof Treatment Slim Chuck. **e.g. BT40-SK10-90-RP**
★Long Straight type (Fig.1) for drilling / plunging use is also available.
BT50-SK10-200ST, 250ST, 300ST BT50-SK13-200ST, 250ST, 300ST BT50-SK16-200ST, 250ST, 300ST

BT15 Shank

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	Weight (kg)	Fig	SK Collet
No.15	**BT15BR-SK 6-40**	0.7 ～ 6.0	40	26	26	19.5	19.5	21～30	SKG-8-18L	0.10	1	SK 6
	-55		55	39	39			21～35	SKG- 8	0.14		
	-65		65	49	49					0.15		
	-SK10-40	1.75～10.0	40	26	26	27.5	27.5	30～37	SKG- 6L	0.14		SK10
	-55		55	41	41			35～45		0.20		

★**BT15BR** is the solid tool integrated with pull stud for BROTHER. ★**BT15HW** is the solid tool integrated with pull stud for HOWA.
★**BT20P** and **BT25M** are the solid tools with integrated with pull stud without drive key groove for MAKINO SEIKI.
e.g. BT20P-SK10-40S, BT25M-SK16-70
★**S20T** is the short taper tool for SUGINO.
★Please refer ☞ **P.291** for **TOOL CLAMPER.**


BT15BR

HIGH SPEED SLIM CHUCK

NIKKEN

MAX.40,000r/min&G2.5

SK-P
Centre Through

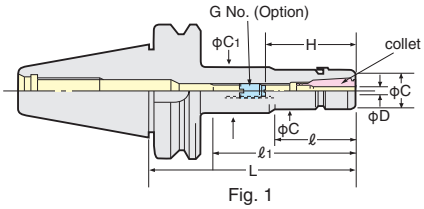

Fig. 1

Explanation of the Code No.

BT40 - SK 10 - 90 P

- Symbol of High Speed
- Nominal Gauge Length mm
- Chucking Capacity
- Symbol of Slim Chuck
- Shank No.

- **When SK J type nut is used, the total chuck length will be extended by 6mm.**
- **When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.**

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	MAX. (r/min)	collet	weight (kg)
No.30	BT30-SK 6- 60P	0.7 ～ 6.0	60	33	33	19.5	19.5	21～35	SKG- 8	40,000	SK 6	0.7
	- 90P		90	56	65		32					0.7
	-120P		120	62	95							0.8
	-SK10- 45P	1.75～10.0	45	22	22	27.5	27.5	30～50	SKG-12S		SK10	0.8
	- 60P		60	35	35				SKG-12L			0.9
	- 75P		75	50	50							1.0
	- 90P		90	65	65							1.0
	-120P		120	95	95							1.1
	-SK13- 60P	2.75～13.0	60	35	35	33	33	31～50	SKG-15		SK13	1.0
	- 75P		75	50	50			31～65				1.1
	- 90P		90	65	65							1.1
	-120P		120	95	95							1.2
	-SK16- 60P	2.75～16.0	60	37	37	40	40	45～60	SKG-12L		SK16	1.1
	- 75P		75	52	52			45～65				1.2
	- 90P		90	67	67				SKG-12			1.2
	-120P		120	97	97			40～70	SKG-18L	30,000		1.3
	-SK20- 60P	3.5～20.0	60	37	37	48.5	48.5	65～70	SKG-12S		SK20	0.7
	- 75P		75	52	52			70～75	SKG-12L			0.9
	- 90P		90	67	67			65～75	SKG-12			1.2
	-SK25- 90P	7.5～25.4				55	55	55～75			SK25	1.5
No.40	BT40-SK 6- 60P	0.7 ～ 6.0	60	30	30	19.5	19.5	21～35	SKG- 8	30,000	SK 6	1.0
	- 90P		90	51	60		32					1.1
	-120P		120	60	90							1.4
	-150P		150		120		25					1.5
	-SK10- 60P	1.75～10.0	60	32	32	27.5	27.5	30～50	SKG-12L		SK10	1.1
	- 75P		75	45	45							1.2
	- 90P		90	48	60		40					1.2
	-120P		120	73	90							1.4
	-150P		150		118		34.5					1.6
	-180P		180		148		39					1.6
	-SK13- 60P	2.75～13.0	60	28	28	33	33	31～65	SKG-15		SK13	1.2
	- 75P		75	43	43							1.3
	- 90P		90	58	58							1.4
	-120P		120	88	88							1.6
	-150P		150		118		40					1.8
	-180P		180		148							1.8
	-SK16- 60P	2.75～16.0	60	32	32	40	40	50～65	SKG-18S		SK16	1.3
	- 75P		75	43	43			40～67	SKG-18L			1.4
	- 90P		90	58	58			40～70				1.5
	-120P		120	88	88							1.7
	-150P		150	118	118					25,000		1.9
	-180P		180	148	148							2.0
	-SK20- 60P	3.5～20.0	60	32	32	48.5	48.5	47～60	SKG-22		SK20	1.3
	- 75P		75	45	45			47～70				1.4
	- 90P		90	60	60			47～80				1.6
	-120P		120	90	90							2.0
	-SK25- 75P	7.5～25.4	75	47	47	55	55	55～75	SKG-12	20,000	SK25	1.7
	- 90P		90	61	61				SKG-28			1.8
	-120P		120	91	91			55～85				2.0

HIGH SPEED SLIM CHUCK

NIKKEN

MAX.40,000r/min&G2.5

SK-P
Centre Through

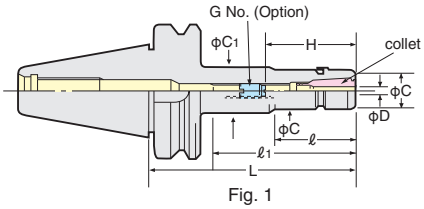

Fig. 1

Explanation of the Code No.

BT40 - SK 10 - 90 P

- Symbol of High Speed
- Nominal Gauge Length mm
- Chucking Capacity
- Symbol of Slim Chuck
- Shank No.

BT

- **When SK J type nut is used, the total chuck length will be extended by 6mm.**
- **When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.**

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	MAX. (r/min)	collet	weight (kg)
No.50	BT50-SK 6-105P	0.7 ～ 6.0	105	55	64	19.5	32	21～35	SKG- 8	20,000	SK 6	3.8
	-135P		135	60	92							3.9
	-165P		165		114							4.0
	-200P		200		151		30					4.2
	-SK10-105P	1.75～10.0	105	57	57	27.5	27.5	30～50	SKG-12L		SK10	4.2
	-135P		135	70	92		32					4.4
	-165P		165	75	114							4.6
	-200P		200		151		36					4.8
	-225P		225		178		40					5.0
	-SK13-105P	2.75～13.0	105	62	62	33	33	31～65	SKG-15		SK13	4.5
	-135P		135	92	92							4.7
	-165P		165		122		45					4.9
	-200P		200		157							5.2
	-SK16-105P	2.75～16.0	105	62	62	40	40	40～70	SKG-18L		SK16	4.7
	-135P		135	92	92							4.9
	-165P		165	90	122		50					5.1
	-200P		200		157		52					5.5
	-SK20-105P	3.5～20.0	105	62	62	48.5	48.5	47～80	SKG-22		SK20	4.3
	-135P		135	92	92							4.6
	-165P		165	122	122							5.0
	-200P		200	157	157							5.4
	-SK25-105P	7.5～25.4	105	62	62	55	55	50～85	SKG-28	15,000	SK25	5.2
	-135P		135	92	92							5.4
	-165P		165	122	122							5.6
	-200P		200	157	157							6.0

★Collet, adjust screw (G No.) and **GH Handle** are available as an option.
The Code No. of the **GH Handle** is **SK6-P: GH6, SK10-P: GH10, SK13-P: GH12, SK16-P: GH16, SK20-P: GH20, SK25-P: GH25**
★Please refer ☞ **P.279** for TiN Bearing Nut.
★Please refer ☞ **P.277** for **SK** collet.
★Adjust screw with centre hole ☞ **P.282** can be used for centre through tool coolant application (MAX. 1MPa).
Please refer ☞ **P.282** for adjust screw (G No.).

GH Handle ☞**P.293**

Code No. for SLIM CHUCK with SPECIAL NUT

NIKKEN

Code No. for Slim Chuck with special nut

Standard nut (for C-spanner) is attached for standard slim chuck.
Nut for high speed (for **GH Handle**) is attached for high speed slim chuck.

- Standard slim chuck + **J** type nut : Please add "**-J**" at the end of Code No. **e.g. BT40-SK10-90-J**
- Standard slim chuck + Nut for high speed : Please add "**-G**" at the end of Code No. **e.g. BT40-SK10-90-G**
- Standard slim chuck + **J** type nut for high speed : Please add "**-GJ**" at the end of Code No. **e.g. BT40-SK10-90-GJ**
- High speed slim chuck + **J** type nut : Please add "**-J**" at the end of Code No. **e.g. BT40-SK10-90P-J**

Code No. for VC holder with special nut

- With **J** type nut : Please add "**-J**" at the end of Code No. **e.g. BT40-VC13-90-J**

Code No. for MAJOR DREAM holder with special nut

- With **J** type nut : Please add "**-J**" at the end of Code No. **e.g. BT40-MDSK13-90-J**
- With nut for C-spanner : Please add "**-SN**" at the end of Code No. **e.g. BT40-MDSK13-90-SN**
- With **J** type nut for C-spanner : Please add "**-SNJ**" at the end of Code No. **e.g. BT40-MDSK13-90-SNJ**

When **RP** treatment is required at same time, please add "**-RP**" first. **e.g. BT40-SK10-90-RP-J**

SLIM CHUCK for Centre Through

NIKKEN

High Pressure
Centre Through
(MAX. 7MPa)

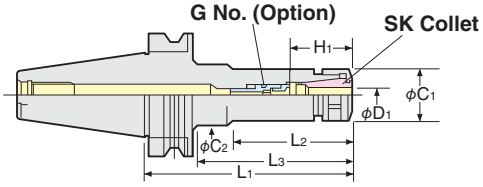

Explanation of the Code No.

BT40 – SK10 C – 90

- L Range
- Symbol of Centre Through
- Style
- Shank No.

・When attaching a J nut, add "-J" to the end of the Code No. (Cap is not included.) ・When SK **J** type nut is used, the total chuck length will be extended by 6mm.
・When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.

TAPER	Code No.	D1	H1	L2	L3	C1	C2	G No. (Option)	Weight (kg)	SK Collet
No.40	BT40-SK 6C- 90,120	4~6	26~31	51,60	60,90	19.5	32,32	SKG6-6HG	1.1,1.4	SK 6
	(IT40)-SK10C- 90,120,150,180	5~10	33~41	48,73,73,73	60,90,118,148	27.5	40,40,34.5,39	SKG10-10HG	1.2,1.4,1.6,1.6	SK10
	-SK13C- 90,120,150,180	5~13	39~51	58,88,88,88	-,-,118,148	33	-,-,40,40	SKG13-10HG	1.4,1.6,1.8,1.8	SK13
	-SK16C- 90,120,150,180	10~16	45~57	58,88,118,148	-	40	-	SKG16-12HG	1.5,1.7,1.9,2.0	SK16
	-SK20C- 75, 90,120	10~20	47~63	45,60,90		48.5		SKG20-18HG	1.4,1.6,2.0	SK20
	-SK25C- 90,120	16~25	60~65,60~70	61,91		55		SKG25-18HGD,SKG25-24HG	1.8,2.0	SK25
No.50	BT50-SK 6C-105,165	4~6	26~31	55,60	64,114	19.5	32,32	SKG6-6HG	3.8,4.0	SK 6
	(IT50)-SK10C-105,135,165,200	5~10	33~41	57,70,75,75	-,92,114,151	27.5	-,32,32,36	SKG10-10HG	4.2,4.4,4.6,4.8	SK10
	-SK13C-105,135,165,200	5~13	39~51	62,92,92,92	-,-,122,157	33	-,-,45,45	SKG13-10HG	4.5,4.7,4.9,5.2	SK13
	-SK16C-105,135,165,200	10~16	45~57	62,92,90,90	-,-,122,157	40	-,-,50,52	SKG16-12HG	4.7,4.9,5.1,5.5	SK16
	-SK20C-105,135,165	10~20	47~63	62,92,122	-	48.5	-	SKG20-18HG	4.3,4.6,5.0	SK20
	-SK25C-105,165	16~25	60~70	62,122		55		SKG25-24HG	5.2,5.6	SK25

★Collet, adjust screw (G No.) and spanner are available as an option.
The Code No. of the spanner is **SK6C (C=φ18) : SKL-6, SK6C (C=φ19.5) : SKL-6W, SK10C: SKL-10, SK13C: 9HC12A, SK16C: 9HC16, SK20C: 9HC22, SK25C: 9HC25**
★Shank of High Speed Slim Chuck (P) is **2LOCK**. ☞**P.175 e.g. NBT40-SK10C-90P. GH handle** ☞**P.293** is necessary for High Speed Slim Chuck.
★Please add **"RP"** at the end of Code No. for Rust Proof Treatmeant Slim Chuck. **e.g. BT40-SK10C-90-RP**. ★Please refer ☞**P.277** for **SK** Collet.
★When cutter shank dia. is smaller than MIN. of D1, special adjust screw (G No.) is required. ☞**P.282**

★GH Handle

SLIM CHUCK for Flange Through

NIKKEN

High Pressure
Flange Through
(MAX. 7MPa)

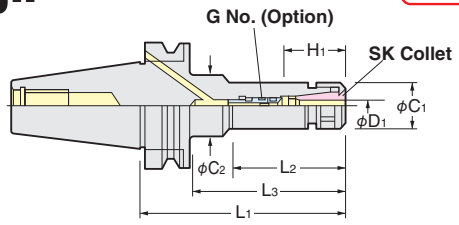

・When attaching a J nut, add "-J" to the end of the Code No. (Cap is not included.) ・When SK **J** type nut is used, the total chuck length will be extended by 6mm.
・When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.

TAPER	Code No.	D1	H1	L2	L3	C1	C2	G No. (Option)	Weight (kg)	Collet
No.40	BT40-SK 6F- 90,120	4~6	26~31	51,60	60,90	19.5	32,32	SKG6-6HG	1.1,1.4	SK 6
	(IT40)-SK10F- 90,120,150,180	5~10	33~41	48,73,73,73	60,90,118,148	27.5	40,40,34.5,39	SKG10-10HG	1.2,1.4,1.6,1.6	SK10
	-SK13F- 90,120,150,180	5~13	39~51	58,88,88,88	-,-,118,148	33	-,-,40,40	SKG13-10HG	1.4,1.7,1.8,1.8	SK13
	-SK16F- 90	10~16	45~50	58	-	40	-	SKG16-12HGB	1.5	SK16
	-120,150,180		45~57	88,118,148				SKG16-12HG	1.7,1.9,2.0	
	-SK20F- 90,120	10~20	57~63,47~63	60,90		48.5		SKG20-18HGB,SKG20-18HG	1.4,2.0	SK20
	-SK25F- 90,120	16~25	50~58,55~65	61,91		55		SKG25-18HGC,SKG25-24HGA	1.8,2.0	SK25
No.50	BT50-SK 6F-105,165	4~6	26~31	55,60	64,114	19.5	32,32	SKG6-6HG	3.8,4.0	SK 6
	(IT50)-SK10F-105,165,200,225	5~10	33~41	57,75,75,75	-,114,151,178	27.5	-,32,36,40	SKG10-10HG	4.2,4.6,4.8,5.1	SK10
	-SK13F-105,165,200	5~13	39~51	62,92,92	-,122,157	33	-,45,45	SKG13-10HG	4.5,4.9,5.2	SK13
	-SK16F-105,165,200	10~16	45~57	62,90,90	-,122,157	40	-,50,52	SKG16-12HG	4.7,5.1,5.5	SK16
	-SK20F-105,165	10~20	47~63	62,122	-	48.5	-	SKG20-18HG	4.3,5.0	SK20
	-SK25F-105,165	16~25	55~65,55~70	62,122		55		SKG25-24HGA,SKG25-24HG	5.2,5.6	SK25

★Collet, adjust screw (G No.) and spanner are available as an option.
The Code No. of the spanner is **SK6F (C=φ18) : SKL-6, SK6F (C=φ19.5) : SKL-6W, SK10F: SKL-10, SK13F: 9HC12A, SK16F: 9HC16, SK20F: 9HC22, SK25F: 9HC25**
★Shank of High Speed Slim Chuck (P) is **2LOCK**. **e.g. NBT40-SK10F-90P GH Handle** ☞**P.293** is necessary for High Speed Slim Chuck.
★Please add **"RP"** at the end of Code No. for Rust Proof Treatmeant Slim Chuck. **e.g. BT40-SK10F-90-RP**.
★Please refer ☞**P.277** for **SK** Collet.
★When cutter shank dia. is smaller than MIN. of D1, special adjust screw (G No.) is required. ☞**P.282**

★GH Handle

⚠
- **The special pull stud with Oring is required for the M/C with flange through coolant capability.**
- **When the stroke of the coolant nozzles at the spindle flange on the M/C with flange through coolant capability is shorter, it may be a collision between flange of 2LOCK tool and the nozzles. Please check the specification on your M/C.**

VC HOLDER

NIKKEN

VC
Centre Through

With TiN Bearing Nut
MAX. 40,000r/min&G2.5
Run-Out Accuracy : Within 3μm at 4D

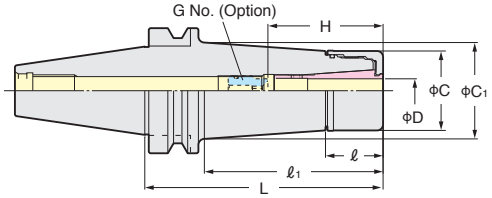

High Speed

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	Weight (kg)	MAX. r/min	Collet
No.30	BT30-VC 6- 45	2.0～ 6.0	45	23	23	27.5	27.5	35～45	VCG 6- 8A	0.5	40,000	VCK 6
	- 60		60		35		31.7			0.6		
	- 90		90		65		33.4			0.8		
	-VC13- 60	3.0～12.0	60	29	37	40	41.1	50～60	VCG13-15A	0.7		VCK13
	- 90		90		67		41.3			0.9		
	-120		120		97		42.4			1.2		
No.40	BT40-VC 6- 60	2.0～ 6.0	60	23	30	27.5	30.0	35～45	VCG 6- 8A	1.1	30,000	VCK 6
	- 90		90		60		32.7			1.3		
	-120		120		90		36.9			1.5		
	-VC13- 60	3.0～12.0	60	29	31	40	40.3	50～60	VCG13-15A	1.2		VCK13
	- 90		90		60		44.3			1.5		
	-120		120		90		48.5			1.9		
No.50	BT50-VC 6-105	2.0～ 6.0	105	23	62	27.5	33.0	35～45	VCG 6- 8A	3.9	20,000	VCK 6
	-135		135		92		37.1			4.1		
	-165		165		122		41.3			4.4		
	-VC13-105	3.0～12.0	105	29	62	40	44.6	50～60	VCG13-15A	4.1		VCK13
	-135		135		92		48.8			4.5		
	-165		165		122		53.0			4.9		

★TiN Bearing Nut is supplied as standard.
★Collet, adjust screw (G No.) ☞ **P.282,P284** and **GH Handle** are available as an option.
The Code No. of the **GH Handle** is **VC6: GH10, VC13: GH16** ☞ **P.293**
★Please add "**-RP**" at the end of Code No. for Rust Proof Treatment **VC** Holder. e.g : **BT40-VC13-60-RP**
★Please use **VC J** type Nut & Cap for Centre Through Coolant. When **VC J** type Nut is used, the total holder length will be extended to 6mm.
★**BT40-VC 6-150, BT40-VC13-150, BT50-VC13- 90, -120** are available as semi-standard.
★When the axial stopper is required, please use Adjust Screw (G No.)
★All series are for High Speed Rotation.

Please refer ☞**P.293**

Explanation of the Code No.



2LOCK MAJOR DREAM HOLDER

NIKKEN

MDSK
Centre Through

Dampening Effect
TiN Bearing Effect

Holder with an adjust screw for axial adjustment is supplied as an option. Please contact us.

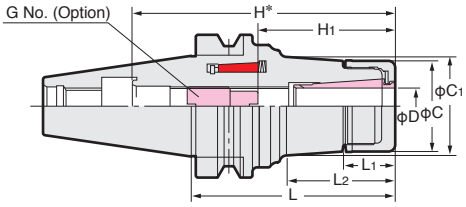

H : MAX. Cutter Shank Length to be inserted

2LOCK tool can be used on the M/C with BT standard spindle.

TAPER	Code No.	D	L	L1	L2	C	C1	H*	H1	G No. (Option)	Weight (kg)	Collet
No.30	NBT30-MDSK 6- 50	3.0～6.0	50	16.2	19.5	19.5	20.0	73	21～35	SKG- 8	0.5	SK 6 A
	- 60		60		25.5		20.8	83			0.6	
	- 75		75		40.5		22.9	98			0.7	
	- 90		90		55.5		25.0	113			0.8	
	-MDSK10- 50	3.0～10.0	50	18.0	19.0	27.5	27.5	72	30～50	SKG-12L	0.5	SK10 A
	- 60		60		25.7		28.6	82			0.6	
	- 75		75		42.9		31.0	97			0.8	
	- 90		90		58.7		33.2	112			0.8	
	-MDSK13- 60	3.0～13.0	60	22.0	29.0	33.0	34.0	83	31～43	SKG-15	0.8	SK13 A
	- 75		75		45.0		36.2	98	31～60		0.8	
	- 90		90		60.0		38.3	113			0.8	
	-MDSK16- 75	3.0～16.0	75	23.0	47.5	40.0	40.0	60	45～60	SKG-12L	1.1	SK16 A
	- 90		90		62.5			75	45～70	SKG-12	1.3	
No.40	NBT40-MDSK 6- 60	3.0～6.0	60	16.2	18.0	19.5	19.5	86	21～35	SKG- 8	0.8	SK 6 A
	- 75		75		33.0		21.9	101			0.9	
	- 90		90		48.0		24.0	116			1.1	
	-105		105		63.0		26.1	131			1.2	
	-120		120		78.0		28.2	146			1.4	
	-MDSK10- 60	3.0～10.0	60	18.0	19.0	27.5	27.5	86	30～50	SKG-12L	1.1	SK10 A
	- 75		75		33.0		29.6	101			1.3	
	- 90		90		48.0		31.7	116			1.5	
	-105		105		63.0		33.8	131			1.6	
	-120		120		78.0		35.9	146			1.8	
	-150		150		110.0		40.4	176			2.2	
	-MDSK13- 65	3.0～13.0	65	22.0	24.0	33.0	33.0	91	31～60	SKG-15	1.2	SK13 A
	- 75		75		33.0		34.6	101			1.4	
	- 90		90		48.0		36.7	116			1.7	
	-105		105		63.0		38.8	131			1.8	
	-120		120		78.0		40.9	146			2.0	
	-150		150		110.0		45.4	176			2.4	
	-180		180		144.0		50.1	206			2.6	
	-MDSK16- 65	3.0～16.0	65	23.0	24.0	40.0	40.0	91	45～60	SKG-18L	1.2	SK16 A
	- 75		75		33.0		41.4	101	45～70		1.5	
	- 90		90		48.0		43.5	116			1.9	
	-105		105		64.0		45.8	131			2.0	
	-120		120		80.0		48.0	146			2.2	
	-150		150		113.0		52.6	176			2.5	
	-MDSK20- 75	4.0～20.0	75	25.2	41.2	48.0	51.3	80	50～73	SKG-12	1.9	SK20 A
	- 90		90		55.0		53.2	95		SKG-12-55L	2.1	
	-105		105		70.0		52.2	110		SKG-12-70L	2.3	
	-120		120		85.0		53.2	125		SKG-12-85L	2.6	

★Please refer ☞ **P.279** for the Jet coolant system, **J** type nut and cap.
★**GH handle** is available as an option. ☞ **P.293** Please order with the Code No. **MDSK6 : GH6, MDSK10 : GH10, MDSK13 : GH12, MDSK16 : GH16, MDSK20 : GH20, MDSK25 : GH25**
★**Please add "P" at the end of Code No. for high speed specification, e.g NBT40-MDSK10-60P**
★**Holder with an adjust screw for axial adjustment is supplied as an option. Please contact us.**

⚠ **Please use A type SK collet for the end milling operation.** ☞ **P.277**

GH Handle

Explanation of the Code No.

NBT40 - MDSK10 - 90

- Nominal Gauge Length
- Chucking Capacity
- MAJOR DREAM HOLDER
- Shank No.

MAX. r/min

Code No.	MAX. r/min	Code No.	MAX. r/min	Code No.	MAX. r/min
NBT30-MDSK 6-P	30,000	NBT40-MDSK 6-P	25,000	NBT50-MDSK 6-P	20,000
-MDSK10-P		-MDSK10-P		-MDSK10-P	
-MDSK13-P		-MDSK13-P		-MDSK13-P	
-MDSK16-P	25,000	-MDSK16-P	20,000	-MDSK16-P	
		-MDSK20-P		-MDSK20-P	
				-MDSK25-P	15,000

2LOCK MAJOR DREAM HOLDER

NIKKEN

Dampening Effect
TiN Bearing Effect

MDSK
Centre Through

Holder with an adjust screw for axial adjustment is supplied as an option. Please contact us.

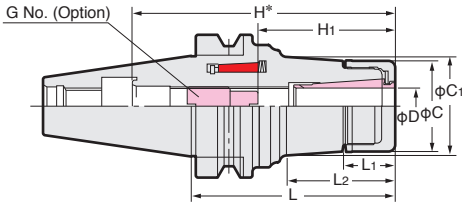

H : MAX. Cutter Shank Length to be inserted

2LOCK tool can be used on the M/C with BT standard spindle.

TAPER	Code No.	D	L	L1	L2	C	C1	H*	H1	G No. (Option)	Weight (kg)	Collet
No.50	NBT50-MDSK 6-105	3.0～6.0	105	16.2	48.0	19.5	24.0	116	21～35	SKG- 8	3.6	SK 6 A
	-120		120		63.0		26.1	131			3.7	
	-MDSK10-105	3.0～10.0	105	18.2	48.0	27.5	31.7	116	30～50	SKG-12L	4.3	SK10 A
	-120		120		63.2		33.8	131			4.4	
	-135		135		78.2		35.9	146			4.7	
	-165		165		110.2		40.4	176			5.0	
	-195		195		141.2		44.8	206			5.3	
	-MDSK13-105	3.0～13.0	105	22.0	48.0	33.0	36.7	116	31～60	SKG-15	4.2	SK13 A
	-120		120		63.0		38.8	131			4.7	
	-135		135		78.0		40.9	146			5.0	
	-165		165		110.0		45.4	176			5.3	
	-195		195		144.0		50.1	206			5.6	
	-MDSK16-105	3.0～16.0	105	23.0	48.0	40.0	43.5	116	45～70	SKG-18L	4.1	SK16 A
	-120		120		64.0		45.8	131			4.9	
	-135		135		80.1		48.0	146			5.2	
	-165		165		114.7		52.6	176			5.5	
	-195		195		144.6		52.8	206			5.8	
	-MDSK20-105	4.0～20.0	105	25.2	42.3	48.0	51.4	159	47～80	SKG-22	4.9	SK20 A
	-135		135		72.0		55.6	175			5.3	
	-165		165		102.0		59.8	205			5.9	
	-195		195		132.0		64.0	235			6.7	
	-MDSK25-105	8.0～25.4	105	27.0	42.3	55.0	57.2	159	55～85	SKG-28	4.9	SK25 A
	-135		135		74.0		61.6	175			5.7	
	-165		165		105.0		66.0	205			6.5	
	-195		195		135.0		70.2	235			7.5	

★Please refer ☞ **P.279** for the Jet coolant system, **J** type nut and cap.
★**GH handle** is available as an option. ☞ **P.293** Please order with the Code No. **MDSK6 : GH6, MDSK10 : GH10, MDSK13 : GH12, MDSK16 : GH16, MDSK20 : GH20, MDSK25 : GH25,**
★**Please add "P" at the end of Code No. for high speed specification, e.g NBT40-MDSK10-60P**
★**Holder with an adjust screw for axial adjustment is supplied as an option. Please contact us.**

Please use A type SK collet for the end milling operation. ☞ **P.277**

GH Handle

Explanation of the Code No.

NBT40 - MDSK10 - 90

- 90: Nominal Gauge Length
- MDSK10: Chucking Capacity
- MDSK10: MAJOR DREAM HOLDER
- NBT40: Shank No.

MINI-MINI CHUCK ADVANCED ALPHA

NIKKEN

MMC

Extra-long sizes are added
High Pressure Centre Through (MAX. 7MPa)
High Speed

EXPERT for SMALL DIA. END MILLING

30,000r/min&G2.5
Gripping from Front Nose
Run-Out Accuracy : 3μm at 4D

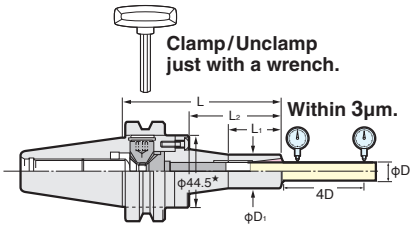

Dimension marked ★ is 52.4 for **MMC12**.

JAPAN PAT.

TAPER	Code No.	Chucking range φD	L	φD1	L1	L2	Collet	MAX.r/min	Weight(kg)
No.30	BT30 - MMC 4 - 105 - AA	1～ 4	105	15	30	43	MPK 4	30,000	0.9
	MMC 8C - 105 - AA	2～ 8		20	33	42	PMK 8 VMK 8		0.9
	MMC 12C - 105 - AA	4～12		30	35	44	PMK12 VMK12		1.1
No.40	BT40 - MMC 4 - 90 - AA	1～ 4	90	15	30	43	MPK 4	30,000	1.2
	8C - 90 - AA	2～ 8		20	33	42	PMK 8 VMK 8		1.2
	- 120 - AA		120		40	72			1.3
	- 150 - AA		150			102			1.4
	- 180 - AA		180		70	132			1.5
	12C - 90 - AA	4～12	90	30	35	44	PMK12 VMK12		1.4
	- 120 - AA		120		60	74			1.5
	- 150 - AA		150		70	104			1.6
	- 180 - AA		180		100	134			1.7
No.50	BT50 - MMC 4 - 105 - AA	1～ 4	105	15	30	43	MPK 4	20,000	3.8
	8C - 105 - AA	2～ 8		20	33	42	PMK 8 VMK 8		3.8
	- 135 - AA		135		40	72			3.9
	- 165 - AA		165			102			4.0
	- 195 - AA		195		70	132			4.1
	12C - 105 - AA	4～12	105	30	35	44	PMK12 VMK12		4.0
	- 135 - AA		135		60	74			4.1
	- 165 - AA		165		70	104			4.2
	- 195 - AA		195		100	134			4.3

★Wrench **MMC4, 8 : EA573KL-6** **MMC12 : MMCL12-M6W (BT30, BT40, HSK50, HSK63)**
MMC12 : MMCL12-M6T62 (BT50, HSK100) is attached as standard.
★**Extra-long sizes are added** ✻**Extra-long sizes : longer +30～90㎜ than conventional.**
★Collet is available as an option. Please refer ☞**P.284**
★Center through coolant type MINI-MINI Chuck is available for **MMC8** and **MMC12** type only.

EA573KL-6

Explanation of the Code No.

BT40 - MMC4 - 90 - AA

- AA: Advanced alpha Direct Screw Type
- 90: Nominal Gauge Length
- MMC4: Chucking Capacity
- MMC4: Symbol of Minimini chuck
- BT40: Shank No.

■Extra-long sizes are added*

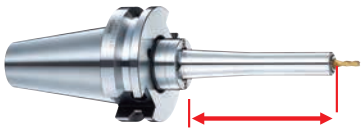

Photo shows **BT50** type

longer than +30～60㎜ than conventional.

Easy to approach a complicated work piece due to compact and extra-long design

DIRECT SCREW TYPE MINI-MINI CHUCK

NIKKEN

TAPER	Code No.	φD	L	φD1	L1	L2	Collet	MAX.r/min	Weight(kg)
No.30	BT30-MMC8C-65-AT	2～8	65	20	30	40	VMK 8	30,000	0.43

★Wrench **EA573KL-15** is attached as standard. ★Wrench both for chuck and pull stud is available as an option. Code No. is **MMCLA-BT30.**
★Collet is available as an option. Please refer ☞**P.284**


MMCLA-BT30

■Direct Screw Type

Photo shows **BT30-MMC8-65-AT**

High Pressure Centre Through (MAX. 7MPa)

High Accuracy and High Gripping Torque by rigid and smooth shape body

HSK Direct Screw Type : ☞**P.234**

Straight Shank MINI-MINI CHUCK

NIKKEN

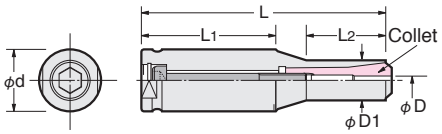

K-MMC

Style	Code No.	Chucking Range D	L	φD1	L1	L2	Collet	Weight(kg)
16	K16-MMP 4- 70, 150	1～ 4	70, 150	15	50, 130	20	MPK 4	0.1, 0.2
20	K20-MMC 8-100	2～ 8	100	20	80	20	PMK 8 VMK 8	0.2
32	K32-MMC 8-122, 160	2～ 8	122, 160	20	67	40	PMK 8 VMK 8	0.5, 0.7
	K32-MMC12-170S	4～12	170	30	120	50	PMK12 VMK12	1.0

★Wrench is supplied as standard. Collet is available as an option.

FLANGE THROUGH COOLANT TYPE HOLDER

NIKKEN

■High Pressure Coolant Through Flange

The Flange Through Coolant System is a solution against the spindle rust and the dust problems of Centre Through Coolant System. These Tool Holder are used for Machine has Flange Through Holes and standard as **DIN69871/B**.

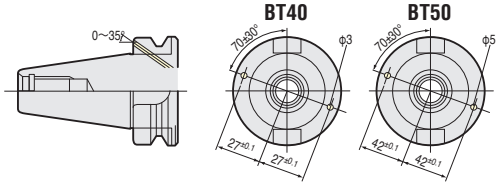

NISHIDA **BT40** Machine's Flange Through Hole alignment is unique. Option**(T)** is available. Specify as **BT40-C20T-90**

■RP (Rust Proof Treatment) ☞**P.296**

Pull Stud (with O-ring) for Flange Through type is also available.

2LOCK FLANGE THROUGH COOLANT TYPE HOLDER

NIKKEN

■High Pressure Coolant Through Flange

The Flange Through Coolant System is a solution against the spindle rust and the dust problems of Centre Through Coolant System. These Tool Holder are used for Machine has Flange Through Holes and standard as **DIN69871/B**.

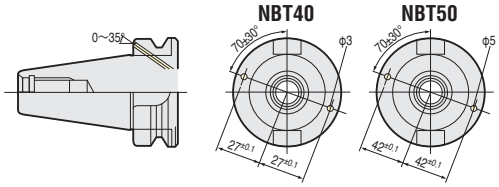

■RP (Rust Proof Treatment) ☞**P.296**

Pull Stud (with O-ring) for Flange Through type is also available.

NPU DRILL CHUCK

NIKKEN

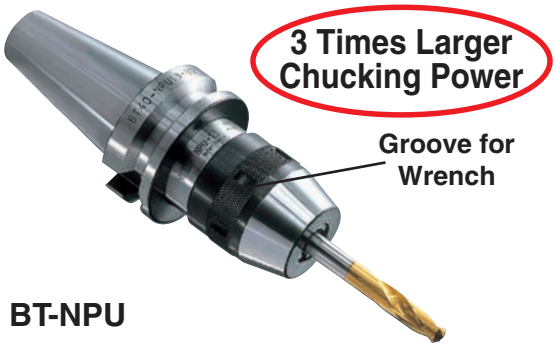

BT-NPU

Being given favorable reception for its Compactness, High Precision & High Rigidity.

- The shank body fabricated solidly with the keyless drill chuck eliminates the possibility of slipping-off.
- The attached tightening wrench prevents slipping-off of drill to ensure the safety in unmanned operation.
- Chucking torque three times as large as ever before. There is no possibility of slipping-off of the carbide drill etc.

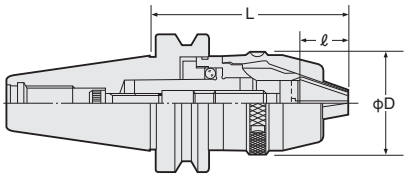

Chucking Length (ℓ)
NPU 8 : 18.8mm
NPU13 : 26.5mm

TAPER	Code No.	Chucking Dia	D	L MIN.	L MAX.	Weight (kg)
No.30	BT30-NPU 8- 70	0.3～8	38	76.5	83.5	0.7
	-NPU13- 95	1～13	48.5	102.1	113.1	1.2
No.40	BT40-NPU 8- 70	0.3～8	38	76.5	83.5	1.2
	(IT40) -110			115.5	122.5	1.5
	-155			160.5	167.5	1.7
	-NPU13- 80	1～13	48.5	86.1	97.1	1.5
	-130			137.1	148.1	2.2
	-175			182.1	193.1	2.7
No.50	BT50-NPU 8- 85	0.3～8	38	87.5	94.5	3.8
	(IT50) -110			115.5	122.5	3.9
	-170			175.5	182.5	4.3
	-NPU13- 90	1～13	48.5	97.1	108.1	4.1
	-130			137.1	148.1	4.6
	-190			197.1	208.1	5.2

★Centre Through Type Drill Chuck has different L-length & Code No. ☞ P.46, Pull Stud with Oil Hole ☞ P.314.
★Flange Through Type Drill Chuck has different L-length & Code No. ☞ P.46.
★Wrench is available as an option. **NPU8: NPUL-8, NPU13: NPUL-13**.
★In case of IT40, **IT40-NPU8-80** is the shortest length.
★In case of IT50, **IT50-NPU8-80** is the shortest length.

JACOBS TAPER ADAPTER

NIKKEN

JTA

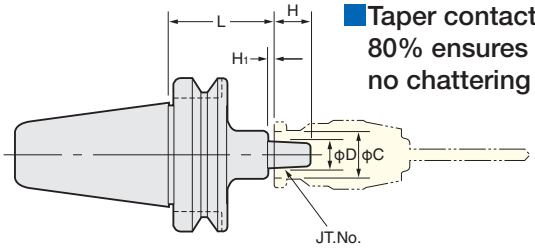

- Taper contact area of more than 80% ensures reliable drilling with no chattering accompanied.

TAPER	Code No. -L	JT. No.	D	H	H_1	C	Weight (kg)
No.30	BT30-JTA6-30	6	17.17	24	4	30	1.0
No.40	BT40-JTA6-45, 90						1.1, 1.4
No.50	BT50-JTA6-45, 105						4.0, 4.4

★Each Drill chuck Adapter is supplied without drill chuck.

★For high speed and high accurate application, Slim Chuck ☞ P.35 is highly recommended.

NPU DRILL CHUCK for Centre Through

(MAX. 1MPa)

NIKKEN

Centre Through
(MAX. 1MPa)

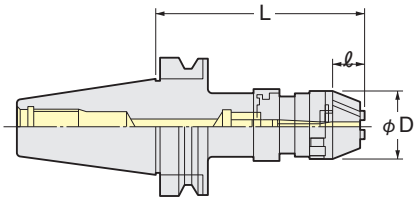

TAPER	Code No.	Chucking Dia	φD	ℓ	L	Weight (kg)
No. 40	BT40-NPU13C- 80	6～13	48.5	26.5	92.1～103.1	1.5
	(IT40) 130				137.1～148.1	2.2
	175				182.1～193.1	2.7
No. 50	BT50-NPU13C- 90				97.1～108.1	4.1
	(IT50) 130				137.1～148.1	4.6
	190				197.1～208.1	5.2

★Wrench is available as an option. **NPU8: NPUL-8, NPU13: NPUL-13**.
★MIN. Chucking Dia. for center through coolant is φ6mm. **★Please use Slim Chuck for high pressure coolant 7MPa. ☞P.39**

NPU DRILL CHUCK for Flange Through

NIKKEN

Flange Through
(MAX. 1MPa)

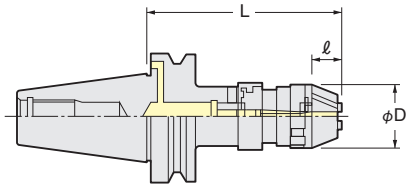

TAPER	Code No.	Chucking Dia	φD	ℓ	L	Weight (kg)
No.40	BT40-NPU13F-105	6～13	48.5	26.5	112.1～123.1	1.9
	(IT40) 150				157.1～168.1	2.4
No.50	BT50-NPU13F-110				117.1～128.1	4.4
	(IT50) 150				157.1～168.1	4.8

★Wrench is available as an option. **NPU8: NPUL-8, NPU13: NPUL-13**. **★Please use Slim Chuck ☞ P.39 for high pressure coolant (MAX. 7Mpa).**
★MIN. Chucking Dia. for center through coolant is φ6mm.

SIDE LOCK HOLDER A TYPE (for END MILL)

NIKKEN

SLA

■Taper contact area of more than 80% ensures reliable cutting with no chattering.

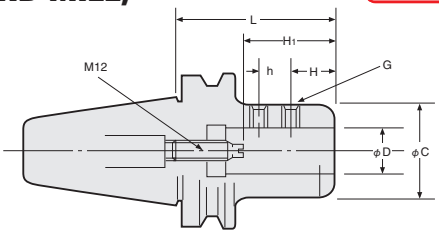

TAPER	Code No.	D	L	C	h	H	H1 MIN.～MAX.	G	Weight(kg)
No.30	BT30-SLA20- 75	20	75	50	21	15	55～ 70	M14 P1.25	1.3
No.40	BT40-SLA20- 90	20	90	50	21	24	55～ 70	M14 P1.25	1.8
	-SLA25- 90	25							1.7
	-SLA32- 90,135*	32	90,135	60	25	25		M16 P1.25	1.9,2.3
No.50	BT50-SLA20-105,135*	20	105,135	50	21	24	55～ 70	M14 P1.25	4.8,5.2
	-SLA25-105,135*,165*	25	105,135,165						4.7,5.2,5.7
	-SLA32-105,135*,165*	32		60	25	25	65～ 80	M16 P1.25	4.0,4.9,5.5
	-SLA42-115*,150*	42	115,150	90	32	30	85～100	M20 P1.25	6.6,7.5

★The Code No. of Centre Through Coolant type is **"SL○○CN"** ☞P.48 For suitable collets, please refer ☞P.117. ★These are semi-standard products.
For Centre-through coolant pull stud, please refer ☞P.314.
★The Code No. of Flange Through Coolant type is **"SL○○FN"** ☞P.48 For suitable collets, please refer ☞P.117.
★**SLA42** type has larger φC and screw size to improve rigidity.
★When using a combat drill, the code No. is **SL**(for drill only, centre-through). **BT50-DM32 -120**
★**Code No. of Side Lock Holder for Combination Shank is DM.** **-DM50.8-120**

SIDE LOCK HOLDER B TYPE (for DRILL)

NIKKEN

SLB

DSA-MT

■Taper contact area of more than 80% ensures reliable drilling with no chattering.

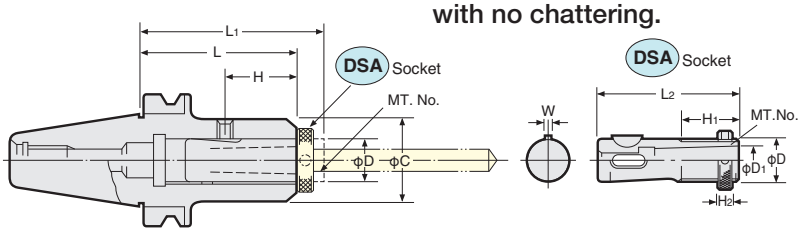

TAPER	Code No.	D	L	L1 MIN.～MAX.	H	C	W	MT.No.	DSA Socket	Weight(kg)
No.30	BT30-SLB26-105	26	105	117～142	40	50	5	MT1	DSA26	1.5
								MT2		1.4
No.40	BT40-SLB26-105	26	105	117～142	40	50	5	MT1	DSA26	2.1
								MT2		2.0
	-SLB35-135	35	135	147～182	55	60	6	MT2	DSA35	3.3
								MT3		3.2
No.50	BT50-SLB26-105	26	105	117～142	40	50	5	MT1	DSA26	4.8
								MT2		4.7
	-SLB35-120	35	120	132～167	55	60	6	MT2	DSA35	5.4
								MT3		5.3
	-SLB35-135	35	135	147～182	55	60	6	MT1,MT2	DSA35	5.7
								MT3		5.6
	-SLB48-165	48	165	181～227	65	80	8	MT1,MT2	DSA48	8.4
								MT3,MT4		8.1

DSA type drill sockets

	Code No.	D	D1	L2	H1	H2	W	MT.No.	Weight(kg)
DSA26	DSA26-MT1	M26 P2	12.065	92	41	12	5	1	0.4
	-MT2		17.780					2	0.3
DSA35	DSA35-MT1	M35 P2	12.065	117	47	12	6	1	0.9
	-MT2		17.780					2	0.8
	-MT3		23.825					3	0.7
DSA48	DSA48-MT1	M48 P2	12.065	143	62	16	8	1	2.2
	-MT2		17.780					2	2.1
	-MT3		23.825					3	1.9
	-MT4		31.267					4	1.6

★It can be inserted into the side lock holder B type(SLB).

SIDE LOCK HOLDER (for DRILL) for CentreThrough

NEW

NIKKEN

High Pressure
Centre Through
(MAX. 7MPa)

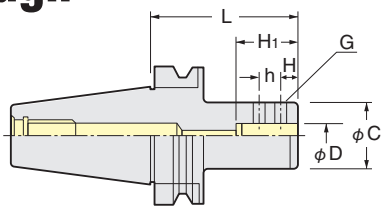

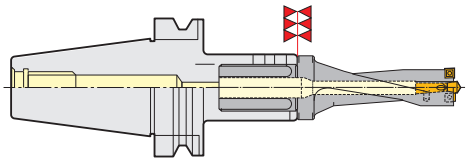

TAPER	Code No.	D	L	C	h	H	H1	G	Weight (kg)
No. 30	BT30-SL12CN- 60	12	60	35	—	20	47	M10	0.6
	-SL16CN- 60	16	60	45	13	18	50	M10	0.7
	-SL20CN- 75	20	75	50	16	13	52	M10	1.0
	-SL25CN- 80	25	80	55	17	14	58	M12 P1.25	1.1
No. 40	BT40-SL20CN- 90,120,150	20	90,120 150	50	16	13	52	M12 P1.25	1.8,2.2,2.7
	(IT40)-SL25CN- 90,120,150	25		55	17	14	58	M12 P1.25	1.7,2.4,2.9
	-SL32CN- 90,120,150	32		60	16	15	62	M10	1.9,2.6,3.3
No. 50	BT50-SL20CN-105,150,200	20	105,150 200	50	16	13	52	M12 P1.25	4.8,5.5,6.3
	(IT50)-SL25CN-105,150,200	25		55	17	14	58	M12 P1.25	4.7,5.5,6.3
	-SL32CN-105,150,200	32		60	16	15	62	M12 P1.25	4.9,5.9,7.0
	-SL40CN-105,150,200	40		88	19	18	72	M12 P1.25	5.2,7.3,9.5

∗SL○○C will be replaced by SL○○CN as soon as it is out of stock.

⚠ OK25 type, OK32 type, OK40 type collets cannot be used.

SIDE LOCK HOLDER (for DRILL) for Flange Through

NIKKEN

High Pressure
Centre Through
(MAX. 7MPa)

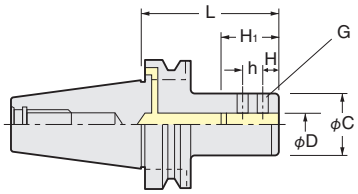

TAPER	Code No.	D	L	C	h	H	H1	G	Weight (kg)
No. 40	BT40-SL20FN- 90	20	90	50	16	12	44.5	M10	1.8
	(IT40)-SL25FN- 90	25	90	55	17	14	54.5	M12 P1.25	1.7
	-SL32FN- 90	32	90	60	16	15	59.5	M12 P1.25	1.9
No. 50	BT50-SL20FN-105	20	105	50	16	12	44.5	M10	4.8
	(IT50)-SL25FN-105	25	105	55	17	14	54.5	M12 P1.25	4.7
	-SL32FN-105	32	105	60	16	15	59.5	M12 P1.25	4.9
	-SL40FN-105	40	105	88	19	18	70	M12 P1.25	5.2

∗SL○○F will be replaced by SL○○FN as soon as it is out of stock.

⚠ OK25 type, OK32 type, OK40 type collets cannot be used.

MORSE TAPER ADAPTER A TYPE

NIKKEN

MTA

■Taper contact area of more than 80% ensures high repeatability run-out accuracy.

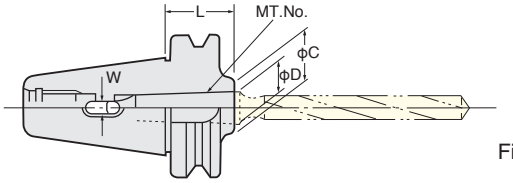

Fig. 1

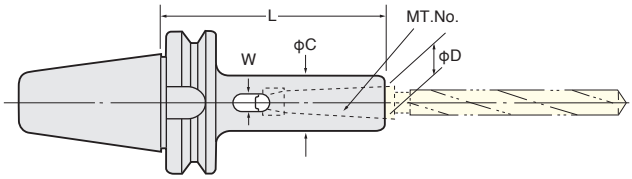

Fig. 2

TAPER	Code No.	MT. No.	D	L	C	W	Fig	Weight (kg)
No.30	BT30-MTA1- 45	1	12.065	45	20	5.6	1	0.8
	-MTA1-105			105	25		2	0.9
	-MTA2- 60	2	17.780	60	30	6.6	1	0.9
	-MTA2-120			120			2	1.2
	-MTA3- 80	3	23.825	80	40	8.4	1	1.0
No.40	BT40-MTA1- 45	1	12.065	45	25	5.6	1	1.0
	(IT40)-MTA1-120			120			2	1.3
	-MTA2- 60	2	17.780	60	32	6.6	1	1.1
	-MTA2-120			120			2	1.4
	-MTA3- 75	3	23.825	75	40	8.4	1	1.2
	-MTA3-135			135			2	1.8
	-MTA4- 95	4	31.267	95	50	12.4	1	1.4
	-MTA4-165			165			2	2.4
No.50	BT50-MTA1- 45	1	12.065	45	25	5.6	1	4.0
	(IT50)-MTA1-120			120			2	4.3
	-MTA1-180			180				4.3
	-MTA2- 45	2	17.780	45	32	6.6	1	4.0
	-MTA2-135			135			2	4.4
	-MTA2-180			180				4.6
	-MTA3- 45	3	23.825	45	40	8.4	1	3.9
	-MTA3-150			150			2	4.7
	-MTA3-180			180				4.9
	-MTA4- 75	4	31.267	75	50	12.4	1	4.0
	-MTA4-180			180			2	5.4
	-MTA5-105	5	44.399	105	65	16.5	1	4.6

★Centre through type MT Adapter has different dimensions.
★Flange through type MT Adapter has different dimensions.

For high pressure coolant through, please use Milling Chuck ☞P.31, Slim Chuck ☞P.35 or Side Lock Holder ☞P.47 instead of MT Adapter.

MORSE TAPER ADAPTER B TYPE with DRAW BOLT

NIKKEN

MTB

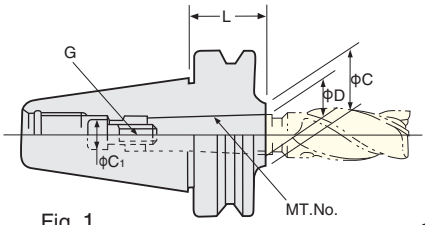

Fig. 1

Draw bolt type

■Taper contact area of more than 80% ensures reliable machining without vibration.

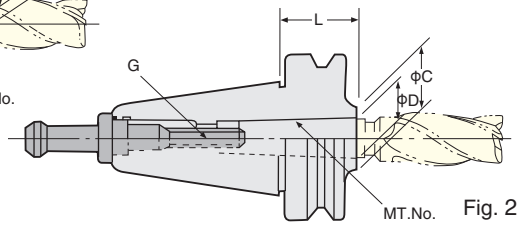

Fig. 2

Pull stud draw bolt type.

TAPER	Code No.	MT.No.	D	L	C	C1	G	Fig	Weight (kg)
No.30	BT30-MTB1- 45	1	12.065	45	25	10	M 6×1	1	0.8
	-MTB2- 25	2	17.780	25	32	—	M10×1.5	2	0.8
	-MTB3- 80	3	23.825	80	40		M12×1.75		1.0
No.40	BT40-MTB1- 45	1	12.065	45	25	10	M 6×1	1	1.0
	-MTB2- 60	2	17.780	60	32	13.5	M10×1.5		1.1
	-MTB3- 45	3	23.825	45	40	—	M12×1.75	2	1.1
	-MTB4- 85	4	31.267	85	50		M16×2		1.3
No.50	BT50-MTB1- 45	1	12.065	45	25	10	M 6×1	1	3.9
	-MTB2- 45	2	17.780		32	16	M10×1.5		3.9
	-MTB3- 60	3	23.825	60	40	18	M12×1.75		3.9
	-MTB4- 75	4	31.267	75	50	20.5	M16×2		3.9
	-MTB5-105-M16	5	44.399	105	70	—			4.2
	-MTB5-105						M20×2.5	2	4.0

★Adapter in Fig.1 is supplied with a special draw bolt.
★Morse Taper Adapters B type as illustrated in Fig.2 need the special pull stud. The pull stud is optional accessory. When ordering, please specify the pull stud code number.

■PULL STUD for MORSE TAPER ADAPTER B TYPE

MT No.	DRAW BOLT
MT 2	M10×1.5
MT 3	M12×1.75
MT4 / MT5	M16×2
MT 5	M20×2.5

TAPER	Standard pull stud Code No.	MTB2	MTB3	MTB4	MTB5
No.30	PS- 16	PS-27	PS- 32	—	—
	- 17	-28	- 33	—	—
No.40	PS- 1	—	PS- 7	PS- 8	—
	- 2	—	- 29	- 10	—
	- 08-1	—	- 017	- 018	—
	- P5-1	—	- P51	- P52	—
	- G51	—	- G56	- G57	—
	- 805	—	- 872	- 873	—
No.50	PS- 5	—	—	PS- 57	PS-15*
	- 6	—	—	- 65	-61*
	- 0	—	—	- 016	-06*

★For standard pull stud Code No. Please refer ☞P.313.
★The other type of pull stud is available, please specify the pull stud Code No.
★The screw of the pull stud marked ＊ is **M20**.

SLEEVE for NT40 TOOL

NIKKEN

TSA

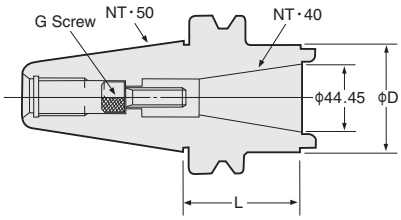

Code No.	L	D	G	Weight (kg)
BT50-TSA40M-75	75	70	M16P＝2	4.6
(IT50) -TSA40U-75			5/8-11UNC	4.6

★G Screw is standard accessory. When ordering, please specify **M** (metric) or **U** (inch).
★Above Code No. is the sleeve which internal taper is for conventional **T40U (M)**. When internal taper is **BT40**, G screw **9TSA40-M16-70L** (option) is necessary.

AUTO. DEPTH CONTROL TAPPER CHUCK

NIKKEN

ZL

- Most suitable for tapping gas threads, blind-end threads and light alloys.
- When normal rotation of machine is stopped at specified position, the Tapper Chuck runs idle after progressing by its elongation (4mm for ZL12 type). Simply rotate the machine in the reverse direction, and the tap depth will be made uniform within a high-precision.

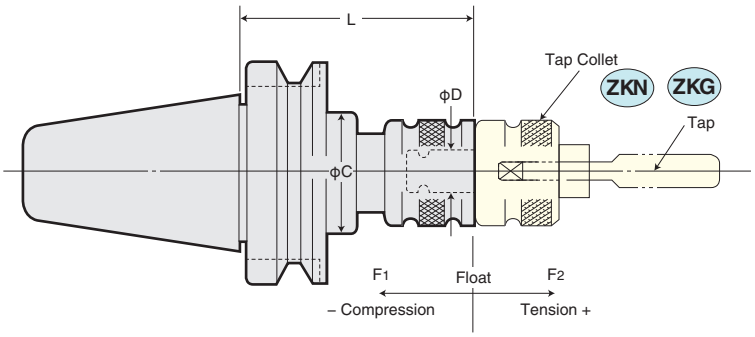

TAPER	Code No.	Tapping Capability M	Tapping Capability U	Tapping Capability P	D	L	C	Float F_1	Float F_2	Tap Collet	Weight (kg)
No.30	BT30-ZL 8-110*1	M 2～ 8	1/8～1/4	—	13	110	34	3	3	ZKN 8 *1	1.5
	-ZL12-130	M 2～12	1/8～1/2	P1/16～1/4	19	130	58	5	4	ZKG12	1.9
No.40	BT40-ZL 8-120*1	M 2～ 8	1/8～1/4	—	13	120	34	3	3	ZKN 8 *1	1.6
	(IT40)-ZL12-100	M 2～12	1/8～1/2	P1/16～1/4	19	100	58	5	4	ZKG12	1.9
	-ZL12-130					130					2.3
	-ZL16-150	M 3～16	1/8～5/8	P1/8～3/8	25	150	60			ZKG16	2.9
	-ZL24-160	M 8～24	1/2～ 1	P1/4～5/8	30	160	73	6	7	ZKG24	3.3
	-ZL38-190	M18～38	3/4～1 3/8	P3/8～ 1	45	190	92	8	10	ZKN38	6.0
No.50	BT50-ZL 8-130*1	M 2～ 8	1/8～1/4	—	13	130	34	3	3	ZKN 8 *1	4.2
	(IT50)-ZL12- 85	M 2～12	1/8～1/2	P1/16～1/4	19	85	58	5	4	ZKG12	3.4
	-ZL12-130					130					4.3
	-ZL16-135	M 3～16	1/8～5/8	P1/8～3/8	25	135	60			ZKG16	4.6
	-ZL24-100	M 8～24	1/2～ 1	P1/4～5/8	30	100	73	6	7	ZKG24	4.5
	-ZL24-142					142					5.8
	-ZL38-150	M18～38	3/4～1 3/8	P3/8～ 1	45	150	92	8	10	ZKN38	6.9

★In Case of **IT40, IT40-ZL16-160** and **IT40-ZL24-175** are standard.
★In Case of **IT50, IT50-ZL12-130, IT50-ZL24-142** and **IT50-ZL38-180** are standard.
★Marked *1 **ZL8** Tapper Chuck and **ZK8** Tap Collet are available as semi-standard.
★Please refer ☞ **P.287 (ZKG) ～P.288 (ZK) for ISO, IMPERIAL, DIN Tap Collet,** ☞ **P.285 (ZKG) ～P.286 (ZKN) for JIS Tap Collet**, and ☞ **P.285** for **Long Size Tap Collet.**
★Centre Coolant type Tapper Chuck is also available. Please contact with us.
★Flange through type Tapper Chuck is also available. Please contact with us.

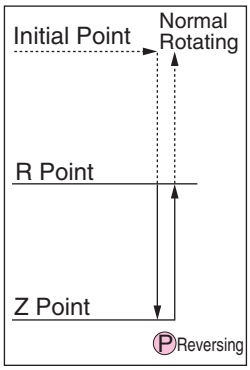

Program of Auto•Depth Control Tapper Chuck

(ZL)

NO. 1	M03	S——;	Spindle Rotating
NO. 2	G00	X——Y——;	Initial Point
NO. 3	G00	Z——;	R Point
NO. 4	G01	Z——F——;	Z Point
NO. 5	G04	P——;	Dwell
NO. 6	M05		Spindle Stop
NO. 7	M04		Spindle Reversing
NO. 8	G01	Z——;	R Point
NO. 9	M05		Spindle Stop
NO.10	G00	Z—— M03;	Initial Point, Spindle Normal Rotating

⚠ When using **ZL** Tapper Chuck, please make sure of the following program.

G04 P —; — Threads are made only by Spindle Rotation during Dwell. Thus, exact depth is controlled.

M05 ; — Spindle stop.

M04 ; / **G01 Z —;** — First command Spindle Reversing. Then, upward movement of Z. If upward movement of Z is commanded earlier than Spindle Reversing, down movement of tap and up movement of Z may cause breakage of tap.

FLOATING TAPPER CHUCK

NIKKEN

BT

Suitable Tapper Chuck for Conventional M/C

- More convenient in tapping, thanks to stable torque and slim body
- Good Run-out, No Pull-out and No Tap Breakage with NIKKEN Tapper Chuck
  Ideal for Unmanned System
- With the axial floating system

Z

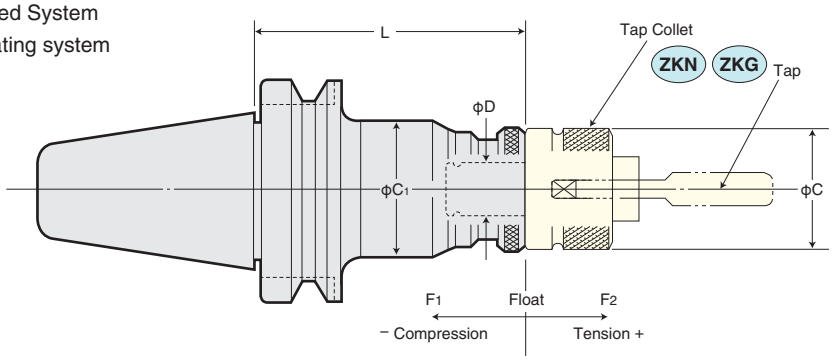

TAPER	Code No.	Tapping Capability M	Tapping Capability U	Tapping Capability P	D	L	C	C1	Float F1	Float F2	Tap Collet	Weight (kg)
No.30	BT30-Z 8- 90*1	M 2～ 8	1/8～1/4	—	13	90	23	33	5	15	ZKN 8 *1	1.2
	-Z12-105	M 2～ 12	1/8～1/2	P1/16～1/4	19	105	32	45	5	15	ZKG12	1.2
No.40	BT40-Z 8- 90*1	M 2～ 8	1/8～1/4	—	13	90	23	33	5	15	ZKN 8 *1	1.4
	(IT40)-Z12- 90	M 2～ 12	1/8～1/2	P1/16～1/4	19	90	32	45	5	15	ZKG12	1.5
	-Z12-130					130			15			1.6
	-Z16-109	M 3～ 16	1/8～5/8	P1/8～3/8	25	109	39	55	8	20	ZKG16	2.0
	-Z24-100	M 8～ 24	1/2～ 1	P1/4～5/8	30	100	46	68	10	20	ZKG24	2.1
	-Z24-187					187		63	20			3.5
	-Z38-140	M18～ 38	3/4～13/8	P3/8～ 1	45	140	78	85	8	22	ZKN38	6.7
No.50	BT50-Z 8-105*1	M 2～ 8	1/8～1/4	—	13	105	23	33	5	15	ZKN 8 *1	4.2
	(IT50)-Z12-130	M 2～ 12	1/8～1/2	P1/16～1/4	19	130	32	45	15	15	ZKG12	4.3
	-Z12-175					175						4.8
	-Z12-220					220						5.0
	-Z16-135	M 3～ 16	1/8～5/8	P1/8～3/8	25	135	39	55	8	20	ZKG16	5.2
	-Z24-142	M 8～ 24	1/2～ 1	P1/4～5/8	30	142	46	63	20	20	ZKG24	5.8
	-Z24-187					187						6.2
	-Z38-175	M18～ 38	3/4～13/8	P3/8～ 1	45	175	78	98	10	25	ZKN38	8.3
	-Z65-160	M36～100	1 ～33/4	P1 ～ 3	68	160	110*2 (125)	110	10	25	ZKN65	9.0

★In Case of **IT40, IT40-Z8-95*1** and **IT40-Z24-125** are standard.
★In Case of IT50, **IT50-Z8-105*1, IT50-Z38-187** and **IT50-Z65-165** are standard.
★Marked *1 **Z8** Tapper Chuck and **ZK8** Tap Collet are available as semi-standard.
★Please refer ☞ **P.287 (ZKG) ～P.288 (ZK) for ISO, IMPERIAL, DIN Tap Collet,** ☞ **P.285 (ZKG) ～P.286 (ZKN) for JIS Tap Collet**, and ☞ **P.285** for **Long Size Tap Collet.**
★Marked *2 ( ) dimension is for M65 or more size of **ZK** Tap Collet.

⚠

① Caution for Floating Mechanism

(1). Too Much Tension
When tension movement exceeds the limitation, the black mark will appear. In this case increase machine feed.

(2). Too Much Compression
When machine feed is too fast for the tap thread pitch, the compression floating mechanism will work. The machine program should be modified to slow feed rate down.



② When the drilled hole diameter is too small (this is often caused by the drilling of the tough materials, extended drilling diameter is not large enough.), the tap will slip before the breakage due to torque limitter mechanism. In this case enlarge the drilled hole and do not adjust the torque setting.

③ For a blind hole tapping, the tap might hit the bottom of the hole and the floating shaft will not extend any further, if the Z point is too close to the component. And the point of reversing the floating shaft could compress further than the extension, it may cause damage to the tapped hole. In this case, make the drilled hole deeper or restrict Z point at the higher position.

④ When the R point is too close to the component, the spindle will moves upwards with the fully extended float mechanism at reversing operation, and it might cause damage to the tapped hole as the tap may be still in the hole when the spindle try to return to the initial point at the rapid feed. In this case, give further distance between the R point and the component.

⑤ In case of the tapping with Z type tapper chuck, since the Z Axis stroke will move upwards after reversing operation starts at the Z point due to the machine tapping cycle features, it may cause damage to the tapped hole. In this case, input the dwell command at the Z point on the program in order to make the upward movement of Z Axis with the tapper chuck as its extended float mechanism.

DREAM SYNCHRO TAP HOLDER NEW

NIKKEN
JAPAN PAT.

Tapping Capability : M2 ~M24
Center Through

ZDS

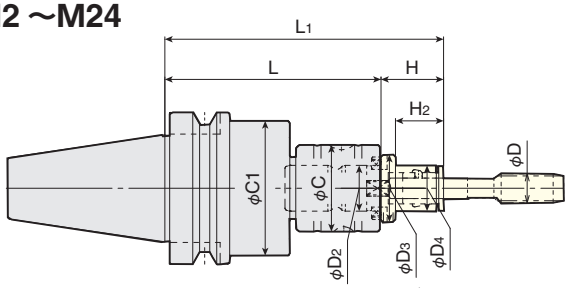

★ +100L specification is also available.

TAPER	Code No.	Tapping Capability D	L	C1	C	Tap Collet	H	L1	Weight (kg)
No.30	NBT30-ZDS12-105	M2～M12 1/8～1/2 P1/8	105	φ56	φ36	ZDK12-□	26	131	1.5
						ZDK12-□-50L	76	181	1.6
	-ZDS16-115	M4～M16 1/8～5/8 P1/8～P3/8	115		φ45	ZDK16-□	28	143	1.8
						ZDK16-□-50L	78	193	2
	-ZDS24-120	M12～M24 1/2～1 P3/8～P5/8	120		φ50	ZDK24-□	38	158	2
						ZDK24-□-50L	88	208	2.3
No.40	NBT40-ZDS12- 90	M2～M12 1/8～1/2 P1/8	90	φ56	φ36	ZDK12-□	26	116	1.8
						ZDK12-□-50L	76	166	1.9
	-ZDS16-100	M4～M16 1/8～5/8 P1/8～P3/8	100		φ45	ZDK16-□	28	128	2.1
						ZDK16-□-50L	78	178	2.3
	-ZDS24-105	M12～M24 1/2～1 P3/8～P5/8	105		φ50	ZDK24-□	38	143	2.3
						ZDK24-□-50L	88	193	2.6
No.50	NBT50-ZDS12-100	M2～M12 1/8～1/2 P1/8	100	φ56	φ36	ZDK12-□	26	126	4.3
						ZDK12-□-50L	76	176	4.4
	-ZDS16-110	M4～M16 1/8～5/8 P1/8～P3/8	110		φ45	ZDK16-□	28	138	4.7
						ZDK16-□-50L	78	188	4.9
	-ZDS24-115	M12～M24 1/2～1 P3/8～P5/8	115		φ50	ZDK24-□	38	153	4.9
						ZDK24-□-50L	88	203	5.2

*NBT shank is standard for DREAM SYNCHRO TAP HORDER. BT shank is also available,please contact us for details.
★Wrench is available as an option. ZDS12:NPUL-8, ZDS16:NPUL-13, ZDS24:NPUL-13.

NEW

For Dream Synchro
Tap Holder
ZDK Tap Collet

ZDK

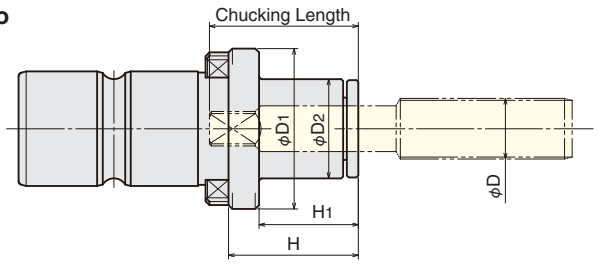

ZDK12-12-J
Coolant discharge

Dimension List of **ZDK** Tap collet

JIS		ZDK12			ZDK16				ZDK24			
D	(M)	2～5	6～8	10～12	4～5	6～8	10～12	14～16	12	14～16	18～20	22～24
	(U)	1/8,3/16	1/4,5/16	3/8,7/16,1/2	3/16	1/4,5/16	3/8,7/16,1/2	9/16,5/8	1/2	9/16,5/8	3/4	7/8,1
	(P)	-	-	1/8	-	-	1/8	1/4,3/8	-	3/8	-	1/2,5/8
D1		28			36				42			
D2		13	16	19	13	16	19	26	19	26		32
H		26			28				33	34	38	
H1		20			22				25	26	30	

★Please contact us for ISO and DIN standards.

ZDK TAP COLLET NEW

NIKKEN
JAPAN PAT.

BT

ZDK TAP COLLET SELECTION TABLE

JIS	ZDK12			ZDK16			ZDK24		
	Code No.	TAP SHANK No.	L1	Code No.	TAP SHANK No.	L1	Code No.	TAP SHANK No.	L1
JIS Metric (M)	ZDK12- 2	3	22.5	ZDK16- 4	11	26.5	ZDK24-12	26	32
	- 3	8	25.5	- 5	12		-14	31	38
	- 4	11	26.5	- 6	14	30	-16	37	40
	- 5	12		- 8	17	31	-18	39	41
	- 6	14	30	-10	19		-20	42	42
	- 8	17	31	-12	26	32	-22	47	47
	-10	19		-14	31	38	-24	51	49
	-12	26	32	-16	37	40	-	-	-
JIS Unified (U)	Code No.	TAP SHANK No.	L1	Code No.	TAP SHANK No.	L1	Code No.	TAP SHANK No.	L1
	ZDK12- 1/8	8	25.5	ZDK16-3/16	12	26.5	ZDK24- 1/2	27	33
	-3/16	12	26.5	- 1/4	14	30	-9/16	31	38
	- 1/4	14	30	-5/16	16	31	- 5/8	35	39
	-5/16	16	31	- 3/8	19		- 3/4	39	41
	- 3/8	19		-7/16	21	32	- 7/8	47	47
	-7/16	21	32	- 1/2	27	33	- 1	53	49
	- 1/2	27	33	-9/16	31	38	-	-	-
	-	-	-	- 5/8	35	39	-	-	-
JIS Pipe (P)	Code No.	TAP SHANK No.	L1	Code No.	TAP SHANK No.	L1	Code No.	TAP SHANK No.	L1
	ZDK12-1/8P	22	28	ZDK16-1/8P	22	28	ZDK24-3/8P	40	35
	-	-	-	-1/4P	33	33	-1/2P	49	41
	-	-	-	-3/8P	40	35	-5/8P	52	42

ISO	ZDK12			ZDK16			ZDK24		
	Code No.	TAP SHANK No.	L1	Code No.	TAP SHANK No.	L1	Code No.	TAP SHANK No.	L1
ISO Metric (M)	ZDK12- 2S	1	23.5	ZDK16- 4S	7	25.5	ZDK24-12S	28	33
	- 3S	4	22.5	- 5S	11	26.5	-14S	34	39
	- 4S	7	25.5	- 6S	18	31	-16S	37	40
	- 5S	11	26.5	- 8S	24	32	-18S	41	41
	- 6S	18	31	-10S	29	34	-20S	41	
	- 8S	24	32	-12S	28	33	-22S	45	47
	-10S	29	34	-14S	34	39	-24S	48	49
	-12S	28	33	-16S	37	40	-	-	-
ISO Unified (U)	Code No.	TAP SHANK No.	L1	Code No.	TAP SHANK No.	L1	Code No.	TAP SHANK No.	L1
	ZDK12- 1/8S	4	22.5	ZDK16-3/16S	11	26.5	ZDK24- 1/2S	28	33
	-3/16S	11	26.5	- 1/4S	18	31	-9/16S	34	39
	- 1/4S	18	31	-5/16S	24	32	- 5/8S	37	40
	-5/16S	24	32	- 3/8S	29	34	- 3/4S	41	41
	- 3/8S	29	34	-7/16S	24		- 7/8S	45	47
	-7/16S	24	32	- 1/2S	28	32	- 1S	48	49
	- 1/2S	28	33	-9/16S	34	39	-	-	-
	-	-	-	- 5/8S	37	40	-	-	-
ISO Pipe (R)	Code No.	TAP SHANK No.	L1	Code No.	TAP SHANK No.	L1	Code No.	TAP SHANK No.	L1
	ZDK12-1/8PS	25	28	ZDK16-1/8PS	25	28	ZDK24-3/8PS	38	34
	-	-	-	-1/4PS	30	33	-1/2PS	46	40
	-	-	-	-3/8PS	38	34	-5/8PS	49	42

DIN	ZDK12			ZDK16			ZDK24		
	Code No.	TAP SHANK No.	L1	Code No.	TAP SHANK No.	L1	Code No.	TAP SHANK No.	L1
DIN Metric (M)	ZDK12- 2D	2	24.5	ZDK16- 4D	9	25.5	ZDK24-12D	27	33
	- 3D	5	25.5	- 5D	15	31	-14D	32	39
	- 4D	9		- 6D	15		-16D	35	
	- 5D	5	31	- 8D	15		-18D	39	41
	- 6D	15		- 8D7	23	32	-20D	43	42
	- 8D	15		- 10D	19	31	-22D	50	48
	- 8D7	23	32	-10D7	29	34	-24D	50	
	- 10D	19	31	- 12D	27	33	-	-	-
	-10D7	29	34	- 14D	32	39	-	-	
	- 12D	27	33	- 16D	35		-	-	-
DIN Pipe (R)	Code No.	TAP SHANK No.	L1	Code No.	TAP SHANK No.	L1	Code No.	TAP SHANK No.	L1
	ZDK12-1/8	20	27	ZDK16-1/8R	20	27	ZDK24-1/4R	33	33
	-	-	-	-1/4R	33	33	-3/8R	36	
	-	-	-	-3/8R	36		-1/2R	44	39

★For applicable taps,see the table of tap dimensions by standard. ☞P.290
★Long size collets of 50mm(-50L)and100mm(-100L)are also auailable. **e.g.ZDK12-4-50L**
★Jet coolaut version is also available,which injects coolant through a groove around the tap shank. **e.g.ZDK12-4-50L-J**

BORING SYSTEM

ROUGH BORING

RAC-E (Steel, Stainless Steel, Cast Iron)

BT P.59
MBT P.155
NBT P.187
NC5 P.215
HSK P.243



CC
Positive type
ϕ25～ϕ130

RAC (Heavy Duty Boring)

BT P.61
MBT P.155
NBT P.187
NC5 P.215
HSK P.245

CN
Negative type
ϕ43～ϕ130

RAC-A (Aluminium)

BT P.63
MBT P.155
NBT P.187
NC5 P.215
HSK P.247

ϕ25～ϕ130

ROUGH BORING

RAC-K (Through Hole / Multi Sheets)

BT P.65
MBT P.155
NBT P.187
NC5 P.215
HSK P.249

ϕ25～ϕ130

RAC (For Large Dia)

BT P.69
MBT P.157
NBT P.190
NC5 P.217
HSK P.251

ϕ130～ϕ580

ULTRA LIGHT BORING BAR FOR Large Dia

ROUGH BORING

RAC-AA P.83

BAC-AA P.85

FINISH BORING

SEMI-FINISH BORING

ZMAC-VR

BT P.73
MBT P.156
NBT P.188
NC5 P.216
HSK P.255

ϕ32～ϕ180

BCB (For Large Dia)

BT P.80
HSK P.258

ϕ130～ϕ595

FINISH BORING

DJ

BT P.87
MBT P.154
NBT P.189
HSK P.262

ϕ3～ϕ50

FINISH BORING

ZMAC-V

BT P.71
MBT P.156
NBT P.188
NC5 P.216
HSK P.253

ϕ16～ϕ180

ZMAC α-V

BT P.72
MBT P.156
NBT P.188
NC5 P.216
HSK P.254

ϕ25～ϕ180

BAC-V (For Large Dia)

BT P.79
MBT P.157
NBT P.190
NC5 P.217
HSK P.257

ϕ130～ϕ595

MODULAR SYSTEM

Base Holder Q

BT ☞ P.89
MBT ☞ P.154
NBT ☞ P.185
NC5 ☞ P.212
HSK ☞ P.261

Spacer SP ☞ P.90

STRAIGHT SHANK

K-RAC K-ZMAC-V ☞ P.93 S-BCBX S-ZMACX-V ☞ P.94
K-DJ ☞ P.95

ϕ25～ϕ100 ϕ16～ϕ70 ϕ3～ϕ50 ϕ12.7～ϕ55

SPECIAL BORING BAR

Multi-Stage, External
☞ P.71, P.73, P.95

Boring, Overturning ☞ P.95

COOLANT THROUGH

MODULAR ZMAC ADVANCED BORING BAR

BASE-HOLDER

Q26 type base holder can be used for various combinations.
Ideal for low volume production on manual machine with wide variety of boring sizes.
We recommend that you also use the Q42 base holder on #50 M/C. ☞P.89

Spacer & Head

The extensive range of heads & spacers allow the correct selection to suit your boring applications.

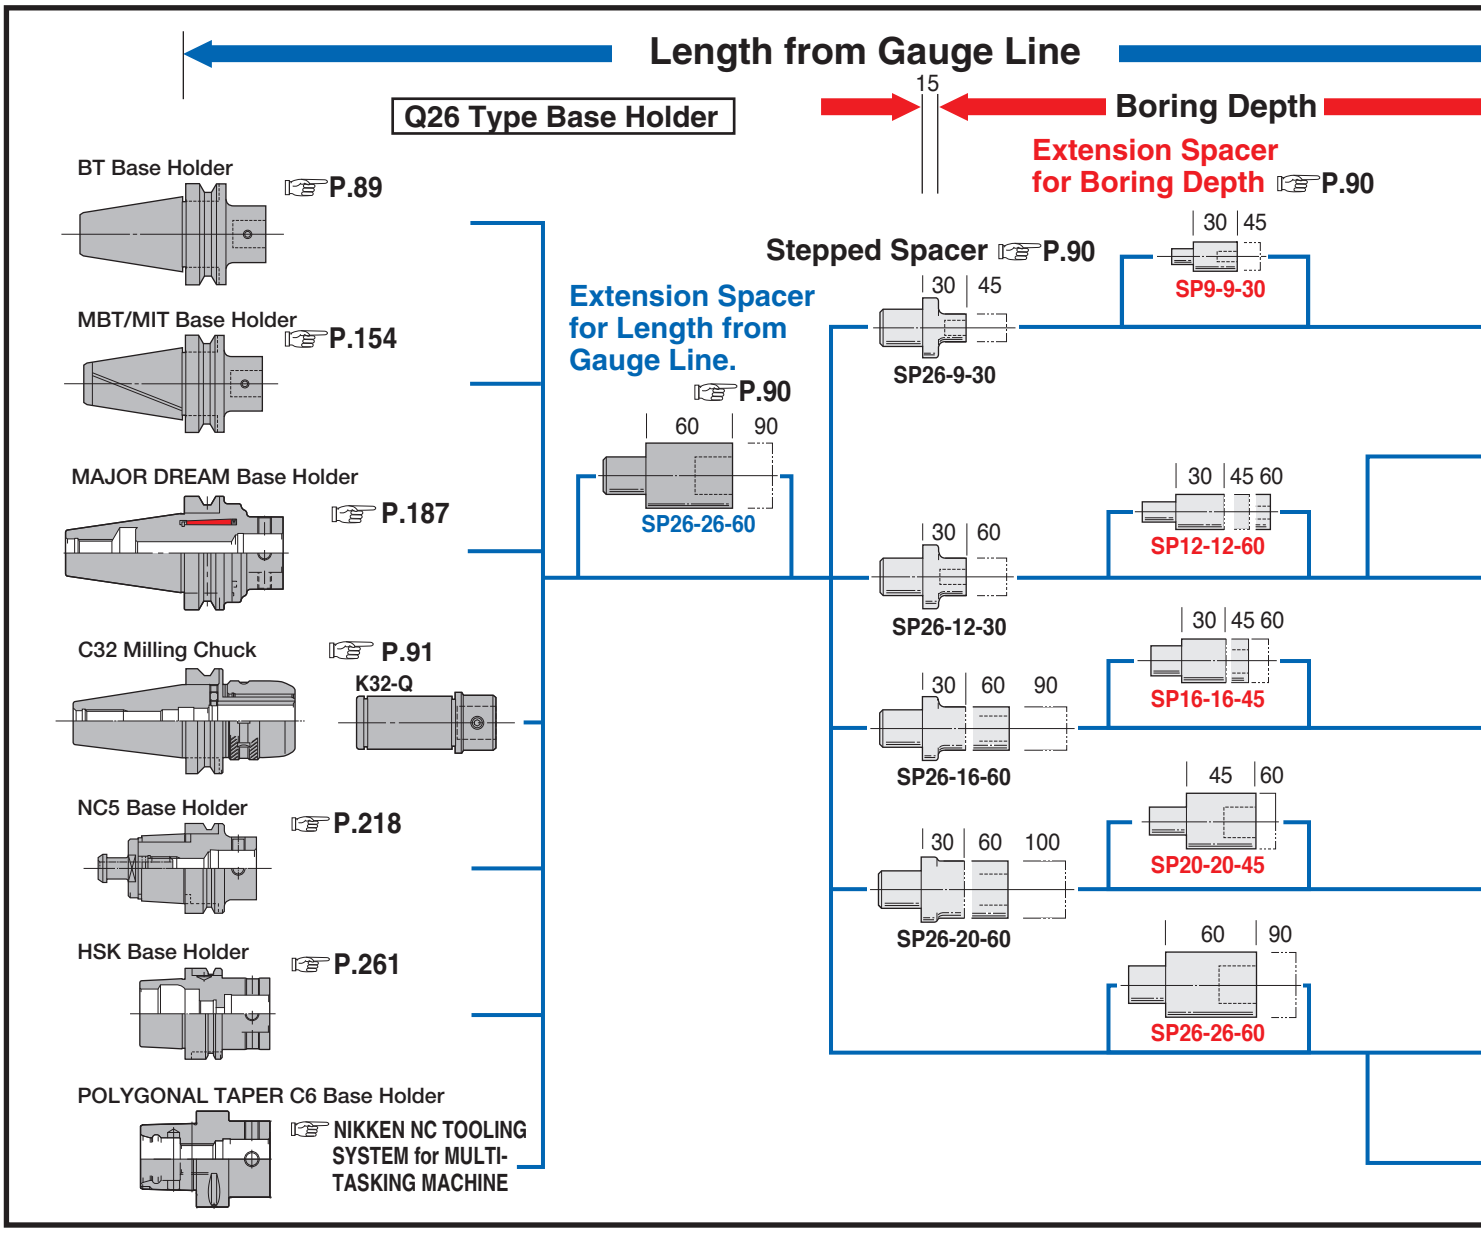

BORING ARBOR FOR LARGE DIA

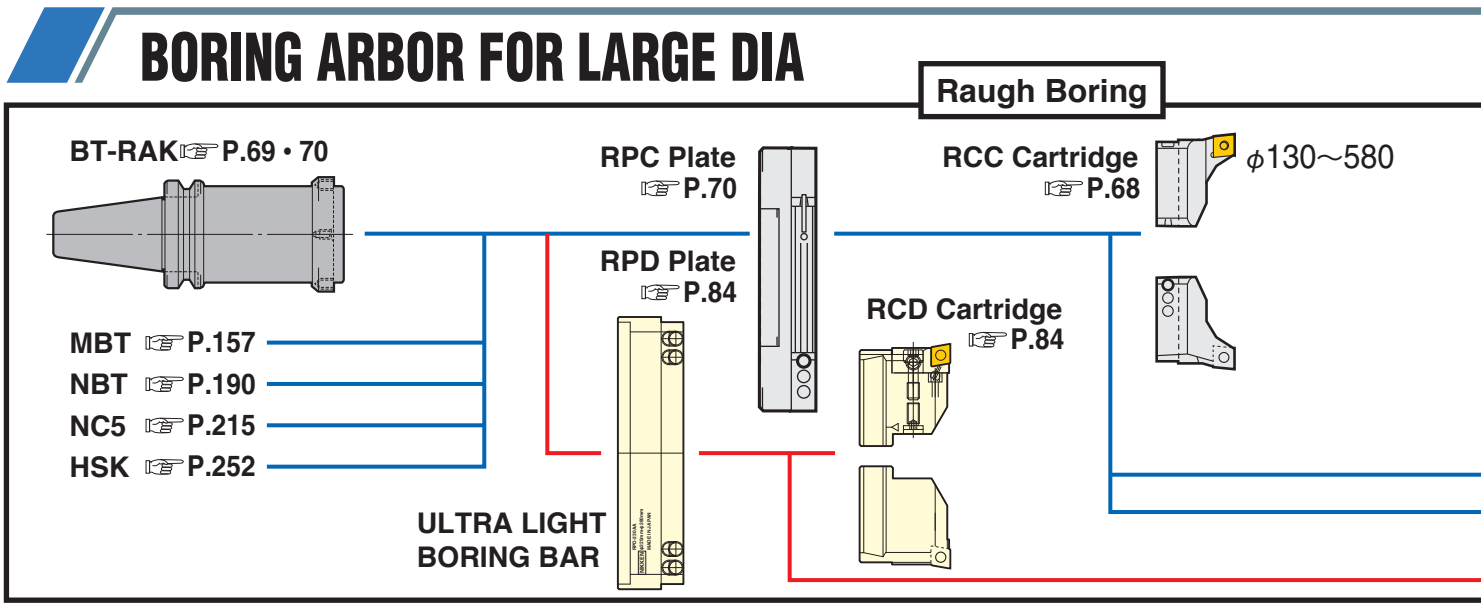

Method of Selection for Modular ZMAC-V Boring Arbors

Firstly, select a head,spacer and stepped spacer from boring diameter and depth.
Then select base holder and SP26 extension spacer by the length from gauge line.

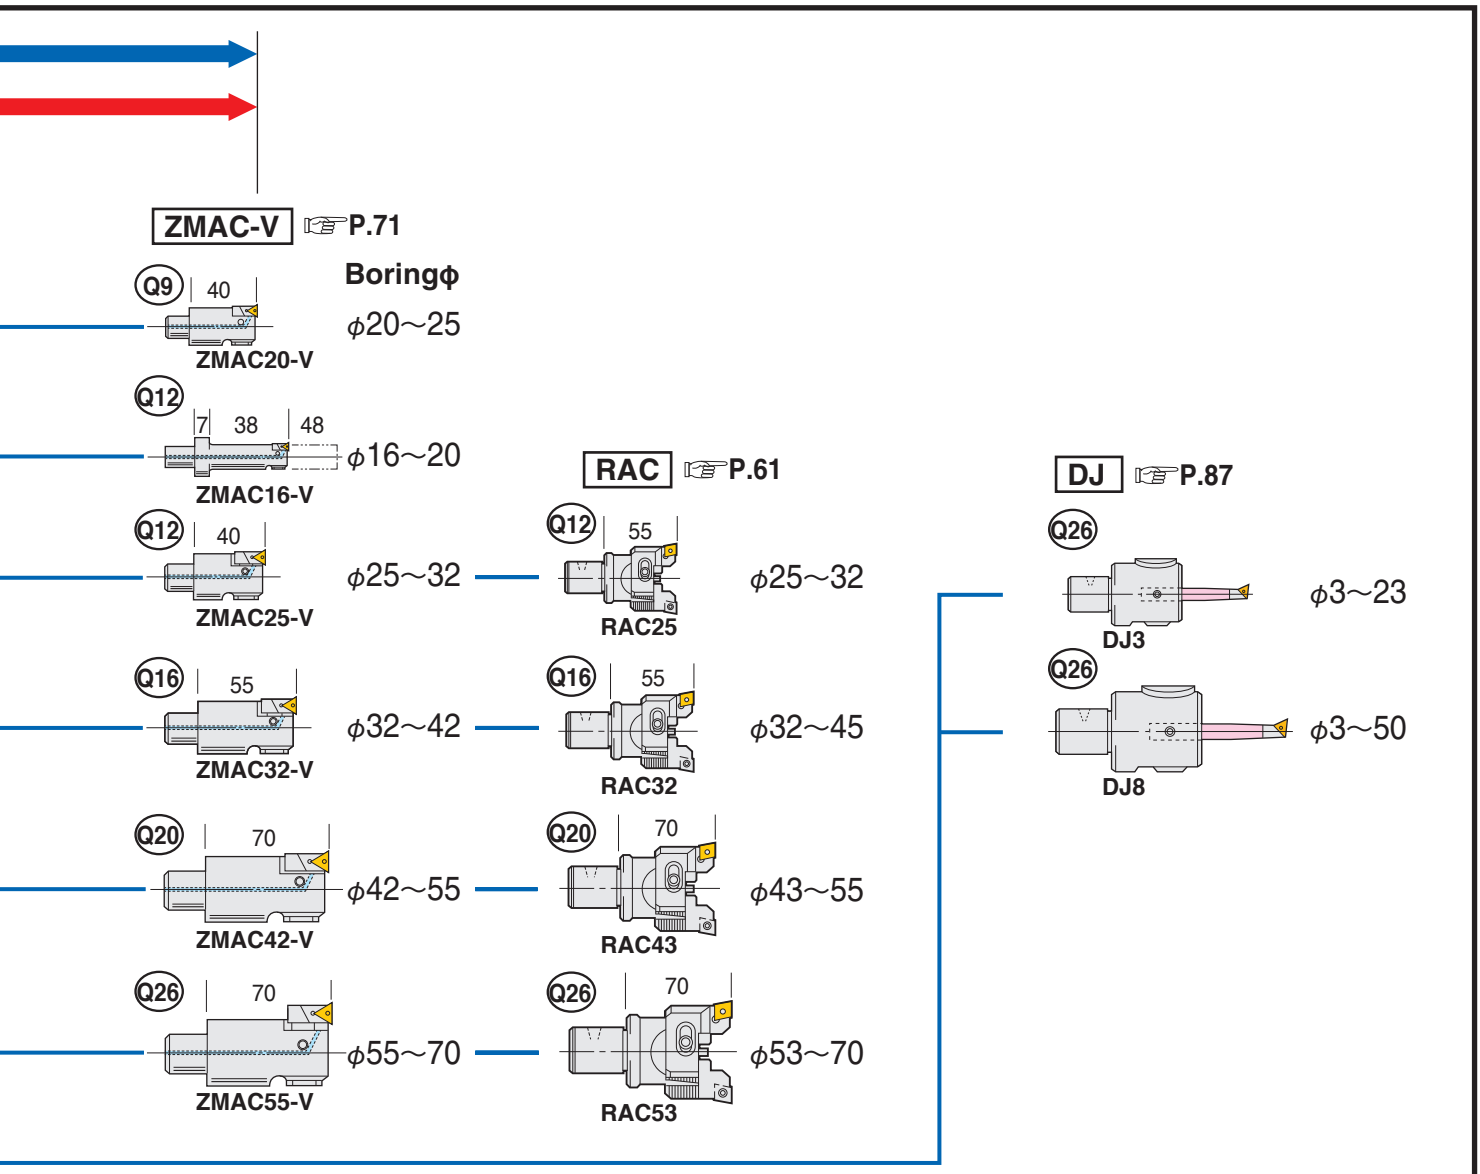

NIKKEN

Finish Boring

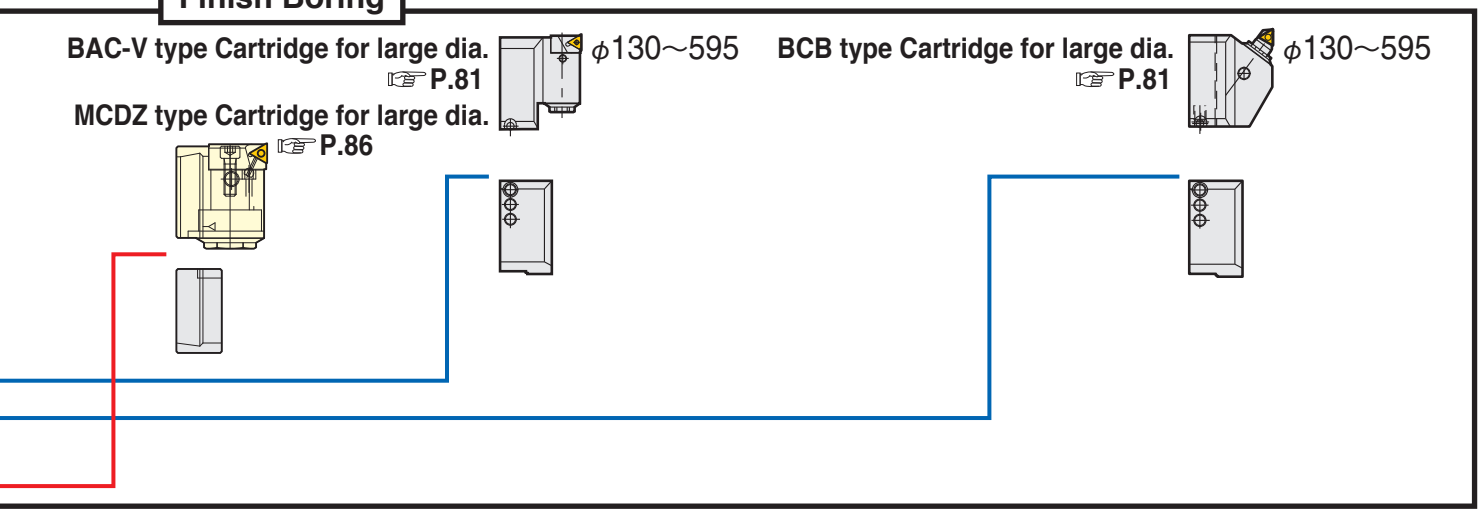

BALANCE-CUT BORING ARBOR (RAC-E)

NIKKEN

Rough Boring — For Steel, Stainless Steel and Cast Iron CC Insert (Positive type)

RAC-E

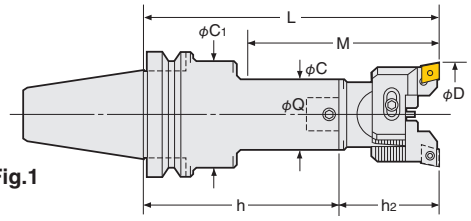

Fig.1

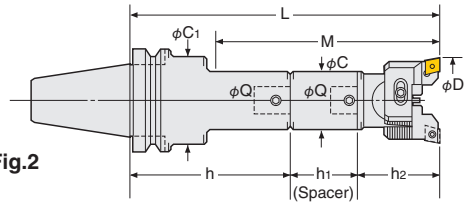

Fig.2

Power of Shoulder Support

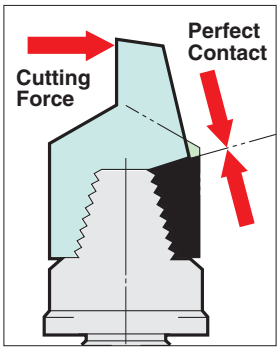

TAPER	Code No.	Boring Range D	Boring Depth M	Coupling Dia Q	C	C_1	Shank Code No.	Spacer Code No.	Head Code No. (P.60)	Tip No.	Weight (kg)	Fig
No.40	BT40-RAC 25-135E	25～32	67	12	24	35	BT40-Q12- 80	—	12-RAC 25- 55E	CC07	2.0	1
	(IT40) -165E		105				-Q12-110				2.1	
	-180E		112				-Q12- 80	SP12-12-45			2.1	2
	-RAC 32-150E	32～45	77	16	31	42	-Q16- 95	—	16-RAC 32- 55E	CC08	2.4	1
	-180E		110				-Q16-125				2.6	
	-195E		122				-Q16- 95	SP16-16-45			2.6	2
	-RAC 43-150E	43～55	97	20	40	50	-Q20- 80	—	20-RAC 43- 70E	CC12	2.7	1
	-180E		130				-Q20-110				2.9	
	-210E		157				-Q20- 80	SP20-20-60			3.2	2
	-RAC 53-165E	53～70	135	26	50		-Q26- 95	—	26-RAC 53- 70E		2.5	1
	-210E		180				-Q26-140				3.3	
	-225E		195				-Q26- 95	SP26-26-60			3.2	2
	-RAC 70-180E	70～100	180	34	64	64	-Q34- 95	—	34-RAC 70- 85E		4.8	1
	-195E		195				-Q34-110				5.2	
	-240E		240				-Q34- 95	SP34-34-60			6.2	2
	-RAC100-195E	100～130	195	42	83	62	-Q42- 95	—	42-RAC100-100E		6.8	1

★**"C" grade (Coated)** inserts are supplied as standard with the head. ☞**P.60** Please refer ☞**P.100** for cutting condition.
★Please refer ☞**P.89** for base holder, ☞**P.90** for spacer and ☞**P.68** for head.
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. BT40-RAC53-165-C**
Code No. of RAC25 and RAC32 with CC inserts are changed to RAC25E and RAC32E.
★**When L length is required longer than standard, please specify the boring depth M.**

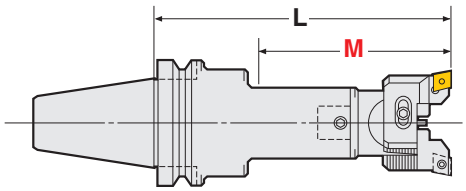

Coolant Through Tool

BALANCE-CUT BORING ARBOR (RAC-E)

NIKKEN

Balance cut boring bar executes boring in 2 cartridge inserts absorbing the vibration each other. The faster the feed rate, the better swarf ejection. This is ideal for rough and medium boring.

Double Cutting Capability



Please use RAC-K for through hole boring.
☞P.65, P.66

Example of 2 Stepped Balance Cut



Approx. double removal of below cutting condition is possible by **-0.3 Cartridge.**
☞P.68

TAPER	Code No.	Boring Range D	Boring Depth M	Coupling Dia Q	C	C_1	Shank Code No.	Spacer Code No.	P.60 Head Code No.	P.60 Tip No.	Weight (kg)	Fig
No.50	BT50-RAC 25-150E	25～ 32	67	12	24	44	BT50-Q12- 95	—	12-RAC 25- 55E	CC07	4.7	1
	(IT50) -180E		105				-Q12-125				4.9	
	-195E		112				-Q12- 95	SP12-12-45			4.8	2
	-RAC 32-180E	32～ 45	77	16	31	50	-Q16-125N	—	16-RAC 32- 55E	CC08	5.4	1
	-210E		110				-Q16-155				5.6	
	-225E		122				-Q16-125N	SP16-16-45			5.6	2
	-RAC 43-180E	43～ 55	97	20	40	60	-Q20-110	—	20-RAC 43- 70E	CC12	5.7	1
	-195E		130				-Q20-125				5.8	
	-225E		142				-Q20-110	SP20-20-45			6.1	2
	-240E		157					SP20-20-60			6.2	
	-RAC 53-210E	53～ 70	117	26	50	65	-Q26-140	—	26-RAC 53- 70E		6.9	1
	-240E		182				-Q26-170N				7.0	
	-270E		177				-Q26-140	SP26-26-60			7.6	2
	-RAC 70-255E	70～100	205	34	64	80	-Q34-170	—	34-RAC 70- 85E		9.5	1
	-285E		235				-Q34-200				9.9	
	-315E		265				-Q34-170	SP34-34-60			10.9	2
	-RAC100-225E	100～130	225	42	83	83	-Q42-125	—	42-RAC100-100E		12.5	1
	-290E		290				-Q42-190				15.2	
	-325E		325				-Q42-225A				16.5	2

★**"C" grade (Coated)** inserts are supplied as standard with the head. ☞**P.60** Please refer ☞**P.100** for cutting condition.
★Please refer ☞**P.89** for base holder, ☞**P.90** for spacer and ☞**P.67** for head.
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. BT50-RAC53-210E-C**
★**BT50-RAC100-375E, 425E and 475E are also available.**

Insert tip for RAC-E

● : best ○ : good

Material			
	Steel	●	
	Stainless Steel	●	
	Cast Iron	○	●
	Aluminium		
		Coated Carbide M	Coated Carbide K
	Grade	C	
	Material / Nose R	AC630M	AC410K

Applicable Arbor	Dimension	Code No.	Nose R	AC630M	AC410K
RAC25E		CC07-○4	0.4	●	●
		CC07-○8	0.8	●	●
RAC25E(CC08) RAC32E		CC08-○4	0.4	●	●
		CC08-○8	0.8	●	●
RAC43E - RAC530E		CC12-○4	0.4	●	●
		CC12-○8	0.8	●	●

★Minimum order quantity : 10pcs.

Please add the grade indication into ○, and add the insert tip material indication at the end off the Code No.
e.g. CC12-C8 (AC630M)

BALANCE-CUT BORING ARBOR (RAC)

NIKKEN

Rough Boring— For Heavy Duty Boring of Iron and Cast Iron CN Insert (Negative type)

Heavy Duty Boring

RAC

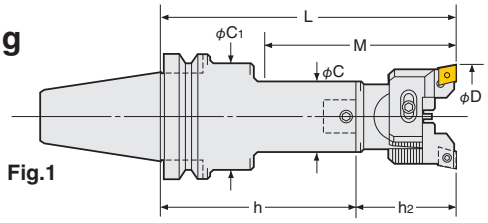

Fig.1

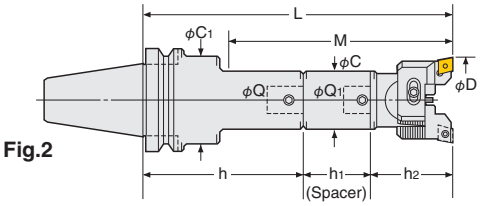

Fig.2

Power of Shoulder Support

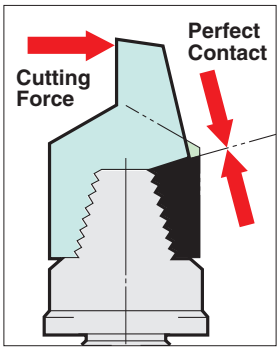

TAPER	Code No.	Boring Range D	Boring Depth M	Coupling Dia Q	C	C1	Shank Code No.	Spacer Code No.	P.62 Head Code No.	P.62 Tip No.	Weight (kg)	Fig
No.40	BT40-RAC 43-150	43～55	97	20	40	50	BT40-Q20- 80	—	20-RAC 43- 70	CN08	2.7	1
	(IT40) -180		130				-Q20-110				2.9	
	-210		157				-Q20- 80	SP20-20-60			3.2	2
	-RAC 53-165	53～70	135	26	50		-Q26- 95	—	26-RAC 53- 70		2.5	1
	-210		180				-Q26-140				3.3	
	-225		195				-Q26- 95	SP26-26-60			3.2	2
	-RAC 70-180	70～100	180	34	64	64	-Q34- 95	—	34-RAC 70- 85		4.8	1
	-195		195				-Q34-110				5.2	
	-240		240				-Q34- 95	SP34-34-60			6.2	2
	-RAC100-195	100～130	195	42	83	62	-Q42- 95	—	42-RAC100-100		6.8	1

★**"C" grade (Coated)** inserts are supplied as standard with the head. ☞**P.62** Please refer ☞**P.100** for cutting condition.
★Please refer ☞**P.89** for base holder, ☞**P.90** for spacer and ☞**P.67** for head.
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. BT40-RAC53-165-C**
★**When L length is required longer than standard, please specify the boring depth M.**

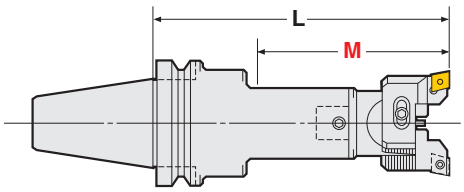

Coolant Through Tool

BALANCE-CUT BORING ARBOR (RAC)

NIKKEN

Balance cut boring bar executes boring in 2 cartridge inserts absorbing the vibration each other. The faster the feed rate, the better swarf ejection. This is ideal for rough and medium boring.

Double Cutting Capability



Please use RAC-K for through hole boring.
☞ **P.65, P.66**

Example of 2 Stepped Balance Cut



Approx. double removal of below cutting condition is possible by **-0.3 Cartridge.**
☞ **P.68**

TAPER	Code No.	Boring Range D	Boring Depth M	Coupling Dia Q	C	C_1	Shank Code No.	Spacer Code No.	P.62 Head Code No.	P.62 Tip No.	Weight (kg)	Fig
No.50	**BT50-RAC 43-180**	43～ 55	97	20	40	60	BT50-Q20-110	—	**20-RAC 43- 70**	**CN08**	5.7	1
	(IT50) **-195**		130				-Q20-125				5.8	
	-225		142				-Q20-110	SP20-20-45			6.1	2
	-240		157					SP20-20-60			6.2	
	-RAC 53-210	53～ 70	117	26	50	65	-Q26-140	—	**26-RAC 53- 70**		6.9	1
	-240		182				-Q26-170N				7.0	
	-270		177				-Q26-140	SP26-26-60			7.6	2
	-RAC 70-255	70～100	205	34	64	80	-Q34-170	—	**34-RAC 70- 85**		9.5	1
	-285		235				-Q34-200				9.9	
	-315		265				-Q34-170	SP34-34-60			10.9	2
	-RAC100-225	100～130	225	42	83	83	-Q42-125	—	**42-RAC100-100**		12.5	1
	-290		290				-Q42-190				15.2	
	-325		325				-Q42-225A				16.5	2

★**"C" grade (Coated)** inserts are supplied as standard with the head. ☞ **P.62** Please refer ☞ **P.100** for cutting condition.
★Please refer ☞ **P.89** for base holder, ☞ **P.90** for spacer and ☞ **P.67** for head.
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. BT50-RAC53-210-C**
★**BT50-RAC100-375, 425 and 475 are also available.**

Insert tip for RAC for Heavy Duty Boring

Material		
	Steel	●
	Stainless Steel	●
	Cast Iron	●
	Aluminium	
		Coated Carbide M
	Grade	C
	Material	AC630M

Applicable Arbor	Dimension	Code No.	Nose R	
RAC43 - RAC530		**CN08-○8**	0.8	●

★Minimum order quantity : 10pcs.
★**When CN08 insert (CN○○1204○○) in the market is used, please use the eccentric bolt type cartridge (S.RCC-○○Q)** ☞ **P.102.** **Nikken CN08-○8 insert can be used on the eccentric bolt type cartridge.**

Please add the grade indication into ○, and add the insert tip material indication at the end off the Code No.
e.g. CC08-C8 (AC630M)

BALANCE-CUT BORING ARBOR (RAC-A)

NIKKEN

Rough Boring—For Aluminium

RAC-A

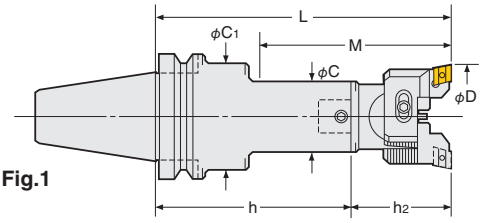

Fig.1

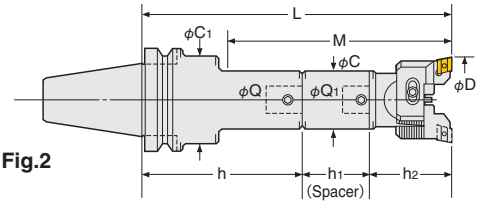

Fig.2

Power of Shoulder Support

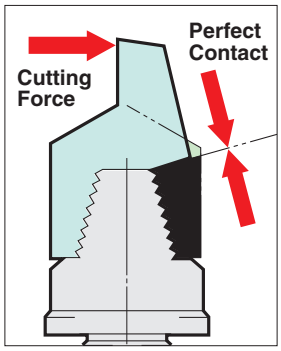

TAPER	Code No.	Boring Range D	Boring Depth M	Coupling Dia Q	C	C_1	Shank Code No.	Spacer Code No.	P.64 Head Code No.	P.64 Tip No.	Weight (kg)	Fig
No.40	BT40-RAC 25-135A	25～32	67	12	24	35	BT40-Q12- 80	—	12-RAC 25- 55A	AEG12	2.0	1
	(IT40) -165A		105				-Q12-110				2.1	
	-180A		112				-Q12- 80	SP12-12-45			2.1	2
	-RAC 32-150A	32～45	77	16	31	42	-Q16- 95	—	16-RAC 32- 55A		2.4	1
	-180A		110				-Q16-125				2.6	
	-195A		122				-Q16- 95	SP16-16-45			2.6	2
	-RAC 43-150A	43～55	97	20	40	50	-Q20- 80	—	20-RAC 43- 70A	AEG16	2.7	1
	-180A		130				-Q20-110				2.9	
	-210A		157				-Q20- 80	SP20-20-60			3.2	2
	-RAC 53-165A	53～70	135	26	50		-Q26- 95	—	26-RAC 53- 70A		2.5	1
	-210A		180				-Q26-140				3.3	
	-225A		195				-Q26- 95	SP26-26-60			3.2	2
	-RAC 70-180A	70～100	180	34	64	64	-Q34- 95	—	34-RAC 70- 85A		4.8	1
	-195A		195				-Q34-110				5.2	
	-240A		240				-Q34- 95	SP34-34-60			6.2	2
	-RAC100-195A	100～130	195	42	83	62	-Q42- 95	—	42-RAC100-100A		6.8	1

★"F" grade inserts are supplied as standard with the head. ☞P.64 Please refer ☞P.100 for cutting condition.
★Please refer ☞P.89 for base holder, ☞P.90 for spacer and ☞P.67 for head.
★For centre through coolant type, please add "-C" at the end of Code No. e.g. BT40-RAC53-165A-C
★When L length is required longer than standard, please specify the boring depth M.

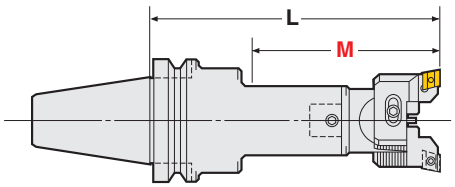

Coolant Through Tool

BALANCE-CUT BORING ARBOR (RAC-A)

NIKKEN

Balance cut boring bar executes boring in 2 cartridge inserts absorbing the vibration each other. The faster the feed rate, the better swarf ejection. This is Ideal for rough and medium boring.

Double Cutting Capability



Example of 2 Stepped Balance Cut



Approx. double removal of below cutting condition is possible by **-0.3 Cartridge.** ☞**P.68**

TAPER	Code No.	Boring Range D	Boring Depth M	Coupling Dia Q	C	C_1	Shank Code No.	Spacer Code No.	P.64 Head Code No.	P.64 Tip No.	Weight (kg)	Fig
No.50	BT50-RAC 25-150A	25～ 32	67	12	24	44	BT50-Q12- 95	—	12-RAC 25- 55A	AEG12	4.7	1
	(IT50) -180A		105				-Q12-125				4.9	
	-195A		112				-Q12- 95	SP12-12-45			4.8	2
	-RAC 32-180A	32～ 45	77	16	31	50	-Q16-125N	—	16-RAC 32- 55A		5.4	1
	-210A		110				-Q16-155				5.6	
	-225A		122				-Q16-125N	SP16-16-45			5.6	2
	-RAC 43-180A	43～ 55	97	20	40	60	-Q20-110	—	20-RAC 43- 70A	AEG16	5.7	1
	-195A		130				-Q20-125				5.8	
	-225A		142				-Q20-110	SP20-20-45			6.1	2
	-240A		157					SP20-20-60			6.2	
	-RAC 53-210A	53～ 70	117	26	50	65	-Q26-140	—	26-RAC 53- 70A		6.9	1
	-240A		182				-Q26-170N				7.0	
	-270A		177				-Q26-140	SP26-26-60			7.6	2
	-RAC 70-255A	70～100	205	34	64	80	-Q34-170	—	34-RAC 70- 85A		9.5	1
	-285A		235				-Q34-200				9.9	
	-315A		265				-Q34-170	SP34-34-60			10.9	2
	-RAC100-225A	100～130	225	42	83	83	-Q42-125	—	42-RAC100-100A		12.5	1
	-290A		290				-Q42-190				15.2	
	-325A		325				-Q42-225A				16.5	2

★**"F" grade** inserts are supplied as standard with the head. ☞**P.64** Please refer ☞**P.100** for cutting condition.
★Please refer ☞**P.89** for base holder, ☞**P.90** for spacer and ☞**P.67** for head.
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. BT50-RAC53-210A-C**
★**BT50-RAC100-375A, 425A and 475A are also available.**

Insert tip for RAC-A

Material	
Steel	
Stainless Steel	
Cast Iron	
Aluminium	●

Applicable Arbor	Dimension	Code No.	Nose R	Coated Carbide K (Grade F, Material KW10)
RAC25A, RAC32A	 (AEGT090304L)	AEG12-○1	0.1	●
		AEG12-○2	0.2	●
		AEG12-○4	0.4	●
RAC43A-RAC530A	 (AEGT150304L)	AEG16-○1	0.1	●
		AEG16-○2	0.2	●
		AEG16-○4	0.4	●

★Minimum order quantity : 10pcs.

Please add the grade indication into ○, and add the insert tip material indication at the end off the Code No. e.g. AEG16-F2 (KW10)

BALANCE-CUT BORING ARBOR (RAC-K)

NIKKEN

Rough Boring—For Through Hole and Multi Sheets

RAC-K

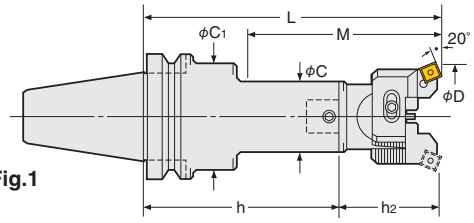

Fig.1

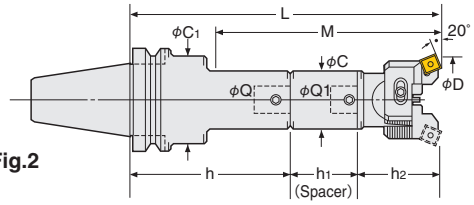

Fig.2

Power of Shoulder Support

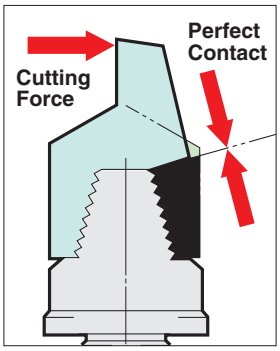

TAPER	Code No.	Boring Range D	Boring Depth M	Coupling Dia Q	C	C_1	Shank Code No.	Spacer Code No.	P.66 Head Code No.	P.66 Tip No.	Weight (kg)	Fig
No.40	BT40-RAC 25-135K	25～32	67	12	24	35	BT40-Q12- 80	—	12-RAC 25- 55K	SC09	2.0	1
	(IT40) -165K		105				-Q12-110				2.1	
	-180K		112				-Q12- 80	SP12-12-45			2.1	2
	-RAC 32-150K	32～45	77	16	31	42	-Q16- 95	—	16-RAC 32- 55K		2.4	1
	-180K		110				-Q16-125				2.6	
	-195K		122				-Q16- 95	SP16-16-45			2.6	2
	-RAC 43-150K	43～55	97	20	40	50	-Q20- 80	—	20-RAC 43- 70K	SC12	2.7	1
	-180K		130				-Q20-110				2.9	
	-210K		157				-Q20- 80	SP20-20-60			3.2	2
	-RAC 53-165K	53～70	135	26	50		-Q26- 95	—	26-RAC 53- 70K		2.5	1
	-210K		180				-Q26-140				3.3	
	-225K		195				-Q26- 95	SP26-26-60			3.2	2
	-RAC 70-180K	70～100	180	34	64	64	-Q34- 95	—	34-RAC 70- 85K		4.8	1
	-195K		195				-Q34-110				5.2	
	-240K		240				-Q34- 95	SP34-34-60			6.2	2
	-RAC100-195K	100～130	195	42	83	62	-Q42- 95	—	42-RAC100-100K		6.8	1

★**"C" grade (Coated)** inserts are supplied as standard with the head. ☞**P.66** Please refer ☞**P.100** for cutting condition.
★Please refer ☞**P.89** for base holder, ☞**P.90** for spacer and ☞**P.67** for head.
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. BT40-RAC53-165K-C**
★**When L length is required longer than standard, please specify the boring depth M.**

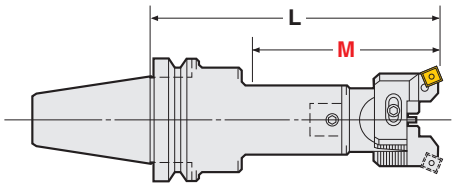

Coolant Through Tool

BALANCE-CUT BORING ARBOR (RAC-K)

NIKKEN

BT

Balance cut boring bar executes boring in 2 cartridge inserts absorbing the vibration each other. The faster the feed rate, the better swarf ejection. This is Ideal for rough and medium boring.

Double Cutting Capability



TAPER	Code No.	Boring Range D	Boring Depth M	Coupling Dia Q	C	C_1	Shank Code No.	Spacer Code No.	P.66 Head Code No.	Tip No.	Weight (kg)	Fig
No.50	BT50-RAC 25-150K	25～ 32	67	12	24	44	BT50-Q12- 95	—	12-RAC 25- 55K	SC09	4.7	1
	(IT50) -180K		105				-Q12-125				4.9	
	-195K		112				-Q12- 95	SP12-12-45			4.8	2
	-RAC 32-180K	32～ 45	77	16	31	50	-Q16-125N	—	16-RAC 32- 55K		5.4	1
	-210K		110				-Q16-155				5.6	
	-225K		122				-Q16-125N	SP16-16-45			5.6	2
	-RAC 43-180K	43～ 55	97	20	40	60	-Q20-110	—	20-RAC 43- 70K	SC12	5.7	1
	-195K		130				-Q20-125				5.8	
	-225K		142				-Q20-110	SP20-20-45			6.1	2
	-240K		157					SP20-20-60			6.2	
	-RAC 53-210K	53～ 70	117	26	50	65	-Q26-140	—	26-RAC 53- 70K		6.9	1
	-240K		182				-Q26-170N				7.0	
	-270K		177				-Q26-140	SP26-26-60			7.6	2
	-RAC 70-255K	70～100	205	34	64	80	-Q34-170	—	34-RAC 70- 85K		9.5	1
	-285K		235				-Q34-200				9.9	
	-315K		265				-Q34-170	SP34-34-60			10.9	2
	-RAC100-225K	100～130	225	42	83	83	-Q42-125	—	42-RAC100-100K		12.5	1
	-290K		290				-Q42-190				15.2	
	-325K		325				-Q42-225A				16.5	2

★**"C" grade (Coated)** inserts are supplied as standard with the head. ☞**P.66** Please refer ☞**P.100** for cutting condition.
★Please refer ☞**P.89** for base holder, ☞**P.90** for spacer and ☞**P.67** for head.
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. BT50-RAC53-210K-C**
★**BT50-RAC100-375K, 425K and 475K are also available.**

Insert tip for RAC-K

● : best ○ : good

Material		Coated Carbide M	Coated Carbide K
	Steel	●	
	Stainless Steel	●	
	Cast Iron	○	●
	Aluminium		

Applicable Arbor	Dimension	Code No.	Grade / Material / Nose R	C / AC630M	C / AC410K
RAC25K, RAC32K		SC09-○4	0.4	●	●
RAC43K-RAC100K		SC12-○8	0.8	●	●

★Minimum order quantity : 10pcs.

Please add the grade indication into ○, and add the insert tip material indication at the end off the Code No. e.g. SC12-C8 (AC630M)

MODULAR TYPE RAC BORING HEAD

NIKKEN

RAC-E Balance-Cut Boring Head



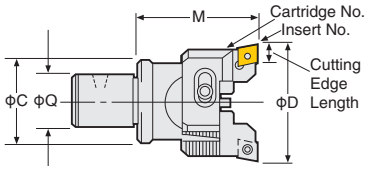

For Steel, Stainless Steel and Cast Iron CC Insert (Positive type)

P.60

Head Code No.	Boring Range D	Boring Depth M	Coupling Dia Q	C	Cartridge No.	Insert No.	Cutting Edge Length	Weight (kg)
12-RAC 25 - 55E	25～32	55	12	24	RCC-025E	CC07	8.0	0.4
16-RAC 32 - 55E	32～45		16	31	RCC- 32E	CC08	9.7	0.5
20-RAC 43 - 70E	43～55	70	20	40	RCC- 43E	CC12	12.9	0.7
26-RAC 53 - 70E	53～70		26	50	RCC- 53E			0.8
26-RAC 70 - 70E*	70～100				RCC- 70E			1.0
34-RAC 70 - 85E		85	34	64				1.5
42-RAC100 -100E	100～130	100	42	83	RCC-100E			2.9

★**Code No. of RAC25 and RAC32 with CC inserts are changed to RAC25E and RAC32E.** ★Insert tips are supplied as an option. ☞**P.60** Please refer ☞**P.100** for cutting condition.
★For centre through coolant type, please add **"-C"** at the end of Code No. **e.g. 26-RAC53-70E-C** ∗Mark : **26-RAC70-70E** is not available with oil hole specification.

RAC Balance-Cut Boring Head

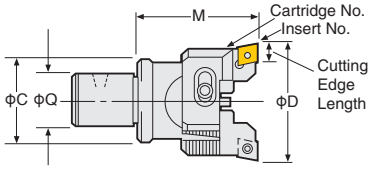

For Heavy Duty Boring of Iron and Cast Iron CN Insert (Negative type)

P.62

Head Code No.	Boring Range D	Boring Depth M	Coupling Dia Q	C	Cartridge No.	Insert No.	Cutting Edge Length	Weight (kg)
20-RAC 43 - 70	43～55	70	20	40	RCC- 43	CN08	12.9	0.7
26-RAC 53 - 70	53～70		26	50	RCC- 53			0.8
26-RAC 70 - 70*	70～100				RCC- 70			1.0
34-RAC 70 - 85		85	34	64				1.5
42-RAC100 -100	100～130	100	42	83	RCC-100			2.9

★Insert tips are supplied as an option. ☞**P.62** Please refer ☞**P.100** for cutting condition.
★For centre through coolant type, please add **"-C"** at the end of Code No. **e.g. 26-RAC53-70-C** ∗Mark : **26-RAC70-70** is not available with oil hole specification.

RAC-A Balance-Cut Boring Head



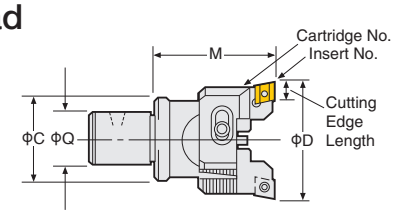

For Aluminum

P.64

Head Code No.	Boring Range D	Boring Depth M	Coupling Dia Q	C	Cartridge No.	Insert No.	Cutting Edge Length	Weight (kg)
12-RAC 25 - 55A	25～32	55	12	24	RAC- 25A	AEG12	9.5	0.4
16-RAC 32 - 55A	32～45		16	31	RAC- 32A			0.5
20-RAC 43 - 70A	43～55	70	20	40	RAC- 43A	AEG16	15.875	0.7
26-RAC 53 - 70A	53～70		26	50	RAC- 53A			0.8
26-RAC 70 - 70A*	70～100				RAC- 70A			1.0
34-RAC 70 - 85A		85	34	64				1.5
42-RAC100 -100A	100～130	100	42	83	RAC-100A			2.9

★Insert tips are supplied as an option. ☞**P.64** Please refer ☞**P.100** for cutting condition.
★For centre through coolant type, please add **"-C"** at the end of Code No. **e.g. 26-RAC53-70A-C** ∗Mark : **26-RAC70-70A** is not available with oil hole specification.

RAC-K Balance-Cut Boring Head

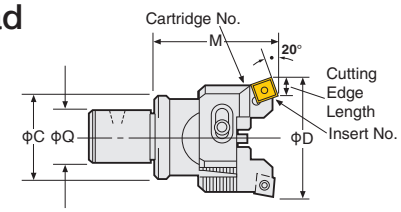

For Through Hole and Multi Sheets

P.66

Head Code No.	Boring Range D	Boring Depth M	Coupling Dia Q	C	Cartridge No.	Insert No.	Cutting Edge Length	Weight (kg)
12-RAC 25 - 55K	25～32	55	12	24	RAC- 25K	SC09	7.4	0.4
16-RAC 32 - 55K	32～45		16	31	RAC- 32K			0.5
20-RAC 43 - 70K	43～55	70	20	40	RAC- 43K	SC12	11.9	0.7
26-RAC 53 - 70K	53～70		26	50	RAC- 53K			0.8
26-RAC 70 - 70K*	70～100				RAC- 70K			1.0
34-RAC 70 - 85K		85	34	64				1.5
42-RAC100 -100K	100～130	100	42	83	RAC-100K			2.9

★Insert tips are supplied as an option. ☞**P.66** Please refer ☞**P.100** for cutting condition.
★For centre through coolant type, please add **"-C"** at the end of Code No. **e.g. 26-RAC53-70K-C** ∗Mark : **26-RAC70-70K** is not available with oil hole specification.

CARTRIDGE for RAC BORING HEAD

NIKKEN

RAC Base ( ) is common for all types of cartridges.
Please select suitable cartridge and insert tip for your application such as material and machining.

For Steel, Stainless Steel and Cast Iron
CC Insert (Positive type)

S.RCC-E Cartridge

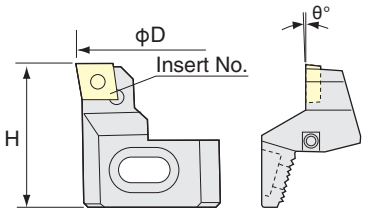

P.60

Set Code No.	Boring Range D	H	θ	Insert Code No. Steel, Stainless Steel	Insert Code No. Cast Iron
S.RCC- 25E	25 ~ 32	41	0°	CC08 (AC630M)	CC08 (AC410K)
-025E		38		CC07 (AC630M)	CC07 (AC410K)
- 32E	32 ~ 45	41		CC08 (AC630M)	CC08 (AC410K)
- 43E	43 ~ 55	46	+3°	CC12 (AC630M)	CC12 (AC410K)
- 53E	53 ~ 70	50			
- 70E	70 ~100	55			
-100E	100~130	57			

★**Code No. of RAC25 and RAC32 with CC inserts are changed to RAC25E and RAC32E.**
★Insert tips are supplied as an option. ☞**P.60** Please refer ☞**P.100** for cutting condition.
★Please order set of cartridges. **e.g S.RCC-70E**
★**2 stepped balance cut with H=-0.3 cartridge is also available. e.g. S.RCC-70E (0.3)**

For Heavy Duty Boring of Iron and Cast Iron
CN Insert (Negative type)

S.RCC Cartridge

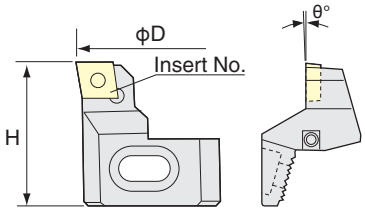

P.62

Set Code No.	D	H	θ	Insert Code No. Iron and Cast Iron
S.RCC- 43	43 ~ 55	46	-3°	CN08
- 53	53 ~ 70	50		
- 70	70 ~100	55		
-100	100~130	57		

★Insert tips are supplied as an option. ☞**P.62** Please refer ☞**P.100** for cutting condition.
★Please order set of cartridges. **e.g S.RCC-70**
★**When CN08 insert (CN○○1204○○) in the market is used, please use the eccentric bolt type cartridge (S.RCC-○○Q) ☞P.96. Nikken CN08-○8 insert can be used on the eccentric bolt type cartridge.**

For Aluminum

S.RCC-A Cartridge

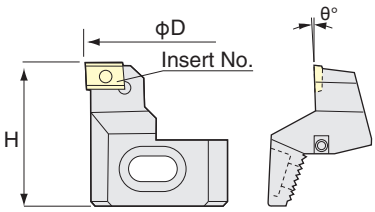

P.64

Set Code No.	D	H	θ	Insert Code No. For Aluminum
S.RCC- 25A	25 ~ 32	38	+6°	AEG12
- 32A	32 ~ 45	41		
- 43A	43 ~ 55	46		AEG16
- 53A	53 ~ 70	50		
- 70A	70 ~100	55		
-100A	100~130	57		

★Insert tips are supplied as an option. ☞**P.64** Please refer ☞**P.100** for cutting condition.
★Please order set of cartridges. **e.g S.RCC-70A**
★**2 stepped balance cut with H=-0.3 cartridge is also available. e.g. S.RCC-70A (0.3)**
★**S.RCC-A** cartridge can be used for the bottom face finishing of iron and cast iron.

For Through Hole and Multi Sheets

S.RCC-K Cartridge

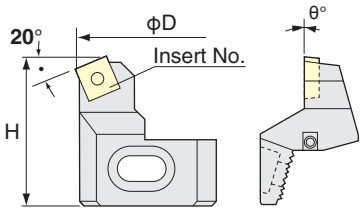

P.66

Set Code No.	D	H	θ	Insert Code No. Steel, Stainless Steel	Insert Code No. Cast Iron
S.RCC- 25K	25 ~ 32	41	0°	SC09 (AC630M)	SC09 (AC410K)
- 32K	32 ~ 45				
- 43K	43 ~ 55	46		SC12 (AC630M)	SC12 (AC410K)
- 53K	53 ~ 70	50			
- 70K	70 ~100	55			
-100K	100~130	57			

★Insert tips are supplied as an option. ☞**P.66** Please refer ☞**P.100** for cutting condition.
★Please order set of cartridges. **e.g S.RCC-70K**

Dimension of RAC Base

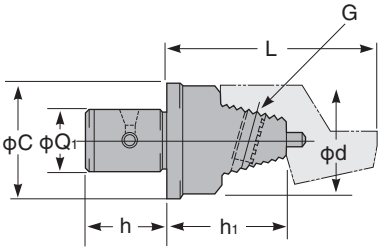

Code No.	Boring Range D	h	h1	C	G	d
12-RAC 25- 55B	25~33	18	31	24	M5	23
12-RAC025- 55B			34			
16-RAC 32- 55B	32~45	22	31	31	M6	30
20-RAC 43- 70B	43~55	24	42	40		35
26-RAC 53- 70B	53~70	28	40	50	M8	45
26-RAC 70- 70B*	70~100		38			60
34-RAC 70- 85B		36	53	64		60
42-RAC100-100B	100~130	42	66	83		70

★Dimension **"L"** is **"58mm"** in combination of **RCC-25K** and **12-RAC25-55B**.
*For centre through coolant type except **26-RAC70-70B**,
please add **"-C"** at the end of Code No. **e.g. 34-RAC70-85B-C**

BALANCE-CUT RAC BORING ARBOR for LARGE DIA.

NIKKEN

For Roughing

- With the screws for slight adjustment
- Boring Dia. : ϕ130～ϕ580mm

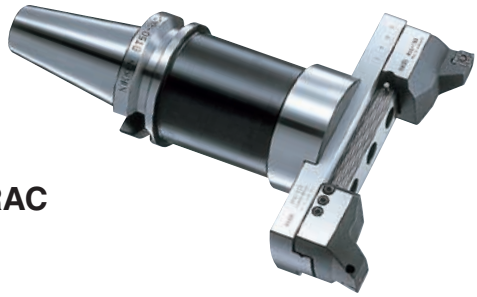

RAC

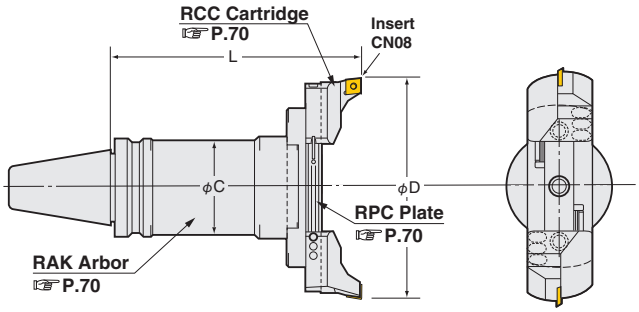

Boring Dia. : ϕ130～580mm

TAPER	Code.No	D MIN.～MAX.	L	C	RAK Arbor Code No.	RPC Plate No.	RCC Cartridge No.	Weight (kg)
No.40	BT40-RAC130-205	130～180	205	61	BT40-RAK-130A	RPC-130	For Heavy Duty Boring of Iron and Cast Iron RCC-130 ×2 Insert Tip CN08	7.0
	(IT40)-RAC180-205	180～230				-180		8.0
No.50	BT50-RAC130-185	130～180	185	90	BT50-RAK-110A	RPC-130		9.8
	(IT50) -235		235		-160A			12.5
	-285		285		-210A			15.2
	-335		335		-260A			17.9
	-385		385		-310A			20.6
	-435		435		-360A			23.3
	-485		485		-410A			26.0
	-RAC180-185	180～230	185		-RAK-110A	RPC-180		10.4
	-235		235		-160A			13.1
	-285		285		-210A			15.8
	-335		335		-260A			18.5
	-385		385		-310A			21.2
	-435		435		-360A			23.9
	-485		485		-410A			26.6
	-RAC230-185	230～280	185		-RAK-110A	RPC-230		11.1
	-235		235		-160A			13.8
	-285		285		-210A			16.5
	-335		335		-260A			19.2
	-385		385		-310A			21.9
	-435		435		-360A			24.6
	-485		485		-410A			27.3
	-RAC280-185	280～330	185		-RAK-110A	RPC-280		11.7
	-235		235		-160A			14.4
	-285		285		-210A			17.1
	-335		335		-260A			19.8
	-385		385		-310A			22.5
	-435		435		-360A			25.2
	-485		485		-410A			27.9
	-RAC330-210*	330～380	210 (220*)	98	BT50-RAK330-125 IT50-RAK330-135	RPC-330		16.0
	-RAC380-210*	380～430				-380		17.0
	-RAC430-210*	430～480				-430		18.0
	-RAC480-210*	480～530				-480		19.0
	-RAC530-210*	530～580				-530		20.0

★The Code No. on above table are the boring arbors with **RCC-130** cartridge (Insert tip: **CN08**) the Heavy Duty Boring of Iron and Cast Iron. Please refer ☞ **P.100** for cutting condition.
★Boring arbor with cartridges & insert for Steel, Stainless Steel and Cast Iron (**E**) , for Aluminum (**A**) and for Through Hole & Multi Sheets (**K**) are available. **e.g. BT50-RAC130-185E**
★Please refer ☞ **P.70** for **RAK** arbor and **RPC** plate.
★Arbor, plate and cartridges are delivered in separate packages.
★Please check the interference of the arbor with your M/C not to occur the interference in the tool magazine.
★The location of the cutting edge is same as the drive key for standard. The different location is available, please specify θ. **e.g. BT50-RAC180-235 (90˚)**
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. BT50-RAC130-185-C**
★The boring arbors marked * with **IT50**, L (gauge length) is 220. **e.g. IT50-RAC330-220**



View from Cutting Edge



Coolant Through Tool

MODULAR TYPE ARBOR

NIKKEN

BALANCE CUT RAK BORING ARBOR for LARGE DIA. <RAK Arbor>

RAK

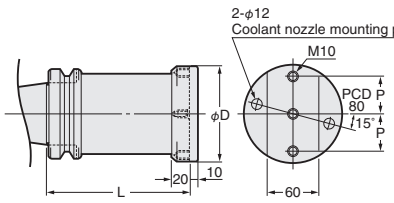

Fig.1

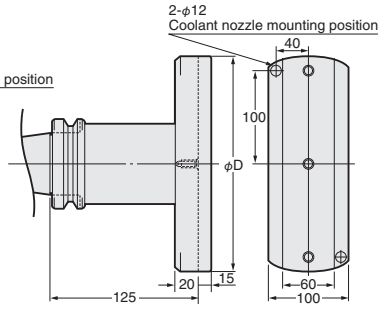

Fig.2

Code No.	Boring Range	L	D	P	Weight (kg)	Applicable RPC Plate	Hex. Socket bolt	Fig.
BT40 (IT40)-RAK-130A	130～230	130	102	35	4.9	RPC-130, 180	M1035	1
BT50-RAK-110A	130～330	110			7.2	RPC-130, 180, 230, 280		
(IT50)-RAK-160A		160			9.9			
-RAK-210A		210			12.6			
-RAK-260A		260			15.3			
-RAK-310A		310			18.0			
-RAK-360A		360			20.7			
-RAK-410A		410			23.4			
-RAK330-125*	330～580	125	240	100	12.0	RPC-330, 380, 430, 480, 530	M1045	2

★The location of the cutting edge is same as the drive key for standard. The different location is available, please specify θ. **e.g. BT50-RAK-160A (90˚)**
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. BT50-RAK-160A-C 2 set of coolant nozzles are standard accessory.**
★Code No of coolant nozzle is **9RAK-NZL-L59**.
★**IT40-RAK-130** is available. ★* : In case of **IT50**, **IT50-RAK-330-135** is standard gauge length.

BALANCE CUT PLATE for LARGE DIA. <RPC Plate>





Dimensions in ( ) are for RPC-330, 380, 430, 480 and 530.

Code No.	Boring Range	L	Weight (kg)	Code No.	Boring Range	L	Weight (kg)	Code No.	Boring Range	L	Weight (kg)
RPC-130	φ130～180	118	1.4	**RPC-330**	φ330～380	316	5.3	**RPC-530**	φ530～580	516	8.7
-180	φ180～230	166	2.0	**-380**	φ380～430	366	6.1				
-230	φ230～280	216	2.7	**-430**	φ430～480	416	7.0				
-280	φ280～330	266	3.3	**-480**	φ480～530	466	7.9				

Accessories for Balance-Cut RAC

Steel, Stainless Steel and Cast Iron
RCC-130 (CN08)

Heavy Duty Boring of Iron and Cast Iron
RCC-130E (CC12)

For aluminum
RCC-130A (AEG16)

For Through Hole and Multi Sheets
RCC-130K (SC12)

Cartridge Lock Bolt
Please remove the bolt when using **RAC-130** type for φ130～157mm.

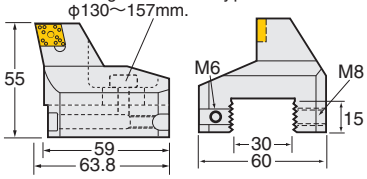

Weight : 0.6kg

Accessories	Insert Tip	Clamp Bolt	Adjust Screw	Adjust Wrench	Wrench for Insert	Set Screw (M8)	Wrench for M815 Bolt	Hex Socket Bolt	Applicable RPC Plate
Code No.	*	CSM-70	M540	M3	20S	M815	M4	9GM6-20	RPC-130,180,230,280,330,380,430,480,530

★* : The insert tip is **RCC-130: CN08 (☞P.62)** , **RCC-130E: CC12 (☞P.60)** , **RCC-130A: AEG16 (☞P.64)** , **RCC-130K: SC12 (☞P.66)** Please refer☞**P.100** for cutting condition.
★There are two different types clamping system. One is eccentric system, the other is screw on system. Above parts are for screw on system.
★Code No. **RCC-130** indicates a single cartridge. When ordering a pair cartridge, please appoint to us Code No. **S.RCC-130**.
★The Code No. of the cartridges for 2 stepped balance cut is **S.RCC-130(0.3)**

ZMAC ADVANCED BORING ARBOR (ZMAC-V)

NIKKEN

Boring for Finishing

ZMAC-V

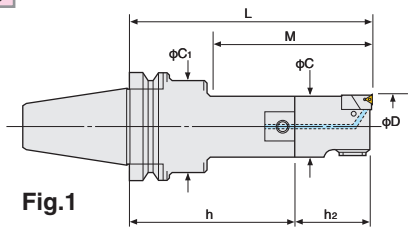

Fig.1

Only for ZMAC16-V

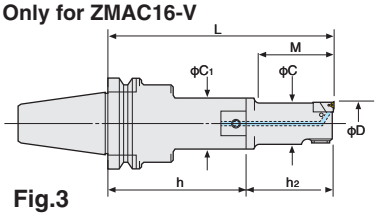

Fig.3

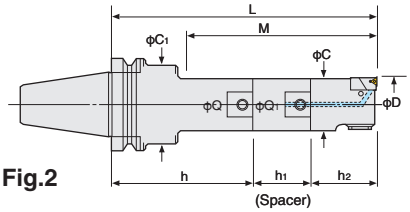

Fig.2

ZMAC100-V, 140-V

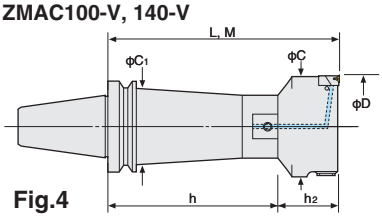

Fig.4

Code No. of the insert tip ◎ ◎ are shown.

JAPAN PAT.

TAPER	Code No.	Boring Range D	Boring Depth M	C	C1	Shank Code No.	Extension Spacer Code No.	P.103 Head No.	P.103 Insert No.	Weight (kg)	Fig.
						BT No.-Q-h	Q-Q1-h1	Q- Min.D -h2			
No.40	BT40-ZMAC16 -125V	15.9～20.2	38	15	24	BT40-Q12- 80	—	12-ZMAC16-45V	3MP	1.9	3
	(IT40) -135V		48					12-ZMAC16-55V		1.9	
	-ZMAC20 -120V	19.8～25.2	45	19	30	-Q 9- 80		9-ZMAC20-40V		1.9	1
	-135V		67			-Q 9- 95N				1.9	
	-150V		75			-Q 9- 80	SP9-9-30			2.0	2
	-ZMAC25 -120V	24.8～32.2	52	24	35	-Q12- 80	—	12-ZMAC25-40V		2.0	1
	-150V		90			-Q12-110				2.1	
	-165V		97			-Q12- 80	SP12-12-45			2.1	2
	-ZMAC32 -150V	31.8～42.2	77	31	42	-Q16- 95	—	16-ZMAC32-55V	4MP	2.5	1
	-180V		110			-Q16-125				2.7	
	-195V		122			-Q16- 95	SP16-16-45			2.7	2
	-ZMAC42 -150V	41.8～55.2	97	40	50	-Q20- 80	—	20-ZMAC42-70V	6MP	3.0	1
	-180V		130			-Q20-110				3.2	
	-210V		157			-Q20- 80	SP20-20-60			3.5	2
	-ZMAC55 -165V	54.8～70.2	135	53	50	-Q26- 95	—	26-ZMAC55-70V		3.9	1
	-210V		180			-Q26-140				4.6	
	-225V		195			-Q26- 95	SP26-26-60			4.6	2
	-ZMAC70 -165V	69.8～85.2	165	67	64	-Q34- 95	—	34-ZMAC70-70V		5.4	1
	-180V		180			-Q34-110				5.8	
	-225V		225			-Q34- 95	SP34-34-60			6.8	2
	-ZMAC85 -195V	84.8～100.2	195	83	62	-Q42- 95	—	42-ZMAC85-100V		9.0	1

★MIN. dial readout : **ZMAC25-V** & smaller is 0.02mm on diameter. **ZMAC32-V** and larger are 0.01mm on diameter.
★**"C" grade (Coated) insert for Steel, Stainless & Cast Iron is supplied as Standard with the head (Smooth boring & Long tool-life) .** ☞ Please refer ☞**P.101** for cutting condition.
We would recommend **"B"** grade **(CBN)** insert for Hardened Steel & High Speed boring of Cast Iron.
★Please refer ☞ **P.89, P90** for Shank&Spacer, and ☞**P.75, P.76** for Head.
★Centre Through Coolant function is available as standard.
★For **BT30**, modular connection system is applied. Please refer ☞**P.90** for Base Holder.
★**When L length is required longer than standard, please specify boring depth M.**



Coolant Through Tool

Boring Arbor with Extension Spacer



ZMAC-V for Multi-Task Boring Bar

Please contact us for the special boring bar.

ZMAC ADVANCED BORING ARBOR (ZMAC-V)

NIKKEN

BT

With ZMACα-V Boring Head

Please add "AA" at the end of Code No.
e.g. BT40-ZMAC42-150AAV

ZMACα-V

Diameter can be adjusted easily and quickly by new handle with wrench.

Unlock | Adjust diameter | Lock

Code No. of the insert tip ◎ ◎ are shown.

JAPAN PAT.

TAPER	Code No.	Boring Range D	Boring Depth M	C	C_1	Shank Code No. BT No.-Q-h	Extension Spacer Code No. Q-Q_1-h_1	P.103 Head No. Q- Min.D -h_2	Insert No.	Weight (kg)	Fig.
No.50	BT50-ZMAC16 -140V	15.9～20.2	38	15	24	BT50-Q12- 95	—	12-ZMAC16-45V	3MP	4.7	3
	(IT50) -150V		48					12-ZMAC16-55V		4.7	
	-ZMAC20 -150V	19.8～25.2	45	19	40	-Q 9-110		9-ZMAC20-40V		4.8	1
	-165V		67			-Q 9-125N				4.8	
	-180V		75			-Q 9-110	SP9-9-30			4.9	2
	-ZMAC25 -135V	24.8～32.2	52	24	44	-Q12- 95	—	12-ZMAC25-40V		4.8	1
	-165V		90			-Q12-125				4.8	
	-180V		97			-Q12- 95	SP12-12-45			4.9	2
	-ZMAC32 -180V	31.8～42.2	77	31	50	-Q16-125N	—	16-ZMAC32-55V	4MP	5.5	1
	-210V		110			-Q16-155				5.6	
	-225V		122			-Q16-125N	SP16-16-45			5.7	2
	-ZMAC42 -180V	41.8～55.2	97	40	60	-Q20-110	—	20-ZMAC42-70V	6MP	6.0	1
	-195V		130			-Q20-125				6.0	
	-225V		142			-Q20-110	SP20-20-45			6.4	2
	-240V		157				SP20-20-60			6.5	
	-ZMAC55 -210V	54.8～70.2	117	53	65	-Q26-140	—	26-ZMAC55-70V		7.5	1
	-240V		182			-Q26-170N				7.6	
	-270V		177			-Q26-140	SP26-26-60			8.1	2
	-ZMAC70 -240V	69.8～85.2	190	67	80	-Q34-170	—	34-ZMAC70-70V		10.0	1
	-270V		220			-Q34-200				10.6	
	-300V		250			-Q34-170	SP34-34-60			11.5	2
	-ZMAC85 -225V	84.8～100.2	182	83	83	-Q42-125	—	42-ZMAC85-100V		12.5	1
	-290V		247			-Q42-190				15.0	
	-315V		272			-Q42-125	SP42-42-90			16.0	2
	-ZMAC100-225V	99.5～140.5	225	95	98	-Q42-125	—	42-ZMAC100-100V		12.4	4
	-290V		290			-Q42-190				15.1	
	-325V		325			-Q42-225A				17.8	
	-375V		375			-Q42-275A				20.5	
	-425V		425			-Q42-325A				23.2	
	-ZMAC140-225V	139.5～180.5	225	135	98	-Q42-125	—	42-ZMAC140-100V		13.8	
	-290V		290			-Q42-190				16.5	
	-325V		325			-Q42-225A				19.2	
	-375V		375			-Q42-275A				21.9	
	-425V		425			-Q42-325A				24.6	

★MIN. dial readout : **ZMAC25-V** & smaller is 0.02mm on diameter. **ZMAC32-V** and larger are 0.01mm on diameter.
★**When L length is required longer than standard, please specify boring depth M.** ★Centre Through Coolant function is available as standard.
★**"C" grade (Coated) insert for Steel, Stainless&Cast Iron is supplied as Standard with the head (Smooth boring & Long tool-life) .** ☞**P.103**
We would recommend **"B"** grade (**CBN**) insert for Hardened Steel & High Speed boring of Cast Iron. Please refer ☞**P.101** for cutting condition.
★Please refer ☞ **P.89, P90** for Shank & Spacer,and ☞ **P.75, P.76** for Head.

ZMAC ADVANCED BORING ARBOR (ZMAC-VR)

NIKKEN

Boring for Semi-Finishing—ZMAC-VR

ZMAC-VR

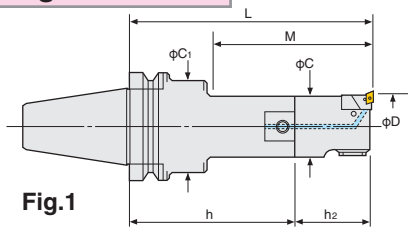

Fig.1

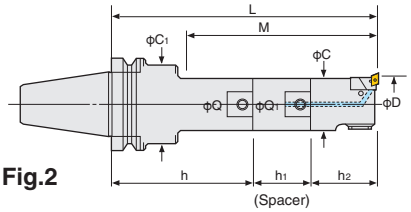

Fig.2

ZMAC100-VR, 140-VR

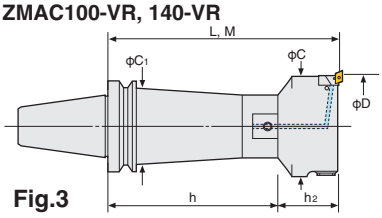

Fig.3

Code No. of the insert tip are shown.

JAPAN PAT.

TAPER	Code No.	Boring Range D	Boring Depth M	C	C1	Shank Code No.	Extension Spacer Code No.	P.74 Head No.	Insert No.	Weight (kg)	Fig.
						BT No.-Q-h	Q-Q1-h1	Q- Min.D -h2			
No.40	BT40-ZMAC32R -150V	31.8～42.2	77	31	42	BT40-Q16- 95	—	16-ZMAC32R-55V	CC06	2.5	1
	(IT40) -180V		110			-Q16-125				2.7	
	-195V		122			-Q16- 95	SP16-16-45			2.7	2
	-ZMAC42R -150V	41.8～55.2	97	40	50	-Q20- 80	—	20-ZMAC42R-70V		3.0	1
	-180V		130			-Q20-110				3.2	
	-210V		157			-Q20- 80	SP20-20-60			3.5	2
	-ZMAC55R -165V	54.8～70.2	135	53	50	-Q26- 95	—	26-ZMAC55R-70V		3.9	1
	-210V		180			-Q26-140				4.6	
	-225V		195			-Q26- 95	SP26-26-60			4.6	2
	-ZMAC70R -165V	69.8～85.2	165	67	64	-Q34- 95	—	34-ZMAC70R-70V	CC08	5.4	1
	-180V		180			-Q34-110				5.8	
	-225V		225			-Q34- 95	SP34-34-60			6.8	2
	-ZMAC85R -195V	84.8～100.2	195	83	62	-Q42- 95	—	42-ZMAC85R-100V		9.0	1

★MIN. dial readout : **ZMAC25-VR** & smaller is 0.02mm on diameter. **ZMAC32-VR** and larger are 0.01mm on diameter.
★**"C" grade (Coated) insert for Steel, Stainless & Cast Iron is supplied as Standard with the head (Smooth boring & Long tool-life) .** ☞**P.74** Please refer ☞**P.101** for cutting condition.
We would recommend "B" grade (CBN) insert for Hardened Steel & High Speed boring of Cast Iron.
★Please refer ☞**P.90, P91** for Shank & Spacer, and ☞**P.75, P.76** for Head.
★Centre Through Coolant function is available as standard.
★For **BT30**, modular connection system is applied. Please refer ☞**P.90** for Base Holder.
★**When L length is required longer than standard, please specify boring depth M.**



Coolant Through Tool

Boring Arbor with Extension Spacer



ZMAC-V for Multi-Task Boring Bar

Please contact us for the special boring bar.

ZMAC ADVANCED BORING ARBOR (ZMAC-VR)

NIKKEN

Insert Tip for ZMAC-VR

● : best ○ : good

Material	Steel	●	
	Stainless Steel	●	
	Cast Iron	○	●
	Aluminium		
	High Speed finish for Cast Iron		
	Hardened Steel		
	High Speed finish for Aluminium		

Please add the grade indication into ○, and add the insert tip material indication at the end off the Code No. e.g. CC12-C8 (AC630M)

There is the CBN insert tip which both corners can be used. Please refer ☞**P.104** for ISO code of the insert tip.

Applicable Arbor	Dimension	Code No.	Grade	C	
			Material / Nose R	Coated Carbide M / AC630M	Coated Carbide K / AC410K
ZMAC32-VR, ZMAC42-VR, ZMAC55-VR		CC06-○4	0.4	●	●
		CC06-○8	0.8	●	●
ZMAC70-VR, ZMAC85-VR		CC08-○4	0.4	●	●
		CC08-○8	0.8	●	●
ZMAC100-VR, ZMAC140-VR		CC12-○4	0.4	●	●
		CC12-○8	0.8	●	●

Code No. of the insert tip  are shown.

TAPER	Code No.	Boring Range D	Boring Depth M	C	C_1	Shank Code No. / BT No.-Q-h	Extension Spacer Code No. / Q-Q_1-h_1	Head No. / Q- Min.D -h_2 (P.74)	Insert No.	Weight (kg)	Fig.
No.50	BT50-ZMAC32R -180V	31.8～42.2	77	31	50	BT50-Q16-125N	—	16-ZMAC32R-55V	CC06	5.5	1
	(IT50) -210V		110			-Q16-155				5.6	
	-225V		122			-Q16-125N	SP16-16-45			5.7	2
	-ZMAC42R -180V	41.8～55.2	97	40	60	-Q20-110	—	20-ZMAC42R-70V		6.0	1
	-195V		130			-Q20-125				6.0	
	-225V		142			-Q20-110	SP20-20-45			6.4	2
	-240V		157				SP20-20-60			6.5	
	-ZMAC55R -210V	54.8～70.2	117	53	65	-Q26-140	—	26-ZMAC55R-70V		7.5	1
	-240V		182			-Q26-170N				7.6	
	-270V		177			-Q26-140	SP26-26-60			8.1	2
	-ZMAC70R -240V	69.8～85.2	190	67	80	-Q34-170	—	34-ZMAC70R-70V	CC08	10.0	1
	-270V		220			-Q34-200				10.6	
	-300V		250			-Q34-170	SP34-34-60			11.5	2
	-ZMAC85R -225V	84.8～100.2	182	83	83	-Q42-125	—	42-ZMAC85R-100V		12.5	1
	-290V		247			-Q42-190				15.0	
	-315V		272			-Q42-125	SP42-42-90			16.0	2
	-ZMAC100R-225V	99.5～140.5	225	95	98	-Q42-125	—	42-ZMAC100R-100V	CC12	12.4	3
	-290V		290			-Q42-190				15.1	
	-325V		325			-Q42-225A				17.8	
	-375V		375			-Q42-275A				20.5	
	-425V		425			-Q42-325A				23.2	
	-ZMAC140R-225V	139.5～180.5	225	135	98	-Q42-125	—	42-ZMAC140R-100V		13.8	
	-290V		290			-Q42-190				16.5	
	-325V		325			-Q42-225A				19.2	
	-375V		375			-Q42-275A				21.9	
	-425V		425			-Q42-325A				24.6	

★MIN. dial readout : **ZMAC25-VR** & smaller is 0.02mm on diameter. **ZMAC32-VR** and larger are 0.01mm on diameter.
★**When L length is required longer than standard, please specify boring depth M.** ★Centre Through Coolant function is available as standard.
★**"C" grade (Coated) insert for Steel, Stainless&Cast Iron is supplied as Standard with the head (Smooth boring & Long tool-life) .** ☞**P.74**
We would recommend **"B"** grade (**CBN**) insert for Hardened Steel & High Speed boring of Cast Iron. Please refer ☞**P.101** for cutting condition.
★Please refer ☞**P.89, P90** for Shank & Spacer,and ☞**P.75, P.76** for Head.

MODULAR TYPE ZMAC ADVANCED BORING HEAD NIKKEN

ZMAC-V Triangular Insert type head



Fig.1



Fig.2



Fig.3

JAPAN PAT. P.103

Head No.	Boring Range D	Boring Depth M	Coupling Dia. Q	Remarks					Weight (kg)
				C	C1	Unit No.	Insert No.	Fig.	
12-ZMAC 16- 45V	15.9～20.2	38	12	15	24	M 2HZ- 16V	3MP	2	0.4
12-ZMAC 16- 55V		48							0.4
9-ZMAC 20- 40V	19.8～25.2	40	9	19	–	M 2HZ- 20V		1	0.4
12-ZMAC 25- 40V	24.8～32.2		12	24		M 3HZ- 25V			0.5
16-ZMAC 32- 55V	31.8～42.2	55	16	31		M 4HZ- 32V	4MP		0.7
20-ZMAC 42- 70V	41.8～55.2	70	20	40		M 5HZ- 42V	6MP		1.1
26-ZMAC 55- 70V	54.8～70.2		26	53		M 5HZ- 55V			1.2
34-ZMAC 70- 70V	69.8～85.2		34	67		M 7HZ- 70V			2.0
42-ZMAC 85-100V	84.8～100.2	100	42	83		M10HZ- 85V			4.3
42-ZMAC100-100V	99.5～140.5			95	83	M10HZ-100V		3	4.9
42-ZMAC140-100V	139.5～180.5			135		M10HZ-140V			6.3

★MIN. dial readout: **ZMAC25-V** and smaller is 0.02mm on dia.
ZMAC32-V and larger is 0.01mm on dia.
★The above boring ranges are based on heads with Nose/R 0.2 insert.
★**"C" grade (Coated) insert for Steel, Stainless & Cast Iron is supplied as Standard with the head (Smooth boring & Long tool-life) .** ☞**P.103** Please refer ☞ **P.101** for cutting condition.
We would recommend **"B"** grade (**CBN**) insert for Hardened Steel & High Speed boring of Cast Iron.
★Centre Through Coolant function is available as standard.
★**Code No. of the set with SP26 stepped spacer is Q26-Coupling Dia.-ZMAC○-LengthV e.g. Q26-20-ZMAC42-100V**



ZMAC– VR Rhomboidal Insert type head



Fig.1



Fig.2

JAPAN PAT. P.74

Head No.	Boring Range D	Boring Depth M	Coupling Dia. Q	Remarks					Weight (kg)
				C	C1	Unit No.	Insert No.	Fig.	
16-ZMAC 32R - 55V	31.8～42.2	55	16	31	–	M 4HZ- 32VR	CC06	1	0.7
20-ZMAC 42R - 70V	41.8～55.2	70	20	40		M 5HZ- 42VR			1.1
26-ZMAC 55R - 70V	54.8～70.2		26	53		M 5HZ- 55VR			1.2
34-ZMAC 70R - 70V	69.8～85.2		34	67		M 7HZ- 70VR	CC08		2.0
42-ZMAC 85R -100V	84.8～100.2	100	42	83		M10HZ- 85VR			4.3
42-ZMAC 100R -100V	99.5～140.5			95	83	M10HZ-100VR	CC12	2	4.9
42-ZMAC 140R -100V	139.5～180.5			135		M10HZ-140VR			6.3

★MIN. dial readout: **ZMAC32-VR** and larger is 0.01mm on dia.
★**"C" grade (Coated) insert for Steel, Stainless & Cast Iron is supplied as Standard with the head (Smooth boring & Long tool-life) .** ☞**P.74** Please refer ☞**P.101** for cutting condition.
★Centre Through Coolant function is available as standard.
★**Code No. of the set with SP26 stepped spacer is Q26-Coupling Dia.-ZMAC○R-LengthV e.g. Q26-20-ZMAC42R-100V**



ZMACα-V Triangular Insert type head



Fig.1



Fig2

JAPAN PAT. P.103

Head No.	Boring Range D	Boring Depth M	Coupling Dia. Q	Remarks					Weight (kg)
				C	C1	Unit No.	Insert No.	Fig.	
12-ZMAC 25- 40AAV	24.8～32.2	40	12	24	–	M 3HZ- 25V	3MP	1	0.4
16-ZMAC 32- 55AAV	31.8～42.2	55	16	31		M 4HZ- 32V	4MP		0.5
20-ZMAC 42- 70AAV	41.8～55.2	70	20	40		M 5HZ- 42V	6MP		0.8
26-ZMAC 55- 70AAV	54.8～70.2		26	53		M 5HZ- 55V			0.7
34-ZMAC 70- 70AAV	69.8～85.2		34	67		M 7HZ- 70V			1.1
42-ZMAC 85-100AAV	84.8～100.2	100	42	83		M10HZ- 85V			2.3
42-ZMAC100-100AAV	99.5～140.5			95	83	M10HZ-100V		2	2.8
42-ZMAC140-100AAV	139.5～180.5			135		M10HZ-140V			3.1

★MIN. dial readout: **ZMAC25α-V** is 0.02mm on dia. **ZMAC32α-V** and larger is 0.01mm on dia.
★The above boring ranges are based on heads with Nose/R 0.2 insert.
★**"C" grade (Coated) insert for Steel, Stainless & Cast Iron is supplied as Standard with the head (Smooth boring & Long tool-life) .** ☞P.103 Please refer ☞P.101 for cutting condition.
We would recommend **"B"** grade (**CBN**) insert for Hardened Steel & High Speed boring of Cast Iron.
★Centre Through Coolant function is available as standard.
★**Code No. of the set with SP26 stepped spacer is Q26-Coupling Dia.-ZMAC○-Length AAV e.g. Q26-20-ZMAC42-100AAV**



ZMACα – VR Rhomboidal Insert type head



Fig.1



Fig.2

JAPAN PAT. P.74

Head No.	Boring Range D	Boring Depth M	Coupling Dia. Q	Remarks					Weight (kg)
				C	C1	Unit No.	Insert No.	Fig.	
16-ZMAC 32R - 55AAV	31.8～42.2	55	16	31	–	M 4HZ- 32VR	CC06	1	0.5
20-ZMAC 42R - 70AAV	41.8～55.2	70	20	40		M 5HZ- 42VR			0.8
26-ZMAC 55R - 70AAV	54.8～70.2		26	53		M 5HZ- 55VR			0.7
34-ZMAC 70R - 70AAV	69.8～85.2		34	67		M 7HZ- 70VR	CC08		1.1
42-ZMAC 85R -100AAV	84.8～100.2	100	42	83		M10HZ- 85VR			2.3
42-ZMAC 100R -100AAV	99.5～140.5			95	83	M10HZ-100VR	CC12	2	2.8
42-ZMAC 140R -100AAV	139.5～180.5			135		M10HZ-140VR			3.1

★MIN. dial readout: **ZMAC32α-VR** and larger is 0.01mm on dia.
★**"C" grade (Coated) insert for Steel, Stainless & Cast Iron is supplied as Standard with the head (Smooth boring & Long tool-life) .** ☞P.74 Please refer ☞P.101 for cutting condition.
We would recommend **"B"** grade (**CBN**) insert for Hardened Steel & High Speed boring of Cast Iron.
★Centre Through Coolant function is available as standard.
★**Code No. of the set with SP26 stepped spacer is Q26-Coupling Dia.-ZMAC○R-Length AAV e.g. Q26-20-ZMAC42R-100AAV**



MODULAR TYPE ZMAC ADVANCED (ISO) BORING HEAD NIKKEN

Boring head for **ISO** insert tip widely available on the market.
* Only insert clamp bolts are supplied (Insert tips are not supplied).

ZMAC-V-I Triangular Insert type head



Fig.1



Fig.2



Fig.3

JAPAN PAT. P.78

Head No.	Boring Range D	Boring Depth M	Coupling Dia. Q	Remarks						Weight (kg)
				C	C1	Unit No.	Insert No.	Thread size of Insert Clamp Screw	Fig.	
16-ZMAC 32- 55V-I	31.8～42.2	55	16	31	–	M 4HZ- 32V-I	TC□□0902□□L	M2.2	1	0.7
20-ZMAC 42- 70V-I	41.8～55.2	70	20	40		M 5HZ- 42V(M3)	TP□□1103□□L	M3		1.1
26-ZMAC 55- 70V-I	54.8～70.2		26	53		M 5HZ- 55V(M3)				1.2
34-ZMAC 70- 70V-I	69.8～85.2		34	67		M 7HZ- 70V(M3)				2.0
42-ZMAC 85-100V-I	84.8～100.2	100	42	83		M10HZ- 85V(M3)				4.3
42-ZMAC100-100V-I	99.5～140.5			95	83	M10HZ-100V(M3)			3	4.9
42-ZMAC140-100V-I	139.5～180.5			135		M10HZ-140V(M3)				6.3

★MIN. dial readout: **ZMAC32-V-I** and larger is 0.01mm on dia.(Sub scale : 0.005)
★The above boring ranges are based on heads with Nose/R 0.2 insert.
★Centre Through Coolant function is available as standard.
★Code No. of the set with SP26 stepped spacer is Q26-Coupling Dia.-ZMAC○-LengthV-I e.g. Q26-20-ZMAC42-100V-I



MODULAR TYPE ZMAC α ADVANCED (ISO) BORING HEAD NIKKEN

For High Speed/Deep Hole Boring

Boring head for **ISO** insert tip widely available on the market.
* Clamp bolt for insert tip is only supplied. (Insert tips are not supplied).

ZMACα-V-I Triangular Insert type head



Fig.1



Fig.2

JAPAN PAT. P.78

Head No.	Boring Range D	Boring Depth M	Coupling Dia. Q	Remarks						Weight (kg)
				C	C1	Unit No.	Insert No.	Thread size of Insert Clamp Screw	Fig.	
16-ZMAC 32- 55AAV-I	31.8～42.2	55	16	31	–	M 4HZ- 32V-I	TC□□0902□□L	M2.2	1	0.5
20-ZMAC 42- 70AAV-I	41.8～55.2	70	20	40		M 5HZ- 42(M3)	TP□□1103□□L	M3		0.8
26-ZMAC 55- 70AAV-I	54.8～70.2		26	53		M 5HZ- 55(M3)				0.7
34-ZMAC 70- 70AAV-I	69.8～85.2		34	67		M 7HZ- 70(M3)				1.1
42-ZMAC 85-100AAV-I	84.8～100.2	100	42	83		M10HZ- 85(M3)				2.3
42-ZMAC100-100AAV-I	99.5～140.5			95	83	M10HZ-100(M3)			2	2.8
42-ZMAC140-100AAV-I	139.5～180.5			135		M10HZ-140(M3)				3.1

★MIN. dial readout: **ZMAC32α-V-I** and larger is 0.01mm on dia.(Sub scale : 0.005)
★The above boring ranges are based on heads with Nose/R 0.2 insert.
★Centre Through Coolant function is available as standard.
★Code No. of the set with SP26 stepped spacer is Q26-Coupling Dia.-ZMAC○-Length AAV-I e.g. Q26-20-ZMAC42-100AAV-I



ZMAC ADVANCED (ISO) BORING UNIT PARTS LIST NIKKEN



ZMAC-V-I

NIKKEN ZMAC-V-I Boring Heads come complete with the ZMAC-V-I Boring Unit. Specify the part No. in the table below when ordering spares.
Triangular Insert Heads and Rhomboid Insert Heads use different boring units, cartridges, insert tips, insert clamp bolts, and insert clamp handles, but all other parts are common to both.

* The **ZMAC** units and new **ZMAC-V-I** units are interchangeable.

ZMAC-V-I Style	Boring Range	Unit	Triangular Insert	Insert Clamp Screw	Insert Clamp Handle	Lock Screw	Adjustment Handle	Unit Clamp Bolt
ZMAC 32-V-I	31.8～ 42.2	M 4HZ- 32V-I	TC□□0902□□L	M2255	T-6	M365	M 4HZL	M2577
ZMAC 42-V-I	41.8～ 55.2	M 5HZ- 42V(M3)	TP□□1103□□L	M3070	T-10	M364	M 5HZL	
ZMAC 55-V-I	54.8～ 70.2	M 5HZ- 55V(M3)				M366		
ZMAC 70-V-I	69.8～ 85.2	M 7HZ- 70V(M3)				M360	M 7HZL	M3090
ZMAC 85-V-I	84.8～100.2	M10HZ- 85V(M3)				M367	M10HZL	M4012
ZMAC 100-V-I	99.5～140.5	M10HZ-100V(M3)				M368		
ZMAC 140-V-I	139.5～180.5	M10HZ-140V(M3)				M369		

★Each Unit and Cartridge are supplied without Insert Tip.

Special cartridge example for necking is available. Please contact us with the work piece drawing.

ZMAC-VR Style	Boring Range	Unit	Rhomboidal Insert (ISO code)	Insert Clamp Screw	Insert Clamp Handle
ZMAC 32-VR	31.8～ 42.2	M 4HZ- 32VR	CC06 (CC□□0602□□)	M2560	T-8
ZMAC 42-VR	41.8～ 55.2	M 5HZ- 42VR		M2577	
ZMAC 55-VR	54.8～ 70.2	M 5HZ- 55VR			
ZMAC 70-VR	69.8～ 85.2	M 7HZ- 70VR	CC08 (CC□□09T3□□)	M4090	T-15
ZMAC 85-VR	84.8～100.2	M10HZ- 85VR		M4012	
ZMAC 100-VR	99.5～140.5	M10HZ-100VR	CC12 (CC□□1204□□)	M5012	T-15
ZMAC 140-VR	139.5～180.5	M10HZ-140VR			

★Each Unit and Cartridge are supplied without Insert Tip.
★Cartridge can not be supplied alone, please order ZMAC-V unit.

The cartridge head can be exchanged itself for the head bigger equal to ZMAC42-V.

Boring Range	Cartridge Head		Head Clamp Bolt
41.8～ 55.2	M 5HZ- 42 CH (M3)	M 5HZ- 42RCH	M512C
54.8～ 70.2			
69.8～ 85.2	M 7HZ- 70 CH (M3)	M 7HZ- 70RCH	M625
84.8～100.2	M10HZ- 85 CH (M3)	M10HZ- 85RCH	M825
99.5～140.5	M10HZ-100 CH (M3)	M10HZ-100RCH	M835
139.5～180.5			

Detach •Loosen head clamp bolt after boring diameter is set to little larger than the MIN. boring diameter.
Attach •Insert the head into cartridge, then tighten head clamp bolt temporary.
•Loosen side lock bolt.
•Rotate the dial ring 0.2～0.3mm to minus direction.
•Tighten head clamp bolt by pushing the head to the support portion of the main body.

INSERT TIP (please refer to the ISO code below to purchase.)

ZMAC-V-I Style	Dimension	ISO code
ZMAC32-V-I	2.38, 7°, ϕ5.56, (ϕ2.5)	TC□□0902□□L
ZMAC42-V-I ～ ZMAC140-V-I	3.18, 11°, ϕ6.35, (ϕ3.3)	TP□□1103□□L

Code No. of ISO standard Insert Tip

T P G T 1 1 0 3 0 4 L

Cutting Edge Length / Thickness / Corner Radius / Cutting Direction L : Left N : Either

Insert Shape: T : 60° W : 80° C : 80° M : 86° S : 90° A : 85°

Normal Clearance: B : 5° C : 7° P :11° N : 0° E :20°

Tolerance Class: G : Ground M : Pressed

Tip Breaker & Hole Configuration: W : T : R : B : H : M : X : Special

BALANCE-CUT BAC ADVANCED BORING ARBOR for LARGE DIA. NIKKEN

For Finishing

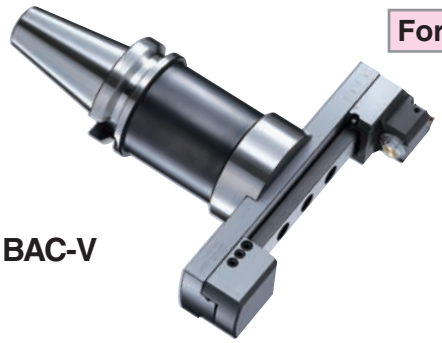

BAC-V

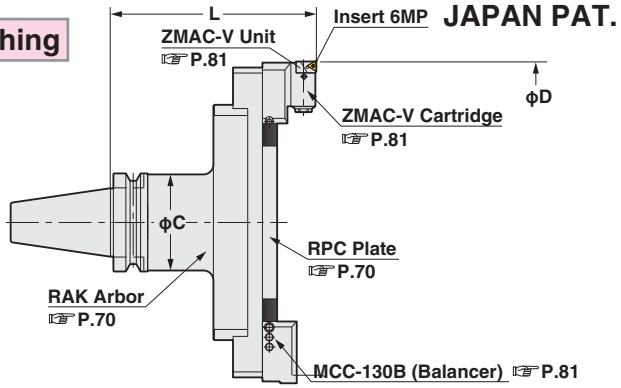

Boring Dia:φ130～595mm

P.103

TAPER	Code.No	D MIN.～MAX.	L	C	RAK Arbor Code No.	PPC Plante No	Cartridge (Balancer)	Weight (kg)
No.40	BT40-BAC130-205V	130～195	205	61	BT40-RAK-130A	RPC-130	MCCZ-130V (MCC-130B) Insert 6MP	7.0
	(IT40)-BAC180-205V	180～245				-180		8.0
No.50	BT50-BAC130-185V	130～195	185	90	BT50-RAK-110A	RPC-130		10.0
	(IT50) -235V		235		-160A			12.7
	-285V		285		-210A			15.4
	-335V		335		-260A			18.1
	-385V		385		-310A			20.8
	-435V		435		-360A			23.5
	-485V		485		-410A			26.2
	-BAC180-185V	180～245	185		-RAK-110A	RPC-180		10.6
	-235V		235		-160A			13.3
	-285V		285		-210A			16.0
	-335V		335		-260A			18.7
	-385V		385		-310A			21.4
	-435V		435		-360A			24.1
	-485V		485		-410A			26.8
	-BAC230-185V	230～295	185		-RAK-110A	RPC-230		11.3
	-235V		235		-160A			14.0
	-285V		285		-210A			16.7
	-335V		335		-260A			19.4
	-385V		385		-310A			22.1
	-435V		435		-360A			24.8
	-485V		485		-410A			27.5
	-BAC280-185V	280～345	185		-RAK-110A	RPC-280		11.9
	-235V		235		-160A			14.6
	-285V		285		-210A			17.3
	-335V		335		-260A			20.0
	-385V		385		-310A			22.7
	-435V		435		-360A			25.4
	-485V		485		-410A			28.1
	-BAC330-210V*	330～395	210 (220*)	98	BT50-RAK330-125 IT50-RAK330-135	RPC-330		16.7
	-BAC380-210V*	380～445				-380		17.0
	-BAC430-210V*	430～495				-430		18.0
	-BAC480-210V*	480～545				-480		19.0
	-BAC530-210V*	530～595				-530		20.0

★**"C" grade (Coated)** Inserts are supplied as standard. ☞**P.103** Please refer ☞**P.101** for cutting condition.
★Unit **"M5HZ-55V"** is provided as standard, please refer ☞**P.70** for Arbor (**RAK**) and Plate (**RPC**) .
★Arbor, Plate and Cartridge are delivered in separate packages.
★When ordering, please let us know machine maker and model no. to avoid the interfererce with tool magazine of **ATC**.
★The location of cutting edge is same as drive key in standard.
The different location is available, please specify **θ** in Code No. **e.g. BT50-BAC180-235V (90°)**
★The boring arbors marked * with **IT50**, L (gauge length) is 220. **e.g. IT50-BAC330-220V**
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. BT50-BAC130-185V-C**



View from Cutting edge.



Coolant Through Tool

BALANCE-CUT BCB BORING ARBOR for LARGE DIA. NIKKEN

For Semi-Finishing

BCB

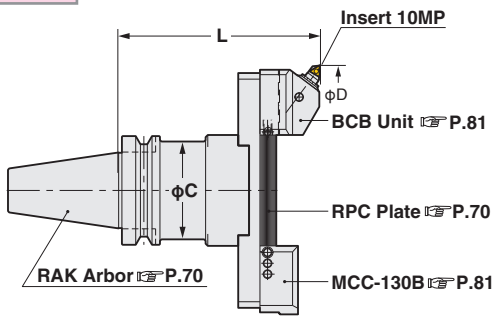

Boring Dia:φ130～595mm

P.103

TAPER	Code.No	D MIN.～MAX.	L	C	RAK Arbor Code No.	RPC Plante No	Cartridge (Balancer)	Weight (kg)
No.40	BT40-BCB130-215	130～195	215	61	BT40-RAK-130A	RPC-130	BCB-130 (MCC-130B) Insert 10MP	7.5
	(IT40) -BCB180-215	180～245				-180		8.5
No.50	BT50-BCB130-195	130～195	195	90	BT50-RAK-110A	RPC-130		10.3
	(IT50) -245		245		-160A			13.0
	-295		295		-210A			15.7
	-345		345		-260A			18.4
	-395		395		-310A			21.1
	-445		445		-360A			23.8
	-495		495		-410A			26.5
	-BCB180-195	180～245	195		BT50-RAK-110A	RPC-180		10.9
	-245		245		-160A			13.6
	-295		295		-210A			16.3
	-345		345		-260A			19.0
	-395		395		-310A			21.7
	-445		445		-360A			24.4
	-495		495		-410A			27.1
	-BCB230-195	230～295	195		BT50-RAK-110A	RPC-230		11.6
	-245		245		-160A			14.3
	-295		295		-210A			17.0
	-345		345		-260A			19.7
	-395		395		-310A			22.4
	-445		445		-360A			25.1
	-495		495		-410A			27.8
	-BCB280-195	280～345	195		BT50-RAK-110A	RPC-280		12.2
	-245		245		-160A			14.9
	-295		295		-210A			17.6
	-345		345		-260A			20.3
	-395		395		-310A			23.0
	-445		445		-360A			25.7
	-495		495		-410A			28.4
	-BCB330-220*	330～395	220 (220*)	98	BT50-RAK330-125 I T50-RAK330-135	RPC-330		16.5
	-BCB380-220*	380～445				-380		17.5
	-BCB430-220*	430～495				-430		18.5
	-BCB480-220*	480～545				-480		19.5
	-BCB530-220*	530～595				-530		20.5

★Please refer ☞**P.101** for cutting condition.
★MIN. dial readout on dia.: 0.02mm, Sub scale: 0.002mm
★The boring arbor marked * with **IT50**, L (gauge length) is 230. **e.g. IT50-BCB330-230**.
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. BT50-BCB130-195 -C**

Up to φ800 is also available. Please contact with us.

Double Cut Style BCB Boring Bar

BCB-W

★Double cut style can be done with both side of **BCB-130** cartridges. Please add **"W"** at the end of Code No. **e.g. BT50-BCB130W-195**

- **True balance cut** can be done to adjust the height by micro adjustment first and then to adjust the diameter by adjust screw.
- **Stepped cut** can be done to change the height of the cartridges.

Stepped Cut



ACCESSORIES for BALANCE-CUT BORING ARBOR for LARGE DIA.

NIKKEN

JAPAN PAT.

Accessories for Balance-Cut BAC-V

Balance-Cut BAC type cartridge for large dia.

MCCZ-130V

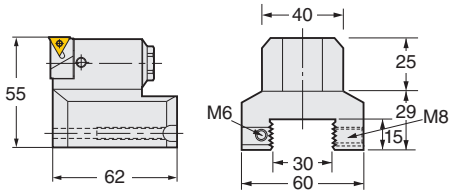

0.8kg

P.103

BAC type Balancer for Balance-Cut large dia.

MCC-130B

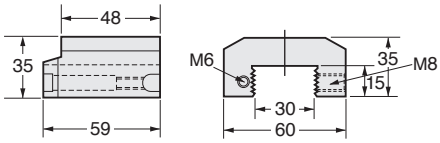

0.6kg

Accessories	ZMAC-V Unit	Insert Tip	Clamp Bolt	Wrench for Insert	Lock Screw	Adjust Screw	Set Screw (M8)	Wrench for M815 Belt	Adjust Wrench	Adjustment Handle	Applicable RPC Plate
											
Code No.	M5HZ-55V	**6MP**	M2577	T-8	M366	M540	M815	M4	M3	M5HZL	RPC-130,180,230,280,330,380,430,480,530

★Please refer ☞**P.70** for **RPC** Plate. ★Set Code No. is **S.MCCZ-130V**.
★**M5HZ-55VR** with **CC06-C** insert tip is available. Please specify code No. **S.MCCZ-130VR**.
★**6MP-C** insert tip is supplied as standard. ☞**P.103** Please refer ☞**P.101** for cutting condition.



Accessories for Balance-Cut BCB

Balance-Cut BCB type cartridge for large dia.

BCB-130

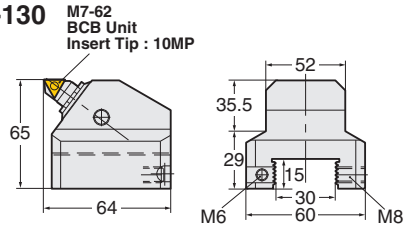

0.9kg

P.103

MAC type Balancer for Balance-Cut large dia.

MCC-130B

Accessories	BCB Unit	Insert Tip	Clamp Bolt	Wrench for Insert	Lock Screw	Adjust Screw	Set Screw (M8)	Wrench for M815 Belt	Adjust Wrench	Adjustment Handle	Applicable RPC Plate
											
Code No.	M7-62	**10MP**	M67	20S	B357, B367	M540	M815	M4	M3	M397	RPC-130,180,230,280,330,380,430,480,530

★Please refer ☞**P.70** for **RPC** Plate.
★Set Code No. is **S.BCB-130**.
★Please refer ☞**P.101** for cutting condition.

SPECIAL DESIGNED BORING ARBOR

NIKKEN

There exist various kinds of boring applications which cannot be managed using standard boring arbors. NIKKEN has great experience of special boring applications, utilizing the double contact shoulder support **ZMAC-V** boring heads. NIKKEN can also design and manufacture special boring arbors to suit your special applications.

RAA

Base Arbor for Special Boring Head

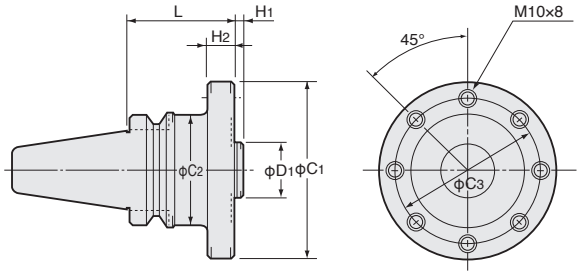

For Overturning

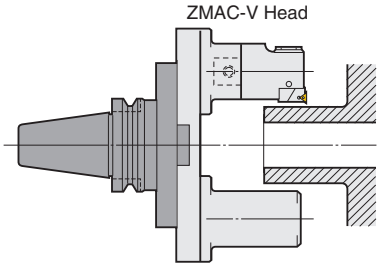

TAPER	Code No.	D_1	L	H_1	H_2	C_1	C_2	C_3	Weight (kg)
No.40	BT40-RAA32- 60 (IT40)	32 h7	60	7	15	102	61	82	2.5
No.50	BT50-RAA32- 60		60		12		98		5
	(IT50) -120		120		20				9
	-180		180						15.5

★The Base Holder with long gauge length is available on demand.
★High Pressure Centre Through Tool Coolant Type is available on demand.
★The dimension with ( ) is for **IT40** and **IT50**.
★For BT40, ϕD_1=22mm is also available.

For U Axis Boring Arbor



Multi Stage Boring Arbor

For Simultaneous machining for rough, finish and chamfer.

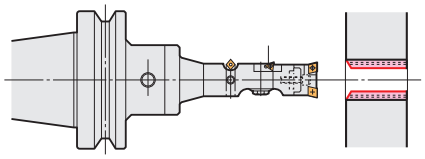

Please specify the boring dia., depth, and necessary length from the gauge line.

For stepped hole boring with restricted concentricity.

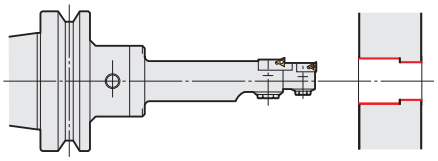

Please specify each boring dia., depth, and necessary length from the gauge line.

For decreasing the number of **A.T.C** with one arbor for two different size of the bores.

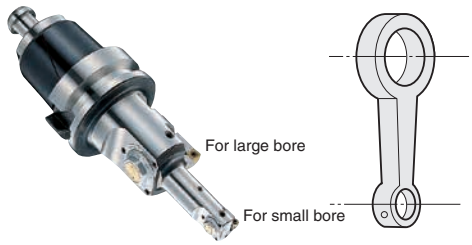

Photo shows Multi Stage Boring Arbor with **NC5** Shank.

The above are just samples. Pre-Balanced type Boring Arbor for High Speed Application and Aluminium Body Head are also available. Please contact with us about your special boring applications.

DRILLING OPERATION by **COMBAT Z DRILL**

"Rationalization is Study of Drilling." which is our Slogan for developing NIKKEN **COMBAT Z DRILL.** ☞P.303 Please try it. Pilot Drill and 3-Phases Heat Treatment significantly improves Cutting Condition, Secure Drilling and Tool Life.

Ultra Long Size Boring Bar

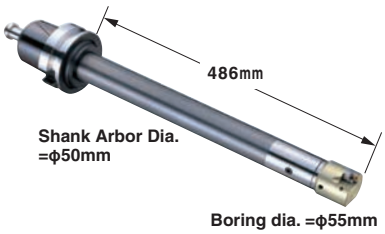

For Extreme Deep Hole Boring Operation, please study the Machine with **NC5 Spindle** ☞P.207 or **3LOCK Spindle** ☞P.147.
In case of **BT/IT** spindle, we recommend **ZMAC α-V** type Head for these applications.

Photo shows Ultra Long size Boring Arbor with **NC5** Shank.

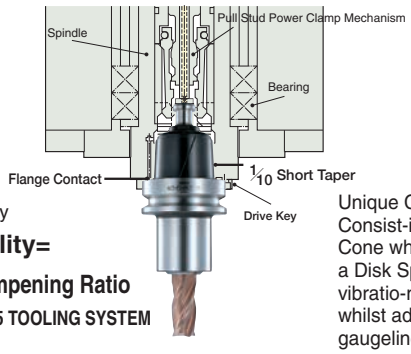

E·H·MERRITT's Theory

Chattering Stability=

Static Stiffness×Dampening Ratio

Thus, the advantage of **NC5 TOOLING SYSTEM** is clearly demonstrated.

Unique Construction : Consist-ing of a Slotted Taper Cone which is Pre-Loaded by a Disk Spring to increase its vibratio-nal dampening effect whilst ad-justing minute gaugeline errors, completely.

BALANCE-CUT RACα BORING ARBOR for LARGE DIA. NIKKEN

For Roughing

- With the screws for slight adjustment
- Boring Dia. : φ130～φ580mm

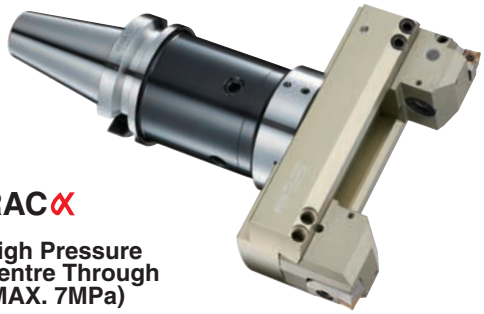

RACα

High Pressure Centre Through (MAX. 7MPa)

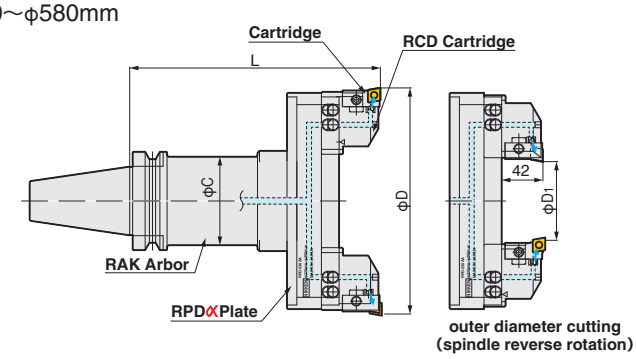

P.62

Boring Dia. : φ130～580mm / Over Turning Dia. : 10～430mm

TAPE	Code.No	D MIN.～MAX.	L	D1 MIN.～MAX.	C	RAK Arbor Code No.*1	RPDα Plate No.	RCD Cartridge No.	Weight (kg)
No.40	BT40-RAC130-225AA	130～180	225	10～30	61	BT40-RAK-130A	RPD-130AA	For Heavy Duty Boring of Iron and Cast Iron RCD-130 ×2 Insert Tip CN08	7.2
	(IT40)-RAC180-225AA	180～230		30～80			-180AA		7.7
No.50	BT50-RAC130-205AA	130～180	205	10～30	90	BT50-RAK-110A	RPD-130AA		9.5
	(IT50) -255AA		255			-160A			12.2
	-305AA		305			-210A			14.9
	-355AA		355			-260A			17.6
	-405AA		405			-310A			20.3
	-455AA		455			-360A			23.0
	-505AA		505			-410A			25.7
	-RAC180-205AA	180～230	205	30～80		-RAK-110A	RPD-180AA		10.0
	-255AA		255			-160A			12.7
	-305AA		305			-210A			15.4
	-355AA		355			-260A			18.1
	-405AA		405			-310A			20.8
	-455AA		455			-360A			23.5
	-505AA		505			-410A			26.2
	-RAC230-205AA	230～280	205	80～130		-RAK-110A	RPD-230AA		10.6
	-255AA		255			-160A			13.3
	-305AA		305			-210A			16.0
	-355AA		355			-260A			18.7
	-405AA		405			-310A			21.4
	-455AA		455			-360A			24.1
	-505AA		505			-410A			26.8
	-RAC280-205AA	280～330	205	130～180		-RAK-110A	RPD-280AA		11.1
	-255AA		255			-160A			13.8
	-305AA		305			-210A			16.5
	-355AA		355			-260A			19.2
	-405AA		405			-310A			21.9
	-455AA		455			-360A			24.6
	-505AA		505			-410A			27.3
	-RAC330-220AA*	330～380	220 (230*)	180～230	98	BT50-RAK330-125 IT50-RAK330-135	RPD-330AA		16.4
	-RAC380-220AA*	380～430		230～280			-380AA		16.9
	-RAC430-220AA*	430～480		280～330			-430AA		17.4
	-RAC480-220AA*	480～530		330～380			-480AA		17.9
	-RAC530-220AA*	530～580		380～430			-530AA		18.4

★The Code No. on above table are the boring arbors with **RCD-130** cartridge (Insert tip: **CN08**) the Heavy Duty Boring of Iron and Cast Iron. Please refer ☞ **P.100** for cutting condition.
★Boring arbor with cartridges & insert for Steel, Stainless Steel and Cast Iron (**E**) , for Aluminum (**A**) and for Through Hole & Multi Sheets (**K**) are available. Please refer ☞ **P.84** for cartridges. **e.g. BT50-RAC130-205AA-E**
★Please refer ☞ **P.84** for **RAK** arbor and **RPD** plate.
★Arbor, plate and cartridges are delivered in separate packages.
★Please check the interference of the arbor with your M/C not to occur the interference in the tool magazine.
★The location of the cutting edge is same as the drive key for standard. The different location is available, please specify θ. **e.g. BT50-RAC180-255AA (90˚)**
★The boring arbors marked * with **IT50**, L (gauge length) is 230. **e.g. IT50-RAC330-230AA**
★Special sleeves (2 pieces) are required to change the arbor to support center coolant. **Code No. RAK-CLS** (sold separately)
★When using it for outer diameter cutting, the spindle will rotate in reverse.



View from Cutting Edge

MODULAR TYPE ARBOR

NIKKEN

BT

BALANCE CUT RAKα BORING ARBOR for LARGE DIA. <RAK Arbor>

RAK

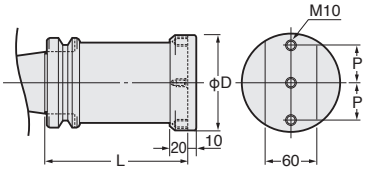

Fig.1

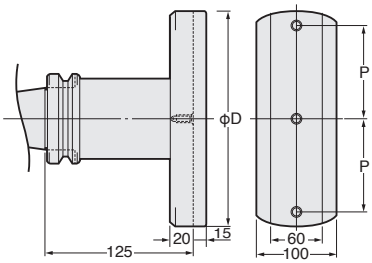

Fig.2

Code No.	Boring Range	L	D	P	Weight (kg)	Applicable RPDα Plate 	Hex. Socket bolt 	Fig.
BT40 (IT40) -RAK-130A	130～230	130	102	35	4.9	RPD-130AA, 180AA	M1035	1
BT50 -RAK-110A	130～330	110			7.2	RPD-130AA, 180AA, 230AA, 280AA		
(IT50) -RAK-160A		160			9.9			
-RAK-210A		210			12.6			
-RAK-260A		260			15.3			
-RAK-310A		310			18.0			
-RAK-360A		360			20.7			
-RAK-410A		410			23.4			
-RAK330-125*	330～580	125	240	100	12.0	RPD-330AA, 380AA, 430AA, 480AA, 530AA	M1045	2

★The location of the cutting edge is same as the drive key for standard. The different location is available, please specify θ. **e.g. BT50-RAK-160A-30°**
★Special sleeves (2 pieces) are required to change the arbor to support center coolant. **Code No. RAK-CLS** (option)
★* : In case of **IT50**, **IT50-RAK-330-135** is standard gauge length.

BALANCE CUTα PLATE for LARGE DIA. <RPDα Plate>

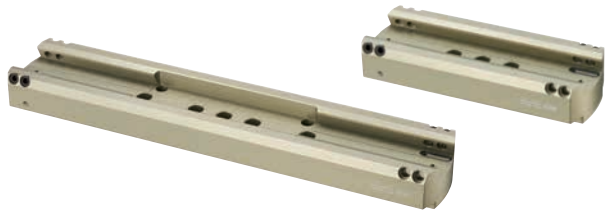

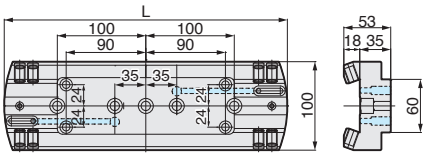

RPD-330AA ~ RPD-530AA

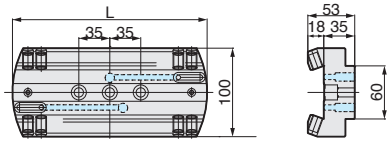

RPD-130AA ~ RPD-280AA

Code No.	Boring Range	L	Weight (kg)	Code No.	Boring Range	L	Weight (kg)	Code No.	Boring Range	L	Weight (kg)
RPD-130AA	φ130～180	124	1.1	RPD-330AA	φ330～380	320	3.2	RPD-530AA	φ530～580	520	5.2
-180AA	φ180～230	170	1.6	-380AA	φ380～430	370	3.7				
-230AA	φ230～280	220	2.2	-430AA	φ430～480	420	4.2				
-280AA	φ280～330	270	2.7	-480AA	φ480～530	470	4.7				

★Special sleeves (2 pieces) are required to change the arbor to support center coolant. **Code No. RAK-CLS** (option)

Accessories for Balance-Cut RACα

Heavy Duty Boring of Iron and Cast Iron
RCD-130 (CN08)

Steel, Stainless Steel and Cast Iron
RCD-130E (CC12)

For Aluminum
RCD-130A (AEG16)

For Through Hole and Multi Sheets
RCD-130K (SC12)

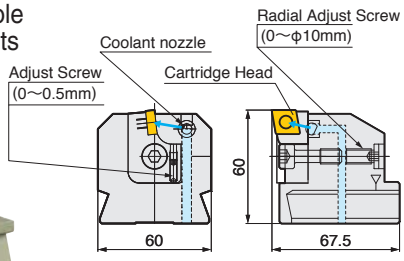

Weight : 0.6kg

Accessories	Insert Tip 	Clamp Bolt 	Adjust Screw for Axial direction	Adjust Wrench for Axial direction 	Wrench for Insert 	Lock Screw (M10) 	Wrench for M1016 	Head Clamp Bolt 	Coolant stop Screw 	Wrench for M510 	Applicable RPDα Plate 
Code No.	*	CSM-70	M416	M2	20S	M1016	M5	M825-AJ	M510	M2.5	RPD-130AA, 180AA, 230AA, 280AA, 330AA, 380AA, 430AA, 480AA, 530AA

★* : The insert tip is **RCD-130: CN08 (☞P.62)** , **RCD-130E: CC12 (☞P.60)** , **RCD-130A: AEG16 (☞P.64)** , **RCD-130K: SC12 (☞P.66)** Please refer☞**P.100** for cutting condition.
★There are two different types clamping system. One is eccentric system, the other is screw on system. Above parts are for screw on system.
★Code No. **RCD-130** indicates a single cartridge. When ordering a pair of cartridge, please appoint to us Code No. **S.RCD-130**.
★The cartridge head can be exchanged. **M10HZ-85CH-N, -E, -A, -K.**

M10HZ-85CH-E

BALANCE-CUT BAC α ADVANCED BORING ARBOR for LARGE DIA. NIKKEN

For Finishing

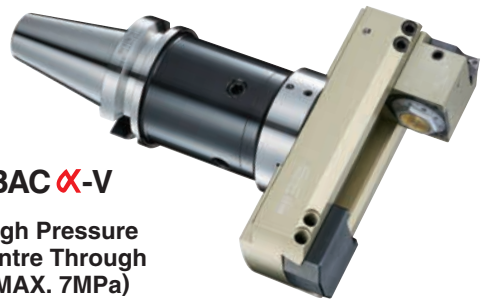

BAC α-V

High Pressure Centre Through (MAX. 7MPa)

JAPAN PAT.

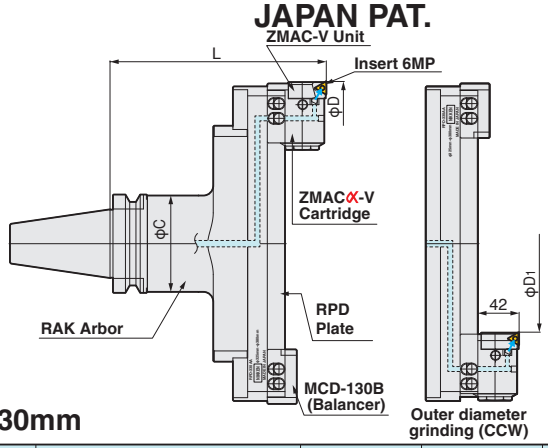

P.103

Boring Dia:φ130～595mm / Over Turning Dia. : 10～430mm

TAPE	Code.No	D MIN.～MAX.	L	D1 MIN.～MAX.	C	RAK Arbor Code No.*1	RPDα Plate No.	Cartridge (Balancer)	Weight (kg)
No.40	BT40-BAC130-225AAV	130～180	225	10～30	61	BT40-RAK-130A	RPD-130AA	MCDZ-130AAV (MCD-130B) Insert 6MP	7.5
	(IT40)-BAC180-225AAV	180～230		30～80			-180AA		8.0
No.50	BT50-BAC130-205AAV	130～180	205	10～30	90	BT50-RAK-110A	RPD-130AA		9.8
	(IT50) -255AAV		255			-160A			12.5
	-305AAV		305			-210A			15.2
	-355AAV		355			-260A			17.9
	-405AAV		405			-310A			20.6
	-455AAV		455			-360A			23.3
	-505AAV		505			-410A			26.0
	-BAC180-205AAV	180～230	205	30～80		-RAK-110A	RPD-180AA		10.3
	-255AAV		255			-160A			13.0
	-305AAV		305			-210A			15.7
	-355AAV		355			-260A			18.4
	-405AAV		405			-310A			21.1
	-455AAV		455			-360A			23.8
	-505AAV		505			-410A			26.5
	-BAC230-205AAV	230～280	205	80～130		-RAK-110A	RPD-230AA		10.9
	-255AAV		255			-160A			13.6
	-305AAV		305			-210A			16.3
	-355AAV		355			-260A			19.0
	-405AAV		405			-310A			21.7
	-455AAV		455			-360A			24.4
	-505AAV		505			-410A			27.2
	-BAC280-205AAV	280～330	205	130～180		-RAK-110A	RPD-280AA		11.4
	-255AAV		255			-160A			14.1
	-305AAV		305			-210A			16.8
	-355AAV		355			-260A			19.5
	-405AAV		405			-310A			22.2
	-455AAV		455			-360A			24.9
	-505AAV		505			-410A			27.6
	-BAC330-220AAV*	330～380	220 (230*)	180～230	98	BT50-RAK330-125 IT50-RAK330-135	RPD-330AA		16.7
	-BAC380-220AAV*	380～430		230～280			-380AA		17.2
	-BAC430-220AAV*	430～480		280～330			-430AA		17.7
	-BAC480-220AAV*	480～530		330～380			-480AA		18.2
	-BAC530-220AAV*	530～580		380～430			-530AA		18.7

★**"C" grade (Coated)** Inserts are supplied as standard. ☞**P.103** Please refer ☞**P.101** for cutting condition.
★Unit **"M10HZ-75V"** is provided as semi-standard, please refer **"M10HZ-85V"** ☞**P.86** for Arbor (**RAK**) and Plate (**RPD**) .
★Arbor, Plate and Cartridge are delivered in separate packages.
★When ordering, please let us know machine maker and model no. to avoid the interfererce with tool magazine of **ATC**.
★The location of cutting edge is same as drive key in standard.
The different location is available, please specify **θ** in Code No. **e.g. BT50-BAC180-255AAV (90°)**
★The boring arbors marked * with **IT50**, L (gauge length) is 230. **e.g. IT50-BAC330-230AAV**
★Special sleeves (2 pieces) are required to change the arbor to support center coolant. **Code No. RAK-CLS** (sold separately)
★When using it for outer diameter cutting, the spindle will rotate in reverse.



View from Cutting edge.

MODULAR TYPE ARBOR

NIKKEN

BALANCE CUT RAKα BORING ARBOR for LARGE DIA. <RAK Arbor>

RAK

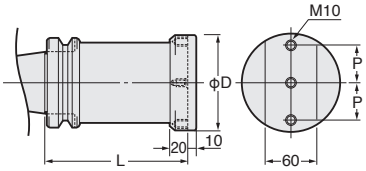

Fig.1

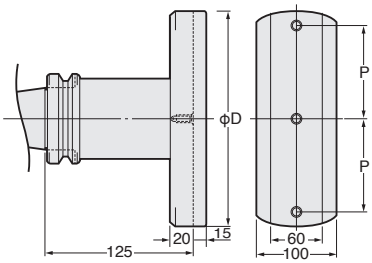

Fig.2

Code No.	Boring Range	L	D	P	Weight (kg)	Applicable RPDα Plate	Hex. Socket bolt	Fig.
BT40 (IT40) -RAK-130A	130～230	130	102	35	4.9	RPD-130AA, 180AA	M1035	1
BT50 -RAK-110A	130～330	110			7.2	RPD-130AA, 180AA, 230AA, 280AA		
(IT50) -RAK-160A		160			9.9			
-RAK-210A		210			12.6			
-RAK-260A		260			15.3			
-RAK-310A		310			18.0			
-RAK-360A		360			20.7			
-RAK-410A		410			23.4			
-RAK330-125*	330～580	125	240	100	12.0	RPD-330AA, 380AA, 430AA, 480AA, 530AA	M1045	2

★The location of the cutting edge is same as the drive key for standard. The different location is available, please specify θ. **e.g. BT50-RAK-160A-30°**
★Special sleeves (2 pieces) are required to change the arbor to support center coolant. **Code No. RAK-CLS** (option)
★* : In case of **IT50**, **IT50-RAK-330-135** is standard gauge length.

BALANCE CUTα PLATE for LARGE DIA. <RPDα Plate>

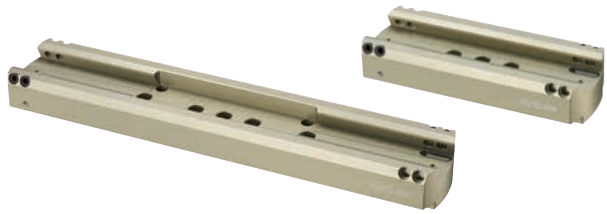

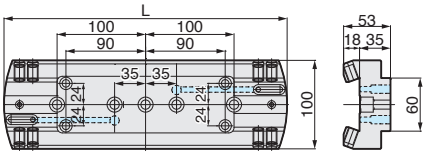

RPD-330AA ～ RPD-530AA

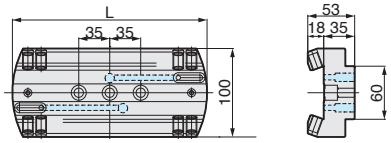

RPD-130AA ～ RPD-280AA

Code No.	Boring Range	L	Weight (kg)	Code No.	Boring Range	L	Weight (kg)	Code No.	Boring Range	L	Weight (kg)
RPD-130AA	φ130～180	124	1.1	RPD-330AA	φ330～380	320	3.2	RPD-530AA	φ530～580	520	5.2
-180AA	φ180～230	170	1.6	-380AA	φ380～430	370	3.7				
-230AA	φ230～280	220	2.2	-430AA	φ430～480	420	4.2				
-280AA	φ280～330	270	2.7	-480AA	φ480～530	470	4.7				

★Special sleeves (2 pieces) are required to change the arbor to support center coolant. **Code No. RAK-CLS** (option)

ACCESSORIES for BALANCE-CUT BORING ARBOR for LARGE DIA.

NIKKEN

JAPAN PAT.

Accessories for Balance-Cut BACα-V

Balance-Cut BACα type cartridge for large dia.

MCDZ-130AAV

P.103

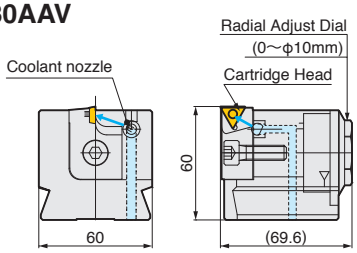

0.8kg

BACα type Balancer for Balance-Cut large dia.

MCD-130B



0.7kg

Accessories	ZMAC-V Unit	Insert Tip	Clamp Bolt	Wrench for Insert	Coolant stop Screw	Wrench for M510	Lock Screw (M10)	Wrench for M1016	Adjustment Handle	Applicable RPDα Plate
Code No.	M10HZ-75V	6MP	M2577	T-8	M510	M2.5	M1016	M5	M10HZL	RPD-130AA,180AA,230AA,280AA,330AA,380AA,430AA,480AA,530AA

★Set Code No. is **S.MCDZ-130AAV**.
★**M10HZ-75VR** with **CC08-C** insert tip is available. Please specify code No. **S.MCDZ-130AAVR**.
★**6MP-C** insert tip is supplied as standard. ☞**P.103** Please refer ☞**P.101** for cutting condition.

DJ BORING BAR

NIKKEN

BT-DJ

Coolant Through type is available. Please contact us.



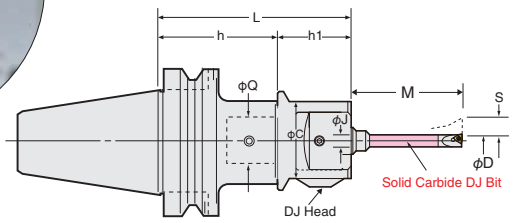

TAPER	Code No.	Boring Range D	Boring Depth M	L	C	Bit Hole Size J	Shank Code No. BTNo.Q-h	Head Code No. Q-MinD-h1	Bit Stroke S	DJ Bit Code No.	Weight (kg)
No.30	BT30-DJ3- 80A	3～28	14～ 80	80	50	10	BT30-Q26- 40	Q26-DJ3-40A	5.2	J10	1.0
	-DJ8- 84AN	3～50	14～130	84	59	16		-DJ8-44AN	6.0	J16	1.2
No.40	BT40-DJ3- 90A	3～28	14～ 80	90	50	10	BT40-Q26- 50	Q26-DJ3-40A	5.2	J10	1.6
	(IT40) -135A			135			- 95				2.2
	-DJ8- 94AN	3～50	14～130	94	59	16	BT40-Q26- 50	-DJ8-44AN	6.0	J16	1.9
	-139AN			139			- 95				2.5
No.50	BT50-DJ3-105A	3～28	14～ 80	105	50	10	BT50-Q26- 65	Q26-DJ3-40A	5.2	J10	4.2
	(IT50) -210A			210			-170N				5.8
	-DJ8-109AN	3～50	14～130	109	59	16	BT50-Q26- 65	-DJ8-44AN	6.0	J16	4.5
	-214AN			214			-170N				6.0

★**MIN. dial readout on dia.: 0.01mm, Sub scale: 0.005mm, 0.8mm/rev.**
★Each boxed set of **DJ3** and **DJ8** Boring Bars include 4 pcs of **DJ** Boring Bits as standard.
★Bits included for **BT40-DJ8-94A : J16-8-40, J16-18-80C, J16-28-85, J16-38-85**
Bits included for **BT40-DJ8-94AN :** The standard set bites will be replaced by those with C(with oil hole) as soon as the stock of those without C(without oil hole) runs out. ☞ **P.88**
★**DJ** Boring Bar without Boring Bits is also available. Please add **"-BD"** at the end of Code No. **e.g. BT40-DJ3-90A-BD**
★Shank and **DJ** Head (including Boring Bits) are delivered in separate packages.
★Please refer ☞**P.88** for Boring Bits. Please refer ☞ **P.102** for cutting condition.

DJ BORING HEAD with DJ BORING BIT

NIKKEN

DJ

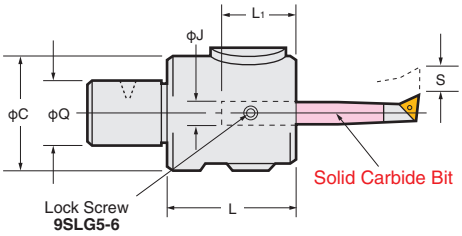

P.103 P.104

Easy to Set Micron Accuracy

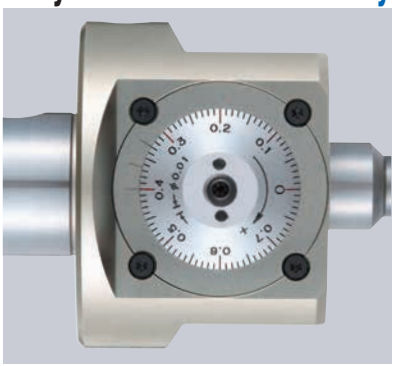

▲1Graduation:0.01mm on dia.

DJ No.	Code No.	Boring Range D	Boring Depth M	Q	L	C	Bit Hole Size J	L1	Bit Stroke S	Weight (kg)	Bit Code No. (Standard Accessories)	Insert Tip Code No.
DJ3	Q26-DJ3-40A	3～28	14～80	26	40	50	10	27	5.2	0.5	J10- 3-14 J10- 5-35 J10- 8-40 J10-18-62A	— CC03 3MP 6MP
DJ8	Q26-DJ8-44AN	3～50	14～130	26	44	59	16	32	6.0	0.8	J16- 8-40 J16-18-60 J16-28-65 J16-38-65	3MP 6MP

★**MIN. dial readout on dia.: 0.01mm, Sub scale: 0.005mm, 0.8mm/rev.**
★Each boxed set of **DJ3** and **DJ8** Boring Bars include 4 pcs. of **DJ** Bits, Insert, Insert Clamp Handle, **(T6**, **T8**, **(10S for DJ3)**)Micro Adjusting Handle **(M2.5)** as standard.
★Bits included for **Q26-DJ8-44A : J16-8-40, J16-18-80C, J16-28-85, J16-38-85**
Bits included for **Q26-DJ8-44AN :** The standard set bites will be replaced by those with C(with oil hole) as soon as the stock of those without C(without oil hole) runs out. ☞ **P.88**
★Please refer ☞ **P.88** for Boring Bits. Please refer ☞ **P.102** for cutting condition.
★**DJ** Boring Head without Bits is also available.Please add **"-BD"** at the end of Code No. **e.g. Q26-DJ3-40A-BD, Q26-DJ8-44A-BD**
★Weight of wooden box of **DJ** head with Boring Bits **Q26-DJ3-40A** : 1.2kg **Q26-DJ8-44AN** : 2.2kg **Q26-DJ8-44A** : 2.5kg

DJ BORING BIT SOLID CARBIDE

NIKKEN

New Bit Series for DJ8

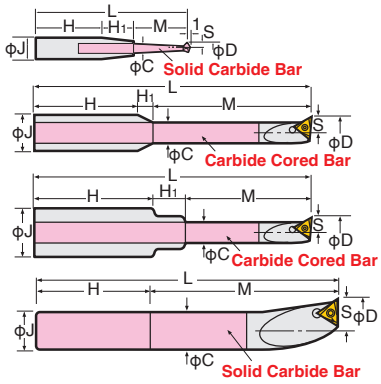

Fig.1 Fig.2 Fig.3 Fig.4



Fig.5 Fig.6



Fig.7

Explanation of the Code No.

J 16 - 5 - 35

- 35: Boring Depth(mm)
- 5: Min. Boring Dia.
- 16: Dia. of Shank.
- J: Abbreviation of DJ Bit.

P.103 P.104

Standard Bit Series

Style	Code No.	Boring Range D	Boring Depth M	J	L	H	H1	C	S	Insert No.	Insert Clamping Bolt No.	Insert Clamping Handle No.	Fig.	Weight (g)
DJ3	J10- 3- 14	3～ 8	14	10	62	30	18	2.2	1.5	–	–	–	1	30
	- 5- 35	5～15	35		70		5.0	4.3	2.5	CC03	M611	10S	5	30
	- 8- 40	8～18	40		75	32.5	2.5	7.2	4.0	3MP	M2037	T-6	2	50
	-18- 62A*2	18～28	62		91	29	–	12	9.0	6MP	M2577	T-8	4	130
DJ8	J16- 8- 40	8～18	40	16	83	32	10	7.2	4.0	3MP	M2037	T-6	3	50
	-18- 60C*3	18～28	60		93	33	–	16	9.0	6MP	M2577	T-8	6	150
	-28- 65C*3	28～39	65		98				14.0					150
	-38- 65C*3	38～50	65						19.0					200
	J16- 8- 40	8～18	40	16	83	32	10	7.2	4.0	3MP	M2037	T-6	3	50
	-18- 80C*3	18～28	80		113	33	–	16	9.0	6MP	M2577	T-8	4	300
	-28- 85C*3	28～39	85		118				14.0					300
	-38- 85C*3	38～50	85						19.0					350

★There are two bit series for **DJ8**. ▭ means attached bit with **N** in the set code. (e.g. **BT40-DJ8-94AN**) ▭ means attached bit without **N** in set code. (e.g. **BT40-DJ3-90A, BT40-DJ8-94A**)
★**DJ boring bit** with **"C"** at the end of code is oil-hole type, and will be switched to oil-hole specifications as soon as there is no stock of oil holeless without **"C"** at the end of code.
★**"C"** grade (Coated) intert tip is supplied as standard. ☞**P.103, P104** Please refer ☞ **P.102** for cutting condition.
★*2 means the dimension when using the new type **DJ3-A** head, and the dimension **M** will be 3mm longer when attached to the old model.
Please consult us separately, if the new **DJ3-A** head requires the same dimension of **M** as the old **DJ3** head. (e.g. **J10-18-65A**)
★*3 The standard set bites will be replaced by those with C(with oil hole) as soon as the stock of those without C(without oil hole) runs out.

P.103 P.104

Optional Bit Series

Style	Code No.	Boring Range D	Boring Depth M	J	L	H	H1	C	S	Insert No.	Insert Clamping Bolt No.	Insert Clamping Handle No.	Fig.	Weight (g)
DJ3	J10- 5- 30	5～15	30	10	60	30	–	4.3	2.5	CC03	M611	10S	5	28
	- 8- 35	8～18	35		65		–	7.2	4.0	3MP	M2037	T-6	2	43
	- 8- 55		55		90	32.5	2.5							70
	-12- 40C*2	12～22	40	10	70	30	–	10	6.0		M2040		4	80
	-12- 55C*2		55		85	26								100
	-18- 65C*1	18～28	65		91	26		12	9.0	6MP	M2577	T-8		130
	-18- 50A*2		50		79	29								110
	-18- 80C*1		80		106	26								130
	-18- 77A*2		77			29								130
DJ8	J10- 3- 14*3	3～ 8	14	10	62	30	18	2.2	1.5	–	–	–	7	30
	J16- 5- 25	5～15	25	16	60	31.5	3.5	4.3	2.5	CC03	M611	10S	5	76
	- 5- 35		35		78	33	10							80
	- 8- 35	8～18	35		70	32.5	2.5	7.2	4.0	3MP	M2037	T-6	2	90
	- 8- 55		55		98	32	10						3	110
	-12- 50C	12～22	50		90	35	–	11.2	6.0	3MP	M2045		2	140
	-12- 60C		60		103	40.5	2.5							170
	-18-100C	18～28	100		133	33	–	16	9.0	6MP	M2577	T-8	4	350
	-18-120C		120		153									400
	-28-100C	28～39	100		133				14.0					350
	-28-130C		130		163									450
	-38-100C	38～50	100		133			23	19.0					370
	-38-130C		130		163			16						470

DJ boring bit with **"C"** at the end of code is oil-hole type, and will be switched to oil-hole specifications as soon as there is no stock of oil holeless without **"C"** at the end of code.
★*1 Means only for the old type **DJ head**.
★*2 Means the dimension when using the new type **DJ3-A** head, and the dimension **M** will be 3mm longer when attached to the old model.
Please consult us separately, if the new **DJ3-A** head requires the same dimension of **M** as the old **DJ3** head. (e.g. **J10-18-65A**)
★*3 **J10-3-14 bit is supplied as standard. But when attached to the DJ8 head, the adapter for J10 bit : 9DJ8-J10-ADP is required. Please see Fig.7.**

BASE HOLDER for MODULAR TYPE (BT Shank)

NIKKEN

Q



Fig.1



Fig.2



Fig.3

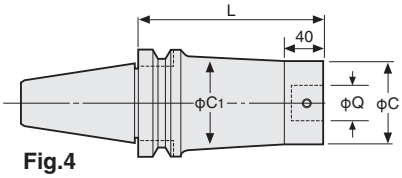

Fig.4

TAPER	Code No.	Coupling Dia Q	L	C	C_1	H	H_1	Coupling Bolt No.	Fig.	Weight (kg)
No.30	BT30-Q 9- 50	9	50	19	30	20	–	B19	2	0.5
	-Q12- 65	12	65	24	–	40		B12	1	0.5
	-Q16- 50	16	50	31		25		B16		0.5
	-Q20- 50	20	50	40		26		B20		0.5
	-Q26- 40	26	40	50	45	18	6	B26N	3	0.5
No.40	BT40-Q 9- 80	9	80	19	30	5	–	B19	2	1.2
	- 95N		95			27				1.2
	-Q12- 80	12	80	24	35	12		B12		1.2
	- 110		110			50				1.3
	-Q16- 95	16	95	31	42	22		B16		1.5
	- 125		125			55				1.6
	-Q20- 80	20	80	40	50	27		B20		1.5
	- 110		110			60				1.7
	-Q26- 50	26	50	50	-	20		B26N	1	1.1
	- 95		95			65				1.8
	- 140		140			110				2.4
	-Q34- 95	34	95	64	62	68	55	B34	3	2.2
	- 110		110			83	70			2.6
	-Q42- 95	42	95	83		68	55	B42		2.8
No.50	BT50-Q 9- 110	9	110	19	40	5	–	B19	2	4.1
	- 125N		125			27				4.1
	-Q12- 95	12	95	24	44	12		B12		4.0
	- 125		125			50				4.0
	-Q16- 125N	16	125	31	50	22		B16		4.5
	- 155		155			55				4.6
	-Q20- 110	20	110	40	60	27		B20		4.6
	- 125		125			60				4.5
	-Q26- 65	26	65	50	65	27		B26N	1	3.7
	- 140		140			47			2	5.3
	- 170N		170			112				5.4
	-Q34- 140	34	140	64	80	102		B34	1	5.6
	- 170		170			120			2	6.5
	- 200		200			150				7.1
	-Q42- 125	42	125	83	-	87		B42	1	6.5
	- 190		190			152				9.1
	-Q42- 225A	42	225	83	98	-			4	12.9
	- 275A		275							15.6
	- 325A		325							18.3
	- 375A		375							21.0

★All base holders have a centre through tool coolant hole.
★The coupling screw & wrench are supplied as standard.
★When L length is required longer than standard, please specify the boring depth M.



Q No.

SPACER for MODULAR TYPE

NIKKEN

BT

Extension Spacer



SP

■ Example of small diameter boring in a deep recess using the largest diameter extension spacer in order to maintain rigidity.



BT40-Q26-95
SP26-26-60
SP26-12-30
12-ZMAC25-40V

■ Example of deep hole boring using the extension spacer with the same diameter as head.



BT40-Q26-95
SP26-12-30
SP12-12-60
12-ZMAC25-40V

Code No. Q-Q1-L	Coupling Dia Q	Coupling Dia Q1	C	Coupling Bolt No.	Weight (kg)
SP 9- 9-30, 45	9	9	19	B19	0.06, 0.1
SP 12-12-30, 45, 60	12	12	24	B12	0.1, 0.15, 0.2
SP 16-16-30, 45, 60	16	16	31	B16	0.15, 0.25, 0.35
SP 20-20-45, 60	20	20	40	B20	0.4, 0.5
SP 26-26-60, 90	26	26	50	B26N	0.8, 1.2
SP 34-34-60, 90	34	34	64	B34	1.4, 2.0
SP 42-42-60, 90	42	42	83	B42	2.4, 3.4

★ϕC of **SP26** Spacer has been increased from 45mm to 50mm due to improvement of its rigidity.
★All spacers have a centre through-tool coolant hole. ★The Coupling screw is included as standard.

Stepped Spacer

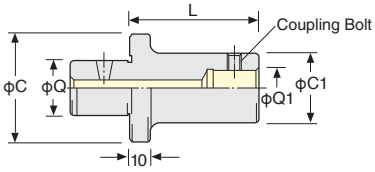

SP

■ Example of small diameter boring in deep recess using stepped spacer with the same diameter as head.



BT40-Q26-95
SP26-26-60
SP26-12-30
12-ZMAC25-40V

Code No. Q-Q1-L	Coupling Dia Q	Coupling Dia Q1	C	C1	Coupling Bolt No.	Weight (kg)
SP 12- 9-45	12	9	24	19	B19	0.1
SP 16- 9-45	16	9	31	19	B19	0.15
-12-60		12		24	B12	0.25
SP 20- 9-45	20	9	40	19	B19	0.2
-12-60		12		24	B12	0.3
-16-60, 90		16		31	B16	0.4, 0.6
SP 26- 9-30, 45	26	9	50	19	B19	0.3, 0.3
-12-30, 60		12		24	B12	0.3, 0.4
-16-30, 60, 90		16		31	B16	0.3, 0.5, 0.6
-20-30, 60, 100		20		40	B20	0.4, 0.6, 1.0
SP 34-16-60, 90	34	16	64	31	B16	0.7, 0.9
-20-60, 100		20		40	B20	1.0, 1.3
-26-60, 100		26		50	B26N	1.1, 1.5
SP 42-20-60, 100	42	20	83	40	B20	1.2, 1.6
-26-60, 100		26		50	B26N	1.4, 1.9
-34-60, 100		34		64	B34	1.8, 2.5

★ϕC of **SP26** Spacer has been increased from 45mm to 50mm due to improvement of its rigidity.
★All spacers have a centre through-tool coolant hole. ★Coupling bolt is supplied as standard.

A1 Spacer for Deep Hole

SP

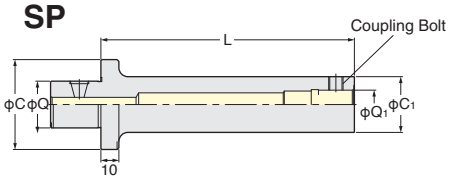

L/D:MAX.6 times

Code No. Q-Q1-L	Coupling Dia Q	Coupling Dia Q1	C	C1	MAX. L	Weight (kg)
SP 26- 9- 85-A1	26	9	50	19	85	0.6
-12-115-A1		12		24	115	0.7
-16-140-A1		16		31	140	0.9
-20-180-A1		20		40	180	1.2
-26-190-A1		26		50	190	1.5

Please specify the "**L**" length when ordering. Code No. is
e.g SP26-9-85-A1 (Q1=9 and L=85)

Modular connection system is the face contact system drawing-in by the bolt, which top shape is gentle taper.
1. Insert a head by adjusting the hole positions.
2. Tighten the bolt temporary, then loosen slightly.
3. Tighten the bolt again by moving the head CW and CCW. (Centering each other)
4. Then tighten the bolt completely until face contact.

2LOCK MAJOR DREAM HOLDER BASE HOLDER for MODULAR TYPE NIKKEN

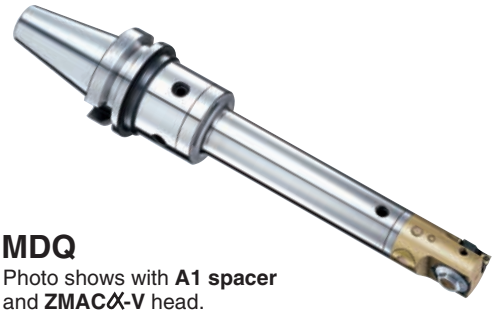

MDQ
Photo shows with **A1 spacer** and **ZMAC-V** head.



Fig.1



Fig.2

TAPER	Code No.	Q	L	C	C1	H	Weight (kg)	ZMAC-V Boring Range	Fig
No.30	NBT30-MDQ26- 60	26	60	50	50	37.5	-	16～70	1
No.40	NBT40-MDQ26- 65	26	65	50	54	30.0	1.3	16～70	2
No.50	NBT50-MDQ26- 80	26	80	50	87	22.0	4.6	16～70	2
	-MDQ34- 90	34	90	64	87	32.0	4.9	16～85	
	-MDQ42-100	42	100	83	87	45.0	5.7	16～180	

★All base holders are used for centre through tool coolant.
★Coupling bolt and wrench are supplied as standard.
★ZMAC-V head is recommended to use with the MAJOR DREAM base holder for anti-vibration.
★When L length is required longer than standard, please specify the boring depth M and Q No.



Q No.

MODULAR TYPE STRAIGHT SHANK NIKKEN

K-Q




ZMAC-V Head ☞ P.75


RAC Head ☞ P.67


DJ Head ☞ P.87

Code No.	Coupling Dia. Q	C	L	Coupling Bolt.	Weight (kg)
K32-Q 9-20	9	19	20	B19	0.4
-40			40		0.5
-Q12-20	12	24	20	B12	0.4
-60			60		0.6
-Q16-20	16	31	20	B16	0.5
-55			55		0.7
-Q20-40	20	40	40	B20	0.7
-Q26-40	26	50		B26N	0.8
K42-Q26-40				B26N	1.2

★All straight shank base holders are used for centre through tool coolant.

CHAMFERING CUTTER for Modular System

CAF



Code No.	Coupling Dia. Q	C	D	T	L	Chamfering Dia. (φd1～φd2)	Blade No.	Piece No.	Clamp Bolt
CAF 9- 32	9	19	35	20	21.9	20～32	CB-2	CR-2	M375 (M3×6ℓ, T10)
CAF12- 38	12	24	42			25～38			
CAF16- 45	16	31	49			33～45			
CAF20- 60	20	40	64	25	27.2	42～60	CB-5	CR-5	M377 (M4×9ℓ, T20)
CAF26- 85A	26	50	90	35	38.2	56～85	CB-6	CR-6	M370 (M5×14ℓ, T25)
CAF34-110	34	64	115		40.2	70～110			

★Chanfering angle is 45°　★Blade Material : T12A (Cermet)



Code No.	h	W	t
CB-2	7.4	5.0	2.5
CB-5	11.0	6.0	3.0
CB-6	18.4	7.0	3.0

MODULAR TYPE BORING HEAD

NIKKEN

BT

BCB Micro-Cut Boring Head

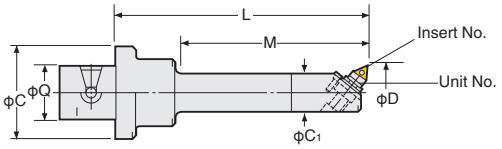

P.103

Code No.	Boring Range D	Boring Depth M	Coupling Dia Q	Total Length L	C	C_1	Unit No.	Insert No.
Q26-BCB12.7S- 95	12.7～14.5	60	26	95	50	12	M1-12.7	1MP
Q26-BCB14.5S-100	14.5～19.5	65		100		13	M1-14.5	
Q26-BCB19 S-125	19 ～22.5	90		125		18	M2-19	3MS

★Please refer ☞**P.101** for cutting condition.

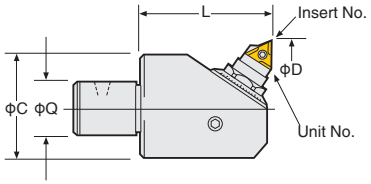

P.103

Set/Head Code No	Boring Range D	Boring Depth M	Coupling Dia Q	Remarks C	Unit No.	Insert No.
9-BCB 22 - 40	22 ～29.5	40	9	20	M 2- 22	3MS
12-BCB 29 - 40	29 ～ 41		12	25	M 3- 29	
16-BCB 38 - 55	38 ～ 50	55	16	35	M 5- 38	6MP
20-BCB 48 - 70	48 ～ 65	70	20	41	M 5- 48	
26-BCB 62 - 70	62 ～ 90		26	54	M 7- 62	10MP
34-BCB 82 - 85	82 ～110	85	34	67		
42-BCB100 -100	100～ 140	100	42	85	M10-100	

★Please refer ☞**P.101** for cutting condition.
★Min. dial readout (on dia) : 0.02mm (Sub scale : 0.002mm)
★Code No. of the set with SP26 stepped spacer is Q26-Coupling Dia.-BCB○-Length e.g. Q26-20-BCB48-100



Straight Shank MICRO CUT BORING BAR

NIKKEN



The sales of micro cut boring bar will be finished, when the stock is sold out.

P.103

K-BCB

Style	Code. No.	Q Holder Code. No.	Head No.	Boring Range ϕD	Boring Depth	Insert No.
K32	K32-BCB12.7S-135	K32-Q26-40	Q26-BCB12.7S- 95	12.7～14.5	60	1MP
	-BCB14.5S-140		-BCB14.5S-100	14.5～19.5	65	

★Please refer ☞**P.91** for straight shank base holder and ☞**P.92** for micro cut head.
★Please refer ☞**P.101** for cutting condition.
★Please use ZMAC-V Boring Bar for the bore dia. is larger equal to ϕ16mm. ☞P.93

Straight Shank BALANCE CUT BORING BAR

NIKKEN

φ32

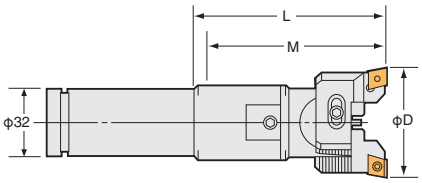

K-RAC

You can use following boring tools with C32 Milling Chuck. It is convenient for Various/Small Volume Productions.
Use with Straight Shank ZMAC-V Boring Bar.

P.62

Code. No.	Boring Range D	Boring Depth M	Shank Code No.	Head No.	Insert No.	Weight (kg)
K32-RAC25- 75E	25～ 32	70	K32-Q12-20	12-RAC 25- 55E	CCO7	0.8
-115E		93	-Q12-60			0.9
-RAC32- 75E	32～ 45	70	-Q16-20	16-RAC 32- 55E	CCO8	1.1
-110E		105	-Q16-55			1.3
-RAC43-110E	43～ 55		-Q20-40	20-RAC 43- 70E	CC12	1.7
-RAC53-110E	53～ 70		-Q26-40	26-RAC 53- 70E		1.8
-RAC70-110E＊	70～100			26-RAC 70- 70E		1.9

★Balance cut boring bar on above table is the boring bar with the cartridges (**E**) for steel, stainless and cast iron. **"C"** grade (Coated) insert tip is supplied as standard. ☞**P.60**
★Boring bar with the cartridges for heavy duty boring of iron and cast iron ☞**P.62**, for aluminium (**A**) ☞**P.64** and for through hole and multi sheets (**K**) . ☞**P.66**
Please refer ☞**P.100** for cutting condition.
★Shank (**P.91**) and head (**P.67**) are delivered in separate packages.
★For centre through coolant type except **K32-RAC70-110E** marked ＊, please add **"-C"** at the end of Code No. **e.g. K32-RAC53-110E-C**

Straight Shank ZMAC ADVANCED BORING BAR

NIKKEN

φ32

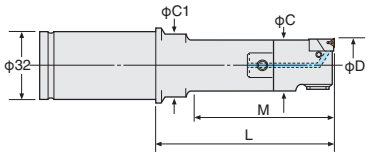

K-ZMAC-V

You can use following boring tools with C32 Milling Chuck. It is convenient for Various/Small Volume Productions. **JAPAN PAT.**

Code No.	Boring Range D	Boring Depth M	C	C_1	Shank Code No.	P.103 Head No.	P.103 Insert No.	P.104 Head No.	P.104 Insert No.	Weight (kg)
K32-ZMAC16- 65V	15.9～20.2	38	15	-	K32-Q12-20	12-ZMAC16-45V	3MP	-	-	0.5
- 75V		48				12-ZMAC16-55V				0.5
-ZMAC20- 60V	19.8～25.2	55	19	-	-Q 9-20	9-ZMAC20-40V				0.6
- 80V		63		30	-Q 9-40					0.7
-ZMAC25- 60V	24.8～32.2	55	24	-	-Q12-20	12-ZMAC25-40V				0.6
-100V		83		30	-Q12-60					0.7
-ZMAC32- 75V	31.8～42.2	70	31	-	-Q16-20	16-ZMAC32-55V	4MP	16-ZMAC32R-55V	CCO6	0.9
-110V		105			-Q16-55					1.1
-ZMAC42-110V	41.8～55.2		40	-	-Q20-40	20-ZMAC42-70V	6MP	20-ZMAC42R-70V		1.5
-ZMAC55-110V	54.8～70.2		53	-	-Q26-40	26-ZMAC55-70V		26-ZMAC55R-70V		1.6

★All Codes shown are for Heads with Triangular Inserts.
For Heads with Rhomboidal Inserts, please add "R" to the Code No. e.g.) K32-ZMAC32 R -75V

★MIN. dial read out: **ZMAC25-V** and smaller is 0.02mm on dia. **ZMAC32-V** and larger is 0.01mm on dia.
★**"C" grade (coated) Insert for Steel, Stainless and Cast Iron is supplied as standard with the Head. (Smooth Boring and Long tool-life)** Please refer ☞ **P.101** for cutting condition.
We would recommend **"B"** grade (**CBN**) Insert for Hardened Steel and High Speed Boring of Cast Iron.
★Centre Through Coolant function is available as standard.

Straight Shank DEEP HOLE ZMACX ADVANCED BORING BAR NIKKEN

Axially Adjustable and Solid Carbide

For Deep Hole Boring

For Deep Hole Boring with Extended Gauge Length



ZMACX25-V,ZMACX32-V&ZMACX42-V models are centre-through models with ZMACα head.

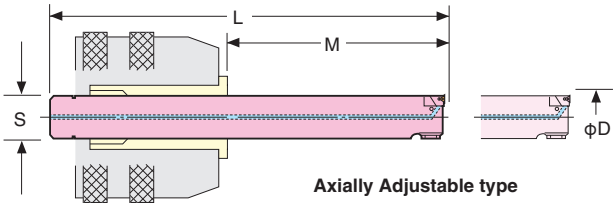

Axially Adjustable type

S-ZMACX-V

JAPAN PAT. P.103

Code. No.	Boring Range D	Boring Depth M	L	S	Unit No.	Insert No.	Weight (kg)	Suitable Holder	
								Chuck	KM Collet
S12-BCBX12.7- 95	12.7～14.5	50～ 95	130	12	M1-12.7	1MP	0.2	BT40-C32 BT50-C32	KM32-12
S13-BCBX14.5-105	14.5～19.5	50～105	135	13	M1-14.5				-13
S15-ZMACX16-120V	15.9～20.2	65～120	150	15	M2HZ-16V	3MP	0.3		-15
S19-ZMACX20-150V	19.8～25.2	100～150	180	19	M2HZ-20V		0.6		-19
S24-ZMACX25-190V	24.8～32.2	140～190	220	24	M3HZ-25V		1.3		-24
S30-ZMACX32-260V	31.8～42.2	190～260	290	30	M4HZ-32V	4MP	2.6		-30
S32-ZMACX42-275V	41.8～55.2	205～275	305	32	M5HZ-42V	6MP	3.8		–

★**T** grade (Cermet) insert tip or "**C**" grade (Coated) insert tip is supplied as standard for **BCBX** or **S-ZMACX-V** respectively. ☞**P.103** Please refer ☞**P.101** for cutting condition.
★Centre Through Coolant function of **ZMAC-V** is available as standard.

Deep Hole Boring Operation with combination of Milling Chuck, Collet and S-ZMACX-V Boring Bar.

Ultra Deep Hole Boring MAX.L/D=8 times with Carbide Solid Boring Bar

Axially Adjustable with Milling Chuck

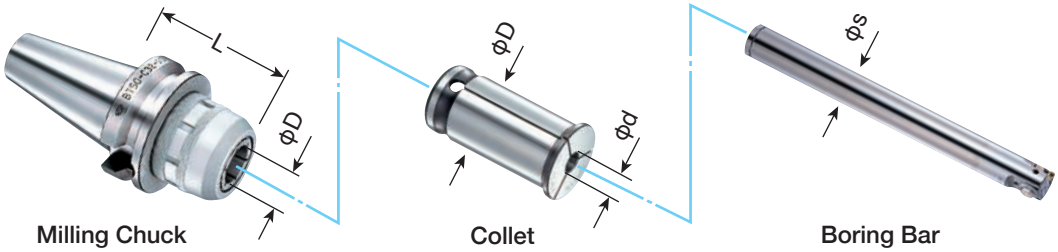

TAPER	Milling Chuck Code No.	Collet
No.40	BT40 -C20- 70, 90, 105, 120	KM20
	-C25- 70, 90, 120	KM25
	-C32- 85, 105, 120	KM32
No.50	BT50 -C20-105, 135, 165, 180	KM20
	-C25-105, 135, 165	KM25
	-C32- 90, 105, 120, 135, 165	KM32
	-C42- 95, 105, 120, 135, 165	KM42

KM Collet No.	Deep Hole Boring Bar Code No.
KM20-12	S12-BCBX12.7- 95
-13	S13-BCBX14.5-105
KM25-12	S12-BCBX12.7- 95
-13	S13-BCBX14.5-105
-15	S15-ZMACX16-120V
(KM42) KM32-12	S12-BCBX12.7- 95
-13	S13-BCBX14.5-105
-15	S15-ZMACX16-120V
-19	S19-ZMACX20-150V
-24	S24-ZMACX25-190V
-30	S30-ZMACX32-260V
KM42-32	S32-ZMACX42-275V

★**KM42-12, 13, 15, 19, 24, 30, 32** are also available.

Straight Shank DJ BORING BAR

NIKKEN

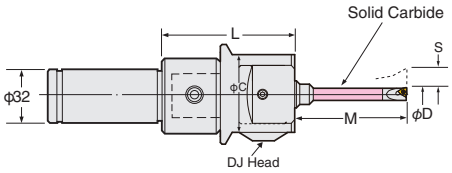

K-DJ

You can use following boring tools with C32 Milling Chuck.
It is convenient for Various/Small Volume Productions.

P.103 P.104

Code No.	Boring Range D	Boring Depth M	L	C	Bit Hole Size L	Shank Code No.	Head No.	Bit Stroke S	Bit Code No.	Weight (kg)
K32-DJ3-80A	3～28	14～ 80	80	50	10	**K32-Q26-40**	**Q26-DJ3-40A**	5.2	**J10**	1.3
-DJ8-84AN	3～50	14～130	84	59	16		**-DJ8-44AN**	6.0	**J16**	1.6

★**MIN. dial readout on dia.: 0.01mm, Sub scale: 0.005mm, 0.8mm/rev.**
★Each box set of **DJ3** and **DJ8** Boring Bar includes 4 pcs of Boring Bits and insert tips.
Bits included to **K32-DJ8-84A : J16-8-40, J16-18-80, J16-28-85, J16-38-85**
Bits included to **K32-DJ8-84AN ; J16-8-40, J16-18-60C, J16-28-65C, J16-38-65C**
★Please refer ☞**P.88** for Boring Bit. Please refer ☞**P.102** for cutting condition.
★**DJ** Boring Bar without Boring Bits is available. **Please add "-BD" at the end of Code No. e.g. K32-DJ8-84A-BD**
★Centre Through Coolant function is available as standard.

MULTI TASK BORING BAR

NIKKEN

Please provide your material drawing, machining drawing and machine infomation for multi task boring bars.

Multi-Boring

Rough Boring by ISO Cartrige

Boring, Over Turnning

Rough Boring by ISO Cartrige

Multi-Boring

Please supply ISO cartriges basically, even we can provide by ourselves.

RAC BALANCE-CUT BORING UNIT PARTS LIST

NIKKEN

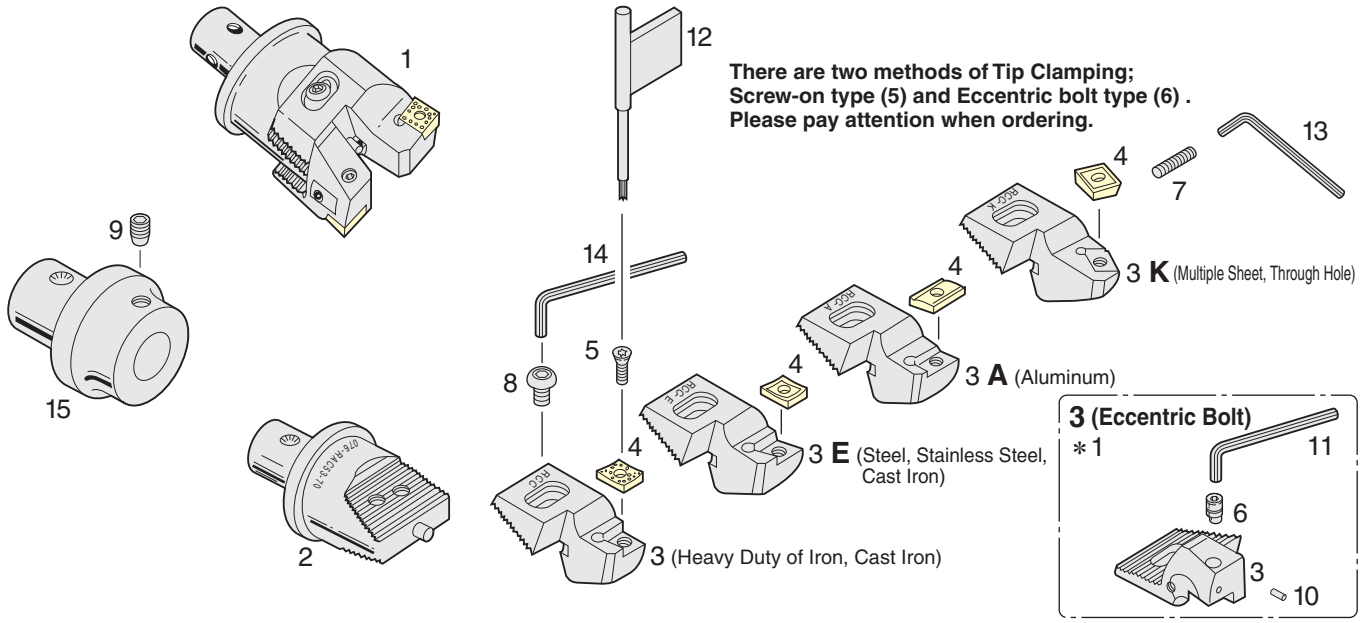

There are two methods of Tip Clamping; Screw-on type (5) and Eccentric bolt type (6) . Please pay attention when ordering.

Boring Range	1 RAC Head	2 RAC Base	3 Cartridge	4 Tip	5 Tip Clamping Bolt	6 Eccentric Bolt	7 Adjusting Screw	8 Cartridge Clamping Bolt	9 Set Screw	10 Copper Pin	11 Tip Clamping L-Wrench	12 Tip Clamping Handle	13 L-Wrench for Adjustment	14 L-Wrench for Cartridge	15 Stepped Spacer
															
φ25~32	**12-RAC 25- 55E**	**12-RAC025- 55B**	RCC-025E	CC07	M3070	—	M508	G025	B12	—	—	T-10	M2.5	M3	SP26-12-30
	- 55A		- 025A	AEG12											
	- 55K		- 025K	SC09											
φ32~45	**16-RAC 32- 55E**	**16-RAC 32- 55B**	RCC- 032E	CC08	M4090	—	M512	G032	B16	—	—	T-15		M4	SP26-16-30
	- 55A		-032A	AEG12	M3070							T-10			
	- 55K		- 032K	SC09											
φ43~55	**20-RAC 43- 70**	**20-RAC 43- 70B**	RCC- 043	CN08	CSM-70	CSM-43	M514	G043	B20	R12	M3	20S		M5	SP26-20-30
	- 70E		- 043E	CC12	M5012	—				—	—	T-15			
	- 70A		- 043A	AEG16	M4090										
	- 70K		- 043K	SC12	M5012										
φ53~70	**26-RAC 53- 70**	**26-RAC 53- 70B**	RCC- 053	CN08	CSM-70	CSM-43	M518	G053	—	R12	M3	20S		M6	—
	- 70E		- 053E	CC12	M5012	—				—	—	T-15			
	- 70A		- 053A	AEG16	M4090										
	- 70K		- 053K	SC12	M5012										
φ70~100	**26-RAC 70- 70**	**26-RAC 70- 70B**	RCC- 070	CN08	CSM-70	CSM-43	M528	G070	—	R12	M3	20S			—
	- 70E		- 070E	CC12	M5012	—				—	—	T-15			
	- 70A		- 070A	AEG16	M4090										
	- 70K		- 070K	SC12	M5012										
	34-RAC 70- 85	**34-RAC 70- 85B**	RCC- 070	CN08	CSM-70	CSM-43	M528	G070	—	R12	M3	20S			—
	- 85E		- 070E	CC12	M5012	—				—	—	T-15			
	- 85A		- 070A	AEG16	M4090										
	- 85K		- 070K	SC12	M5012										
φ100~130	**42-RAC100-100**	**42-RAC100-100B**	RCC-100	CN08	CSM-70	CSM-43	M538	G070	—	R12	M3	20S			—
	-100E		-100E	CC12	M5012	—				—	—	T-15			
	-100A		-100A	AEG16	M4090										
	-100K		-100K	SC12	M5012										

★You can use only one type **RAC** Base irrespective of material and work piece. Suitable Cartridge and Carbide Insert must be selected. ☞**P.67, P.68**
★Insert tip is available as an option.
★There are 2 methods of Tip Clamping; Screw-on type (5) and Eccentric Bolt type (6) . Please pay attention when ordering for spare parts.
★Code No. of Cartridge means for Cartridge only. When ordering for cartridge set, please use set Code No. **e.g. "S.RCC-25"**.
★The Code No. of Tip Clamping Handle is unified to **T10**, **T15** and **20S**.
★＊1 **Eccentric Bolt type Cartridge ; Code No. e.g. "RCC-43Q"**.

ZMAC ADVANCED BORING UNIT PARTS LIST

NIKKEN



ZMAC-V



ZMAC-VR

* The **ZMAC** units and new **ZMAC-V, ZMAC-VR** units are interchangeable.

NIKKEN ZMAC-V Boring Heads come complete with the ZMAC-V Boring Unit. Specify the part No. in the table below when ordering spares.

Triangular Insert Heads and Rhomboid Insert Heads use different boring units, cartridges, insert tips, insert clamp bolts, and insert clamp handles, but all other parts are common to both.

Other manufacturers' ISO standard insert tips available on the market may have different insert clamp hole diameters, so please contact us regarding use.

＊Boring heads that use ISO standard insert tips available on the market are also available with us.

ZMAC Advanced (ISO) Boring Head ☞ P.77

P.103

ZMAC-V Style	Boring Range	Unit	Triangular Insert	Insert Clamp Screw	Insert Clamp Handle	Lock Screw	Adjustment Handle	Unit Clamp Bolt
ZMAC16 -V	15.9～ 20.2	M 2HZ- 16V	3MP	M2040	T-6	M361	M 2HZL-A	M2045
ZMAC20 -V	19.8～ 25.2	M 2HZ- 20V				M362	M 2HZL-B	
ZMAC25 -V	24.8～ 32.2	M 3HZ- 25V		M2045		M363	M 3HZL	M2577
ZMAC32 -V	31.8～ 42.2	M 4HZ- 32V	4MP	M2055		M365	M 4HZL	
ZMAC42 -V	41.8～ 55.2	M 5HZ- 42V	6MP	M2577 (M2562D)*	T-8	M364	M 5HZL	
ZMAC55 -V	54.8～ 70.2	M 5HZ- 55V				M366		
ZMAC70 -V	69.8～ 85.2	M 7HZ- 70V				M360	M 7HZL	M3090
ZMAC85 -V	84.8～100.2	M10HZ- 85V				M367	M10HZL	M4012
ZMAC100-V	99.5～140.5	M10HZ-100V				M368		
ZMAC140-V	139.5～180.5	M10HZ-140V				M369		

★Each Unit and Cartridge are supplied without Insert Tip.
★Cartridge for base forming of bore is an option.
Please specify the diameter and width of base forming.
★For Diamond Insert Tip (6MP-D), M2562D* must be used.
★Cartridge can not be supplied alone, please order **ZMAC-V** unit.

P.104

Special cartridge example for necking is available. Please contact us with the work piece drawing.

ZMAC-VR Style	Boring Range	Unit	Rhomboidal	Insert Clamp Screw	Insert Clamp Handle
ZMAC32 -VR	31.8～ 42.2	M 4HZ- 32VR	CC06	M2560	T-8
ZMAC42 -VR	41.8～ 55.2	M 5HZ- 42VR		M2577	
ZMAC55 -VR	54.8～ 70.2	M 5HZ- 55VR			
ZMAC70 -VR	69.8～ 85.2	M 7HZ- 70VR	CC08	M4090	T-15
ZMAC85 -VR	84.8～100.2	M10HZ- 85VR		M4012	
ZMAC100-VR	99.5～140.5	M10HZ-100VR	CC12	M5012	T-15
ZMAC140-VR	139.5～180.5	M10HZ-140VR			

★Each Unit and Cartridge are supplied without Insert Tip.
★Cartridge can not be supplied alone, please order ZMAC-V unit.

The cartridge head can be exchanged itself for the head bigger equal to ZMAC42-V.

Boring Range	Cartridge Head		Head Clamp Bolt
41.8～ 55.2	M 5HZ- 42 CH	M 5HZ- 42RCH	M512C
54.8～ 70.2			
69.8～ 85.2	M 7HZ- 70 CH	M 7HZ- 70RCH	M625
84.8～100.2	M10HZ- 85 CH	M10HZ- 85RCH	M825
99.5～140.5	M10HZ-100 CH	M10HZ-100RCH	M835
139.5～180.5			

Detach
Attach

- **Loosen head clamp bolt after boring diameter is set to little larger than the MIN. boring diameter.**
- **Insert the head into cartridge, then tighten head clamp bolt temporary.**
- **Loosen side lock bolt.**
- **Rotate the dial ring 0.2～0.3mm to minus direction.**
- **Tighten head clamp bolt by pushing the head to the support portion of the main body.**

ZMAC BORING UNIT PARTS LIST

NIKKEN

This is for only for conventional ZMAC boring unit.

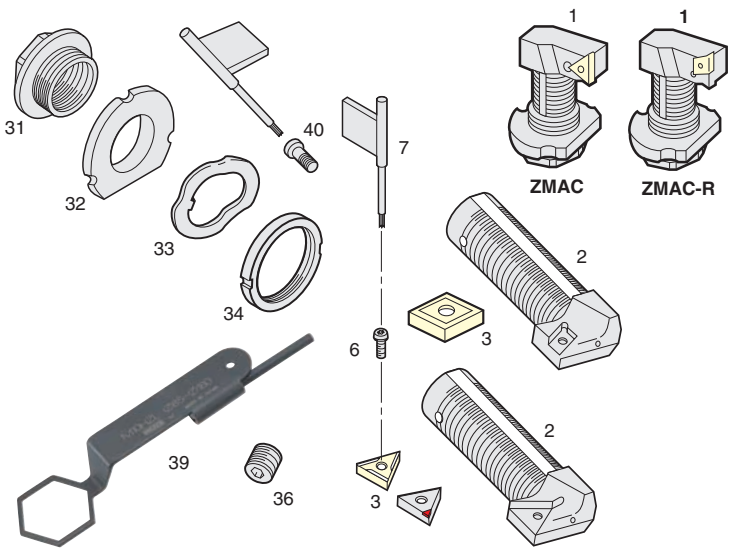

NIKKEN ZMAC-V Boring Heads come complete with the ZMAC-V Boring Unit. Specify the part No. in the table below when ordering spares.

Triangular Insert Heads and Rhomboid Insert Heads use different boring units, cartridges, insert tips, insert clamp bolts, and insert clamp handles, but all other parts are common to both.

Other manufacturers' ISO standard insert tips available on the market may have different insert clamp hole diameters, so please contact us regarding use.

＊Boring heads that use ISO standard insert tips available on the market are also available with us.

ZMAC Advanced (ISO) Boring Head

☞ **P.77**

Boring Range	1 Unit	2 Cartridge	3 Triangular Insert	6 Insert Clamp Screw	7 Insert Clamp Handle	31 Dial Ring	32 Lock Flange	33 Wave Spring	34 Pre-Load Nut	36 Lock Screw	39 Adjustment Handle	40 Unit Clamp Bolt
15.9～ 20.2	M 2HZ- 16	M 2HZ- 16C	**3MP**	M2045	T-6	9M216D	9M216L	9M216W	9M216P	M361	M 2HZL-A	M2045
19.8～ 25.2	M 2HZ- 20	M 2HZ- 20C				9M220D	9M220L			M362	M 2HZL-B	
24.8～ 32.2	M 3HZ- 25	M 3HZ- 25C				9M325D	9M325L	M333	9M325P	M363	M 3HZL	M2577
31.8～ 42.2	M 4HZ- 32	M 4HZ- 32C	**4MP**	M2070		9M432D	9M432L	M334	M344	M365	M 4HZL	
41.8～ 55.2	M 5HZ- 42	M 5HZ- 42C	**6MP**	M2577 (M2562D)*	T-8	9M542D	9M542L	M335	9M542P	M364	M 5HZL	
54.8～ 70.2	M 5HZ- 55	M 5HZ- 55C								M366		
69.8～ 85.2	M 7HZ- 70	M 7HZ- 70C				9M770D	9M770L	M337	9M770P	M360	M 7HZL	M3090
84.8～100.2	M10HZ- 85	M10HZ- 85C				9M108D	9M108L	M330	9M108P	M367	M10HZL	M4012
99.5～140.5	M10HZ-100	M10HZ-100C								M368		
139.5～180.5	M10HZ-140	M10HZ-140C								M369		

★Each Unit and Cartridge are supplied without Insert Tip.
★Cartridge for base forming of bore is an option. Please specify the diameter and width of base forming.
★For Diamond Insert Tip (6MP-D), M2562D* must be used.
★Cartridge can not be supplied alone, please order **ZMAC-V** unit.

P.104

Special cartridge example for necking is available. Please contact us with the work piece drawing.

Boring Range	1 Unit	2 Cartridge	3 Rhomboidal	6 Insert Clamp Screw	7 Insert Clamp Handle
31.8～ 42.2	M 4HZ- 32R	M 4HZ- 32RC	**CC06**	M2560	T-8
41.8～ 55.2	M 5HZ- 42R	M 5HZ- 42RC		M2577	
54.8～ 70.2	M 5HZ- 55R	M 5HZ- 55RC			
69.8～ 85.2	M 7HZ- 70R	M 7HZ- 70RC	**CC08**	M4090	T-15
84.8～100.2	M10HZ- 85R	M10HZ- 85RC		M4012	
99.5～140.5	M10HZ-100R	M10HZ-100RC	**CC12**	M5012	T-15
139.5～180.5	M10HZ-140R	M10HZ-140RC			

★Each Unit and Cartridge are supplied without Insert Tip.
★Cartridge can not be supplied alone, please order ZMAC-V unit.

The cartridge head can be exchanged itself for the head bigger equal to ZMAC42-V.

Boring Range	Cartridge Head		Head Clamp Bolt
41.8～ 55.2	M 5HZ- 42CH	M 5HZ- 42RCH	M512C
54.8～ 70.2	M 5HZ- 42CH	M 5HZ- 42RCH	
69.8～ 85.2	M 7HZ- 70CH	M 7HZ- 70RCH	M625
84.8～100.2	M10HZ- 85CH	M10HZ- 85RCH	M825
99.5～140.5	M10HZ-100CH	M10HZ-100RCH	M835
139.5～180.5	M10HZ-100CH	M10HZ-100RCH	M835

Detach
Attach
- **Loosen head clamp bolt after boring diameter is set to little larger than the MIN. boring diameter.**
- **Insert the head into cartridge, then tighten head clamp bolt temporary.**
- **Loosen side lock bolt.**
- **Rotate the dial ring 0.2～0.3mm to minus direction.**
- **Tighten head clamp bolt by pushing the head to the support portion of the main body.**

BCB MICRO-CUT BORING UNIT PARTS LIST

NIKKEN

BCB
Screw on type

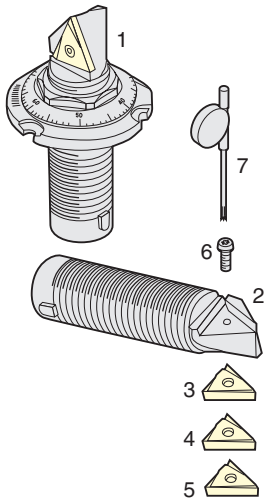

Relation between Micro-Cut Boring Arbor and Micro-Cut Boring Unit

NIKKEN Micro-Cut Boring Arbor is provided with Micro-Cut Boring Unit. When ordering each parts for spare, please place the order by Code No. of Insert, Cartridge and Unit of the following parts list.

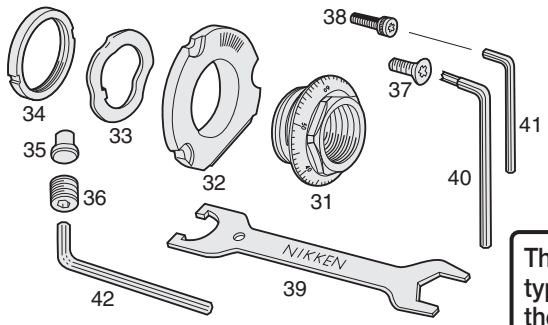

BCB
Clamp on type

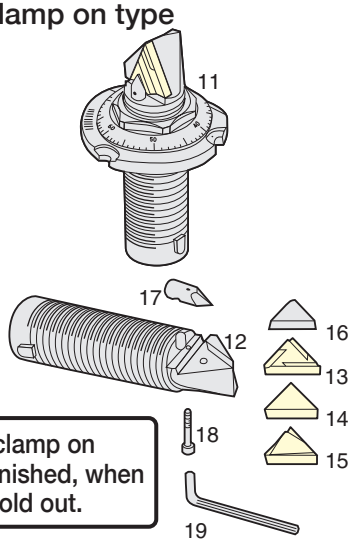

The sales of clamp on type will be finished, when the stock is sold out.

Boring Range	Screw on type							Clamp on type								
	1	2	3	4	5	6	7	11	12	13	14	15	16	17	18	19
	BCB Unit	Cartridge	Insert for Alloy Steel	Insert for Cast Iron	Insert for Steel, Stainless Steel	Insert Clamp Bolt	Insert Clamp Handle	BCB Unit	Cartridge	Insert for Alloy Steel	Insert for Cast Iron	Insert for Steel, Stainless Steel	Insert Breaker	Clamp Piece	Insert Clamp Bolt	Insert Clamp Handle
12.7～14.5	M 1-12.7	—	1MP-E	1MP-F	1MP-T	M61	10S	M 1S-2	M 1S-2C※	—	—	—	—	—	—	—
14.5～19.5	M 1-14.5	—						M 1L-2	M 1L-2C※	—	—	—	—	—	—	—
19 ～22.5	M 2-19	M 2-19 C	3MS-E	3MS-F	3MS-T	M68	13S	M 2S-2	M 2S-2C※	—	—	—	—	—	—	—
22 ～29.5	M 2-22	M 2-22 C						M 2L-2	M 2L-2C※	—	—	—	—	—	—	—
29 ～ 41	M 3-29	M 3-29 C				M63		M 3L-2S	M 3L-2SC	3P-E	3P-F	3P-T	—	CP- 3	B183	M1.5
38 ～ 50	M 5-38	M 5-38 C	6MP-E	6MP-F	6MP-C	M2577	T-8	M 5S-2S	M 5S-2SC	5P-E	5P-F	5P-T	5CB	CP- 5	B185	M2
48 ～ 65	M 5-48	M 5-48 C						M 5L-2S	M 5L-2SC							
62 ～ 90	M 7-62	M 7-62 C	10MP-E	10MP-F	10MP-C	M67	20S	M 7L-2S	M 7L-2SC	7P-E	7P-F	7P-T	7CB	CP- 7	B187	M2.5
82 ～110																
100～140	M10-100	M10-100 C				M60		M10L-2S	M10L-2SC	10P-E	10P-F	10P-T	10CB	CP-10	B180	M3

★Each Unit and Cartridge are supplied without Insert Tip.
★Codes for BCB boring bars that support micro units are indicated by red text.
e.g. M5-28: BCB38

★All brazed types marked ＊ were stopped production on 2007 JAN.
★Each unit and cartridge are supplied without insert tip.
★Brazed type is available for the diameter of φ29～φ200.

Boring Range	31	32	33	34	35	36	37	38	39	40	41	42
	Dial Ring	Lock Flange	Wave Spring	Pre-Load Nut	Lock Metal	Lock Screw	Unit Mounting Bolt A	Unit Mounting Bolt B	Adjustment Handle	Wrench for Unit Mounting Bolt A	Wrench for Unit Mounting Bolt B	Wrench for Lock Screw
12.7～14.5	—	B321	B331	B341	B351	B361	—	B381	M391	—	M1.27	M1.5
14.5～19.5												
19 ～22.5	B312	B322	9M216W	9M216P	B352	B362	—	B382	M392	—	T6	M2
22 ～29.5						M363						
29 ～ 41	B313	B323	M333	9M325P	B353	B363	—	B384	M393	—	13S	M2.5
38 ～ 50	B315	B325	M335	9M542P	B355	B365		B386	M395	—	20S	M3
48 ～ 65		B326			B356	B366	M375	—		M405	—	M4
62 ～ 90	B317	B327	M337	9M770P	B357	B367	M377	B387	M397	M407	M405	M5
82 ～110						B368						
100～140	B310	B320	M330	9M108P	B350	B360	M370		M390	M400		M6

★31, 32, 33 and 34 are set for spare parts. When ordering, please add **"D."** at the beginning of Code No.
e.g. D.M2-22 for Boring Range: 22～29.5mm

RAC BALANCE-CUT BORING ARBOR CUTTING DATA NIKKEN

CC (Positive type) RAC-E



CN (Negative type) RAC

RAC-A



RAC-K

Material

Steel	60～150m/mim. (Dry or Wet cutting)
Stainless Steel	40～80m/mim. (Wet cutting)
Cast Iron	60～150m/mim. (Dry or Wet cutting)
Aluminium, Non-ferrous metal	200～500m/mim. (Wet cutting)
Multiple Sheets, Through Hole	40～120m/mim. (Dry or Wet cutting)

Recommended cutting Speed ◎…Best ○…Good —…Unsuitable

Insert			SS41	S55C	SCM	SKD	SC	FC,FCD	SUS	AL,ALC	Interrupted Cutting
	Code No.	Grade									
	CC	Coated Carbide M	◎ 60～120	◎ 60～150	◎ 60～150	◎ 50～80	○ 80～120	○ 60～150	◎ 40～80	—	○
	CC	Coated Carbide K	—	—	—	—	◎ 80～120	◎ 60～150	—	—	—
	CN	Coated Carbide M	○ 60～120	○ 60～150	○ 60～150	○ 50～80	○ 50～80	○ 60～150	○ 40～80	—	○
	AEG	K10	—	—	—	—	—	—	—	◎ 400～800	○
	SC	Coated Carbide M	◎ 60～120	◎ 60～150	◎ 60～150	◎ 50～80	○ 80～120	○ 60～150	◎ 40～80	—	○
	SC	Coated Carbide K	—	—	—	—	◎ 80～120	◎ 60～150	—	—	—

★The cutting speed is recommended to be reduced to 50% for the interrupted cutting.
★When L/D is longer, the insert tip with small Nose R is recommended.
★When L/D is longer, the feed rate at the entrance is recommended to be reduced to 60 to 70%.

Relation between Boring Dia. & MAX. Removal

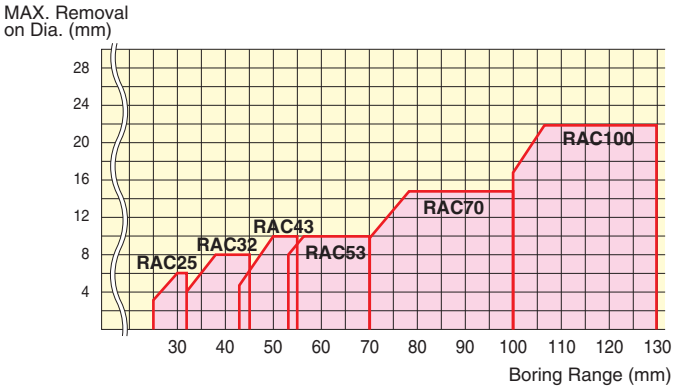

Recommended Cutting Condition (removal,feed)

These figures are based on the application of L/D=3～3.5 times on cast iron.

Boring Range	Type	Best Condition		MAX. Condition	
		Removal mm/φ	Feed mm/rev.	Removal mm/φ	Feed mm/rev.
φ25～ 32	RAC 25	2.0~ 4.0	0.2~0.3	0.5～ 6.0	0.1～0.4
φ32～ 43	RAC 32	3.0~ 5.0	0.2~0.3	1.0～ 8.0	0.1～0.4
φ43～ 53	RAC 43	4.0~ 7.0	0.2~0.3	1.0～10.0	0.1～0.5
φ53～ 70	RAC 53	4.0~ 7.0	0.2~0.3	1.0～10.0	0.1～0.5
φ70～100	RAC 70	5.0~10.0	0.3~0.4	1.0～15.0	0.1～0.5
φ100～130	RAC100	7.0~12.0	0.3~0.4	1.0～22.0	0.1～0.5

ZMAC ADVANCED BORING SYSTEM CUTTING DATA NIKKEN

Selection of Insert Tip for each material.

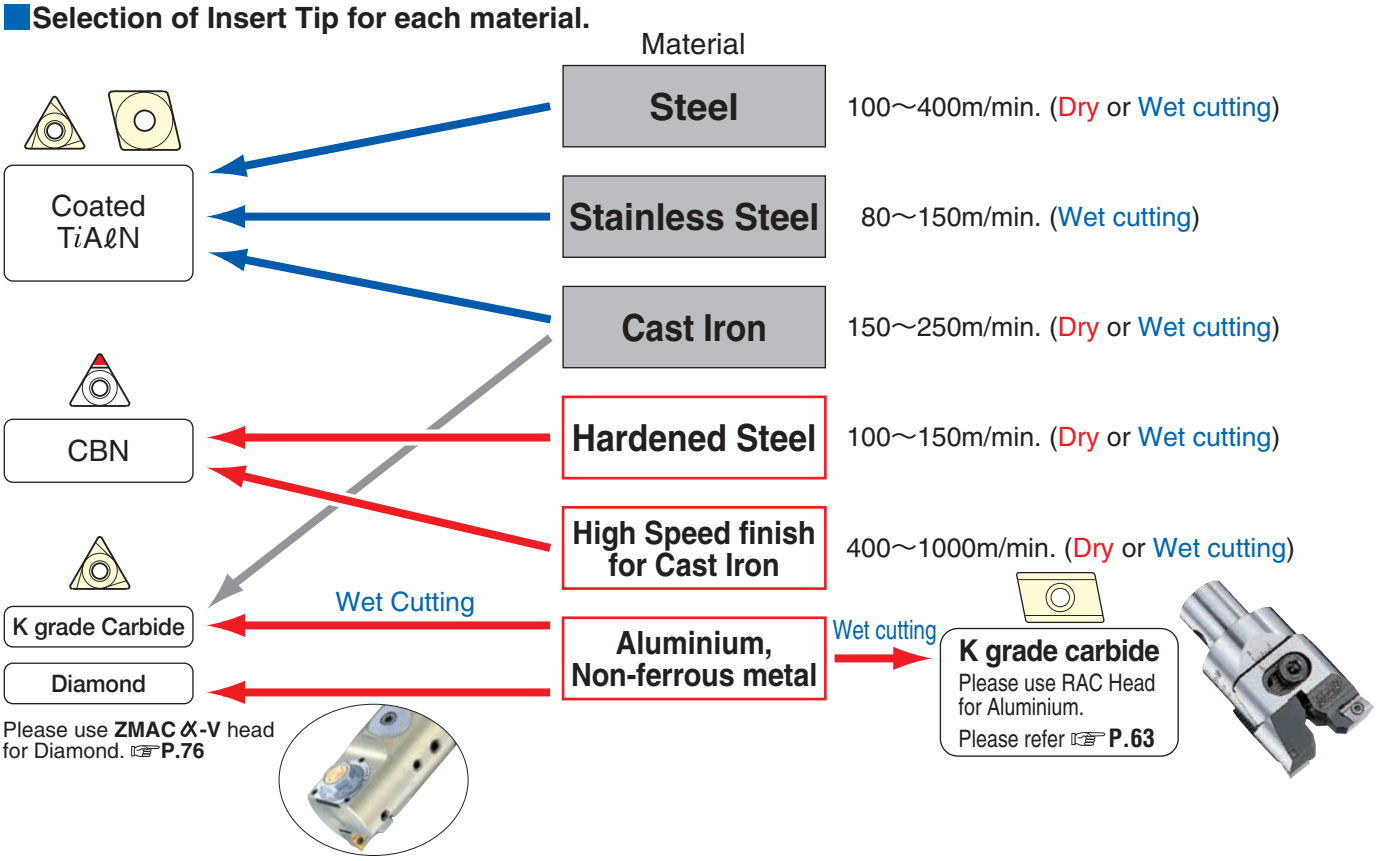

Recommended Cutting Speed

◎…Best ○…Good —…Unsuitable

Insert			SS41	S55C	SCM	SKD	SC	FC,FCD	SUS	AL,ALC	Hardened Steel			Inter-rupted Cutting
	Code No.	Grade									SCM	SKD	SUJ	
	C	Coated	◎ 100～400	◎ 150～400	◎ 150～400	◎ 80～150	◎ 80～150	○ 150～250	◎ 80～150	–	–	–	–	◎
	E	P10	○ 60～100	○ 60～100	○ 80～120	○ 40～100	◎ 60～100	–	○ 40～ 80	–	–	–	–	◎
	F	K10	–	–	–	–	–	◎ 60～130	–	○ 400～1000	–	–	–	◎
	T	Cermet	◎ 200～400	◎ 200～400	◎ 200～400	◎ 80～150	◎ 80～150	–	◎ 120～180	–	–	–	–	○
	B	CBN	–	–	–	–	–	◎ 300～800	–	–	◎ 100～150	◎ 70～100	◎ 120～150	○
	D	Diamond	–	–	–	–	–	–	–	◎ 400～2000	–	–	–	–
	C	Coated Carbide M	◎ 100～400	◎ 150～400	◎ 150～400	◎ 80～150	○ 80～150	○ 150～250	◎ 80～150	–	–	–	–	◎
		Coated Carbide K	○ 100～400	○ 150～400	○ 150～400	○ 80～150	◎ 80～150	◎ 150～250	○ 80～150	–	–	–	–	○

★Existing Inserts (Cermet,P grade Carbide & K grade Carbide) are available.
★The cutting speed is recommended to be reduced to 50% for the interrupted cutting.
★When L/D is longer, the insert tip with small Nose R is recommended.
★When L/D is longer, the feed rate at the entrance is recommended to be reduced to 60 to 70%.

Recommended Cutting Condition (removal,feed)

Boring Range	Type	Best Condition		MAX. Condition		Best Condition		MAX. Condition	
		Removal mm/φ	Feed mm/rev.	Removal mm/φ	Feed mm/rev.	Removal mm/φ	Feed mm/rev.	Removal mm/φ	Feed mm/rev.
φ16～ 20	ZMAC16-V	0.2～0.4	0.05～0.07	1.0	0.1				
φ20～ 25	ZMAC20-V	0.2～0.4	0.05～0.07	1.5	0.1				
φ25～ 32	ZMAC25-V	0.2～0.4	0.05～0.07	2.0	0.1				
φ32～ 42	ZMAC32-V	0.2～0.4	0.05～0.08	2.0	0.2	1.0～3.0	0.1～0.15	5.0	0.2
φ42～ 55	ZMAC42-V	0.2～0.5	0.05～0.08	4.0	0.2	1.0～3.0	0.1～0.15	5.0	0.2
φ55～ 70	ZMAC55-V	0.2～0.5	0.05～0.08	4.0	0.2	1.0～3.0	0.1～0.15	5.0	0.2
φ70～ 85	ZMAC70-V	0.2～0.8	0.05～0.1	4.0	0.25	1.0～4.0	0.1～0.2	8.0	0.25
φ85～	ZMAC85-V~	0.2～0.8	0.05～0.1	4.0	0.25	1.0～4.0	0.1～0.2	8.0	0.25

In case of CBN insert, reduce L/D as small as possible : MAX. 3 times.
Stock removal on diameter.
D<32mm : less than 0.25mm
D>32mm : less than 0.3mm

Feed per rev. depends on NoseR and accuracy required.

Logical Surface Finish : $\frac{(\text{Feed per rev.})^2}{8\times\text{NoseR}}$

DJ BORING ARBOR CUTTING DATA

NIKKEN

BT

Selection of Insert Tip for each material.

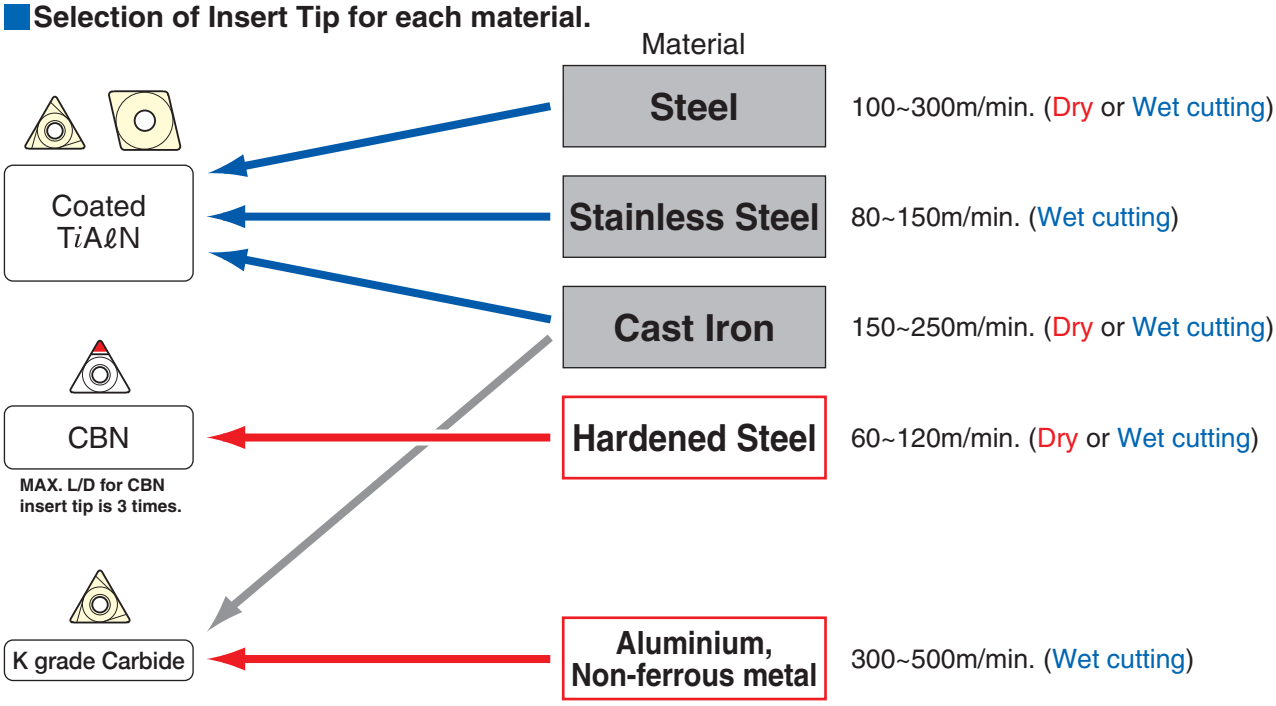

Recommended Cutting Speed

◎…Best ○…Good –…Unsuitable

Insert			SS41	S55C	SCM	SKD	SC	FC,FCD	SUS	AL,ALC	Hardened Steel			Inter-rupted Cutting
	Code No.	Grade									SCM	SKD	SUJ	
	C	Coated	◎ 100~300	◎ 100~300	◎ 100~300	◎ 80~150	◎ 80~150	○ 150~250	◎ 80~150	–	–	–	–	◎
	E	P10	○ 60~100	○ 60~100	○ 80~120	○ 40~100	◎ 60~100	–	○ 40~ 80	–	–	–	–	◎
	F	K10	–	–	–	–	–	◎ 60~130	–	○ 300~500	–	–	–	◎
	T	Cermet	◎ 100~300	◎ 100~300	◎ 100~300	◎ 80~150	◎ 80~150	–	◎ 80~150	–	–	–	–	○
	B	CBN	–	–	–	–	–	◎ 200~500	–	–	◎ 60~120	◎ 60~100	◎ 60~120	○
	C	Coated	◎ 100~300	◎ 100~300	◎ 100~300	◎ 80~150	◎ 80~150	◎ 150~250	◎ 80~150	–	–	–	–	◎

★Existing Inserts (Cermet,P grade Carbide & K grade Carbide) are available.
★The cutting speed is recommended to be reduced to 50% for the interrupted cutting.

Recommended Cutting Condition (removal,feed)

Boring Range	Type		Best Condition		MAX. Condition	
	DJ3	DJ8	mm/φ	mm/rev.	mm/φ	mm/rev.
φ 3~ 8	J10- 3		~0.1	0.03~0.07		
φ 5~ 15	J10- 5		0.1~0.2	0.05~0.07		
φ 8~ 18	J10- 8	J16- 8	0.1~0.2	0.05~0.08		
φ18~ 28	J10-18	J16-18	0.2~0.4	0.05~0.08	1.0	0.1
φ28~ 39		J16-28	0.2~0.4	0.05~0.08	1.5	0.15
φ38~ 50		J16-38	0.2~0.5	0.05~0.08	2.0	0.15

In case of CBN insert, reduce L/D as small as possible : MAX. 3 times.
Stock removal on diameter.
D<32mm : less than 0.25mm
D>32mm : less than 0.3mm

Feed per rev. depends on NoseR and accuracy required.

Logical Surface Finish : $\frac{(\text{Feed per rev.})^2}{8\times\text{NoseR}}$

NIKKEN INSERT TIP (EXCLUSIVE FOR BORING ARBOR) (1)

NIKKEN

Material									
Steel		●		●		●			
Stainless Steel		●		●					
Cast Iron		●					●	●	
Aluminium								●	
High Speed finish for Cast Iron									●	
Hardened Steel									●	
High Speed finish for Aluminium										●

For the Boring of Large Diameter and Short Depth, the use of insert with large nose radius is recommended. The smaller nose radius inserts are ideal for smaller diameter boring or finishing operation.

Applicable Arbor	Dimension	Code No.	NOSE R	Coated Cermet		Cermet (w/o coating)		Carbide P	Carbide K		CBN	Diamond
			Grade	C		T		E	F-NB*2 w/o breaker	F	B	D
			Material	PV720	T1500Z	NS9530	TN90	ST10P	H1		KBN510	KPD010
BCB12.7, BCB14.5	 (WBGT050102L)	1MP-○2	0.2	●			●	●		●		
BCB19, BCB22, BCB29	 TBGT0601○L	3MS-○2	0.2	●			●	●	●*2	●	●	
ZMAC16-V, ZMAC20-V, ZMAC25-V for DJ Bit	 WBGT0601○L	3MP-○2	0.2	●	●	●		●	●*2	●	●	●
		3MP-○4	0.4	●	●						●	●
ZMAC32-V	 WBGT0802○L	4MP-○2	0.2	●	●	●		●	●*2	●		●
		4MP-○4	0.4	●	●				●*2	●	●	●
ZMAC42-V-ZMAC140-V BCB38, BCB48 DJ Bit, MCCZ130-V BAC130-V - BAC530-V	 TPGT1103○L	6MP-○2	0.2	●	●	●		●	●*2	●		●*4
		6MP-○4	0.4	●	●	●		●	●*2	●	●	●*4
		6MP-○8	0.8	●	●	●		●	●*2	●	●	●*4
BCB62, BCB82, BCB100	 TPGT16T3○L	10MP-○2	0.2	●				●	●*2	●		
		10MP-○4	0.4	●				●	●*2	●	●	
		10MP-○8	0.8	●				●	●*2	●	●	

★Minimum quantity of CBN and Diamond: 1pcs, All other insert tip: 10pcs
★*2 **"-NB"** (w/o breaker) is recommended for cast iron.
★*3 **Hole diameter of 6MP is φ2.8mm. M2562D (Optional tip clamp bolt) is required for the ISO standard insert tip with the hole diameter of φ3.3～φ 3.5mm.**
★*4 **M2562D** is necessary for **6MP-D (Diamond)** , because of the hole diameter is different.
★The ISO code No. surrounded with ( ) is the Nikken original insert tip.

Code No. of ISO standard Insert Tip

T P G T 1 1 0 3 0 4 L

- Cutting Edge Length
- Thickness
- Corner Radius
- Cutting Direction: L : Left, N : Either
- Insert Shape: T : △, W : 80°, C : 80°, M : 86°, S : 90°, A : 85°
- Normal Clearance: B : 5°, C : 7°, P :11°, N : 0°, E :20°
- Tolerance Class: G : Ground, M : Pressed
- Tip Breaker & Hole Configuration: W :, T :, R :, B :, H :, M :, X : Special

Please add the grade indication into ○, and add the insert tip material indication at the end off the Code No.
e.g. 6MP-C4 (PV720) , 6MP-F4-NB (H1)

NIKKEN INSERT TIP (EXCLUSIVE FOR BORING ARBOR) (2)

NIKKEN

Material				
Steel	●	●	
Stainless Steel	●	●	
Cast Iron	●	●	●

For the Boring of Large Diameter and Short Depth, the use of insert with large nose radius is recommended. The smaller nose radius inserts are ideal for smaller diameter boring or finishing operation.

Applicable Arbor	Dimension	Code No.	Material / NOSE R	Coated Cermet	Coated Carbide M	Coated Carbide K
			Grade	C		
				PV720	AC630M	AC410K
J10-5, J16-5	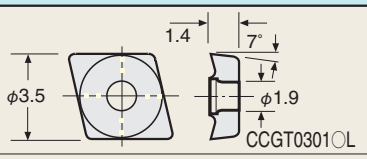	CC03-○2	0.2	●		
ZMAC32-VR, ZMAC42-VR ZMAC55-VR	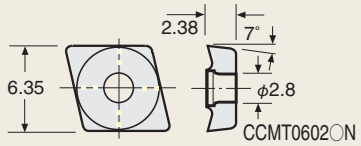	CC06-○4	0.4		●	●
		CC06-○8	0.8		●	●
RAC25E	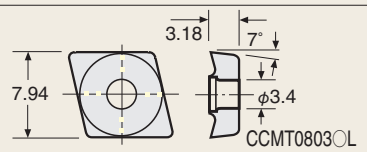	CC07-○4	0.4		●	●
		CC07-○8	0.8		●	●
ZMAC70-VR, ZMAC85-VR, RAC25E(CC08), RAC32E	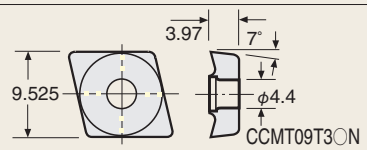	CC08-○4	0.4		●	●
		CC08-○8	0.8		●	●
RAC43 - RAC530 (Eccentric Bolt Type)	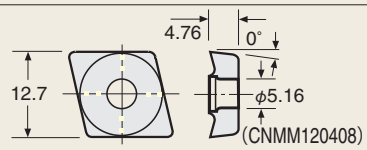	CN08-○8	0.8		●	
ZMAC100-VR, ZMAC140-VR RAC43E - RAC100E	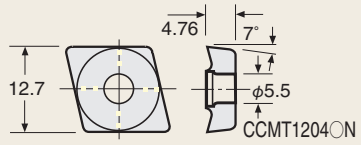	CC12-○4	0.4		●	●
		CC12-○8	0.8		●	●

★Minimum quantity of CBN and Diamond: 1pcs, All other insert tip: 10pcs
★The ISO code No. surrounded with ( ) is the Nikken original insert tip.

Please add the grade indication into ○, and add the insert tip material indication at the end off the Code No.
e.g. CC12-C4(AC630M)

Code No. of ISO standard Insert Tip

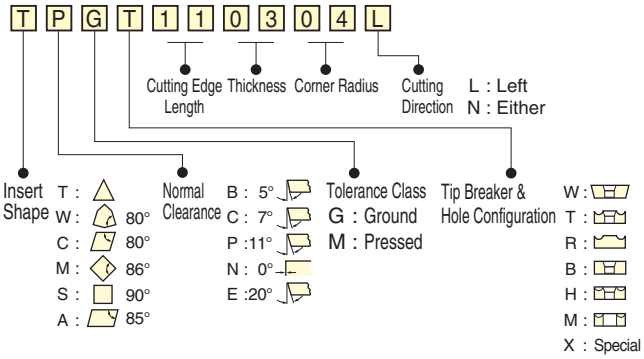

Example of hardened steel boring with CBN Insert

Reduce L/D as small as possible:MAX. 3times
For bits of L/D shorter than standard one are also available. Please contact with us.



Example of intermittent boring of hardened steel (HRC60) ϕ10mm

Results of concentricity on 24 pcs. were all within 3μm.





Results of surface finish on 24 pcs. were all within 3.3 microns. (R MAX.)

Results of concentricity on 24 pcs. were all within 3.6μm.





Example of intermittent boring of hardened steel (HRC60)ϕ20mm

No.20
C(ϕ20)



Results of surface finish on 24 pcs. were all within 2.8 microns. (R MAX.)

NIKKEN INSERT TIP (EXCLUSIVE FOR BORING ARBOR) (3)

NIKKEN

Material	Steel		●	●		
	Stainless Steel		●			
	Cast Iron				●	
	Aluminium				●	
	High Speed finish for Cast Iron					●
	Hardened Steel					●
			Cermet (w/o coating)	Carbide P	Carbide K	CBN
		Grade	T	E	F	B
		Material	T12A	ST10P	HTi10	KBN510

Applicable Arbor	Dimension	Code No.	NOSE R	T12A	ST10P	HTi10	KBN510
BCB29		3P-○2	0.2	●	●	●	
BCB38, BCB48		5P-○4	0.4	●	●	●	
BCB62, BCB82	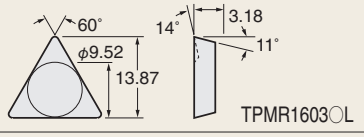	7P-○4	0.4	●	●	●	●
		7P-○8	0.8		●	●	
BCB100	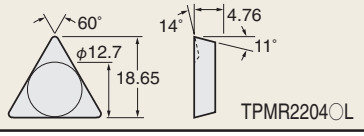	10P-○4	0.4	●	●	●	●
		10P-○8	0.8		●	●	

★Minimum quantity of CBN: 1pcs, All other insert tip: 10pcs
★The ISO code No. surrounded with ( ) is the Nikken original insert tip.

Please add the grade indication into ○, and add the insert tip material indication at the end off the Code No. e.g. 10P-T4 (T12A)

Grade & Material

Grade	Grade Indication	Insert Tip Material Indication	Specification
Coated Cermet	C	PV720	Applicable for the midium roughing and finishing on the steel. Very stable cutting with coolant to be improved the heat resistance and the impact resistance.
		T1500Z	ZX coaled suitable for the high speed finishing on the steel with long insert life. Very fine surface finish to be improved the impact resistance and the fracture resistance.
Coated Carbide M		AC630M	Very tough carbide M (base material) with the super FF coated. Excellent for the impact resistance and the fracture resistance for the stainless steel
Coated Carbide K		AC410K	Very tough carbide K (base material) with the super FF coated. Very stable cutting for the ductile cast iron and normal cast iron.
Cermet (w/o coating)	T	NS530	The general material for the steel and the cast iron with the heat resistence and the toughness.
		NS9530	New grade with tough and smooth top layer demonstrates amazing fracture resistance. Stable tool life due to incredible toughness. This is an upgraded version of NS530.
		T12A	Applicable for the roughing and finishing on the steel. Very stable cutting to be improved the heat resistance and the impact resistance.
Carbide P	E	ST10P	Applicable for the middle to high speed cutting on the steel and the steel casting.
Carbide K	F	H1	Excellent wear resistance and applicable for the cast iron, non-ferrous metal and the non-metal.
		HTi10	Toughness and the excellent wear resistance. Applicable for the cast iron, non-ferrous metal and the non-metal.
		KW10	Stable wear resistance and the fracture resistance. Applicable for the cast iron, non-ferrous metal and the non-metal.K10
CBN	B	KBN10B	Excellent for the fracture resistance and wear resistance. Suitable for the high performance and high accuracy cutting on the harden steel
		KBN510	Excellent for the fracture resistance and wear resistance. This is an upgraded version of KBN10B. Suitable for the high performance and high accuracy cutting on the harden steel.
Diamond	D	KPD010	Suitable for the high speed cutting on the aluminium and the non-metal. Applicable for the cutting on the carbide, ceramics, glass fibere and the plastic also.

BORING BAR for SQUARE & CYLINDRICAL BORING TOOL NIKKEN

BSA BSB BOA

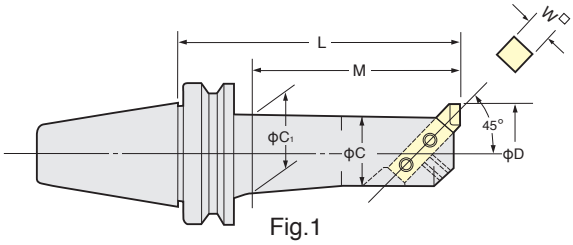

Fig.1
BSA



Fig.2
BSB

Fig.3
BOA

TAPER	Code No.	Boring Range	Boring Depth	Dimension				
	BTNo.-Min D -L	D	M	W	C	C₁	Weight (kg)	Fig
No.40	BT40-BSA 25-135	25～ 38	108	8	20	22	1.3	Fig.1 BSA
	(IT40)-BSA 30-165	30～ 42	138		24	26	1.5	
	-BSA 38-180	38～ 52	153	10	30	33	1.8	
	-BSA 42-210	42～ 56	183		34	37	2.3	
	-BSA 50-180,225	50～ 65	153, 198	13	40	44	2.4, 2.9	
	-BSA 62-180,240	62～ 90	153, 218	16	50	56	3.2, 4.2	
	-BSA 72-180,240	72～110	153, 213	19	60	63	4.4, 5.7	
	-BSA 90-180	90～125	180		75		5.4	
No.50	BT50-BSA 25-135	25～ 38	95	8	20	22	4.4	
	(IT50)-BSA 30-165	30～ 42	125		24	26	4.6	
	-BSA 38-180	38～ 52	140	10	30	33	4.8	
	-BSA 42-210	42～ 56	170		34	37	5.0	
	-BSA 50-180,240	50～ 65	140, 200	13	40	44	5.4, 5.7	
	-BSA 62-195,270	62～ 90	155, 230	16	50	56	6.1, 7.5	
	-BSA 72-195,285	72～110	155, 245	19	60	66	6.9, 9.3	
	-BSA 90-210,300	90～125	170, 260		75	80	9.2,12.3	
	-BSA105-195,285	105～160	157, 247	25	90	90	10.5,15.0	
No.40	BT40-BSB 25-135	25～ 50	108	8	20	22	1.3	Fig.2 BSB
	(IT40)-BSB 38-180	38～ 70	153	10	30	33	1.9	
	-BSB 50-180,225	50～ 90	153, 198	13	40	44	2.6, 3.1	
	-BSB 62-180,225	62～115	153, 198	16	50	56	3.4, 4.1	
	-BSB 72-180,225	72～138	153, 198	19	60	63	4.7, 5.6	
	-BSB 90-180,225	90～150	180, 225		75		5.7, 6.6	
No.50	BT50-BSB 25-135	25～ 50	95	8	20	22	4.1	
	(IT50)-BSB 38-180	38～ 70	140	10	30	32	4.8	
	-BSB 50-180,240	50～ 90	140, 200	13	40	44	5.5, 5.7	
	-BSB 62-195,270	62～115	155, 230	16	50	56	6.4, 7.9	
	-BSB 72-195,285	72～138	155, 245	19	60	66	7.3, 9.6	
	-BSB 90-210,300	90～150	170, 260		75	80	9.6,12.6	
	-BSB105-195,285	105～190	155, 245	25	90	94	11.0,15.0	
No.40	BT40-BOA 25-135	25～ 31	107	8	20	22	1.3	Fig.3 BOA
	(IT40)-BOA 30-165	30～ 35	137		24	26	1.5	
	-BOA 34-165	34～ 42	137	10	28	30	1.7	
	-BOA 40-180	40～ 46	152		32	35	2.3	
	-BOA 44-210	44～ 54	182	12	36	39	2.4	
	-BOA 52-180,225	52～ 60	152, 197		42	46	2.5, 3.0	
No.50	BT50-BOA 25-135	25～ 31	97	8	20	22	4.2	
	(IT50)-BOA 30-165	30～ 35	127		24	26	4.4	
	-BOA 34-180	34～ 42	142	10	28	30	4.7	
	-BOA 40-210	40～ 46	172		32	35	5.0	
	-BOA 44-210	44～ 54	172	12	36	39	5.1	
	-BOA 52-180,240	52～ 60	142, 202		42	46	5.1, 6.0	

★Square or Cylindrical Boring Bit is not included.
★When L length is required longer than standard, please specify the boring depth M.

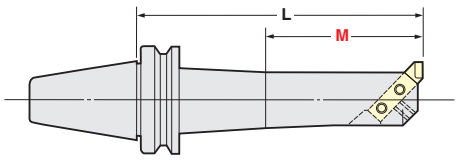

FACE MILL ARBOR

NIKKEN

FMA

For JIS B4113 Face Mill

■Taper contact area of more than 80% ensures reliable milling with no chattering accompanied

FMH Arbor for High Feed with Coolant Through ☞ P.109, P.110

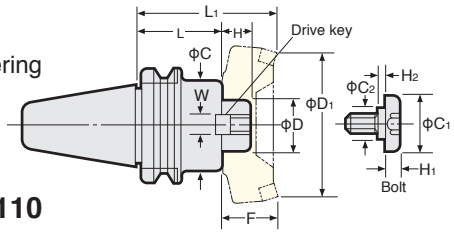

TAPER	Code No. (ΦD -L)	H	C	W	C1	C2	H1	H2	Weight (kg)	Demension of Arbor with cutter L1	D1	F	Drive Key	Bolt
No.30	BT30-FMA25.4 - 45	22	50	9.5	33	23	10	2	0.9	95	80	50	FW 5	FM12
No.40	BT40-FMA25.4 - 45	22	50	9.5	33	23	10	2	1.4	95	80	50	FW 5	FM12
	(IT40)-FMA25.4 - 90								2.1	140			FW 5	
	-FMA31.75 - 45	30	60	12.7	40	23	10	6	1.7	105	100	60	FW13*1	FM16
	-FMA31.75 - 75								2.3	135			FW13	
	-FMA38.1 - 60	34	80	15.9	50	27	14	6	2.5	120	125	60	FW18	FM20
No.50	BT50-FMA25.4 - 45	22	58	9.5	33	23	10	2	3.9	95	80	50	FW 5	FM12
	(IT50)-FMA25.4 - 90								5.1	140				
	-FMA25.4 -150								6.5	200				
	-FMA31.75 - 45	30	70	12.7	40	23	10	6	4.1	105	100	60	FW12	FM16
	-FMA31.75 - 75								4.9	135			FW13	
	-FMA31.75 -105								5.8	165				
	-FMA38.1 - 45	34	80	15.9	50	27	14	6	4.3	105	125	60	FW18	FM20
	-FMA38.1 - 75								5.5	135			FW19	
	-FMA50.8 - 45	36	100	19	65	37	14	10	5.0	105	160	60	FW23	FM24
	-FMA50.8 - 75								6.7	135			FW24	
	-FMA47.625- 75	38	128.57	25.4	—	—	—	—	8.0	135	200	60	FW26	4×9GM16-55

★Drive keys, L-Wrench & Bolt are supplied as standard. ★The arbor marked * requires 4 fixing bolts. ★Above weight is for Arbor only. (Not include Face Mill Cutter)
★**FMA25.4** type Arbor is suitable for NIKKEN PRO-END MILL φ60 (**PE60HC**) and φ80 (**PE80HC**).
★**FMA31.75** type Arbor is suitable for NIKKEN PRO-END MILL φ100 (**PE100HC**). Please refer. ☞ P.111
★Code No. of Centre Through Coolant type **FMA** Arbor for NIKKEN PRO-END MILL is : **e.g. BT40-FMA25.4C-45**
★Extended length Face Mill Arbors are available on request.
BT50-FMA25.4 -200,-250
-FMA31.75-150,-200
-FMA38.1 -150,-200
★Diameter φC of **BT50-FMA25.4** and **BT50-FMA31.75** are enlarged.
★ *1 In case of **IT40**, the drive Key of **FW12** are supplied.

★In case of the special cutter, please specify the dimensions below.

Fig.1



Fig.2



FACE MILL ARBOR

NIKKEN

FMB

■Taper contact area of more than 80% ensures reliable milling with no chattering accompanied

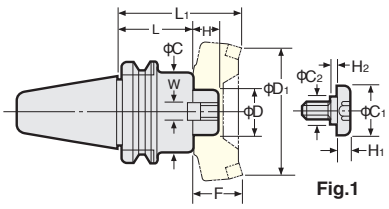

Fig.1

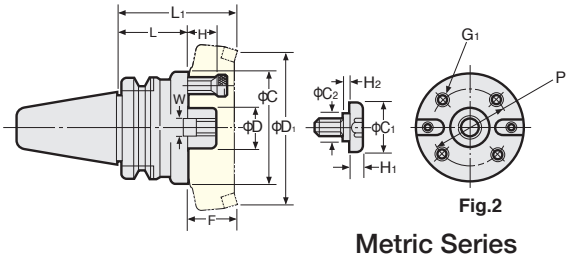

Fig.2

Inch Series

(●)figures for Metric Series

Metric Series

TAPER	Code No. (ΦD -L)	H	C	W	C1	C2	H1	H2	G1	P	Weight (kg)	Demension of Arbor with cutter L1	D1	F	Fig.	Code No. (ΦD -L)
No.30	BT30-FMB25.4 - 45	26	80	9.5 (12)	33	23	10	2	—	—	1.2	95	80	50	1	BT30-FMB27 - 45
No.40	BT40-FMB25.4 - 60	26	80	9.5 (12)	33	23	10	2	—	—	2.2	110	80	50	1	BT40-FMB27 - 60
	(IT40)-FMB25.4 - 90										2.9	140				(IT40)-FMB27 - 90
	-FMB38.1 - 60		85	15.9 (16)	50	27	14	6	—	—	2.5	123	125	63		-FMB40 - 60
No.50	BT50-FMB25.4 - 45	26	80	9.5 (12)	33	23	10	2	—	—	4.0	95	80	50	1	BT50-FMB27 - 45
	(IT50)-FMB25.4 - 90										5.8	140				(IT50)-FMB27 - 90
	-FMB25.4 -150										8.1	200				-FMB27 -150
	-FMB38.1 - 45		85	15.9 (16)	50	27	14	6	—	—	4.3	108	125	63	1	-FMB40 - 45
	-FMB38.1 - 75										5.6	138				-FMB40 - 75
	-FMB38.1 -105										6.9	168				-FMB40 -105
	-FMB38.1F- 75		110						M12	66.7	6.4	138			2	-FMB40F- 75
	-FMB60 - 75	25	140	25.4	—	—	—	—	M16	101.6	8.2		200	63		-FMB60 - 75

★Drive keys, L-Wrench & Bolt are supplied as standard.
★Above weight is for Arbor only. (Not include Face Mill Cutter)

SHOULDER CUTTER ARBOR

NIKKEN

FMC

■Taper contact area of more than 80% ensures reliable Milling with no chattering accompanied.





Fig.1

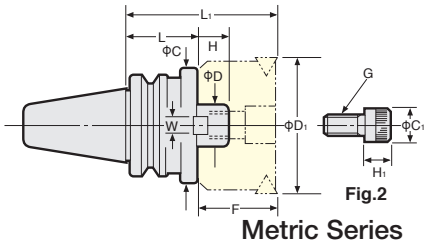

Fig.2

Inch Series　　(●)figures for Metric Series　　Metric Series

Dimensions					Weight (kg)	Dimensions of Arbor with cutter				C1	H1	Fig	Code No.(ΦD -L)
TAPER	Code No.(ΦD -L)	H	C	W		L1	D1	F	G CAP bolt				
No.30		18	45	10	0.8	80	50	40	9GM10-30	16	10	1	BT30-FMC22- 40
No.40		18	45	10	1.3	85	50	40	9GM10-30	16	10	1	BT40-FMC22- 45
					1.9	130							(IT40) FMC22- 90
	BT40-FMC25.4- 60	20	60	9.4(12)	1.8	110	80	50	9GM12-35	18	12	2	FMC27- 60
	(IT40)-FMC25.4- 90				2.5	140							FMC27- 90
	-FMC38.1- 60	22	85	15.5(14)	2.4	110	125	50	9GM16-40	30 (24)	15(16)		FMC32- 60
	-FMC38.1- 75				2.7	125							FMC32- 75
No.50		18	45	10	4.0	100	50	40	9GM10-30	16	10	1	BT50-FMC22- 60
					4.5	145							(IT50) FMC22-105
					5.1	190							FMC22-150
	BT50-FMC25.4- 45	20	70	9.4(12)	4.0	95	80	50	9GM12-35	18	12		FMC27- 45
	(IT50)-FMC25.4- 90				5.4	140							FMC27- 90
	-FMC25.4-150				7.1	200							FMC27-150
	-FMC38.1- 45	22	85	15.5(14)	4.1	95	125	50	9GM16-40 (35)	30 (24)	15(16)		FMC32- 45
	-FMC38.1- 75				5.4	125							FMC32- 75
	-FMC38.1-105				6.7	155							FMC32-105

★Drive keys, L-Wrench & Bolt are supplied as standard.
★Above weight is for Arbor only. (Not include Face Mill Cutter)
★**FMC22** type Arbor is suitable for NIKKEN PRO-END MILL φ50(**PE50HC**). ☞**P.111**
★Code No. of Centre Through Coolant type **FMC** Arbor for NIKKEN PRO-END MILL is **e.g. BT40-FMC22C-45.**

SHELL END MILL ARBOR

NIKKEN

SMS

■Taper contact area of more than 80% ensures reliable Milling with no chattering accompanied.

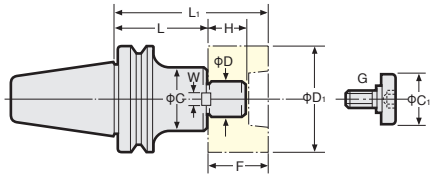

Dimensions									Weight (kg)
TAPER	Code No.	D	L	H	C	C1	W	G	
No.30	BT30-SMS16- 30	16	30	14	34	20	8	M 8	0.9
	-SMS22- 30	22		16	42	28	10	M10	1.0
	-SMS27- 45	27	45	18	50	33	12	M12	1.3
No.40	BT40-SMS16- 60	16	60	14	34	20	8	M 8	1.3
	(IT40)-SMS16-120		120						1.7
	-SMS22- 60	22	60	16	42	28	10	M10	1.4
	-SMS22-120		120						2.1
	-SMS27- 45	27	45	18	50	33	12	M12	1.4
	-SMS27-105		105						2.3
	-SMS32- 45	32	45	20	60	40	14	M16	1.6
	-SMS32- 75		75						2.3
No.50	BT50-SMS16- 75	16	75	14	34	20	8	M 8	4.2
	(IT50)-SMS16-120		120						5.8
	-SMS22- 75	22	75	16	42	28	10	M10	4.3
	-SMS22-120		120						4.8
	-SMS27- 60	27	60	18	50	33	12	M12	4.3
	-SMS27-105		105						5.2
	-SMS32- 45	32	45	20	60	40	14	M16	4.2
	-SMS32- 75		75						5.2
	-SMS40- 45	40	45	23	80	50	16	M20	4.3
	-SMS40- 75		75		70				5.5
	-SMS50- 60	50	60	26	90	65	18	M24	6.3

★Drive keys, L-Wrench & Bolt are supplied as standard.
★Above weight is for Arbor only. (Not include Face Mill Cutter)

BT FMH FACE MILL ARBOR

NIKKEN

■For Oil Hole Cutter
For High Feed Cutter

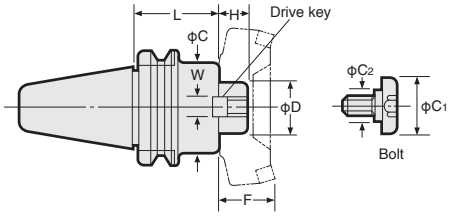

FMH

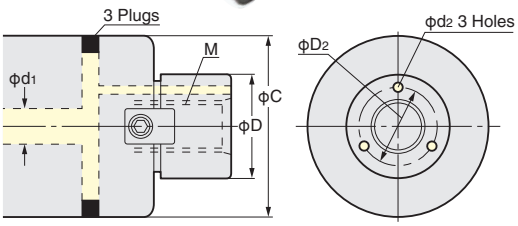

Code No.	Cutter Dia.	φD	φC	M	Coolant Hole φD2	Coolant Hole φd1	Coolant Hole φd2
FMH22.225	φ50, φ52	22.225	47	M10 P1.5	16	6~8	3
	φ63, φ66		60				
FMH25.4	φ80	25.4	70	M12 P1.75	18.5	8~10	3.5
FMH31.75	φ100	31.75	76,96	M16 P2.0	24	10~13	4
FMH38.1	φ125	38.1	100	M20 P2.5	29	10~15	5
FMH50.8	φ160	50.8	100	M24 P3.0	37.5	15~20	7

★Fixing dimension is basically based on **FMA/FMC.** ★The combination of the other cutter dia. are also available.

FMH Inch Series

TAPER	Arbor Code No.	Arbor D	Arbor L	Arbor H	Arbor C	Arbor C1	Arbor W	Drive Key	Lock Bolt	G Cap Bolt	Weight (kg)
No.40	BT40-FMH22.225- 47- 45	22.225	45	17	47	28	8	FW 3	FM10	—	1.3
	(IT40) - 60		60								1.5
	- 90		90								1.9
	-150		150								2.7
	-FMH22.225- 60- 45	22.225	45	17	60	28	8	FW 3	FM10	—	1.5
	- 60		60								1.8
	- 90		90								2.5
	-FMH25.4 - 70- 60	25.4	60	22	70	33	9.5	FW 5	FM12	—	2.0
	- 90		90								2.7
	-105		105								3.1
	-FMH31.75 - 76- 60	31.75	60	30	76	40	12.7	FW13	FM16	—	2.2
	- 90		90								2.9
	-FMH31.75 - 96- 60		60		96						2.5
No.50	BT50-FMH22.225- 47- 60	22.225	60	17	47	28	8	FW 3	FM10	—	4.1
	(IT50) -105		105								4.7
	-150		150								5.3
	-200		200								6.0
	-250		250								6.6
	-300		300								7.7
	-350		350								8.9
	-FMH22.225- 60- 60	22.225	60	17	60	28	8	FW 3	FM10	—	4.2
	-105		105								5.2
	-150		150								6.2
	-200		200								7.4
	-250		250								8.5
	-300		300								9.6
	-350		350								10.6
	-FMH25.4 - 70- 45	25.4	45	22	70	33	9.5	FW 5	FM12	—	4.0
	- 60		60								4.5
	- 90		90								5.4
	-150		150								7.2
	-200		200								8.7
	-250		250								10.3
	-300		300								11.8
	-FMH31.75 - 76- 45	31.75	45	30	76	40	12.7	FW12	FM16	—	4.1
	- 75		75					FW13			5.2
	-105		105								6.3
	-150		150								7.9
	-200		200								9.7
	-250		250								11.6
	-300		300								13.4
	-FMH31.75 - 96- 45	31.75	45	30	96	40	12.7	FW13	FM16	—	4.3
	- 75		75								6.0
	-105		105								7.7
	-150		150								10.3
	-200		200								13.1
	-250		250								16.4
	-300		300								19.2
	-FMH38.1 -100- 45	38.1	45	34	100	50	15.9	FW18	FM20	—	4.4
	- 75		75					FW19			6.3
	-105		105								8.1
	-150		150								10.9
	-200		200								14.5
	-250		250								17.5
	-300		300								20.5
	-FMH50.8 -100- 45(50)	50.8	45	36	100	65	19	FW23	FM24	—	4.4

★Drive keys, L-Wrench & Bolt are supplied as standard.
★Above weight is for Arbor only. (Not include Face Mill Cutter)

BT FMH FACE MILL ARBOR

NIKKEN

■For Oil Hole Cutter
For High Feed Cutter

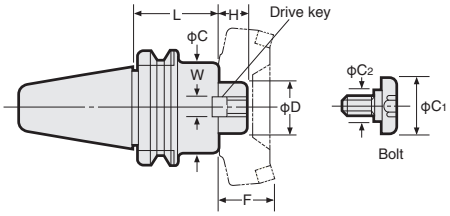

FMH

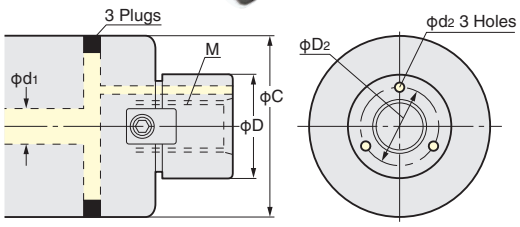

Code No.	Cutter Dia.	φD	φC	M	Coolant Hole φD2	Coolant Hole φd1	Coolant Hole φd2
FMH16	φ40	16	37	M8 P1.25	12	6	2
FMH22	φ50, φ52	22	47	M10 P1.5	16	6~8	3
	φ63,φ66		60				
FMH27	φ80	27	60,76	M12 P1.75	18.5	8~10	3.5
FMH32	φ100	32	96	M16 P2.0	24	10~13	4
FMH40	φ125	40	100	M20 P2.5	29	10~15	5

★Fixing dimension is basically based on **FMA/FMC.** ★The combination of the other cutter dia. are also available.

FMH Metric Series

TAPER	Arbor Code No.	D	L	H	C	C1	W	Drive Key	Lock Bolt	G Cap Bolt	Weight (kg)
No.30	BT30-FMH16- 37 - 35	16	35	17	37	20	8	FW 3	FM 8	—	0.56
	-FMH22- 47 - 45	22	45	18	47	16	10	FW 8	—	9GM10-30	0.76
	-FMH27- 60 - 45	27	45	20	60	18	12	FW11	—	9GM12-35	0.91
No.40	BT40-FMH16- 37 - 40	16	40	17	37	20	8	FW 3	FM 8	—	1.1
	(IT40)-FMH22- 47 - 45	22	45	18	47	16	10	FW 8	—	9GM10-30	1.3
	- 60		60								1.5
	- 90		90								1.9
	-150		150								2.7
	-FMH22- 60 - 45*1	22	45	18	60	16	10	FW 8	—	9GM10-30	1.5
	- 60		60								1.8
	- 90		90								2.5
	-FMH27- 60 - 45	27	45	20	60	18	12	FW11	—	9GM12-35	1.5
	- 60		60								1.8
	- 90		90								2.5
	-FMH27- 76 - 60	27	60	20	76	18	12	FW11	—	9GM12-35	2.1
	- 90		90								2.8
	-FMH32- 96 - 60	32	60	22	96	24	14	FW16	—	9GM16-35	2.4
No.50	BT50-FMH16- 37 - 60	16	60	17	37	20	8	FW 3	FM 8	—	3.8
	(IT50) -105		105								4.1
	-150		150								4.5
	-200		200								4.9
	-FMH22- 47 - 60	22	60	18	47	16	10	FW 8	—	9GM10-30	4.1
	-105		105								4.7
	-150		150								5.3
	-200		200								6.0
	-250		250								6.7
	-300		300								7.8
	-350		350								8.9
	-FMH22- 60 - 60	22	60	18	60	16	10	FW 8	—	9GM10-30	4.2
	-105		105								5.2
	-150		150								6.3
	-200		200								7.4
	-250		250								8.5
	-300		300								9.6
	-350		350								10.7
	-FMH27- 60 - 45	27	45	20	60	18	12	9FWE27	—	9GM12-35	3.9
	- 90		90					FW11			5.0
	-150		150								6.3
	-200		200								7.4
	-250		250								8.5
	-300		300								9.6
	-FMH27- 76 - 45	27	45	20	76	18	12	FW10	—	9GM12-35	4.0
	- 90		90					FW11			5.6
	-150		150								7.8
	-200		200								9.7
	-250		250								11.4
	-300		300								13.2
	-FMH32- 96 - 45	32	45	22	96	24	14	FW15	—	9GM16-35	4.2
	- 90		90					FW16			6.8
	-150		150								10.2
	-200		200								13.3
	-250		250								16.1
	-300		300								19.0
	-FMH40-100 - 45	40	45	26	100	50	16	FW20	FM20	—	4.4
	- 75		75					FW22			6.2
	-105		105								8.1

★Drive keys, L-Wrench & Bolt are supplied as standard.
★Above weight is for Arbor only. (Not include Face Mill Cutter)
★*1 **IT40-FMH27-60-45** is not available.

PRO-END MILL for Precision Face Milling, Right Angle Shoulder Mill & High Speed Grooving.

NIKKEN

BT

PRO-END MILL with Oil Hole



S53C

Suitable for NIKKEN FMA/FMC Arbor.



Fig.1



Fig.2



PE

Code No.	D	D1	L	No. of Teeth	Insert Tip	Tip Clamp Bolt	Weight (kg)	Fig.
PE 50HC	50	22	45	5	Steel : 9DKT15 Aluminium, Cast Iron : 9DKR15	M 4090	0.4	1
PE 60HC	60	25.4	45	5			0.6	
PE 80HC	80	25.4	45	6		M 4012	0.8	2
PE100HC	100	31.75	50	6			1.6	

★Insert Clamp Bolt & Wrench are supplied as standard. ★Insert Tip is available as an option.
★Suitable for Face Mill Arbor **FMA & FMC**.
★Please add **"C"**after **FMA/FMC** for Centre Through Tool Coolant type. **e.g.BT40-FMC22C-45**
★The Lock Bolt is not supplied for **PE50HC**. Please use the bolt **(M10×30)** attached to **FMC22**.
★The Lock Bolt is supplied for **PE60HC～PE100HC** as standard.
PE60HC: M12×35 PE80HC: 9PEM12-50 PE100HC: 9PEM16-55

BT (IT) Shank Arbor for PRO-END MILL



TAPER	PRO-END MILL	PRO-END MILL Arbor	L	L1	D	D1
No.30	PE50HC	BT30-FMC22 -40	85	40	50	22
	PE60HC, PE80HC	-FMA25.4 -45	90	45	60,80	25.4
No.40	PE50HC	BT40-FMC22 -45,-90	90,135	45, 90	50	22
	PE60HC, PE80HC	-FMA25.4 -45,-90			60,80	25.4
	PE100HC	-FMA31.75-45,-75	95,125	45, 75	100	31.75
No.50	PE50HC	BT50-FMC22 -60,-105	105,150	60,105	50	22
	PE60HC, PE80HC	-FMA25.4 -45,-90	90,135	45, 90	60,80	25.4
	PE100HC	-FMA31.75-45,-75	95,125	45, 75	100	31.75

★Please add **"C"** after **FMA/FMC** for Centre Through Coolant type. **e.g. BT40-FMC22C-45**
★Please refer ☞**P.107,P.108** for **FMC** Arbor, **FMA** Arbor.

Code No.	Dimension	Grade	Material	ISOコードNo.	Tip Clamp Bolt 	Tip Clamp Wrench 
9DKT15		IC50M	Steel	ADKT1505	M 4090*1	PE-T15
9DKR15		IC28	Aluminum, Cast Iron	ADKR1505	M 4012*2	

★Please ask us if you require any other type of insert grade e.g. Coated, Cermet etc. For Heavy Cutting on Cast Iron, insert grade of **IC520M** is suitable.
★Purchase of Insert : box each (10 pcs.) ★＊1 Please note there are two different kinds of Tip Clamp Bolts.

Straight Shank PRO-END MILL

NIKKEN

S-MDPE



Code No.	φD	D1	L	L1	L2	MAX. Cutting Depth L3	No. of Teeth	Insert Code No.	Tip Clamp Bolt	Tip Clamp Wrench	Weight (kg)
S16-MDPE16- 90	16	16	90	60	30	10	2	AOMT123608PEER-M	TPS-25	TIP07F	0.2
S20-MDPE20-100	20	20	100	70			3				0.2
S25-MDPE25-110	25	25	110	75	35	15	2	AOMT184808PEER-M	TPS-4	TIP15W	0.4
S32-MDPE32-120	32	32	120	80	40		3				0.7

★2 tip clamp bolts and tip clamp wrench are supplied as standard. ★Please refer ☞ **P.238** for cutting condition.
★Insert tip is available as an option. ☞ **P.181**
★Coolant through tool is available as an standard for all series.

STUB ARBOR

NIKKEN

■Taper contact area of more than 80% ensures reliable milling with no chattering accompanied.

SCA

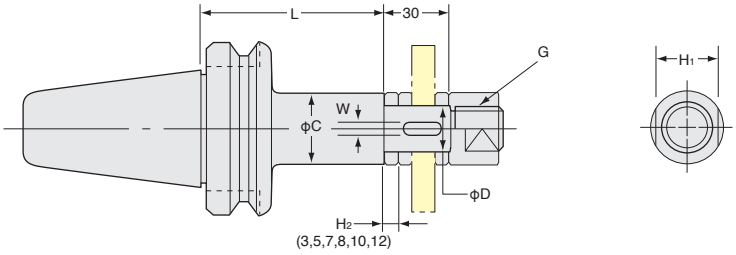

TAPER	Inch Series Code No.(ΦD-L)	H₁	C	W	G	Weight (kg)	Metric Series Code No.(ΦD-L)
No.30	BT30-SCA12.7 -60	17	20	—	M12	1.0	BT30-SCA13-60
	-SCA15.875-60	23	26	3.18 (4)	M14	1.1	-SCA16-60
	-SCA22.225-60	29	34	3.18 (6)	M20	1.2	-SCA22-60
	-SCA25.4 -60	32	40	6.35 (7)	M24	1.3	-SCA27-60
No.40	BT40-SCA12.7 -75,105	17	20	—	M12	1.2 , 1.3	BT40-SCA13-75,105
	(IT40)-SCA15.875-75,105	23	26	3.18 (4)	M14	1.4 , 1.5	(IT40)-SCA16-75,105
	-SCA22.225-75,120	29	34	3.18 (6)	M20	1.7 , 2.0	-SCA22-75,120
	-SCA25.4 -75,120	32	40	6.35 (7)	M24	2.0 , 2.4	-SCA27-75,120
	-SCA31.75 -90	41	46	7.92 (8)	M30	2.6	-SCA32-90
No.50	BT50-SCA12.7 -75,105	17	20	—	M12	4.0 , 4.3	BT50-SCA13-75,105
	(IT50)-SCA15.875-90,120	23	26	3.18 (4)	M14	4.2 , 4.4	(IT50)-SCA16-90,120
	-SCA22.225-90,135	29	34	3.18 (6)	M20	4.4 , 4.7	-SCA22-90,135
	-SCA25.4 -90,135	32	40	6.35 (7)	M24	4.5 , 4.9	-SCA27-90,135
	-SCA31.75 -90,135	41	46	7.92 (8)	M30	4.7 , 5.2	-SCA32-90,135
	-SCA38.1 -90,135	46	55	9.52 (10)	M36	4.9 , 5.9	-SCA40-90,135

(●) figures for Metric Series

★JIS B4206, JIS B4107, JIS B4219, JIS B4109 cutters can be attached.
★Key and Collars (H_2=3, 5, 7, 8, 10, 12) are supplied as standard.
★The Code No. of Nut is unified from **"GN"** to **"GNT"**.

Inch Series			Metric Series		
Arbor	Collar	Nut	Arbor	Collar	Nut
SCA12.7	G 1/2	GNT 1/2	SCA13	G13	GNT 1/2
15.875	G 5/8	GNT 5/8	16	G16	GNT 5/8
22.225	G 7/8	GNT 7/8	22	G22	GNT 7/8
25.4	G1	GNT1	27	G27	GNT1
31.75	G1 1/4	GNT1 1/4	32	G32	GNT1 1/4
38.1	G1 1/2	GNT1 1/2	40	G40	GNT1 1/2

★Please add the H_2 thickness at the end of Code No. for the collar. **e.g. G1-8.**

Straight Shank **STUB ARBOR**

■For Multi-Lock Milling Chuck

K-SCA

K-SCC

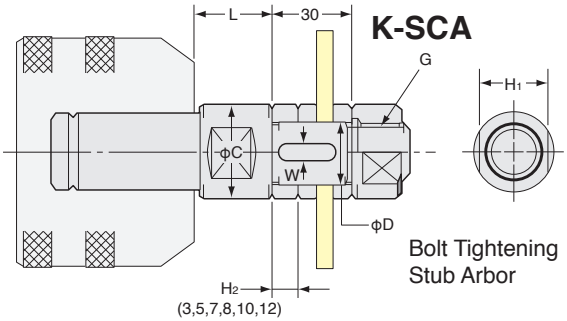

Style	K No. ΦD -L	H₁	C	W	G	Weight (kg)
32	K32-SCA25.4-30	32	40	6.35	M24	1.2
	-SCC25.4-30				M12	1.2
42	K42-SCA25.4-30				M24	1.3
	-SCC25.4-30				M12	1.3

K-SCC



Thinner Bolt Head type is also available.

MULTI OIL HOLE HOLDER (1)

NIKKEN

Internal and External Coolant Feeding Switchable

Internal Coolant Feeding is done with Oil Holder Drill and External Coolant Feeding from Multi Nozzles exactly hit the cutting point in jet streams, when drill, end mill, tap, and reamer without oil hole are used switching of Internal and External Feeding can be done in one touch.

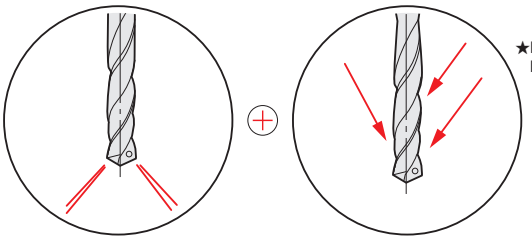

Oil Holder Drill　　Jet Coolant from Multi Nozzles

★For High Precision Machining, **MOC** or **MOK** is recommended.

JET Coolant direction adjustable

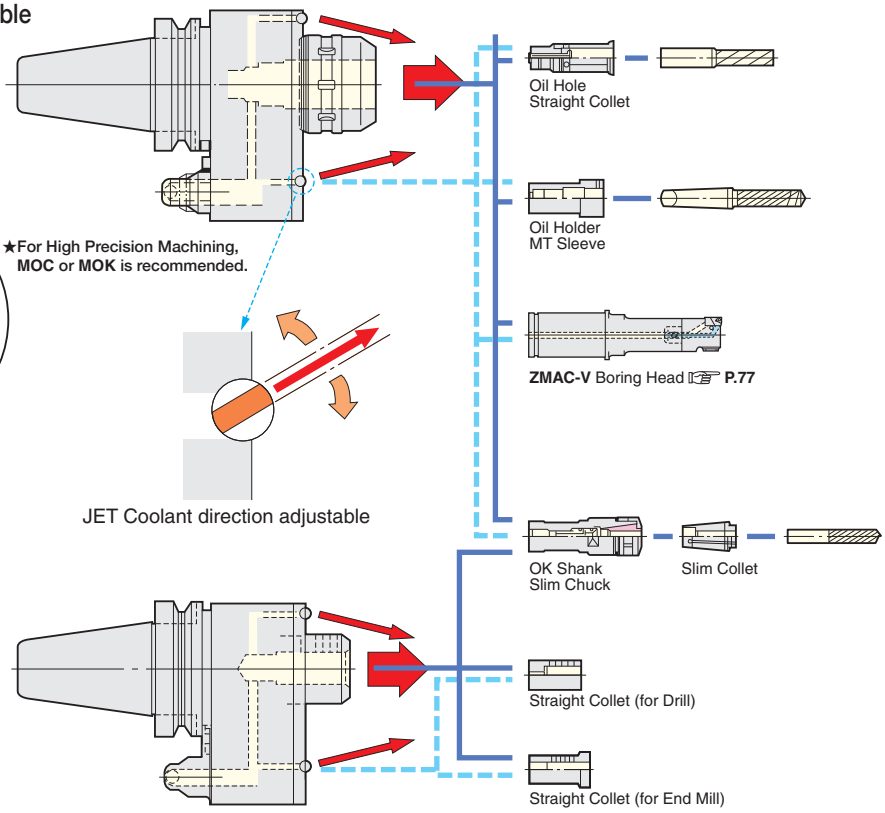

Varieties of Attachment ☞ **P.121**

■Conventional Oil Hole Holder (Internal Coolant Feeding) **SLO**, **SKO** are also available. ☞**P.115**

Milling Chuck type Multi Oil Hole Holder

■Rigidity・Gripping Power・Accuracy

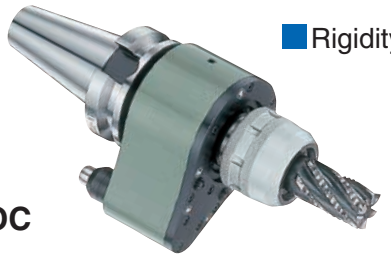

MOC

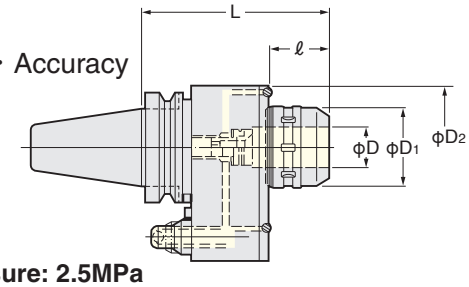

D2 :
BT40 : 85
BT50 : 110

MAX. Coolant Pressure: 2.5MPa

TAPER	Code No. -L	D	ℓ	D1	MAX.r/min	Weight (kg)	Applicable Collet
No.40	BT40-MOC20-145	20	49	52	4,000	3.6	CCK20 CCNK20
	(IT40)-MOC32-160	32	69	69	3,500	4.4	CCK32 CCNK32 OK32-MT K32-Q
No.50	BT50-MOC20-160	20	44	52	4,000	7.0	CCK20 CCNK20
	(IT50)-MOC32-170	32	54	69	3,500	7.1	CCK32 CCNK32 OK32-MT K32-Q

★For Collet and Adapter, please refer ☞**P.115**.　★**K32-Q** : Straight Shank for Modular type. ☞**P.91**　★**IT40-MOC20-155** and **IT40-MOC32-170** are also available.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension. ☞**P.318**

Slim Chuck type Multi Oil Hole Holder

■For High Speed Rotation of Small Dia. Cutter
MAX.6,000r/min

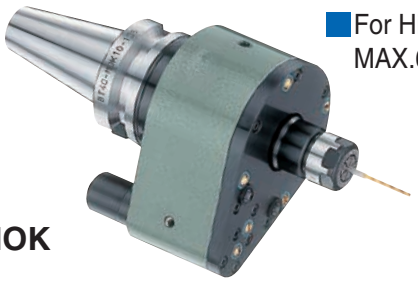

MOK

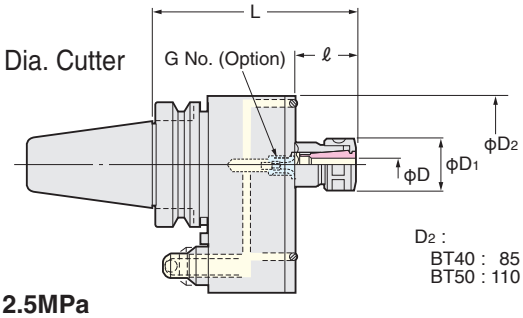

D2 :
BT40 : 85
BT50 : 110

MAX. Coolant Pressure: 2.5MPa

TAPER	Code No. -L	D	ℓ	D1	MAX.r/min	Weight (kg)	Collet	G No. (Option)
No.40	BT40-MOK10-135	5～10	39	27.5	6,000	3.2	SK10	SKG10-10HGF
	(IT40)-MOK16-150	10～16	54	40	5,500	3.5	SK16	SKG16-12HGF
No.50	BT50-MOK10-150	5～10	34	27.5	6,000	6.8	SK10	SKG10-10HGF
	(IT50)-MOK16-165	10～16	49	40	5,500	7.1	SK16	SKG16-12HGF

★Nut is supplied as standard.　★Adjust Screw (G No.) ☞**P.282** and spanner are available as an option. **MOK10: SKL-10**, **MOK16: 9HC16** ☞**P.318**
★For Slim Chuck Collet, please refer ☞ **P.277**.　★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.

MULTI OIL HOLE HOLDER (2)

NIKKEN

BT

Side Lock type Multi Oil Hole Holder

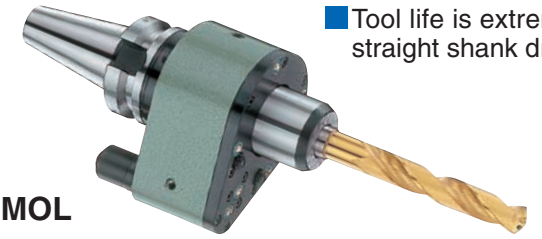

MOL

- Tool life is extremely extended in straight shank drill.

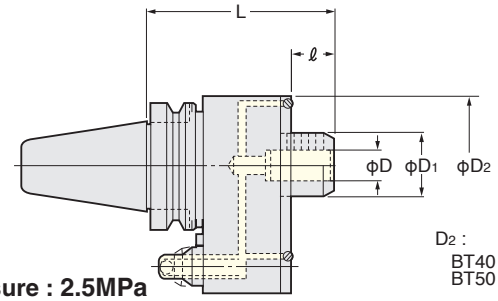

D2 :
BT40 : 85
BT50 : 110

MAX. Coolant Pressure : 2.5MPa

TAPER	Code No. -L	D	ℓ	D1	MAX.r/min	Weight (kg)	Collet
No.40	BT40-MOL16-130	16	34	34.5	5,500	3.1	—
	(IT40)-MOL20-130	20		44	4,000	3.5	—
	MOL25-130	25					OK25-16, 20
	-MOL32-135	32	39	49	3,500	3.8	OK32-16, 20, 25
No.50	BT50-MOL16-150	16	34	34.5	5,500	7.0	—
	(IT50)-MOL20-150	20		44	4,000	7.5	—
	-MOL25-150	25					OK25-16, 20
	-MOL32-150	32		49	3,500	7.8	OK32-16, 20, 25
	-MOL40-160	40	44	59	3,000	8.0	OK40-32

★For Collet, please refer ☞P.115. ★IT40-MOL16-140, IT40-MOL20-140, IT40-MOL25-140 and IT40-MOL32-145 are also available.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension. ☞P.318

Morse Taper type Multi Oil Hole Holder

MOM

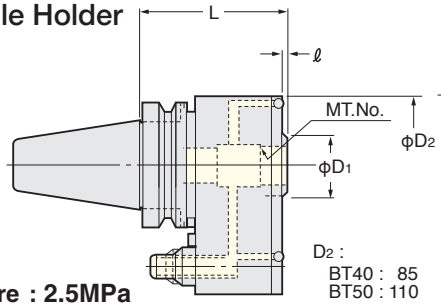

D2 :
BT40 : 85
BT50 : 110

MAX. Coolant Pressure : 2.5MPa

MTO MT Shank MT Sleeve

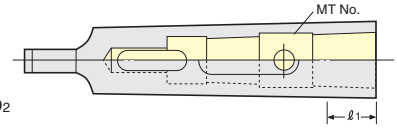

Explanation of the Code No.

MTO 3 - 1

- Internal Taper
- External Taper
- Symbol of Oil Hole MT Sleeve

TAPER	Code No. -L	MT	ℓ	D1	MAX.r/min	Weight (kg)	Sleeve
No.40	BT40-MOM3- 95	3	0	—	5,500	2.6	MTO3-1, 2
	(IT40)-MOM4-105	4	17	44	4,000	2.6	MTO4-1, 2, 3
No.50	BT50-MOM3-113	3	0	—	5,500	6.3	MTO3-1, 2
	(IT50)-MOM4-120	4	4	44	4,000	6.8	MTO4-1, 2, 3
	-MOM5-120	5	4	59	3,000	6.8	—

★IT40-MOM3-105 and IT40-MOM4-115 are also available. ★( ) in sleeve shows ℓ1.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension. ☞P.318

Auto Depth Control Tapper Chuck for Oil Hole Tap

- To be used with Oil Hole Tap.
- Tapping depth is precisely controlled.
- **MAX. 2,000r/min, MAX. Coolant Pressure : 1.5MPa**

OZL

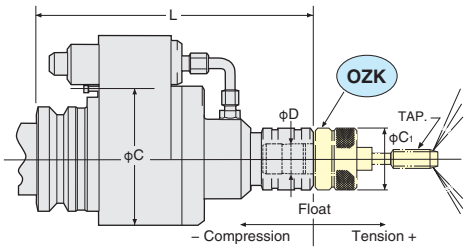

OZK Tap Collet for OZL

TAPER	Code No. -L	Tapping Capability M	Tapping Capability U	Tapping Capability P	D	Float Compression	Float Tension	C	C1	Weight (kg)	Tap Collet
No.40	BT40-OZL12-170	M 2～12	1/8～1/2	P1/16～1/4	19	5	4	82	38.5	4.8	OZK12
	(IT40)-OZL24-205	M 8～24	1/2～1	P1/4～5/8	30	6	7	98	56	5.3	OZK24
No.50	BT50-OZL12-185	M 2～12	1/8～1/2	P1/16～1/4	19	5	4	98	38.5	8.5	OZK12
	(IT50)-OZL24-210	M 8～24	1/2～1	P1/4～5/8	30	6	7	98	56	9.0	OZK24
	-OZL38-240	M18～38	3/4～1 3/8	P3/8～1	45	8	10	115	78	10.0	OZK38

★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension. ☞P.318

OIL HOLE HOLDER

NIKKEN

SLO Side Lock type
SKO Slim Chuck type



Slim Chuck type for BT40/50 is Multi Oil Hole type (**MOK**), please refer ☞ **P.113**.

SLO

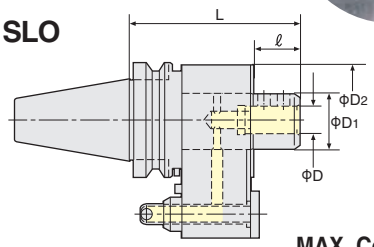

Fig.2

SKO

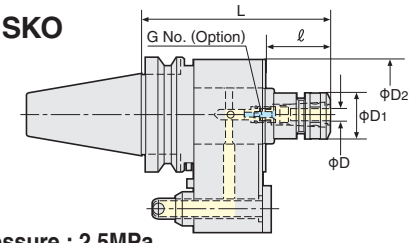

Fig.1

MAX. Coolant Pressure : 2.5MPa

Oil Mist type holder which is not necessary to use coolant is also available for health and safety environment regulation. Please contact with us. **e.g. BT40-SLO25M-130**

TAPER	Code No. L	D	ℓ	D_1	D_2	MAX.r/min	Weight (kg)	Collet	Fig.
No.30	BT30-SKO10-135B,135,125KA	5～10	18,41,43	27.5	63	6,000	1.8	SK10	1
	-SKO16-140B,145,130KA	10～16	23,51,48	40		5,500	2.1	SK16	
	-SKO25-145B,145,130KA	16～25	28,48,48	55	80	3,000	2.8	SK25	
No.40	BT40-SLO16-130	16	39.5	49	82	3,000	3.5	—	2
	(IT40)-SLO20-130	20							
	-SLO25-130	25						OK25	
	-SLO32-140	32	41.5	54			3.8	OK32	
No.50	BT50-SLO16-150	16	40	49	98	3,000	7.5	—	2
	(IT50)-SLO20-150	20							
	-SLO25-150	25						OK25	
	-SLO32-150	32		54				OK32	
	-SLO40-160	40	50	64			8.0	OK40	
	-SLO50-160	50		79	118		10.0	—	

★**BT-30-SKO added "B" (e.g. BT-30-SKO10-135B) is for BROTHER. BT30-SKO added "KA" (e.g. BT30-SKO10-125KA) is for KIRA.**
★**IT40-SLO16-140, IT40-SLO20-140, IT40-SLO25-140 and IT40-SLO32-140 are also available.**
★For **SKO** Slim Chuck, Adjust Screw (G No.) is available as an option. ☞**P.282**
★**For Heavy Duty Model with strong oil seals, please add the letter "HD" to the Code No. e.g.BT40-SLO25-130HD Ideal for ceramic material component.**

SKO10-135B, 135, 125KA : SKG10-10HGG
SKO16-140B : SKG16-12HGH, SKO16-145 : SKG16-12HGG SKO16-130KA : SKG16-10HGB
SKO25-145B, 145, 130KA : SKG25-16HG

★Please refer ☞**P.115** for **OK25** and **OK32** Collet for **SLO** type. ★Nut, Adjust Screw and Collet Extractor are included for **SKO** type as standard. Please refer ☞**P.277** for Slim Chuck Collet.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension. ☞**P.318**

OK Shank MT Sleeve for MOL and SLO



OK-MT Sleeve Code No.
OK32-MT1-85, MT2-85, MT3-100

Explanation of the Code No.

OK **32** - **MT1** - **L**

- Length
- Internal Taper
- OD of Collet
- Symbol of OK Shank

OK Shank Slim Chuck for MOL and SLO



Explanation of the Code No.

OK **25** - **SK** **10**

- MAX. Chucking Dia.
- Slim Chuck
- OD of Shank
- Symbol of OK Shank

Code No.	D	C	ℓ	G No. (Option)	Collet
OK25-SK10	5～10	27.5	23	SKG10-10HG	SK10
-SK16	10～16	40	65	SKG16-12HG	SK16
OK32-SK10	5～10	27.5	23	SKG10-10HG	SK10
-SK16	10～16	40	65	SKG16-12HG	SK16
OK40-SK10	5～10	27.5	25	SKG10-10HG	SK10
-SK16	10～16	40	51	SKG16-12HG	SK16

★Adjust Screw (G No.) is available as an option. ☞ **P.282**
★Please refer ☞ **P.277** for Slim Chuck Collet.

OK Shank Straight Collet for MOL and SLO (for drill)



Code No.	L	L_1
OK25-16, 20	56	45
OK32-16, 20, 25	61	45, 45, 55
OK40-32	71	60

Explanation of the Code No.

OK **25** - **16**

- ID of Collet
- OD of Collet
- Symbol of OK Shank

OK Shank Straight Collet for MOL and SLO (for end mill)



Code No.	L
OKE32-16, 20, 25	63
OKE40-20, 25, 32	73

Explanation of the Code No.

OK **E** **32** - **16**

- ID of Collet
- OD of Collet
- for End Mill
- Symbol of OK Shank

ZERO FIT TYPE OIL HOLE HOLDER

NIKKEN

When the machine has been used for 2～3 years, the run-out accuracy of the spindle will be declining with accuracy of 0.01mm～0.04mm at 100mm from the gauge line, the Zero Fit Holder allows correction of this error back to the run-out of 0.001～0.002mm.

ZERO FIT TYPE OIL HOLE HOLDER SLIM CHUCK

SZFO

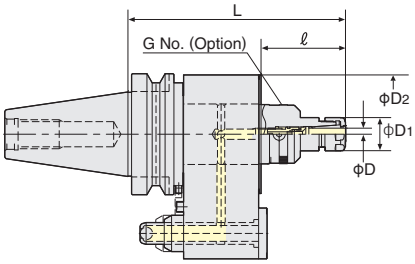

Fig.1

MAX. run-out at 100mm	
SZFO 10	0.050mm/dia.
SZFO 16	0.040mm/dia.
SZFO 25	0.025mm/dia.

ZERO FIT TYPE OIL HOLE HOLDER MILLING CHUCK

CZFO

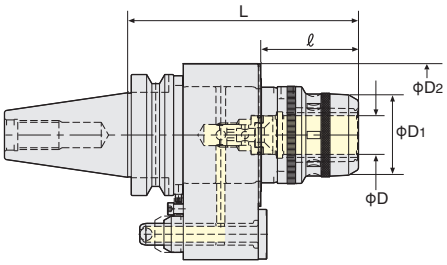

Fig.2

MAX. run-out at 100mm	
CZFO 20	0.050mm/dia.
CZFO 32	0.030mm/dia.

The milling surface finish and quality can be improved.

- The milling surface finish and quality can be improved.
- For better and stable finish tolerance for machining holes.
- The tool life can be extended.
- **Zero Fit Holder has** wide adjustment range compared with competitors equivalent, and its mechanism performs simple, quick and secured operation.
- The choice of the Slim Chuck style **"SZF"** & the Anniversary type Milling Chuck style **"CZF"** can be selected depending on your cutter.
- The side through coolant type does not hurt the machine tool spindle inside.

MAX. Coolant Pressure : 2.5MPa

TAPER	Code No. L	D	ℓ	D1	D2	MAX.r/min	Weight(kg)	Collet	G No. (Option)	Fig.
No.40	BT40-SZFO10-160	6～10	69.5	49	82	3,000	4.0	SK10	SKG10-10HG	1
	-CZFO20-180(65)	20	65	66.5	98		4.5	KM20 CCK20	—	2
No.50	BT50-SZFO10-180	6～10	70	49	98	3,000	8.0	SK10	SKG10-10HG	1
	-SZFO16-190	2.75～16	80	64			9.0	SK16	SKG16-12HG	
	-SZFO25-175	16～25.4	65	66.5			9.0	SK25	SKG25-16HG	
	-CZFO20-175	20					9.0	KM20 CCK20	—	2
	-CZFO32-190	32	80	80.5	118		12.0	KM32 CCK32		

★For SZFO Slim Chuck, Nut is available as a standard.
★For SZFO Slim Chuck, Adjust screw (G No.), wrench to adjust run-out (**9ZFL**) and **SKL** spanner are available as an option. **SZF6: SKL-6W, SZF10: SKL-10, SZF16: 9HC16, SZF25: 9HC25**
★For SZFO Slim Chuck, Collet is available as an option. .Please refer ☞**P.277** for Slim Chuck Collet.
★For SZFO Slim Chuck, Adjust screw for small cutter shank dia. (Φ4) is available. Please contact with us.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.☞**P.318**

HIGH SPEED SPINDLE SPEEDER

NIKKEN

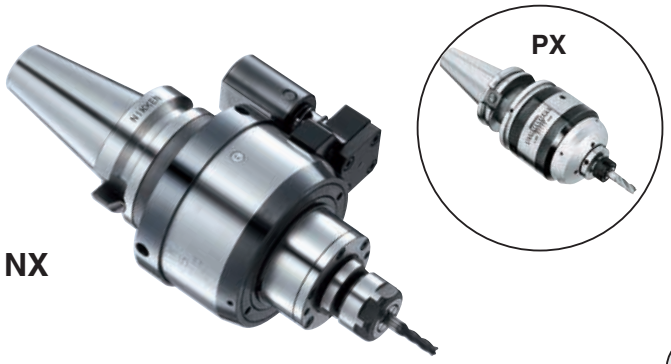

NX

10,000～40,000r/min

- **NIKKEN NX increases the spindle speed by 4 or 5 times, so economically convert your standard M/C to high speed M/C.**
- Even small endmills can cut smoothly without chatter.
- **Run-out accuracy is more stable due to TiN Bearing Nut (standard accessory).**

Explanation of the Code No.

BT40 - NX 5 160

- Length
- Ratio
- NX : 4times, 5 times
  PX : 6times, 10 times
- Shank

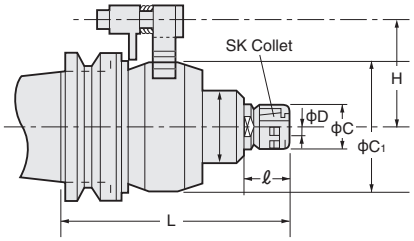



TAPER	Code No.	D	L	C	C_1	ℓ	H	Ratio	MAX. r/min	Weight (kg)	Collet
No.30	BT30-NX 5-153	1.75～10	153	27.5	85	32	55	5	20,000	2.9	SK10A
No.40	BT40-NX 5-153		153				60			5.0	
	(IT40)-PX 6-150GX	0.5～8.0	149	22	76	14.5		6	30,000	4.1	ETS14
	-PX10-160GX		162.5		98			10	40,000	4.5	
No.50	BT50-NX 4-192	1.75～16	192	40	118	46	82	4	10,000	11.0	SK16A
	(IT50)-NX 5-151	1.75～10	151	27.5	85			5	20,000	7.0	SK10A
	-PX 6-140GX	0.5～8.0	142	22	76	14.5		6	30,000	6.8	ETS14
	-PX10-155GX		155.5		98			10	40,000	7.2	

NX type

★For End Mill, please use **SK A type collet**. For Drill, please use **SK-P** class collet. ☞**P.277**
★Wrench, Collet Extractor and **A type SK Collets** are supplied as standard.
NX5: SK10-6A, 8A, 10A NX4: SK16-8A, 10A, 12A, 16A
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension. ☞**P.318**
★**Air Clyinder for Cooling (NXE-COOL) is highly recommended to use for the stable milling.**

PX type

★Grease lubrication is standard.
★Please add **"MX"** instead of **"GX"** at the end of Code No. for the oil mist lubrication. **e.g. BT40-PX6-130MX**
★**ETS** collet is supplies as an option.

ETS Collet



Explanation of the Code No.

ETS 14 - 0.5

- MAX. Chucking Dia.
  - ★ d=0.5～1.0: Each 0.1mm (Gripping range : 0.1mm)
    e.g. ETS14-0.5 : 0.4～0.5mm
  - ★ d=1.25～2.5: Each 0.25mm (Gripping range : 0.25mm)
  - ★ d=3.0 ～8.0: Each 0.5mm (Gripping range : 0.5mm)
- Style No.
- Symbol of ETS Collet

Air Cylinder for Cooling with ON/OFF Magnet NXE-COOL

The best cooling is to cool the speeder body directly.

ANGULAR HEAD SYSTEM (Free Positioning in 360°) NIKKEN

Quick type Angular Head ☞P. 119

BT-AFT Off-Set type



BT-AHT 90°type



BT-AHT 45°type



AHK-C



AHK-SK

AHK-PC



AHK-Z



AHK-SCA

☞P.120

Various machining such as end milling, drilling, face milling, tapping etc. can be conveniently done by just changing adapter. Very suitable for production of many kinds of small quantity.

BT50-AFT35-90 Cutting Data
Material of Work: S55C Carbon Steel

Adaptor	Tool	Cutting Width×Depth	r/min	Feed (mm/min)
SK10	HSS 2 Flutes End Mill	10×5.0	800	80
PC60	φ60 Face Mill	45×3.0	600	300
SCA	φ100×4 Side Cutter	4.0×6.0	70	70
C20	φ18.5 Drill	18.5×40	400	80

Modular type Angular Head ☞P.121

BT-AHM Modular type Main Body



AHM-SK
45°type



Direct Mount Flange type Angular Head ☞P.144

NT-F
Direct Mount Flange type Shank



F Flange



AHM-SK
90°type



Head can be changed according to the application. Small Dia. Head, 45° or 90° Head, Long Head etc. are available in standard series. For Heavy Cutting, Direct Mount Flange type is recommended.

Solid Type Angular Head ☞P.122

Most popular Slim Chuck SK10, 16, 25 and Milling Chuck C20, 32 are combined as solid. High Precision and High Rigidity are ensured.

AFK AFC Off-Set type



AHK AHC 90°type



AHK AHC 30°,45°,60°types



- Free Radius Positioning in 360°.
- Taper Connection System is applied to Stopper Block. (Different from the one of another FA tooling)
- Oil Hole type is available. Please contact with us.
- Special Degree Angular Head is available on demand.
- **Spindle Speeder type Angular Head (X5 times, MAX. 18,000r/min) is available.**
  BT40-AHPX10-215, BT50-AHPX10-206
  IT40-AHPX10-215, IT50-AHPX10-206

Spindle Speeder type Angular Head
MAX.18,000r/min

Angular Head with Oil Hole System

QUICK TYPE ANGULAR HEAD (Free Positioning in 360°) NIKKEN

Quick type OffSet Angular Head

AFT

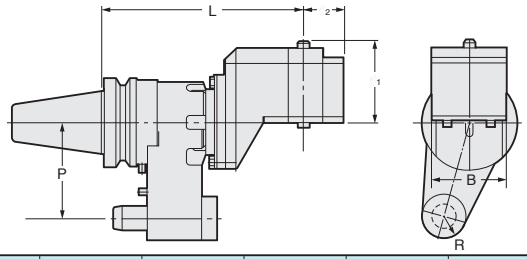

Explanation of the Code No.

BT40 - AF T 30 - 200

- Length from Gauge Line
- Taper No. of Adapter
- Quick type
- Off-Set type Angular Head
- Shank

MAX**2,000**r/min

TAPER	Code No.	Shank	L	P	ℓ_1	ℓ_2	B	R	Adapter	Weight (kg)
No.40	BT40 (IT40)-AFT30-200	BT40	200	65	85	35	70	17.5	AHK30	7.5
No.50	BT50 (IT50)-AFT35-230	BT50	230	110	85	45	84	25	AHK35	16.0

★Taper Connection System is applied to Stopper Block. (Different from the another FA Tooling) ★All types are available with Oil Hole System. ★Test bar is attached as standard.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.
★IT40-AFT30-200 and IT50-AFT35-230 are also available. **★When M/C spindle rotates CW, the cutter rotates CW.**

Quick type 90° Angular Head

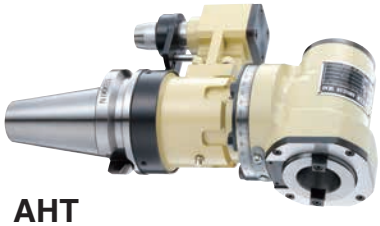

AHT

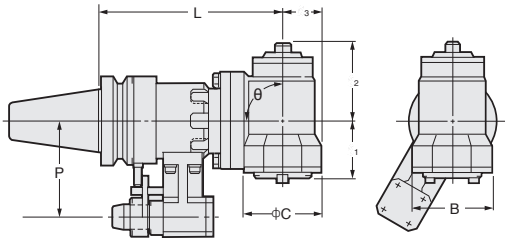

Explanation of the Code No.

BT40 - AH T 30 - 160 - 90

- Angle
- Length from Gauge Line
- Taper No. of Adapter
- Quick type
- Symbol of Angular Head
- Shank

MAX**2,000**r/min

TAPER	Code No. L -θ	Shank	L	P	ℓ_1	ℓ_2	ℓ_3	C	B	θ	Adapter	Weight (kg)
No.40	BT40-AHT30-160 -90	BT40	160	65	58	61	37	86	80	90	AHK30	6.5
	(IT40) -250*-90	BT40	250									10.5
No.50	BT50-AHT35-210 -90	BT50	210	110	65	88	45	100	90	90	AHK35	17.0
	(IT50) -300*-90	BT50	300									22.0

★Taper Connection System is applied to Stopper Block. (Different from the another FA tooling) ★All types are available with Oil Hole System. ★Test bar is attached as standard.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.
★Models with ✻ mark : Detailed discussion is needed. **★When M/C spindle rotates CCW, the cutter rotates CW.**

Quick type 30°, 45°, 60°Angular Head

AHT

Photo shows 30° type.

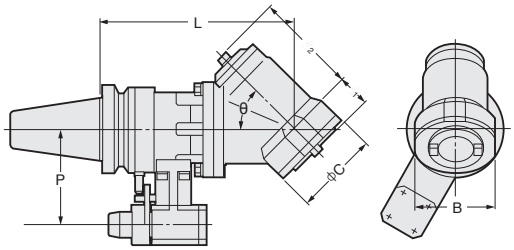

Explanation of the Code No.

BT40 - AH T 30 - 170 - 45

- Angle
- Length from Gauge Line
- Taper No. of Adapter
- Quick type
- Symbol of Angular Head
- Shank

MAX**2,000**r/min

TAPER	Code No. L -θ	Shank	L	P	ℓ_1	ℓ_2	C	B	θ	Adapter	Weight (kg)
No.40	BT40-AHT30-205 -30	BT40	205	65	1.5	122	86	80	30	AHK30	6.5
	(IT40) -170 -45		170		35	88			45		6.5
	-160 -60		160		35	88			60		6.5
	-250*-30	BT40	250	65	1.5	122	86	80	30	AHK30	10.5
	-45				35	88			45		10.5
	-60				35	88			60		10.5
No.50	BT50-AHT35-258 -30	BT50	258	110	0	140	100	90	30	AHK35	17.0
	(IT50) -225 -45		225		26	110			45		17.0
	-210 -60		210		40	105			60		17.0
	-300*-30	BT50	300	110	0	140	100	90	30	AHK35	22.0
	-45				26	110			45		22.0
	-60				40	105			60		22.0

★Taper Connection System is applied to Stopper Block. (Different from the another FA tooling) ★All types are available with Oil Hole System. ★Test bar is attached as standard.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.
★Models with ✻ mark : Detailed discussion is needed. **★When M/C spindle rotates CCW, the cutter rotates CW.**

ADAPTER FOR QUICK TYPE ANGULAR HEAD

NIKKEN

Quick type Angular Head
☞ P.119

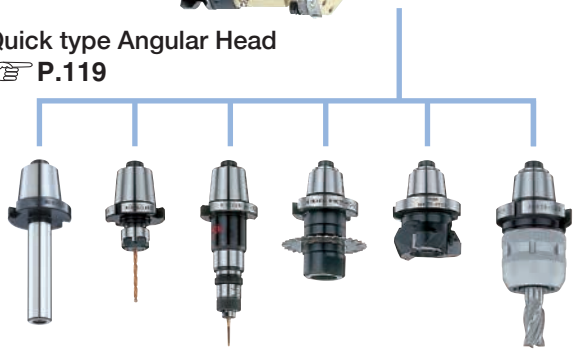

Quick type Milling Chuck (Double Face Contact)



Code No. D	L	D1	Weight(kg)	KM Collet
AHK30-C16	60	44	1.0	KM16
AHK35-C16,C20	60, 65	44, 52	1.1, 1.2	KM16 KM20

★For **KM** COLLET, please refer ☞ P.274.

Quick type NIKKEN PRO-CUT (Double Face Contact)



Code No. PC.No.	L	D1	Weight(kg)
AHK30-PC50	45	50	0.7
AHK35-PC60,PC80	45, 57	60, 80	0.9, 1.3

★Inserts are standard accessory.

Quick type Side Cutter Arbor (Double Face Contact)





Code No.	L	D	D1	Weight(kg)
AHK35-SCA25.4	12	25.4	40	1.1

★The key and set of distance collars are standard accessory.

Quick type Slim Chuck



Code No. SK.No.	D	L	D1	Weight(kg)	SK Collet
AHK30-SK10	1.75～10	35	27.5	0.4	SK10
-SK16	2.75～16	50	40	0.6	SK16
AHK35-SK10	1.75～10	35	27.5	0.5	SK10
-SK16	2.75～16	50	40	0.7	SK16

★**SK** Collet is not included, please refer ☞ P.277.

Quick type Tapper Chuck



Code No. Z.No.	L	Weight(kg)	Tap Collet
AHK30-Z8, Z12	85,100	0.6, 0.9	ZKN 8 ZKG12
AHK35-Z8, Z12, Z16	75,85,100	0.7,1.0,1.5	ZKN 8 ZKG12 ZKG16

★Tapping Capability **Z8 : M2～8 Z12 : M2～12 Z16 : M3～20**
★Tap Collet is not included, please refer ☞ P.285.

Quick type Face Mill Arbor (Double Face Contact)



Code No.	L	D1	W	Weight(kg)
AHK35-FMA25.4	18.5	25.4	9.5	0.7
-FMA31.75		31.75	12.7	0.8

★The Keys and a Bolt are standard accessory.

Quick type Morse Taper Sleeve



Code No. MT.No.	L	D1	Weight(kg)
AHK30-MT1,MT2	50, 65	25, 32	0.4, 0.5
AHK35-MT1,MT2,MT3	50, 60, 85	25, 32, 40	0.5, 0.6, 0.9

Quick type Drill Chuck Adapter



Code No. J.No.	L	J.No.	Weight(kg)
AHK30-J6	16	J6	0.4
AHK35-J6			0.5

★This adapter is supplied without drill chuck.

MODULAR TYPE ANGULAR HEAD

NIKKEN

Modular type Angular Head AHM

AHM

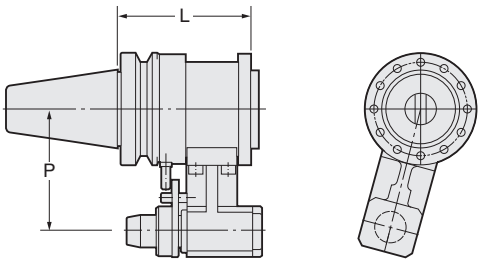

MAX**6,000**r/min

TAPER	Code No. -L	L	P	Weight (kg)	Suitable Modular Head
No.40	BT40 (IT40)-AHM-100	100	65	4.5	
No.50	BT50 (IT50)-AHM-120	120	110	11.5	

★Taper Connection System is applied to Stopper Block. (Different from the another FA Tooling) ★All types are available with Oil Hole System.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.

90°type Modular Head AHM90

AHM

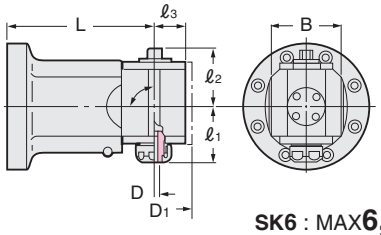

Explanation of the Code No.

AHM90 - SK6 - 80

- Length from Gauge Line
- Symbol of Slim Chuck
- Symbol of Modular Head 90°type

SK6 : MAX**6,000**r/min **SK10,16** : MAX**4,000**r/min

Code No. -L	D	ℓ1	ℓ2	ℓ3	D1	B		Weight (kg)	SK Collet
AHM90-SK 6-80, 120, 150*	0.7～6	42	35	22	50	48	90	3.0, 4.0, 4.5	SK 6
-SK10-80, 120, 150*	1.75～10	63	57	32	64	60		3.5, 4.5, 5.0	SK 10
-SK16-80, 120, 150*	2.75～16	66	58	35	74	70		4.2, 5.2, 5.7	SK 16

★*Mark is for light machining. ★For **SK** Collet, please refer ☞**P.277**. ★**When M/C spindle rotates CCW, the cutter rotates CW.** ★Test bar is attached as standard.

30°, 45°, 60°,type Modular Head AHM45

AHM

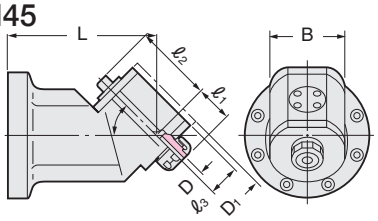

Explanation of the Code No.

AHM45 - SK6 - 120

- Length from Gauge Line
- Symbol of Slim Chuck
- Symbol of Modular Head 45°type

SK6 : MAX**6,000**r/min **SK10,16** : MAX**4,000**r/min

Code No. -L	D	ℓ1	ℓ2	ℓ3	D1	B		Weight (kg)	SK Collet
AHM45-SK 6-120, 150*	0.7～6	27	67	22	50	52	45	3.0, 4.0, 4.5	SK 6
-SK10-120, 150*	1.75～10	39	80	30	64	60		3.5, 4.5, 5.0	SK 10
-SK16-120, 150*	2.75～16	38	90	35	74	70		4.2, 5.2, 5.7	SK 16

★*Mark is for light machining. ★For **SK** Collet, please refer ☞**P.277**. ★Angle 30°, 60° are also available as an option. ★**When M/C spindle rotates CCW, the cutter rotates CW.**
★Test bar is attached as standard.

Angular head for deep hole

AHPL

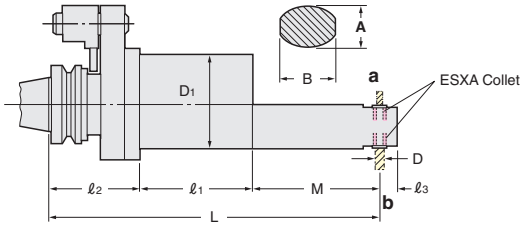

TAPER	Code No. -L	D	D1	A	B	L	M	ℓ1	ℓ2	ℓ3	min-1	Weight (kg)	Applicable Collet
No.40	BT40-AHPL4-199	1.0～4.0	80	25	31	199	32	67.5	99.5	14.5	6,450	5.0	ESXA4
	-223					223	56					5.5	
	-247					247	80					6.0	
	-271					271	104					7.5	
	-AHPL6-208	1.0～6.0	80	36	45	207.5	46.5	61.5	99.5	15	8,000	5.0	ESXA6
	-236					235.5	74.5					6.0	
	-264					263.5	102.5					8.0	
No.50	BT50-AHPL6-221	1.0～6.0	80	36	45	220.5	46.5	83.5	90.5	15	8,000	7.0	ESXA6
	-249					248.5	74.5					8.0	
	-277					276.5	102.5					10.0	
	-AHPL8-248	1.0～8.0	110	43	47.5	247.5	73	78	96.5	20	6,000	9.0	ESXA8
	-280					279.5	105					10.0	
	-300					299.5	125					11.0	

★**ESXA** Collet is supplied as an option. ★**Different shape is possible, please contact with us for more detail.**
★**When M/C spindle rotates cw, the cutter at a rotates CW and the cutter at b rotates CCW.** ★**IT40-AHPL6-270** and **IT50-AHPL8-288** are also available.

SOLID TYPE ANGULAR HEAD (Free Positioning in 360°)

NIKKEN

Solid OffSet type Angular head

AFK·AFC

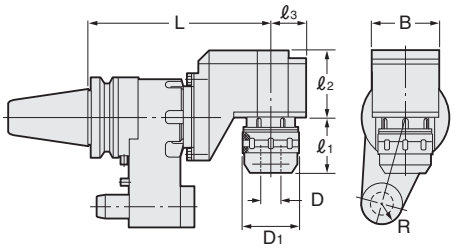

Explanation of the Code No.

BT40 - AF K 16 - 200

- Length from Gauge Line
- MAX. Chucking Dia.
- Kind of chuck
  K : Slim Chuck
  C : Milling Chuck
- OFF SET type
  Symbol of Angular Head
- Shank

TAPER	Code No. -L	D	D1	ℓ1	ℓ2	ℓ3	B	R	r/min	Weight (kg)	Collet
No.40	BT40-AFK16-200	2.75～16	40	50	85	35	70	17.5	2,000	8.5	SK 16
	(IT40)-AFC20-200	2～20	52	56						8.7	KM 20
No.50	BT50-AFC20-230-NCC	2～20	52	58	85	45	84	25	2,000	17.0	KM 20
	(IT50)-AFC32-230-NCC	3～32	69	65						17.2	KM 32

★Taper Connection System is applied to Stopper Block. (Different from the another FA Tooling) ★Test bar is attached as standard.
★All types are available with Oil Hole System.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.
★For SK16, please refer ☞ P.277. For KM20 and KM32, please refer ☞ P.274.
★Please advise name of M/C builder and model No. etc. **★When M/C spindle rotates CW, the cutter rotates CW.**
★Those ending in NCC are centre-through compatible as standard.

Solid - 90°, 45°type Angular head

AHK·AHC

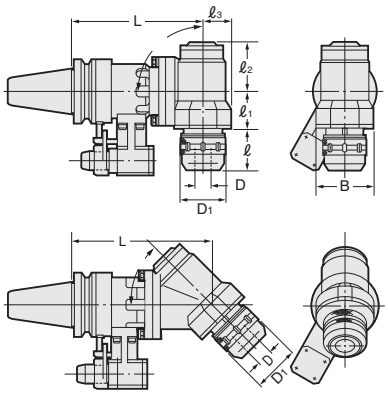

Explanation of the Code No.

BT40 - AH K 10 - 195 - 90

- angle 30°, 45°, 60°, 90°
- Length from Gauge Line
- MAX chucking Dia
- Kind of chuck
  K : Slim Chuck
  C : Milling Chuck
- Symbol of Angular Head
- Shank

TAPER	Code No. -L -θ	D	D1	ℓ	ℓ1	ℓ2	ℓ3	B	r/min	Weight (kg)	Collet
No.30	BT30-AHK10-120 -90	1.75～10	27.5	20	49	50	27.5	55	2,000	3.0	SK 10
No.40	BT40-AHK10-180 -90	1.75～10	27.5	18	45	57	32	60	4,000	8.0	SK 10
	-220*-90									9.0	
	(IT40)-AHK16-180 -90	2.75～16	40	25	41	58	35	70		8.7	SK 16
	-220*-90									9.7	
	-AHC20-160 -90	2～20	52	57	58	61	37	80	2,000	7.1	KM20
	-250*-90									11.1	
No.50	BT50-AHK10-200 -90	1.75～10	27.5	18	45	57	32	60	4,000	15.0	SK 10
	-240*-90									16.0	
	(IT50)-AHK16-200 -90	2.75～16	40	25	41	58	35	70		15.7	SK 16
	-240*-90									16.7	
	-AHK25-210 -90	7.5～25.4	55	57	60	82	45	90	2,000	17.2	SK 25
	-300*-90									22.2	
	-AHC32-210 -90	3～32	69							17.5	KM32
	-300*-90									22.5	

★Taper Connection System is applied to Stopper Block. (Different from the another FA Tooling) ★Test bar is attached as standard.
★All types are available with Oil Hole System.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.
★For SK10 SK16 SK25, please refer ☞ P.277. For KM20 KM25 and KM32, please refer ☞ P.274.
★Angle 30°, 45°, 60° are also available as an option. ★ ＊Mark is for light cutting.
★When M/C spindle rotates CCW, the cutter rotates CW.
★Please contact with us for the dimension of 30°, 45°, 60° type.

DIRECT MOUNT FLANGE TYPE ANGULAR HEAD

NIKKEN

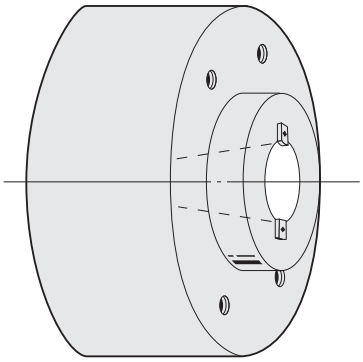

Spindle



Direct Mount
Flange type Shank

Code. No.

NT 50 - F 235 - 14

- Shank No.
- φD
- L

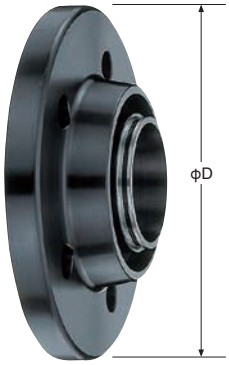

Flange

Code. No.

F 235 - AHM

- Symbol of Flange type
- φD
- Symbol of Modular type Angular Head

Modular Head

☞ P.121

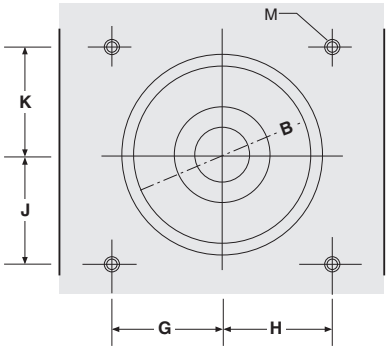



We have a lot of experience of Special Angular Heads such as Flange Mount type, Both Sides Spindles type Heads and Angular Head for High Speed Rotation. Please contact with us.

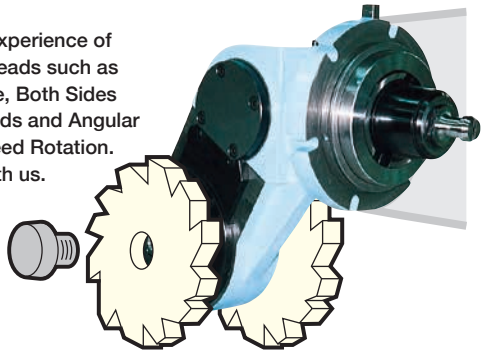

Photo shows **NC5** Shank.

★When ordering, please let us know above A, B, C, D, E, F, G, H, J, K, M and Work Drawing.

MULTI SPINDLE HEAD SERIES

NIKKEN

MHS ①Multi Drill Head
(for Straight Shank Drill)

MHD ②Multi Drill Head
(for MT Shank Drill)

MHT ③Multi Drill Head
(for Tapper Chuck)

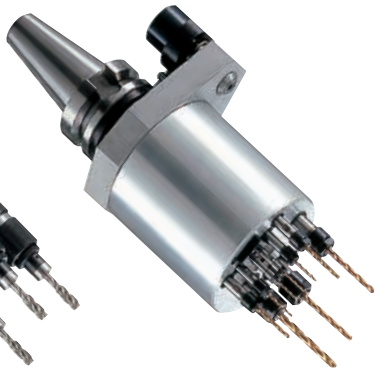

MHV High Speed
Multi Drill Head
MAX.8,000r/min

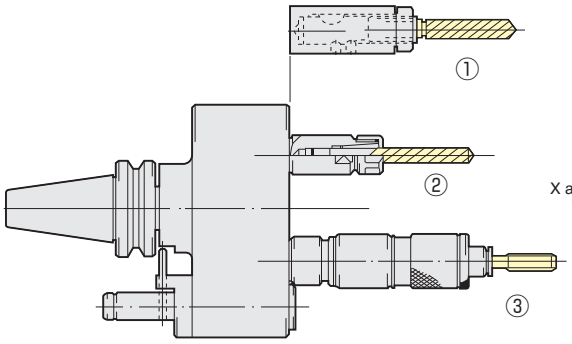



Please specify the below when ordering.

- M/C Maker, Model No. Drawing of Spindle Flange. Stopper Block is provided or not.
- Coordinates of each hole A(X= -35, Y= 35)
  B(X= 35, Y= 35)
  C(X= -35, Y=-35)
  D(X= 35, Y=-35)
  or pitch and number of holes.
- A diameter of drill or tap
- Material

ANGULAR HEAD Torque - power

NIKKEN

BT

Please decide a cutting condition for the cause in 70% of following torque and power.

BT-AH

BT-AHT 90˚ type



AHK AHC 90˚ type



ANGULAR HEAD(AH)
speed(r/min)-torque(Nm)/power(kW)

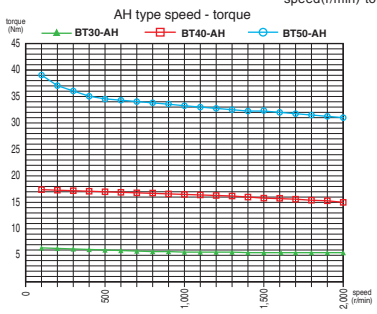

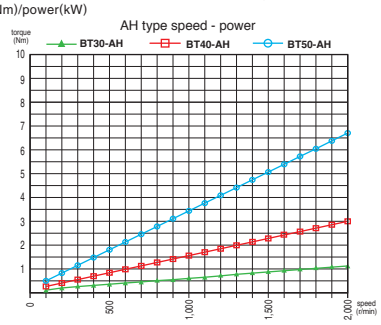

AHM-SK

AHM-SK 90˚ type



ANGULAR HEAD(AMH)
speed(r/min)-torque(Nm)/power(kW)

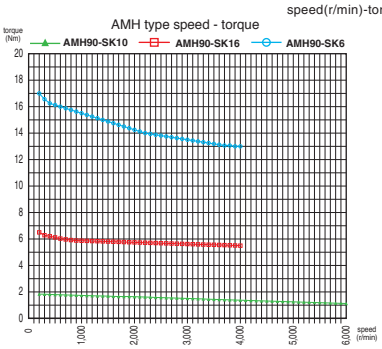

BT-AF

BT-AFT OFF SET type



AFK AFC OFF SET type



ANGULAR HEAD(AF)
speed(r/min)-torque(Nm)/power(kW)

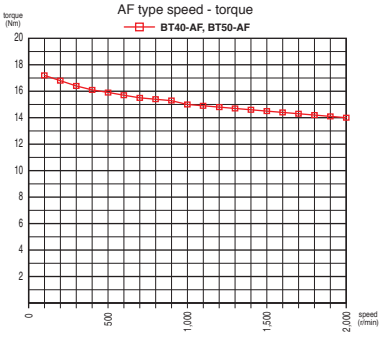

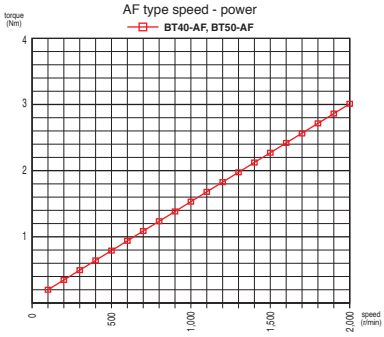

Cutting Power : Pc (kW) and Cutting Torque : Mc (Nm) for Milling

$$Pc(kW) = \frac{ap \cdot ae \cdot vf \cdot kc}{60 \times 10^6} \qquad Mc(Nm) = \frac{9550 \times Pc}{n}$$

ap(mm) : Depth of Cut
ae(mm) : Cutting Width
Vf(mm/min) : Table Feed per Min
Kc(MPa) : Specific Cutting Force
Pc(kW) : Cutting Power

n(r/min) : Spindle Speed
Mc(Nm) : Cutting Torque
■Kc(MPa) :Reference level of the specific cutting Force.
It is found by materials and feed per tooth (fz (mm/t)).
Specifically, please refer to a cutting tool maker catalogue.
□S50C(fz=0.1mm/tooth)≒2000MPa
□FC250(fz=0.1mm/tooth)≒1800MPa

BT-AHPL4

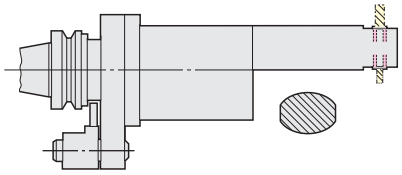

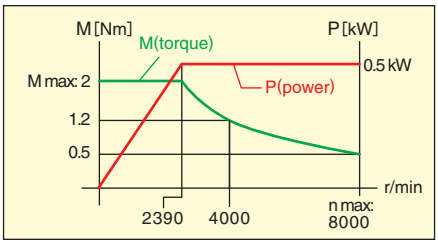

BT-AHPL6

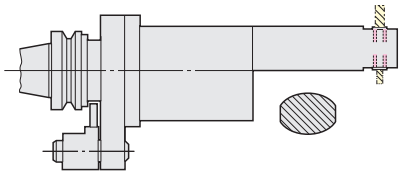

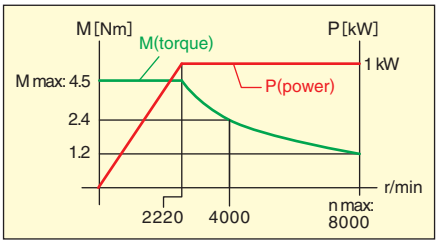

BT-AHPL8

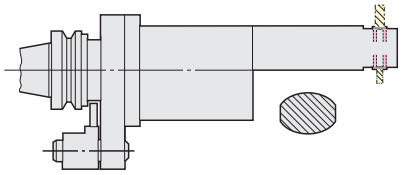

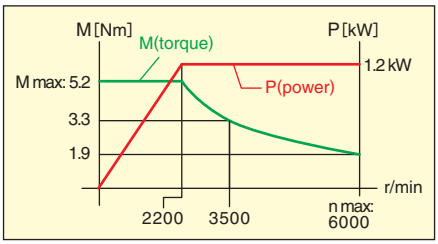

BT-AHPX10



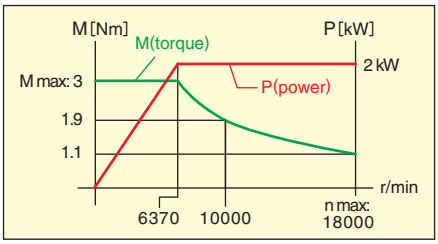

ZERO FIT TYPE MILLING CHUCK

NIKKEN

CZF
Centre Through

Fig.1

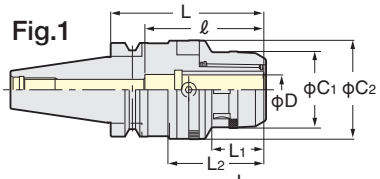

Fig.2

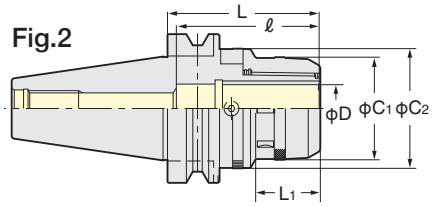

Explanation of the Code No.

BT40 CZF32 – 120

- Nominal Gauge Length
- Chucking Capacity
- Zero Fit Type Milling Chuck
- Shank No.

MAX. run-out at 100mm	
CZF20	0.050mm/ϕ
CZF25	0.050mm/ϕ
CZF32	0.030mm/ϕ

TAPER	Code No.	C1	C2	L	L1	L2	ℓ	Weight (kg)	Fig.	Collet
No.30	BT30-CZF20-100	51.5	66.5	100	35	68	80	1.5	1	KM20 CCK20
	-CZF25-100	59.5	74.5					1.6		KM25 CCK25
No.40	BT40-CZF20-105	51.5	66.5	105	35	64.5	80	2.1		KM20 CCK20
	-120			120				2.5		
	-CZF25-105	59.5	74.5	105		68		2.4		KM25 CCK25
	-120			120				2.9		
	-CZF32-120	69	80.5	120	42	78	105	2.8		KM32 CCK32
No.50	BT50-CZF20-105	51.5	66.5	105	35	-	80	4.6	2	KM20 CCK20
	-165			165				6.0		
	-CZF25-105	59.5	74.5	105				5.0		KM25 CCK25
	-165			165				6.8		
	-CZF32-105	69	80.5	105	42		105	5.3		KM32 CCK32
	-165			165				7.4		

★Spanner is available as an option. **CZF20 type : 9HC22, CZF25 type : 9HC25, CZF32 type : 9HC32**
★Wrench to adjust run-out (**9ZFL**) is available as an option.
★Please refer ☞ **P.274**, **P.275** for **KM**, **CCK** collet.
★When direct chucking of centre through tool coolant, please use **CKFN-D** nut.
When using collet, please use **CCK collet** and **CKFN nut**. ☞ **P.276**
★Please note the acceptable shank tolerance is h7.
★Multi-Cam style is available. **e.g. BT40-CZF32-120-C3.** (3 Cams) Please contact us for more detail.

Wrench to adjust
9ZFL

FLANGE STYLE ZERO FIT TYPE MILLING CHUCK

NIKKEN

CF-CZF





Explanation of the Code No.

CF – CZF32

- Chucking Capacity
- Zero Fit Type Milling Chuck
- Symbol of Flange Style

JAPAN, USA, UK, GERMANY, KOREA, TAIWAN PAT.

A holder for gripping the cutter on a tool-grinding machine and adjusting run-out.

Style	Code No.	ϕF	ϕD	ϕC1	ϕC2	L	L1	L2	Width of groove for fixing bolts	ϕP,C,D
32	CF-CZF32	165	32	69	80.5	93.2	43.5	70.2	14mm (three places)	130
42	CF-CZF42	175	42	86	98.2	95	46	72		140

★Sanner is available as Standard **CZF20 type : 9HC22, CZF25 type : 9HC25, CZF32 type : 9HC32**
★Wrench to adjust run-out (**9ZFL**) is available as an option.
★Please refer ☞ **P.274**, **P.275** for **KM**, **CCK** collet.
★When direct chucking of centre through tool coolant, please use **CKFN-D** nut.
When using collet, please use **CCK collet** and **CKFN nut**. ☞ **P.276**
★Please note the acceptable shank tolerance is h7.

Wrench to adjust
9ZFL

- Ideal for adjusting cutter run-out on an NC grinding machine or universal grinding machine.
- 3-point cam as a standard feature makes it easy to adjust run-out on a grinding machine.

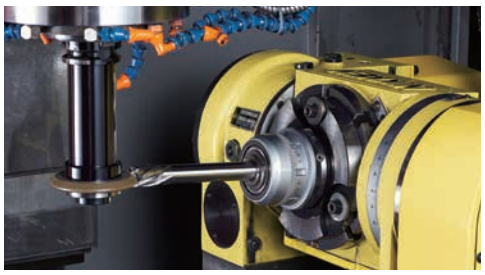

⚠
- **In case of CZF (Milling Chuck) style, please rotate the Adjust Cam to the free position. Then, tighten the nose ring until face contact.**
If the face contact is not completed, the Adjust Cam can not function. (Free run)
If the Adjust Cam is not at the free position before tightening, you can not tighten the nose ring until face contact correctly.
- **For the safety reason, the Cam Ring Lock Screws can not be loosen to remove to the outside. Please loose the Cam Ring Lock Screws slightly to rotate the Cam Ring.**

ZERO FIT TYPE SLIM CHUCK

NIKKEN

SZF
Centre Through

Fig.1

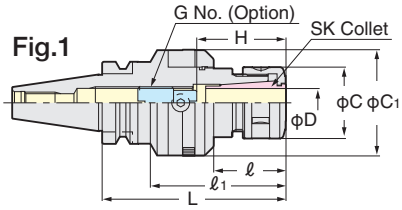

Fig.2

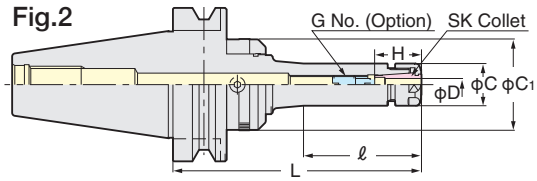

Explanation of the Code No.

BT40 SZF10 – 90

- Nominal Gauge Length
- Chucking Capacity
- Zero Fit Type Slim Chuck
- Shank No.

MAX. run-out at 100mm		
SZF 6	L<150	0.050mm/φ
	L≧150	0.040mm/φ
SZF10		0.050mm/φ
SZF16		0.040mm/φ
SZF25		0.025mm/φ

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	Weight (kg)	Fig.	Collet
No.30	BT30-SZF 6- 90	0.7～6.0	90	42	-	19.5	40.5	21～35	SKG- 8	0.9	2	SK 6
	-SZF10- 90	1.75～10.0		35	61	27.5	48.5	30～50	SKG-12L	1.3	1	SK10
	-SZF16-105	2.75～16.0	105	40	76	40	59.5	45～65	SKG-18L	1.6		SK16
No.40	BT40-SZF 6- 90	0.7～6.0	90	37	-	19.5	40.5	21～35	SKG- 8	1.3	2	SK 6
	-150		150	60			48.5			1.7		
	BT40-SZF10- 90	1.75～10.0	90	37		27.5	48.5	30～50	SKG-12L	1.5		SK10
	-150		150	97						1.9		
	BT40-SZF16- 90	2.75～16.0	90	37		40	59.5	40～70	SKG-18L	1.8		SK16
	-150		150	97						2.2		
	-SZF25-120	7.5～25.4	120	55	84	55	66.5	55～85	SKG-28	2.4	1	SK25
	-150		150	86	114					2.9		
No.50	BT50-SZF 6-105	0.7～6.0	105	41	-	19.5	40.5	21～35	SKG- 8	4.0	2	SK 6
	-165		165	63			59.5			4.2		
	-SZF10-105	1.75～10.0	105	41		27.5	48.5	30～50	SKG-12L	4.5		SK10
	-165		165	101						4.9		
	-SZF16-105	2.75～16.0	105	41		40	59.5	40～70	SKG-18L	5.0		SK16
	-165		165	101						5.4		
	-SZF25-135	7.5～25.4	135	71		55	66.5	55～85	SKG-28	5.8		SK25
	-165		165	101						6.0		

★Adjust screw (G No.), wrench to adjust run-out (**9ZFL**) and **SKL** spanner are available as an option. **SZF6: SKL-6W, SZF10: SKL-10, SZF16: 9HC16, SZF25: 9HC25**
★**Please use "P" class or "A" type SK collet.** ☞ P.277
★For centre through coolant application please use **SK J** type nut and cap for your preference. Please note that the length of **J** type nut is 6mm longer than the standard **SK** nut. ☞ P.279
★For High Speed type, Code No. is **"SZF-P"**. **e.g. BT40-SZF10-90P** **GH handle** ☞ P.293 is necessary for High Speed Milling Chuck.
★Multi-Cam style is available. **e.g. BT40-SZF16-90-C3**. (3 Cams) Please contact us for more detail.
•When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.

Wrench to adjust
9ZFL

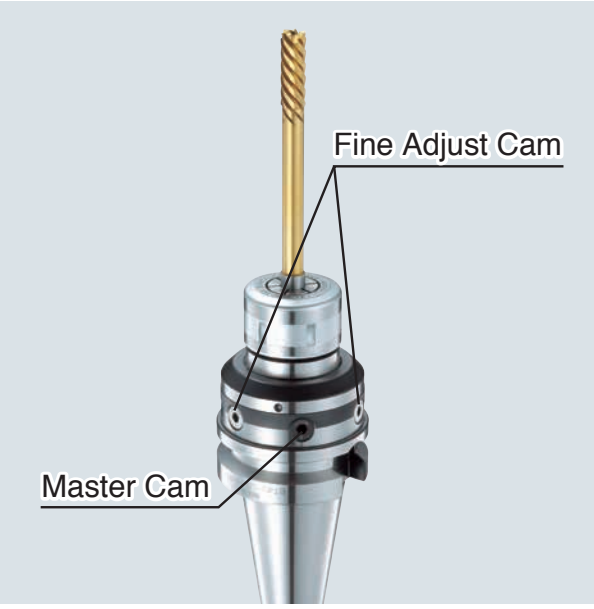

Multi-Cam Style

The minute run-out after adjusting by a master cam can be adjusted by fine adjust cams at the same position.
e.g. BT40-SZF16-90-C3 (3 Cams)
The multi-cam style can not be made for all zero fit holders.

AUTOMATIC BACK SPOT FACING ARBOR

NIKKEN

No Swarf Adhesion. Mechanical Automatic Blade In/Out System.
No Need of Stopper Block.

Coolant Through is standard.

AF-OH

Operational Procedure of Back Spot Facing Arbor (Full Automatic System by NC Programming)

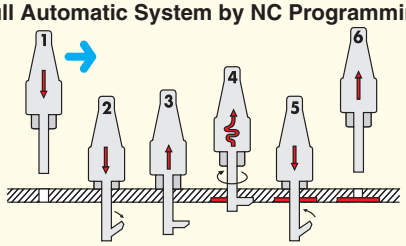

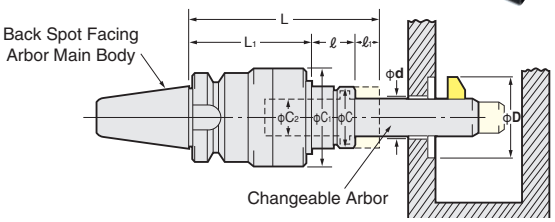

The front end arbor is changeable to suit different facing diameter.
Bit can be selected as follows;

- **HSS : Powdered HSS + Ion Nitrided + TiAℓN Coated (Min. order : 3pcs)**
- **Carbide : Grade P, K or M can be selected. (Min. oder : 5pcs)**
- **Insert Tip**

Explanation of the Code No.

9BF | **120-16-31-30** – ☐

- 9BF: Byte
- 120-16-31-30: Arbor Code No.
- ☐: I : Insert Tip / H : HSS / W : Carbide

d MIN. and D MAX. are the figures only for the selection of the main body.

TAPER	Code No.	d MIN.	D MAX.	L	L1	ℓ	ℓ1	C	C1	C2	Weight (kg)	Arbor Code No.
No.40	BT40-AF1-20-OH	16	32	185	143	7	35	60	90	32	4.5	BF120-d-D-T
	(IT40) -30-OH	29	58	205	153		45				4.8	BF130-d-D-T
	-40-OH	40	80	225	163		55				5.0	BF140-d-D-T
No.50	BT50-AF1-20-OH	16	32	160	118	7	35	60	90	32	6.0	BF120-d-D-T
	(IT50) -30-OH	29	58	180	128		45				6.5	BF130-d-D-T
	-40-OH	40	80	200	138		55				7.0	BF140-d-D-T
	BT50-AF2-50-OH	50	90	230	158	7	65	73	112	40	9.0	BF250-d-D-T
	(IT50) -60-OH	60	100	250	168		75				9.5	BF260-d-D-T
	-70-OH	70	130	270	178		85				10.0	BF270-d-D-T
	-80-OH	80	160	290	188		95				10.5	BF280-d-D-T
	-90-OH	90	180	310	198		105				11.0	BF290-d-D-T

Please specify φd, φD, t, T, h and material, when ordering.



Material	Hole Dia. φd	Facing Dia. φD	Facing Depth t	Thickness T	Space h

Grade : Coated Material : Steel, Cast Iron

Code No.	Dimension	A	B	T	Φd	Nose R	Tip Clamp Bolt	Tip Clamp Handle
AFC- 9		9.5	6.4	2.4	2.8	0.4	M2545S	T8
-15		15	7	3.2	3.5	0.8	M3065S	8IP
-20		20.5						
-27		27.4						
-35		35	9.4	5.4	3.5 2 pcs		M3090 2 pcs	T8
-45		45						

■Processing example of minimum hole diameter Φ14



Bit(HSS)
9BF120-14-25-30C-H

Back Spot Facing Arbor Main Body

Changeable Arbor
BF120-14-25-30C

Specification of hole diameter Φ14.

■Maximum facing diameter : Φ25 (for M12 bolt head)
■Material of bit : Powdered HSS + Ion Nitrided + TIAIN Coated
■With coolant hole.
■Reference Cutting Speed
Material : S50C(JIS) / Hole dia. "d" : Φ14
Facing dia. "D" : Φ25 / Thickness "T" : 30mm
V=20~30m/min. f=0.05~0.1mm/rev.

CHANGEABLE ARBOR for Automatic Back Spot Facing Arbor

NIKKEN

BF



Explanation of the Code No.

BF 1 20 - 16 - 31 - 30 C -

- Symbol of Changeable Arbor
- 1:AF1 type 2:AF2 type
- Stroke
- Hole Dia. Φd (mm)
- Facing Dia. ΦD (mm)
- Thickness of the Material (mm)
- :Side Lock C:Modular
- :Oil Hole N:No Oil Hole

★ The following list shows the concepts for the changeable arbor.Please order your own arbor to suit your application.

Changeable Arbor Code No.	Facing Dia. D	Facing Depth d	Thick T	h_1	h_2	C_2	Bit $W_1 \times W_2$	Main Body Code No.
BF120-d-D-TC	18~ 32	14.0~17.7	30	32	63	32	8× 4	BT40,50-AF1-20-OH
BF120-d-D-TC	20~ 36	17.8~19.9		30	65		10× 6	
BF120-d-D-TC	23~ 40	20.0~22.4						
BF120-d-D-TC	26~ 45	22.5~25.9					10× 8	
BF120-d-D-TC	29~ 50	26.0~28.9		35	68		12× 8	
BF120-d-D-TC	32~ 50	29.0~31.9		36	73		15×10	
BF130-d-D-TC	51~ 58				83			BT40,50-AF1-30-OH
BF120-d-D-TC	36~ 55	32.0~35.9			73			-AF1-20-OH
BF130-d-D-TC	56~ 63				83			-AF1-30-OH
BF120-d-D-TC	40~ 55	36.0~39.9			73		15×12	-AF1-20-OH
BF130-d-D-TC	56~ 73				83			-AF1-30-OH
BF120-d-D-TC	45~ 60	40.0~44.9		39	79		18×15	-AF1-20-OH
BF130-d-D-TC	61~ 75				89			-AF1-30-OH
BF140-d-D-TC	76~ 80				99			-AF1-40-OH
BF120-d-D-TC	50~ 60	45.0~49.9			79			-AF1-20-OH
BF130-d-D-TC	61~ 75				89			-AF1-30-OH
BF140-d-D-TC	76~ 90				99			-AF1-40-OH
BF250-d-D-TC	65~ 75	45.0~49.9		65	109	40	18×15	-AF2-50-OH
BF260-d-D-TC	75~ 85			70	119			-AF2-60-OH
BF270-d-D-TC	80~ 90			75	129			-AF2-70-OH
BF250-d-D-TC	75~ 85	50.0~54.9		65	111		20×15	-AF2-50-OH
BF260-d-D-TC	85~ 95			70	121			-AF2-60-OH
BF270-d-D-TC	90~100			75	131			-AF2-70-OH
BF250-d-D-TC	85~ 95	55.0~61.9		65	111			-AF2-50-OH
BF260-d-D-TC	95~105			70	121			-AF2-60-OH
BF270-d-D-TC	100~110			75	131			-AF2-70-OH
BF250-d-D-TC	95~105	62.0~69.9		65	118		22×18	-AF2-50-OH
BF260-d-D-TC	105~115			70	121			-AF2-60-OH
BF270-d-D-TC	110~120			75	138			-AF2-70-OH
BF250-d-D-TC	105~115	70.0~74.9		65	118			-AF2-50-OH
BF260-d-D-TC	115~125			70	121			-AF2-60-OH
BF270-d-D-TC	120~130			75	138			-AF2-70-OH

MANUAL BACK SPOT FACING ARBOR

NIKKEN

JAPAN, CHINA PAT.

e.g. ST32-MF53-84-300

Arbor shank is straight shank. Please use side lock holder (BT50-SL32C-105☞P.47).

MF



★Please specify Φd, ΦD, t, T, h and material, when ordering. H (Dimension for bit in/out) is depended on Φd and ΦD.

Bit IN

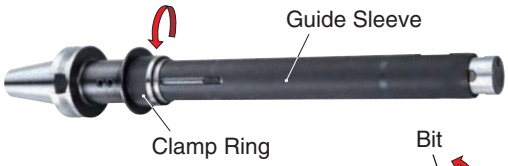

Bit OUT

Operation

1. X, Y Positioning
2. Z down (Insert the arbor into the hole.)
3. Rotate clamp ring causes guide sleeve forward to push the bit out.
4. Z up (Back spot facing)
5. Z Down
6. Rotate clamping in reverse direction causes guide sleeve backward to store the bit in.
7. X, Y Moving

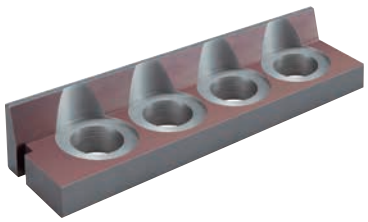

Sample

Material : FCD200 V=30m/min.
Hole : Φ53 f=0.1mm/rev.
Facing Dia. : Φ84

IT TOOLING SYSTEM

NIKKEN

What is IT Shank Tooling?

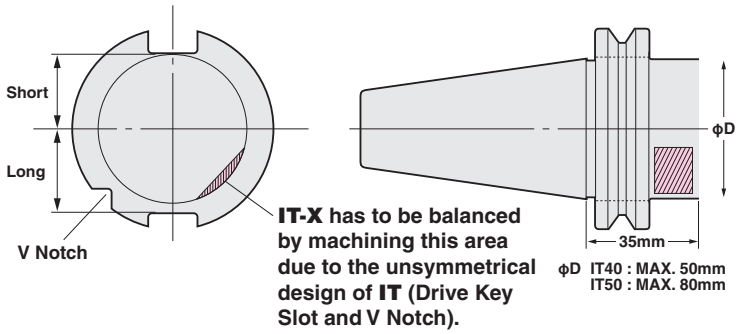

IT shank is based on ISO 7388/1-'83 (DIN69871-'90) and its flange has an unsymmetrical shape.
-Depth of Drive Key Slots are different.
-V Notch on one side.
Therefore, NIKKEN IT_X shank has a groove at bottom of V groove for mass balancing.
Diameter **"D"** below the flange is restricted under the above standard. Normally the holder for large diameter cutter has a large body, therefore, large diameter at **"D"** is expected. However, in case of IT Shank large diameter tool holder, **"D"** is smaller than the front end part due to the standard, and the length from gauge line is also different from BT Shank tool holders.

IT MULTI LOCK MILLING CHUCK

NIKKEN

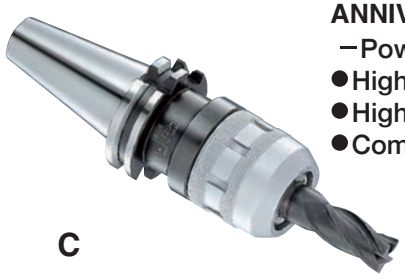

C

Centre Through

ANNIVERSARY Type
−Powerful gripping torque−
- **High rigidity**
- **High precision**
- **Compact design**

C12A

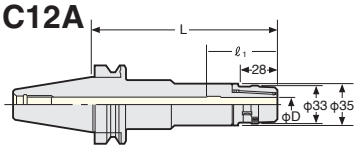

C16~C42

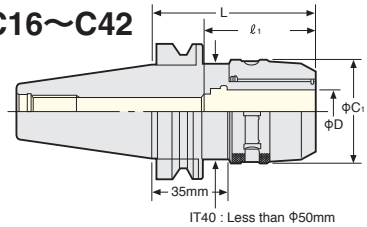

IT40 : Less than Φ50mm
IT50 : Less than Φ80mm

TAPER	ITNo. -D -L Code No.	C1	L	ℓ1	Collet	Weight (kg)
No.40	IT40-C12- 65, 90*1, 120*1	33	65, 90, 120	58	KM12 CCK12	1.3, 1.6, 1.8
	-C16- 60, 90*1, 120*1	44	60, 90, 120	65	KM16 CCK16	1.4, 1.7, 2.0
	-C20- 80, 90, 105, 120*2	52	80, 90, 105, 120	80	KM20 CCK20 CCNK20	1.6, 1.8, 2.0, 2.2
	-C25- 85, 105, 120	60	85, 105, 120	80	KM25 CCK25 CCNK25	2.1, 2.3, 2.5
	-C32- 95, 105, 120	64	95, 105, 120	82, 95, 105	KM32 CCK32 CCNK32	2.1, 2.5, 2.8
No.50	IT50-C12-105, 135, 165*1	33	105, 135, 165	58	KM12 CCK12	4.0, 4.3, 4.6
	-C16-105, 135, 165*1	44	105, 135, 165	65	KM16 CCK16	4.2, 4.6, 5.1
	-C20-105, 135, 165, 180*1	52	105, 135, 165, 180	80	KM20 CCK20 CCNK20	4.5, 5.1, 5.7, 6.0
	-C25-105, 135, 165	60	105, 135, 165	80	KM25 CCK25 CCNK25	4.8, 5.2, 5.6
	-C32- 85, 105, 120, 135, 165	69	85, 105, 120, 135, 165	105	KM32 CCK32 CCNK32	4.1, 4.6, 5.1, 5.6, 6.4
	-C42-*3 95,*2 105, 135,*1 165*1	86	95, 105, 135, 165	125	KM42 CCK42 CCNK42	5.2, 5.5, 7.2, 8.6

★Spanner is available as an option.
C12(φ30):9HC12, C12A(φ33):9HC12A, C16:9HC16, C20: 9HC20, C25: 9HC25, C32&φC1=64:9HC25, C32:9HC32, C42:9HC42

★Please note the acceptable shank tolerance is h7.
★For **KM**, **CCK** and **CCNK** Collet, please refer ☞ **P.274, P.275.**
★**For heavy duty milling, please grip the end mill shank longer than ℓ1.**
★**For Milling Chucks marked ＊2, NK Collet, CCNK Collet, ONK Collet and OJK Collet can not be used.**
★**Milling chucks marked ＊1 are available as an option.**
★**IT50-C32-200, 250** and **IT50-C42-200,250** are also available as an option.
★C22 style is also available.
★Please add "**C**" for the centre through tool coolant type.
IT40-C20C-80, 90, 105, 120
-C25C-85, 105
-C32C-95, 105, 120
IT50-C20C-105, 135, 165*1
-C25C-105, 135, 165*1
-C32C- 85, 105, 135, 165
-C42C-105
★Please add "**F**" for the flange through tool coolant type.
IT40-C20F- 90, 120*1
-C25F- 90, 120*1
-C32F-105
IT50-C20F-105, 135, 165*1
-C25F-105, 135, 165*1
-C32F-105, 135, 165
-C42F-120
★**＊3 C42 Milling Chuck is High Pressure Center Coolant Through type as standard.**

High Speed Milling Chuck

High Pressure Centre Through (MAX. 7MPa)

GH Handle ☞ **P.293**

Code No.	MAX. (r/min)	Code No.	MAX. (r/min)
IT40X-C12- 65G, 90G	30,000	IT50X-C12-105G, 135G*1	20,000
-C16- 60G, 90G	25,000	-C16-105G, 135G*1	
-C20- 80G, 90G		-C20-105G, 135G*1	
-C25- 85G	20,000	-C25-105G, 135G*1	
-C32- 95G, 105G		-C32- 85G, 105G, 120G	15,000
		-C42- 95P,*2 105P	

★For Milling Chucks except ＊2, Stopper for Direct Chucking, **ONK** Collet and **OJK** Collet can be used.
★The extended gauge length (**L**) is available. Please contact with us.
★The end mill shank tolerance is recommended to be h6.

IT

IT SLIM CHUCK

NIKKEN

High precision
High speed
Powerful gripping

SK

Centre Through

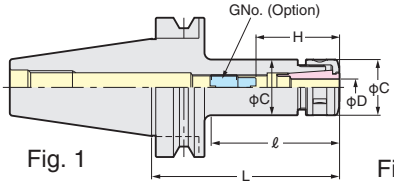

Fig. 1

Fig. 2



Fig. 3



•When SK J type nut is used, the total chuck length will be extended by 6mm.
•When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.

TAPER	Code No.	D	ℓ	ℓ1	C	C1	H	G No. (Option)	Weight (kg)	Fig.	SK Collet
No.40	IT40-SK 6- 60	0.7～6.0	38	–	19.5	–	21～35	SKG-8	1.0	1	SK 6
	- 90		48	–		–			1.1	1	
	-120		62	82		32			1.2	2	
	-150		60	112		25			1.4	3	
	-SK10- 60	1.75～10.0	40	–	27.5	–	30～50	SKG-12L	1.1	1	SK10
	- 90		50	–		–			1.2	1	
	-120		60	82		32			1.4	2	
	-150		73	112		33.5			1.6	3	
	-180		73	144		39			1.7	3	
	-SK13- 60	2.75～13.0	40	–	33	–	31～65	SKG-15	1.3	1	SK13
	- 90		50	–		–			1.4	1	
	-120		80	–		–			1.6	1	
	-150		88	114		40			1.8	3	
	-180		88	144		40			1.9	3	
	-SK16- 60	2.75～16.0	40	–	40	–	40～70	SKG-18S	1.4	1	SK16
	- 90		54					SKG-18L	1.5	1	
	-120		84						1.7	1	
	-150		114						1.9	1	
	-180		144						2.0	1	
	-SK20- 90	3.5～20.0	70	–	48.5	–	47～80	SKG-22	1.7	1	SK20
	-120		100						1.9	1	
	-SK25- 90	7.5～25.4	70	–	55	–	55～75	SKG-28	1.8	1	SK25
	-120		100						2.0	1	
No.50	IT50-SK 6-105	0.7～6.0	60	–	19.5	–	21～35	SKG-8	3.7	1	SK 6
	-135		62	93		32			3.9	2	
	-165		62	117		32			4.1	2	
	-200		60	154		30			4.3	3	
	-SK10-105	1.75～10.0	65	–	27.5	–	30～50	SKG-12L	4.2	1	SK10
	-135		70	95		32			4.4	2	
	-165		75	125		32			4.6	2	
	-200		75	154		36			5.0	3	
	-SK13-105	2.75～13.0	65	–	33	–	31～65	SKG-15	4.5	1	SK13
	-135		95	–		–			4.7	1	
	-165		92	125		45			4.8	2	
	-200		92	160		45			5.3	3	
	-SK16-105	2.75～16.0	65	–	40	–	40～70	SKG-18L	4.7	1	SK16
	-135		95	–		–			4.9	1	
	-165		90	125		50			5.1	2	
	-200		90	160		50			5.5	2	
	-SK20-105	3.5～20.0	65	–	48.5	–	47～80	SKG-22	4.8	1	SK20
	-135		95						5.1	1	
	-165		125						5.4	1	
	-200		160						5.8	1	
	-SK25-105	7.5～25.4	65	–	55	–	50～85	SKG-28	4.8	1	SK25
	-135		95						5.2	1	
	-165		125						5.6	1	
	-200		160						6.0	1	

★Collet, adjust screw (G No.) and spanner are available as an option.
The Code No. of the spanner is **SK6 (C=φ18) : SKL-6, SK6 (C=φ19.5) : SKL-6W, SK10: SKL-10, SK13: 9HC12A, SK16: 9HC16, SK20: 9HC22, SK25: 9HC25**

★Please refer ☞ **P.277** for **SK** collet and please refer ☞ **P.279** for **J** type nut,.
★Please refer ☞ **P.131** for the center through coolant type and flange through coolant type.

High Speed SLIM CHUCK

Centre Through

GH Handle ☞ P.293

Code No.	MAX. (r/min)	Code No.	MAX. (r/min)
IT40X-SK 6- 60P, 90P, 120P	30,000	IT50X-SK 6-105P, 165P	20,000
-SK10- 60P, 90P, 120P		-SK10-105P, 165P	
-SK13- 60P, 90P, 120P		-SK13-105P, 165P	
-SK16- 60P, 90P, 120P	25,000	-SK16-105P, 165P	
-SK20- 90P, 120P		-SK20-105P, 165P	
-SK25- 90P, 120P	20,000	-SK25-105P, 165P	15,000

★The extended gauge length **(L)** is available. Please contact with us.

IT SLIM CHUCK CENTRE THROUGH TYPE

NIKKEN

High precision
High speed
Powerful gripping

SK-C

High Pressure Centre Through (MAX. 7MPa)

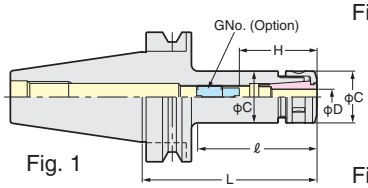

Fig. 1



Fig. 2



Fig. 3

- **When SK J type nut is used, the total chuck length will be extended by 6mm.**
- **When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.**

TAPER	Code No.	D_1	H_1	L_2	L_3	C_1	C_2	G No. (Option)	Weight (kg)	SK Collet
No.40	IT40-SK 6C- 90	4～6	26～31	48	–	19.5	–	SKG6-6HG	1.1	SK 6
	-120			62	82		32		1.2	
	-SK10C- 90	5～10	33～41	50	–	27.5	–	SKG10-10HG	1.2	SK10
	-120			60	82		32		1.4	
	-SK13C- 90	5～13	39～51	50	–	33	–	SKG13-10HG	1.4	SK13
	-120			80					1.6	
	-SK16C- 90	10～16	45～57	54	–	40	–	SKG16-12HG	1.5	SK16
	-120			84					1.7	
	-SK20C- 90	10～20	47～63	70	–	48.5	–	SKG20-18HG	1.7	SK20
	-120			100					1.9	
	-SK25C- 90	16～25	60～65	70	–	55	–	SKG25-18HGD	1.8	SK25
	-120		60～70	100				SKG25-24HG	2.0	
No.50	IT50-SK 6C-105	4～6	26～31	60	–	19.5	–	SKG6-6HG	3.7	SK 6
	-165			62	117		32		4.1	
	-SK10C-105	5～10	33～41	65	–	27.5	–	SKG10-10HG	4.2	SK10
	-165			75	125		32		4.6	
	-SK13C-105	5～13	39～51	65	–	33	–	SKG13-10HG	4.5	SK13
	-165			92	125		45		4.8	
	-SK16C-105	10～16	45～57	65	–	40	–	SKG16-12HG	4.7	SK16
	-165			90	125		50		5.1	
	-SK20C-105	10～20	47～63	65	–	48.5	–	SKG20-18HG	4.8	SK20
	-165			125					5.4	
	-SK25C-105	16～25	60～70	65	–	55	–	SKG25-24HG	4.8	SK25
	-165			125					5.6	

IT SLIM CHUCK FLANGE THROUGH TYPE

SK-F **High Pressure Centre Through(MAX. 7MPa)**

- **When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.**

TAPER	Code No.	D	H	ℓ	ℓ1	C	C1	G No. (Option)	Weight (kg)	SK Collet
No.40	IT40-SK 6F- 90	4～6	26～31	48	–	19.5	–	SKG6-6HG	1.1	SK 6
	-120			62	82		32		1.2	
	-SK10F- 90	5～10	33～41	50	–	27.5	–	SKG10-10HG	1.2	SK10
	-120			60	82		32		1.4	
	-SK13F- 90	5～13	39～51	50	–	33	–	SKG13-10HG	1.4	SK13
	-120			80					1.6	
	-SK16F- 90	10～16	45～50	54	–	40	–	SKG16-12HGB	1.5	SK16
	-120		45～57	84				SKG16-12HG	1.7	
	-SK20F- 90	10～20	57～63	70	–	48.5	–	SKG20-18HGB	1.7	SK20
	-120		47～63	100				SKG20-18HG	1.9	
	-SK25F-120	16～25	55～65	100	–	55	–	SKG25-24HGA	2.0	SK25
No.50	IT50-SK 6F-105	4～6	26～31	60	–	19.5	–	SKG6-6HG	3.7	SK 6
	-165			62	117		32		4.1	
	-SK10F-105	5～10	33～41	65	–	27.5	–	SKG10-10HG	4.2	SK10
	-165			75	125		32		4.6	
	-SK13F-105	5～13	39～51	65	–	33	–	SKG13-10HG	4.5	SK13
	-165			92	125		45		4.8	
	-SK16F-105	10～16	45～57	65	–	40	–	SKG16-12HG	4.7	SK16
	-165			90	125		50		5.1	
	-SK20F-105	10～20	47～63	65	–	48.5	–	SKG20-18HG	4.8	SK20
	-165			125					5.4	
	-SK25F-105	16～25	55～62	65	–	55	–	SKG25-24HGA	4.8	SK25
	-165		55～70	125				SKG25-24HG	5.6	

★Collet, adjust screw (G No.) and spanner are available as an option. The Code No. of the spanner is **SK6 (C=φ19.5) : SKL-6W, SK10: SKL-10, SK13: 9HC12A, SK16: 9HC16, SK20: 9HC22, SK25: 9HC25**

★Please refer ☞ P.277 for **SK** collet and please refer ☞ P.279 for **J** type nut,.

High Speed SLIM CHUCK

GH Handle ☞ P.293

Code No.	MAX. (r/min)	Code No.	MAX. (r/min)
IT40X-SK 6C(F)- 90P, 120P	30,000	IT50X-SK 6C(F)-105P, 165P	20,000
-SK10C(F)- 90P, 120P		-SK10C(F)-105P, 165P	
-SK13C(F)- 90P, 120P		-SK13C(F)-105P, 165P	
-SK16C(F)- 90P, 120P	25,000	-SK16C(F)-105P, 165P	
-SK20C(F)- 90P, 120P		-SK20C(F)-105P, 165P	
-SK25C(F)- 90P, 120P	20,000	-SK25C(F)-105P, 165P	15,000

★The extended gauge length **(L)** is available. Please contact with us.

NIT MAJOR DREAM HOLDER

NIKKEN

MDSK
Centre Through

Difference of the swarfs

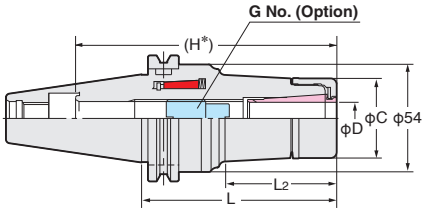

(H*) : MAX. H without adjust screw.

Please use Jet Coolant Splash for better swarf generation. ☞P. 53

TAPER	Code No.	D	L2	C	H	H1	G No. (Option)	Weight (kg)	SK Collet
No.40	NIT40N-MDSK 6- 60	3.0～6.0	18	19.5	86	21～35	SKG-8	0.8	SK 6-A
	- 75		33		101			0.9	
	- 90		48		116			1.1	
	-105		63		131			1.2	
	-120		78		146			1.4	
	-MDSK10- 60	3.0～10.0	19	27.5	86	30～50	SKG-12L	1.1	SK10-A
	- 75		33		101			1.3	
	- 90		48		116			1.5	
	-105		63		131			1.6	
	-120		78		146			1.8	
	-150		110		176			2.2	
	-180		141.2		206			2.4	
	-MDSK13- 65	3.0～13.0	24	33	86	31～60	SKG-15	1.2	SK13-A
	- 75		33		101			1.4	
	- 90		48		116			1.7	
	-105		63		131			1.8	
	-120		78		146			2.0	
	-150		110		176			2.4	
	-180		144		206			2.6	
	-MDSK16- 65	3.0～16.0	24	40	86	45～60	SKG-18L	1.2	SK16-A
	- 75		33		101	45～70		1.5	
	- 90		48		116			1.9	
	-105		64		131			2.0	
	-120		80		146			2.2	
	-150		113		176			2.5	
	-180		144.6		206			2.8	
	-MDSK20- 75	4.0～20.0	41.2	48	80	50～73	SKG-12	1.9	SK20-A
	- 90		55		95		SKG-12-55L	2.1	
	-105		70		110		SKG12-70L	2.3	
	-120		85		125		SKG-12-85L	2.6	
No.50	NIT50N-MDSK 6-105	3.0～6.0	48	19.5	116	21～35	SKG-8	3.6	SK 6-A
	-120		63		131			3.7	
	-135		78		146			3.9	
	-MDSK10-105	3.0～10.0	48	27.5	116	30～50	SKG-12L	4.3	SK10-A
	-120		63.2		131			4.4	
	-135		78.2		146			4.7	
	-165		110.2		176			5.0	
	-195		141.2		206			5.3	
	-MDSK13-105	3.0～13.0	48	33	116	31～60	SKG-15	4.2	SK13-A
	-120		63		131			4.7	
	-135		78		146			5.0	
	-165		110		176			5.3	
	-195		144		206			5.6	
	-MDSK16-105	3.0～16.0	48	40	116	45～70	SKG-18L	4.1	SK16-A
	-120		64		131			4.9	
	-135		80.1		146			5.2	
	-165		114.7		176			5.5	
	-195		144.6		206			5.8	
	-MDSK20-105	4.0～20.0	42	48	159	47～80	SKG-22	4.9	SK20-A
	-135		72		175			5.3	
	-165		102		205			5.9	
	-195		132		235			6.7	
	-MDSK25-105	8.0～25.4	42	55	159	55～85	SKG-28	4.9	SK25-A
	-135		74		175			5.7	
	-165		105		205			6.5	
	-195		135		235			7.5	

★**Please use A type SK collet that is available as an option for end milling operation.** ☞P.277
★Please refer ☞P.279 for Jet coolant J type nut and cap.
★**GH Handle** is available as an option. ☞P.293 Please order with the Code No. **MDSK10 : GH10, MDSK13 : GH12, MDSK16 : GH16, MDSK20 : GH20, MDSK25 : GH25.**
★**Please add "P" at the end of Code No. for high speed holder, e.g. NIT40N-MDSK10-60P.**
★**φC2 of NIT40N is larger than the dimension of the IT40 standard.**

IT

IT ANNIVERSARY TYPE VC HOLDER

NIKKEN

VC
Centre Through

With TiN Bearing Nut
MAX.30,000r/min&G2.5
Run-Out Accuracy : 3μm at 4D

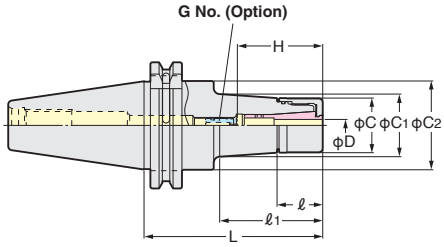

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	C2	H	G No. (Option)	Weight (kg)	MAX. (r/min)	Collet
No.40	IT40X-VC 6- 60	2.0～6.0	60	23	23	27.5	27.5	44.7	35～45	VCG 6- 8A	1.1	30,000	VCK 6
	- 90		90		51.9		31.5				1.3		
	-120		120		81.9		35.7				1.5		
	-VC13- 60	3.0～12.0	60	29	29	40	40.0		50～60	VCG13-15A	1.2		VCK13
	- 90		90		70		44.7				1.5		
	-120		120		100						1.9		
No.50	IT50X-VC 6-105	2.0～6.0	105	23	64.9	27.5	33.4	70.1	35～45	VCG 6- 8A	3.9	20,000	VCK 6
	-135		135		94.9		37.6				4.1		
	-165		165		124.9		41.8				4.4		
	-VC13-105	3.0～12.0	105	29	64.9	40	45.0		50～60	VCG13-15A	4.1		VCK13
	-135		135		94.9		49.2				4.5		
	-165		165		124.9		53.4				4.9		

★TiN Bearing Nut is supplied as standard.
★When the axial stopper is required, please use Adjust Screw (G No.)
★Please add "**-RP**" at the end of Code No. for Rust Proof Treatment **VC** Holder.
e.g. IT40X-VC13-60-RP
★Please use **VC J** type Nut & Cap for Centre Through Coolant.
When **VC J** type Nut is used, the total holder length will be extended to 6mm.
★Please refer ☞**P.40** for **VCK Collet.**

★**IT40X-VC6-150, IT40X-VC13-150, IT50X-VC13-90, -120** are available as semi-standard.
★Collet, adjust screw (G No.) ☞**P.282,P284** and **GH Handle** are available as an option.
The Code No. of the **GH Handle** is **VC6: GH10, VC13: GH16** ☞ **P.293**
★All series are for High Speed Rotation.

Please refer ☞**P.293**

IT MINI-MINI CHUCK JAPAN PAT.

The best chuck for the small dia.cutting tool

NIKKEN

MMC
High Pressure Centre Through (MAX. 7MPa)

MAX. 30,000r/min&G2.5
Gripping from Front Nose
Run-Out Accuracy : 3μm at 4D

Clamp/Unclamp just with a wrench.

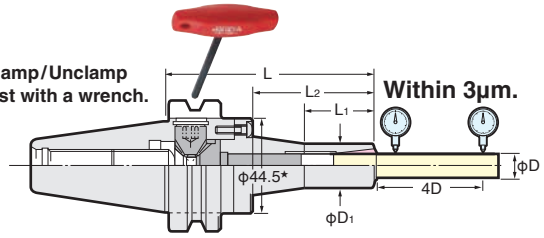

Within 3μm.

★ : MMC12 = φ52.4

TAPER	Code No.	Chucking Range φD	L	φD1	L1	Collet	MAX.(r/min)	Weight(kg)
No.40	IT40X-MMC 4 - 90-AA	1 ～ 4	90	15	30	MPK 4	30,000	1.2
	-MMC 8C- 90-AA	2 ～ 8	90	20	33	PMK 8	30,000	1.4
	-120-AA		120		40	VMK 8		1.5
	-MMC12C- 90-AA	4 ～12	90	30	35	PMK12	30,000	1.7
	-120-AA		120		60	VMK12		1.8
No.50	IT50X-MMC 4 -105-AA	1 ～ 4	105	15	30	MPK 4	20,000	3.8
	-MMC 8C-105-AA	2 ～ 8	105	20	33	PMK 8	20,000	4.4
	-135-AA		135		40	VMK 8		4.5
	-165-AA		165					4.6
	-MMC12C-105-AA	4 ～12	105	30	35	PMK12	20,000	4.6
	-135-AA		135		60	VMK12		4.7
	-165-AA		165		70			4.8

★Wrench **MMC4, MMC8C : EA573KL-6 MMC12C : MMCL12-M6W(IT40X) :**
MMC12C : MMCL12-M6T62(IT50X) is attached as standard.
★**MPK**, **PMK**, **VMK** collet is not included with MINI-MINI Chuck. Please refer ☞**P.284**
★Center through coolant type MINI-MINI Chuck is available for **MMC8** and **MMC12** type only.
★Please add "**F**" for the flange through tool coolant type; **IT40X-MMC 8F- 90-AA,120-AA IT50X-MMC 8F-105-AA,120-AA**
-MMC12F- 90-AA,120-AA -MMC12F-105-AA,120-AA

IT ZERO FIT TYPE MILLING CHUCK

NIKKEN

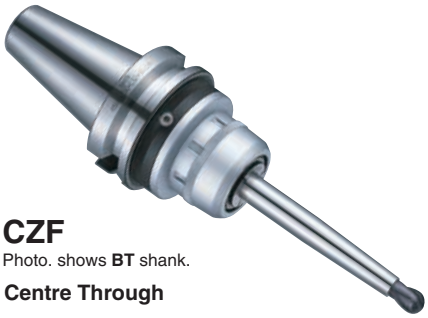

CZF

Photo. shows **BT** shank.

Centre Through

Fig.1



Fig.2

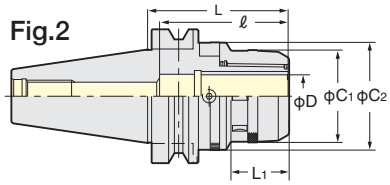

Explanation of the Code No.

IT40 CZF 32 – 120

- Nominal Gauge Length
- Chucking Capacity
- Zero Fit Type Milling Chuck
- Shank No.

TAPER	Code No.	C1	C2	L	L1	L2	ℓ	Weight (kg)	Fig.	Collet
No.40	IT40-CZF20-105	51.5	66.5	105	35	70	80	2.1	1	KM20 CCK20
	-CZF25-105	59.5	74.5	105	35	70	80	2.4		KM25 CCK25
	-CZF32-120	69	80.5	120	42	85	105	2.8		KM32 CCK32
No.50	IT50-CZF20-105	51.5	66.5	105	35	–	80	4.7	2	KM20 CCK20
	-CZF25-105	59.5	74.5	105	35	–	80	5		KM25 CCK25
	-CZF32-120	69	80.5	120	42	–	105	5.3		KM32 CCK32

★Spanner is available as an option.
CZF20 type : 9HC22, CZF25 type : 9HC25, CZF32 type : 9HC32

★Please note that the acceptable shank tolerance is h6~h7.
★Please add "**P**" at the end of Code No. for the high speed type. **e.g. IT40-CZF25-105P**
★Wrench to adjust run-out (**9ZFL**) is available as an option.
★Multi-Cam style is available. **e.g. IT40-CZF32-120-C3**. (3 Cams) Please contact us for more detail.

★Please refer ☞ **P.273, P.274** for **KM**, **CCK** collet.

Wrench to adjust
9ZFL

- **In case of CZF (Milling Chuck) style, please rotate the Adjust Cam to the free position. Then, tighten the nose ring until face contact.**
  If the face contact is not completed, the Adjust Cam can not function. (Free run)
  If the Adjust Cam is not at the free position before tightening, you can not tighten the nose ring until face contact correctly.
- **For the safety reason, the Cam Ring Lock Screws can not be loosen to remove to the outside.**
  Please loose the Cam Ring Lock Screws slightly to rotate the Cam Ring.

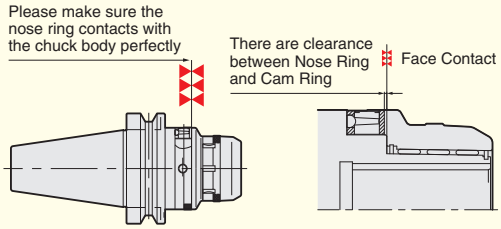

IT ZERO FIT TYPE SLIM CHUCK

NIKKEN

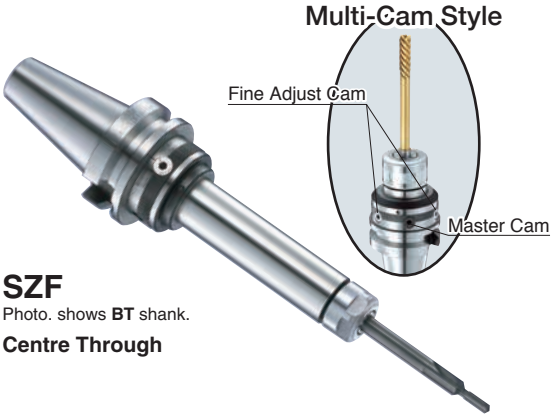

SZF

Photo. shows **BT** shank.

Centre Through

Fig.1

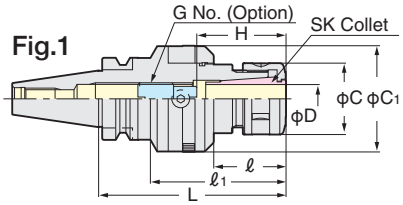

Fig.2

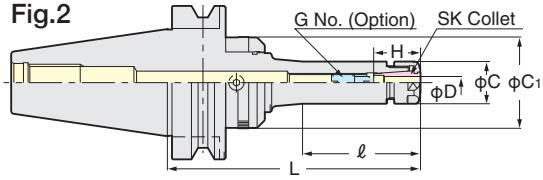

Explanation of the Code No.

IT40 SZF 10 – 120

- Nominal Gauge Length
- Chucking Capacity
- Zero Fit Type Slim Chuck
- Shank No.

•When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	Weight (kg)	Fig.	Collet
No.40	IT40-SZF 6- 90, 150	0.7~6.0	90, 150	45, 60	–	19.5	40.5, 48.5	21~35	SKG- 8	1.3, 1.7	2	SK 6
	-SZF10-120, 150	1.75~10.0	120, 150	57, 87	–	27.5	48.5	30~50	SKG-12L	1.6, 1.9	2	SK10
	-SZF16-120, 150	2.75~16.0	120, 150	51, 81	–	40	59.5	40~70	SKG-18L	1.9, 2.2	2	SK16
	-SZF25-120, 150	16.0~25.4	120, 150	49 ,79	85, 115	55	66.5	55~85	SKG-28	2.4, 2.9	1	SK25
No.50	IT50-SZF 6-105, 165	0.7~6.0	105, 165	60, 67	–	19.5	40.5, 59.5	21~35	SKG- 8	4.0, 4.2	2	SK 6
	-SZF10-105, 165	1.75~10.0	105, 165	60, 65	–	27.5	48.5, 59.5	30~50	SKG-12L	4.5, 4.9	2	SK10
	-SZF16-105, 165	2.75~16.0	105, 165	60, 120	–	40	59.5	40~70	SKG-18L	5.0, 5.4	2	SK16
	-SZF25-120, 165	7.5~25.4	120, 165	75, 120	–	55	66.5	55~85	SKG-28	5.7, 6.0	2	SK25

★Adjust screw (G No.) , wrench to adjust run-out (**9ZFL**) and **SKL** spanner are available as an option. **SZF6: SKL-6W, SZF10: SKL-10, SZF16: 9HC16, SZF25: 9HC25**

★**Please use "P" class or "A" type SK collet.** ☞ **P.277**
★For centre through coolant application please use **SK J** type nut and cap for your preference. Please note that the length of **J** type nut is 6mm longer than the standard **SK** nut.
★For High Speed type, Code No. is **"SZF-P"** . **e.g. IT40-SZF10-120P**
★Multi-Cam style is available. **e.g. IT40-SZF16-120-C3**. (3 Cams) Please contact us for more detail.

UNIVERSAL MICRO TOUCH

NIKKEN

3D Electronic Edge Detector of Basic Point

- Precision Touch Sensor
  Repeatability ±2 micron.
- Long Safety Over-Travel Distance protects from damage. X , Y= ±7mm Z= 3mm
- Red lamp and electronic beep sound notice the touching position. When touching to the work piece, red lamp immediately lights up all around. The one with BT shank gives the electronic beep sound also to make double notices.

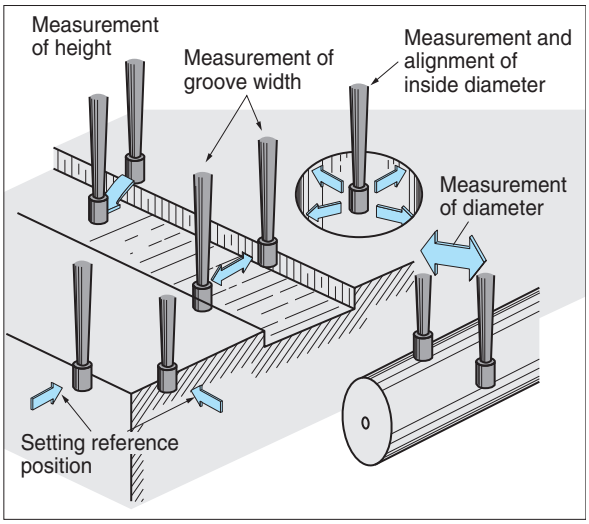

- Tools that have treated RP will not conduct electricity. RP treatment cannot be performed on measuring tools that detect workpiece contact through electrical conduction.
- Even if you hold an electrically conductive type straight shank measuring tool with a tool treated RP, workpiece contact will not be detected. Please use an internal contact type straight shank micro touch (**UMTX** ☞**P.136**).

How to obtain touching position

Make the stylus slowly get near to the measuring surface of work piece and the red lamp will light at the moment when the former touches the latter. A position where 3mm is compensated from that position (because of 6mm stylus diameter), is the touching position to be obtained.

Straight Shank UMT MICRO TOUCH

UMT

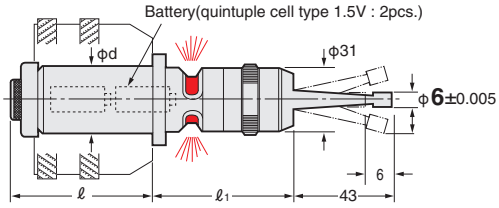

Code No.	φd	ℓ	ℓ1	Weight (kg)
S20-UMT	20	68	61	0.4
S32-UMT	32	65	65	0.7
MT2-UMT	MT2	66.5	75	0.4

★Ball type φ6mm stylus is also available : **S32-UMTB**

BT-UMT-W MICRO TOUCH

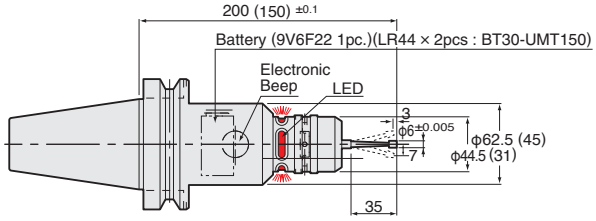

Dimensions in parentheses are same as **BT30-UMT150**

TAPER	Code No.	Weight (kg)
No.30	**BT30-UMT200W**	2.1
	-UMT150	1.0
No.40	**BT40-UMT200W**	2.7
No.50	**BT50-UMT200W**	5.0

★Ball type φ6mm stylus is also available : **BT40-UMTB200**
★**IT40-UMT200W** and **IT50-UMT200W** are also available.

BT-UMTH

MICRO TOUCH for ring sensor

For Machining Centre with ring sensor, the electric circuits are different from standard, please purchase this through M/C Builder.

BT30-UMT

UNIVERSAL MICRO TOUCH with INTERNAL CONTACT SYSTEM NIKKEN

Internal Contact System - can be used for not conductive work piece.

- Precision Touch Sensor
  Repeatability ±2 micron.
- Long Safety Over-Travel Distance protects from damage. X , Y= ±7mm Z= 3mm
- Not conductive work piece can be measured. Internal contact system is built-in.
  Blue lamp and electronic beep sound notice the touching position. After touching to the work piece, blue lamp lights up all around. The one with BT shank gives the electric beep sound also to make double notices.

How to obtain touching position

Make the stylus slowly get near to the measuring surface of work piece and the blue lamp will light at the moment when the former touches the latter. A position where 2mm is compensated from that position (because of 4mm stylus diameter) , is the touching position to be obtained.

Photo shows with ruby stylus (option).

Straight Shank UMTX MICRO TOUCH

UMTX

Ruby stylus is available as an option.

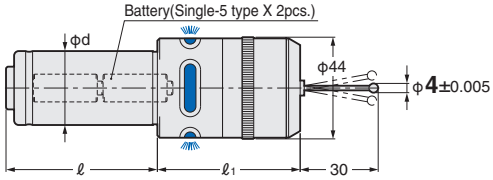

Code No.	φd	ℓ	ℓ1	Weight (kg)
S20-UMTX	20	68	64	0.5
S32-UMTX	32	65	64	0.8
MT2-UMTX	MT2	66.5	64	0.5

★Battery is supplied as standard.
★The delay of the system is within 0.01mm, because of the internal contact system.

BT-UMTX MICRO TOUCH

BT-UMTX

Ruby stylus is available as an option.

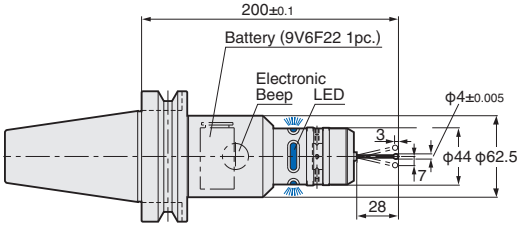

TAPER	Code No.	Weight (kg)
No.30	**BT30-UMTX200W**	2.3
No.40	**BT40-UMTX200W**	2.9
No.50	**BT50-UMTX200W**	5.2

★Battery is supplied as standard.
★The delay of the system is within 0.01mm, because of the internal contact system.

Specification

Measuring Pressure	X, Y = 0.35N Z = 0.8N	
Battery	Straight Shank	An alkali dry cell Model 5 1.5V 2pcs
	BT Shank	Manganese dry cell 6F33 X 9V 1pcs
	36 Hours	
Stylus	Standard : φ4mm steel stylus Option : φ4, φ3, φ2 and φ1 mm ruby stylus The ruby stylus can not be ordered alone. Please order the Micro Touch with the ruby stylus. When ordering, please add (RB○) at the end of the Micro Touch Code No. **e.g. BT30-UMTX200W (RB2)** └With φ2mm ruby stylus **S32-UMTX (RB4)** └With φ4mm ruby stylus	

MEASUREMENT

NIKKEN

High Sensitive Position Sensor

- Instant Indication of red LED Lamp.
- Instant Indication by red LED lamp at very light contact of Sensor Ball with Workpiece.

⚠
- Tools that have treated RP will not conduct electricity. RP treatment cannot be performed on measuring tools that detect workpiece contact through electrical conduction.
- Even if you hold an electrically conductive type straight shank measuring tool with a tool treated RP, workpiece contact will not be detected. Please use an internal contact type straight shank micro touch (**UMTX** ☞ **P.136**).

- Ideal for Centre Detecting with Milling Machine, Boring Mill, Drilling Machine and Machining Centre.
- Repeatability:within 2 micron.
- Safety Mechanism against Overrun !!

The ball is pulled up by spring. Even if overrun happens, ball will be detached from the ball seat.



Easy Checking Location of Work, Face, OD and ID !!

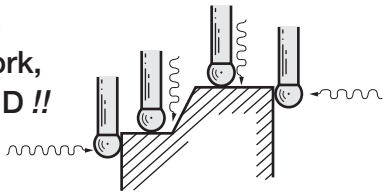

Straight Shank TOUCH POINT

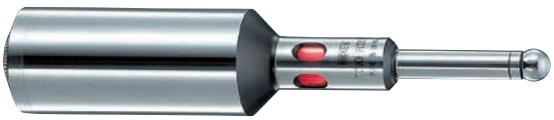

TP

- Can be connected to NIKKEN Milling Chuck **C20, C32**

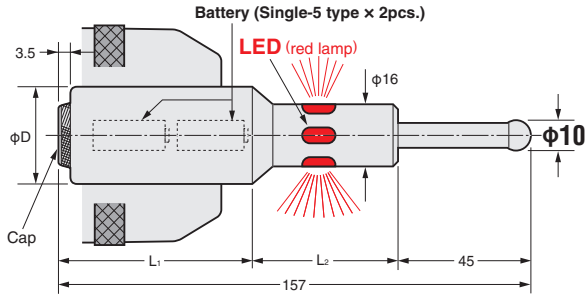

Code No.	φD	L_1	L_2	Weight (kg)
TP-20	20	77	35	0.2
TP-32	32	71	41	0.5

★No Z-axis float in straight shank type TOUCH POINT.
If float is needed, please order **UMT** series (**S20,S32-UMT**).☞ **P.135**

TOUCH POINT for machining centre (with Z-axis Float Mechanism)

BT-TP

- The Ball End is located 200mm distant from Gauge Line, and can be used as Gauge Line Reference of Z-axis. Ultra precision Float Mechanism in the Thrust Direction enables Soft Touch Detection.

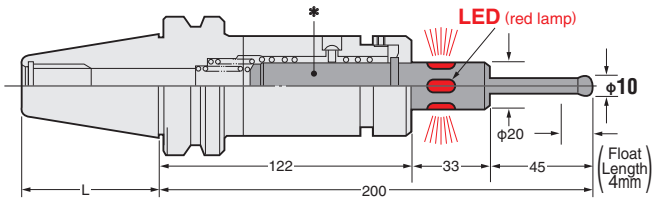

TAPER	Code No.	L	Float Length	Weight (kg)
No.40	**BT40-TP200**	65.4	4	1.9
No.50	**BT50-TP200**	101.8	4	4.5

★No applicable to Non-conductive work piece (Plastic, Bakelite and so on).
★Included Battery (Single-5 type × 2pcs.)
★**IT40-TP200** and **IT50-TP200** are also available.
★The Code No. of Touch Point marked ＊ for the spare part is **9TP200S**.

φ10 Shank TOUCH POINT

S10-TP8

- Compact and slim type.
- It can be used for the narrow space and deep groove.
- It's suitable for **HSK25A, 32A, 40A** and **50A**.
- No Z-axis froat.

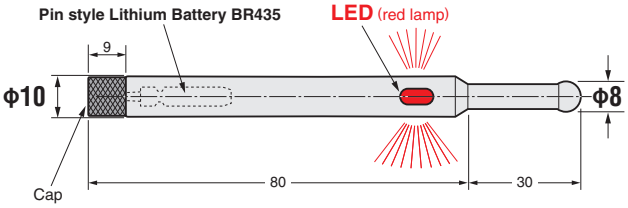

UNIVERSAL MICRO STAND

NIKKEN

Long Reach 300mm

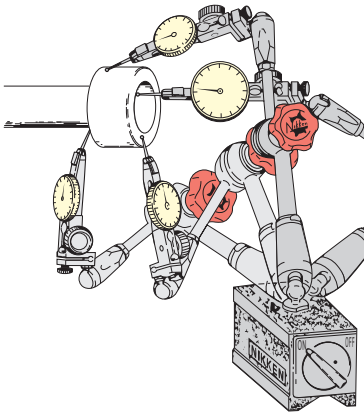

Free flexing with single knob, no dead angle and long reach, two arms incorporating ball joint mechanism at both ends provide free movement in any direction such as vertical, lateral, longitudinal or rotational etc. If stretched horizontally, a reach as long as **300mm** can be attained. Measurements of inside dia., outside dia., end face and back face etc, can be made at will.

Remote Adjusting Knob

New mechanism permitting no looseness due to vibration

By only tightening the single red clamp knob, all articulated joints are locked firmly and no fine (micron) movement will occur even after being left as they are for 100 hours.

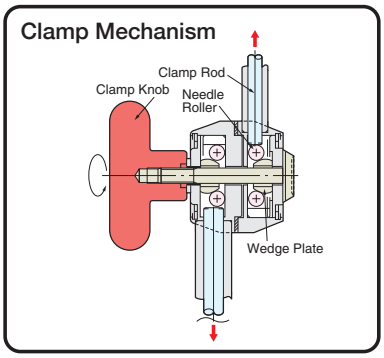

Remote Fine Adjusting Knob (UDS-2)

The base is made by heavy and precision casting and arms are clamped by a remote knob with fine adjustment. Measurement position of dial gauge can be easily adjusted without losing setup of Universal Micro Stand.

Code No.	Style
UDS-1	With magnet base
UDS-2	With precision casting base

★Dial gauge is supplied as an option.

Strong magnet base makes it possible to adapt to vertical, angular, uneven surface, etc.



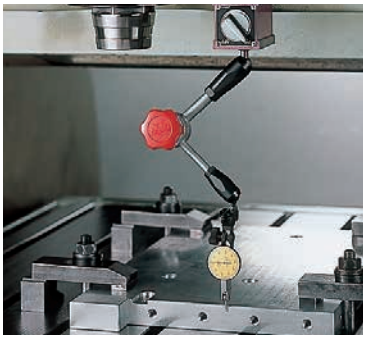

On M/C

On NC Lathe

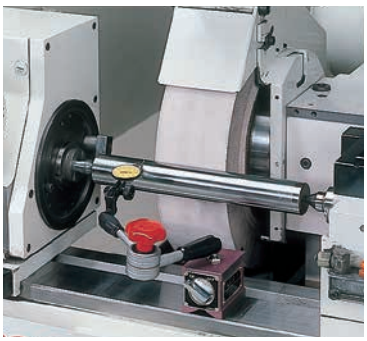

On Grinding Machine

Any dial gauge, pick tester can be connected with this attachment.

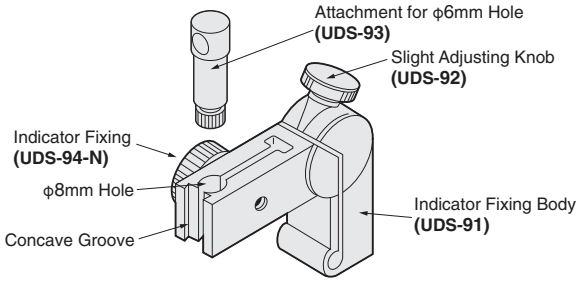

MEASUREMENT

HEIGHT PRESETTER WP (Necessities of machining)

NIKKEN

Reference point of work piece can be measured very quickly and accurately without damage of tool teeth.

- **High Precision Measurement**
- **Easy to measure tooling off-set values on the machine accurately.**
- **Hard wearing powerful magnetic Base.**
- **Powerful magnetic base (700N) makes it suitable for use on manual machine as well as Vertical/Horizontal Machining Centres and NC Lathes.**
- **Swarf Removal**
  The Magnetic Base can be switched on and off allowing the reference face to keep clean.
- **Plunger Head is given a Anti-Rust Rubber Seal.**
- **Proximity Lamp**
  The red lamp is activated when the plunger comes within the measuring range of the reference height.
- **IP43 International protect**
  Protect the precision equipment from dust and water spray.
  ∗It does not protect internal equipment from coolant injection or submersion in water.

HP-100WP

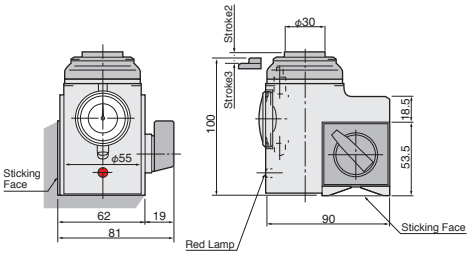

★2 of Batteries LR44(HC) are supplied as standard with both of **HP-100** and **HP-150**.

HP-150WP

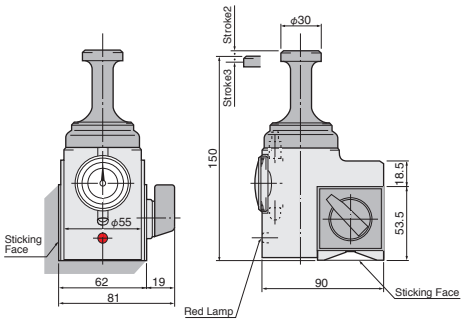

Adjustment of Reference Point

No setting gauge plate is required to adjust Zero Point. Push Plunger down by hand, and adjust the large hand to the Zero Scale of Dial Gauge. The small hand indicates "-3" at this time.)

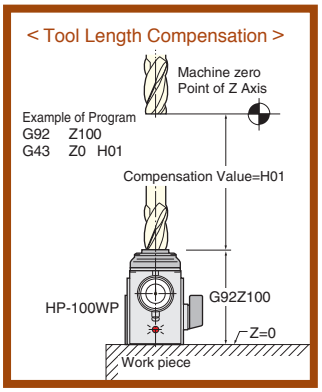



Example of usage at Vertical Machining Centre.



Example of usage at NC Lathe.

Also suitable for use of Micron Adjustment of Boring Arbor.

MEASUREMENT

HEIGHT PRESETTER NEO NEW

NIKKEN

- **Quick measurement of the cutting edge position 50 mm from the reference surface.**
- **Equipped with new LEDs that emit light in 360° for easy viewing from any position.**
- **Strong magnets enable a wide range of machining operations from vertical/horizontal machining centers to lathes.**
- **Lineup includes two types: energized type and internal contact type.**



HP-50N
Energized Height Presetter NEO
LED lamp type

The LED lights up at the moment the cutting edge contacts the slide head, which is 50 mm from the reference surface.

⚠ Cannot be used on non-current-carrying workpieces, machines,RPT TOOLING or cutting tools; use **HP-50XN**.

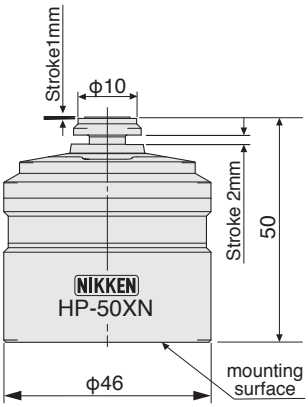

HP-50XN
Internal Contact Type Height PresetterNEO

- When the cutting edge contacts the slide head and strokes 1 mm, the LED lights up and the position is 50 mm from the reference surface.
- Can be used on non-energized machines and workpieces where energized height presetters cannot be used.

Minimum Cutting Tool Diameter: φ0.2
Feed: Measured at 5 mm/min or less.

CENTERING HOLDER

NIKKEN

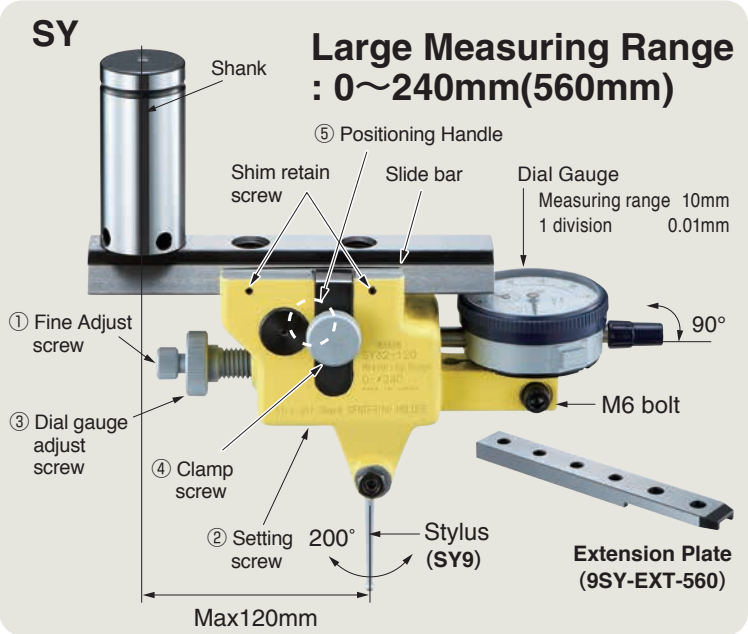

- No need of changing the setting of Dial Gauge. Only by turning Knob, ID, OD and Parallelism can be easily measured.
- Large measuring range. Cross moving distance of stylus is 120mm in radius.
- **Up to ϕ560mm can be measured by the extension plate. It can be user on your existing centering holder.**

Centering Holder Code No.	ID of Milling Chuck	Measuring Range
SY20-120	ϕ20	0～ϕ240
SY32-120	ϕ32	
SY42-120	ϕ42	

★0.01mm Dial Gauge is supplied as standard accessory.
★MT Shank (MT2～6) , and IT Shank (#40/#50) are available.

Explanation of the Code No.

SY 32 - 120

- ●MAX. Measuring Radius
- ●OD of Shank :ϕ22, 32, 42
- ●Symbol of Centering Holder

●Wide Range Measuring is possible both for ID and OD.

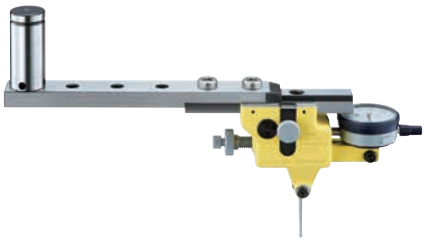

Centering Holder with Extension Plate

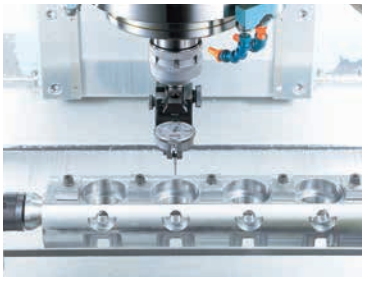

Parallelism Measuring

ID Centering

OD Centering

BALL CENTRALIZER

NIKKEN

Centering of ID and OD can be done by the Ball Centralizer gripping into Nikken Milling Chuck.

Indispensable for Accuracy Control

Universal Application of ϕ20 ball

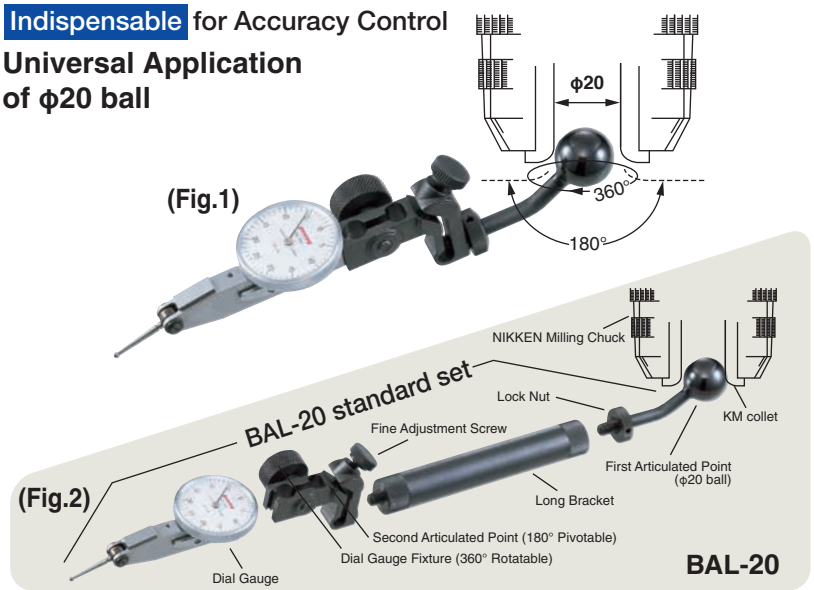

- 0.01mm Dial Gauge is supplied as standard accessory.

Code No.	Measuring Range	
	Using Fig.1	Using Fig.2
BAL-20	I D : ϕ3.5～ϕ320	I D : ϕ3.5～ϕ520
	OD : MAX. ϕ300	OD : MAX. ϕ500

MEASUREMENT

TEST BAR

NIKKEN

TB

Indispensable for checking your machine spindle.
Sub-zero treatment keeps accuracy to prevent from the deformation.
Each test bar is provided in a safety wooden box.

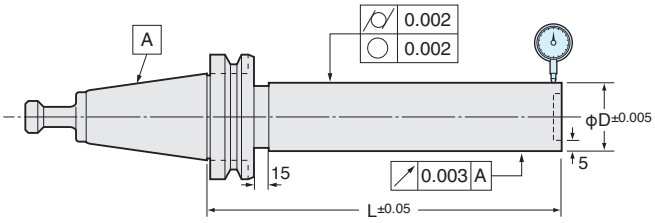

Exact size of ϕD and L are marked on each test bar.

TAPER	Code No.	ϕD	L	Weight(kg)	Run-out at total length	Circularity, Cylindricality
No.15	BT15BR-TB15-110	15	110	0.25	Within 0.003mm	Within 0.002mm
No.30	BT30-TB40-150	40	150	1.7		
No.40	BT40-TB40-200	40	200	2.7		
No.50	BT50-TB50-300	50	300	7.7		

★The code No. for Test Bar without flange is **AST** instead of **BT**. **e.g. Test Bar for #40=AST40-TB40-200**
★It comes with Pull Stud, please specify Pull Stud Code No. Please refer ☞ **P.313** for Pull Stud.
★The different dimension of ϕD and L are available. e.g. BT50-TB50-40
But, the accuracy standard will be different. Please contact us.

The inspection certificate traceable to the national standard is available with charge.

HSK TEST BAR

NIKKEN

TB

Indispensable for checking your machine spindle.
Sub-zero treatment keeps accuracy to prevent from the deformation.
Each test bar is provided in a safety wooden box.

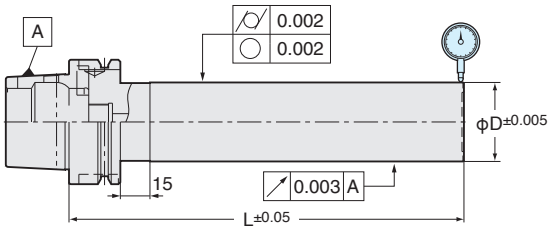

Exact size of ϕD and L are marked on each test bar.

TAPER	Code No.	ϕD	L	Weight(kg)	Run-out at total length	Circularity, Cylindricality
HSK 40A	HSK 40A-TB30-150	30	150	1.0	Within 0.003mm	Within 0.002mm
HSK 50A	HSK 50A-TB40-200	40	200	2.2		
HSK 63A	HSK 63A-TB40-200	40	200	2.4		
HSK100A	HSK100A-TB50-300	50	300	6.3		

★The different dimension of ϕd and L are available. e.g. HSK100A-TB50-400
But, the accuracy standard will be different. Please contact us.

The inspection certificate traceable to the national standard is available with charge.

TOOL PRESETTER E236+

NIKKEN

E236+

Rapid & Accurate Measurement Non-Contact Type

C MOS Sensor
Autocollimation
(The cutting edge is detected automatically and displayed.)
Rapid Positioning & Fine Adjustment

Spindle

Rapid Positioning & Fine Adjustment

Granite Column and Base

Spindle can be exchanged.

(BT, HSK, CAPTO TOOLING)

Fine and Easy Screen

7" TFT LCD Monitor (86 X 150mm)
Magnification: 20

Printer WASP-PT

Various Functions for Measurement

Measuring of the cutting edge

Angle of the cutting edge



Nose R of the cutting edge

Item	Contents		E236PLUS-40	E236PLUS-50
Measuring Range	X Axis: Dia. of Tool		Maxφ260mm	Maxφ260mm
	Z Axis: Length of Tool		Max360mm	Max360mm
MIN. Reading	Reading Method MIN. Reading	X Axis	Scale Counter 0.001mm (Radius)	
		Z Axis	Scale Counter 0.001mm	
Monitor			Magnification: 20 7" TFT LCD Monitor	
Tool Clamp			Not installed	
Spindle			NT40	NT50
Master Gauge			GN40K(option)	GN50K(option)
Spindle (Option)			The spindle can be exchanged. NT40, 50, HSK32, 40, 50, 63, 80, CAPTO TOOLING C4, 5, 6 Z stroke will be shortened for HSK and CAPTO TOOLING.	
Reduction Sleeve (Option)			TN430 : NT40-NT30	TN540 : NT50-NT40
Power			AC100~230V	

★The spindle for **HSK100A**, **CAPTO TOOLING C8, 3LOCK, NC5-100** can not be supplied.
★Box size : W × H × D = 900 × 590 × 680mm, Box weight : 58Kg
★Printer (**WASP-PT**) and 10 pcs of the roll papers with seal (**WASP-PTP**) are available as an option.
★Spindle for **HSK32, 40, 50, 80** and **CAPTO TOOLING C4, C5, C6** are order made spindles.





Spindle

Spindle Code No.	Tool Clamping	Shank No.	Presetter	Max Z Stroke(mm)	Master Gauge Code No.
E236N-SP-30	-	NT30	E236PLUS	360	GN30K
E450N-SP-30	Vacuum		E346BV	460	
E46BA-SP-30	Universal		E46BA/E46CA	600/600	
E236N-SP-40	-	NT40	E236PLUS	360	GN40K
E450N-SP-40	Vacuum		E346BV	460	
E46BA-SP-40	Universal		E46BA/E46CA	600/600	
E236N-SP-50	-	NT50	E236PLUS	360	GN50K
E450N-SP-50	Vacuum		E346BV	460	
E46BA-SP-50	Universal		E46BA/E46CA	580/580	
E236N-SP-HSK32	Manual	HSK32	E236PLUS/E346BV	328/428	GN-HSK32
E236N-SP-HSK40		HSK40	E236PLUS/E346BV	326/426	GN-HSK40,GN-HSK40N
E46BA-SP-HSK40	Universal		E46BA/E46CA	600/600	GN-HSK40N
E236N-SP-HSK50	Manual	HSK50	E236PLUS/E346BV	318/418	GN-HSK50,GN-HSK50N
E46BA-SP-HSK50	Universal		E46BA/E46CA	600/600	GN-HSK50N
E236N-SP-HSK63	Manual	HSK63	E236PLUS/E346BV	310/410	GN-HSK63,GN-HSK63N
E46BA-SP-HSK63	Universal		E46BA/E46CA	600/600	GN-HSK63N
E236N-SP-HSK80	Manual	HSK80	E236PLUS/E346BV	298/398	GN-HSK80
E450N-SP-HSK100		HSK100	E346BV	368	GN-HSK100
E46BA-SP-HSK100	Universal		E46BA/E46CA	538/538	GN-HSK100N
E236N-SP-C4	Manual	C4	E236PLUS/E346BV	298/398	GN-C4
E46BA-SP-C4	Universal		E46BA/E46CA	600/600	
E236N-SP-C5	Manual	C5	E236PLUS/E346BV	290/390	GN-C5
E46BA-SP-C5	Universal		E46BA/E46CA	600/600	
E236N-SP-C6	Manual	C6	E236PLUS/E346BV	270/370	GN-C6
E46BA-SP-C6	Universal		E46BA/E46CA	600/600	
E450N-SP-C8	Manual	C8	E346BV	352	GN-C8
E46BA-SP-C8	Universal		E46BA/E46CA	600/600	
E236N-SP-NC5-46N	Manual	NC5-46	E236PLUS/E346BV	320/420	GNC5-46-150
E236N-SP-NC5-63		NC5-63	E236PLUS/E346BV	300/400	GNC5-63-150
E236N-SP-NC5-100		NC5-100	E236PLUS/E346BV	260/360	GNC5-100-150

★**Spindles for HSK,C and NC5 can be exchanged only by a wrench.**
★Master gauge is available as an option.

TOOL PRESETTER E346BV

NIKKEN

E346BV

Rapid & Accurate Measurement Non-Contact Type

C MOS Sensor
Autocollimation
(The cutting edge is detected automatically and displayed.)
Rapid Positioning & Fine Adjustment

Spindle

Rapid Positioning & Fine Adjustment

Granite Column and Base

Spindle can be exchanged.

(BT, HSK, CAPTO TOOLING)

Fine and Easy Screen

15" TFT Color 16:9 Vertical Touch Screen Monitor
Magnification: 25

Various Functions for Measurement

Fixed Feticule Mode



Circular Reticule Mode



Angle and Radius Mode

Inspection Tool Mode

Item	Contents		E346BV-40	E346BV-50
Measuring Range	X Axis: Dia. of Tool		MaxΦ360mm	MaxΦ360mm
	Z Axis: Length of Tool		Max460mm	Max460mm
MIN. Reading	Reading Method MIN. Reading	X Axis	Scale Counter 0.001mm (Radius)	
		Z Axis	Scale Counter 0.001mm	
Monitor			Magnification: 25 15.6" TFT Color 16:9 Vertical Touch Screen Monitor	
Tool Clamp			Vacuum clamping for **NT30, 40** and **50**. Manual clamping for **HSK, C** and **NC5** ☞**P.143**	
Spindle			NT40	NT50
Master Gauge			GN40K(option)	GN50K(option)
Spindle (Option)			The spindle can be exchanged. NT30,40, 50,HSK32,40,50,63,80, CAPTO TOOLING C4, 5,6,8 Z stroke will be shortened for HSK and CAPTO TOOLING.	
Reduction Sleeve (Option)			TN430 : NT40-NT30	TN540 : NT50-NT40
External Output			USB(3 ports) LAN(1 port), TD-SIX(TONE UP)	
Power			AC100～230V	

★Box size : W × H × D = 1090 × 1020 × 670mm, Box weight : 130Kg, Presetter weight : 90Kg.
★Spindle for HSK32, 40, 50, 80, 100 and CAPTO TOOLING C4, C5, C6, C8 are order made spindles.

Working Desk E346VP-STD (Option)

Working desk for **E346BV+** and **E236+**.
(No fixing mechanism for E346V+ and E236+.)
Size : W x H x D = 984 x 754 x 504, Weight : 66Kg.
The spindle case has 3 pots.

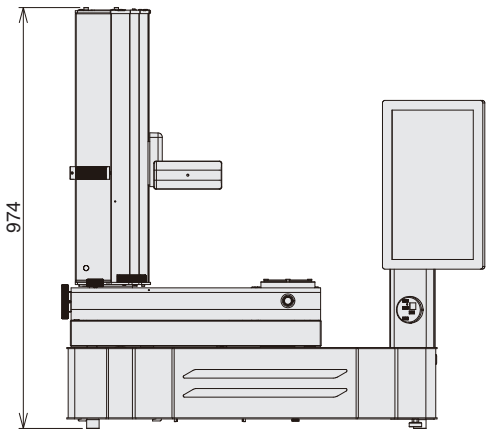

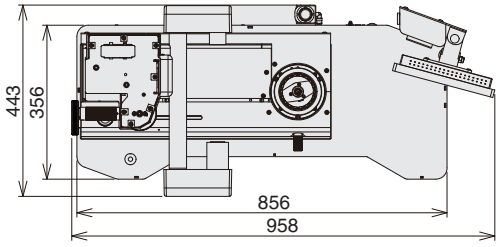

TOOL PRESETTER E46BA/E46CA

NIKKEN

E46BA E46CA

Ultra-precision&High-accuracy
Granite column and base

Non-contact measurement
CMOS sensor camera

Spindle exchange type
BT, HSK, polygonal taper

Universal mechanical clamping system
Compatible with all pull studs

Automatic rotation spindle
Automatic indexing of cutting edge focus, automatic measurement of multi-blades tools.

Item	Contents		E46BA	E46CA
Measuring range	X Axis : Diameter of Tool		Maxϕ400mm	Maxϕ400mm
	Z Axis : Length of Tool		Max600mm	Max600mm
Min. reading increment	Reading Method Min. reading	X Axis	Scale Counter 0.001mm (Radius) Changable of Radius/Diameter	
		Y Axis	Scale Counter 0.001mm	
Camera/Monitor			X18 CMOS sensor(microscope switching)/15.6"full HD	X25 CMOS sensor(microscope switching)/21.5"full HD
Tool Clamp			Universal Mechanical Tool Clamping System.Pulling Force 250～300kg	
Master Gauge (Option)			GN○○K,GN-HSK○○N,GN-C○(option) ☞ **P.143**	
Inter-changeable spindle (Option)			**E46BA-SP-○○**	
External Output			USB (4 ports),LAN (1 port)	USB (4 ports),LAN (1 port),Wi-Fi
Power			AC100～230V	
DXF function			Inport	Inport/Export
Spindle stand			-	2 spindles

★Please prepare the 3-piece air set by yourself.★The master gauge is sold separately.★The dedicated printer (E460N-LPT-BR) with the dedicated roll paper stickers (E460N-LPTP-BR-400)

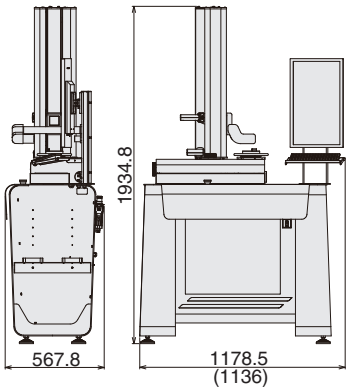

Presetter Weight:230kg
Box Weight:255kg

(1136mm) ※( )E46BA limensions

New user interface
The software has been completely redesigned to make it easier to use intuitively.

Various measurement functions
- Auto-targeting (automatic measurement of cutting edge)
- Freezing (memory of the maximum cutting edge measurement value)
- Cutting edge angle measurement (in 0.01° increments)
- Cutting edge radius measurement (in 0.001mm increments)
- Various manual measurement functions (distance between two points, angle between three points, radius of circle passing through three points)
- SP-ID (spindle identification system)
- Coordinate measurement of chamfered areas
- Adjustment of inspection area (AOI)
- Cutting edge inspection function
- Output of various measurement values

E46BA(Blue)

E46CA(Yellow)

①X-axis/Z-axis rapid feed enable switch
②Z-axis rapid feed handle
③X-axis fine adjustment knob
④Z-axis fine adjustment knob
⑤Spindle
⑥Spindle rotation handle
⑦Monitor



Tool holder

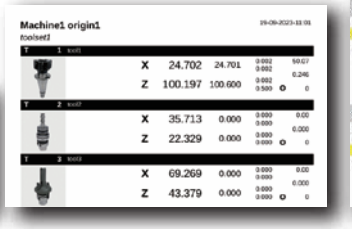

Tool holder list



Multi-blades report

MEASUREMENT

TONE UP (Standard Specification)

Tool length/diameter data measured by the presetter is converted into tool length/diameter compensation data via various post processors and transferred to the machine. The post processor can also handle the special formats

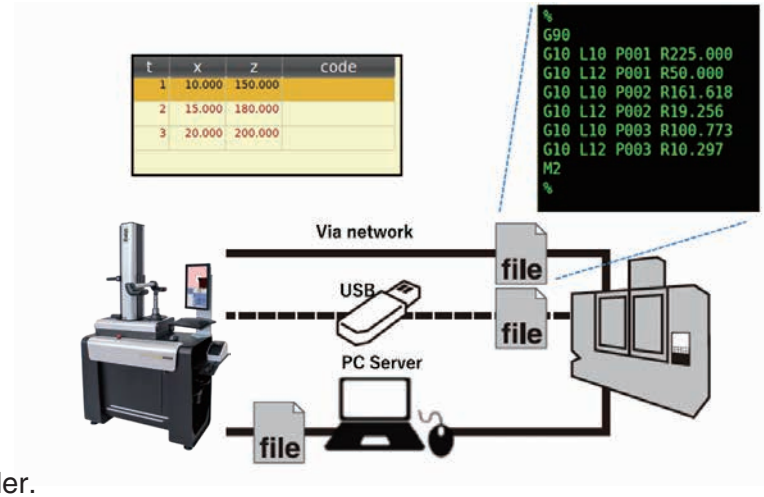

e-TOP SYSTEM Japan PAT.

- A QR code is laser-marked on the tool holder.
- This system can also suitable for the tool holders with RP (Black holder).
- The QR code is used as the identification number for the tool management system, and a tool database of tool holders is created for the total management.
- Tool length/diameter data is measured using a presetter and written to a tool database related to the QR code.
- When the tool holder is installed in the tool magazine of the machine, the QR code is read by the IPC placed near the machine, and the tool length/diameter compensation data is transferred from the tool database to the machine. At the same time, the T No. is written to the corresponding pot position on the magazine table on the PMC.
- When removing a tool holder from the tool magazine, the IPC reads the QR code of the removed tool holder and transfers the tool length/diameter wear compensation values from the machine to the tool database. At the same time, the T No. of the corresponding pot on the magazine table is cleared.

Tool holder with QR code

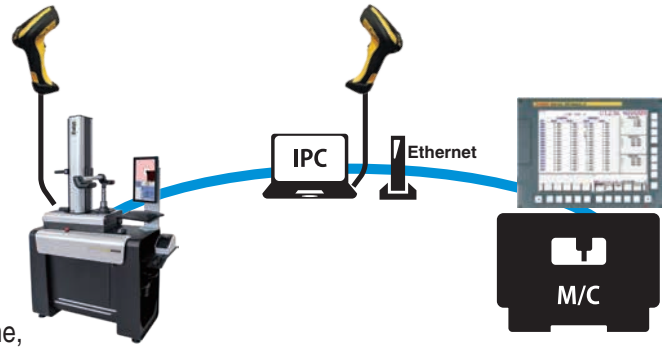

⚠ Notes

- As the magazine table on the PMC of the machine is referenced, it is necessary to corpolate and consult with the machine tool builder.
- QR Code is a matrix-type two-dimensional code developed by Denso Wave. "QR Code" is a registered trademark of Denso Wave.

TTS Tool Tracking System Japan PAT.

This is an expanded version of the e-TOP System. It instantly searches for and displays the location of the tool holders in the tool set (tool list for the workpiece) that is scheduled to be machined next. It displays a list of common tool holders that can be used as they are, and tool holders that need to be newly prepared.

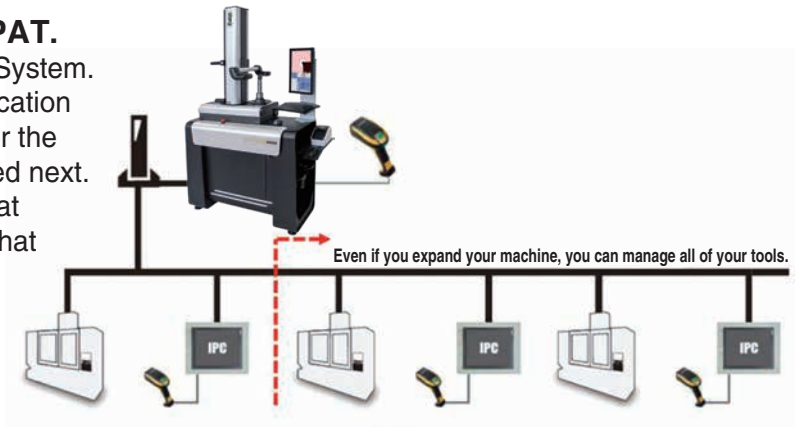

- If the tool is in the tool magazine of the machine to be machined there, the pot number and T No. will be displayed.
- If the tool is in the tool magazine of the another machine, the machine name, pot number and T No. will be displayed.
- If a new tool holder needs to be prepared, this will be indicated.

3LOCK (triple contact) can be done on the BT double face contact spindle.

1. Power of Dampening Effect.

Tool Life 3 to 5 times

Performance enhancement due to the dampening effect are already universally recognized when using Nikken's DREAM-CUT Holder.
- Extended tool life of 3 to 5 times.

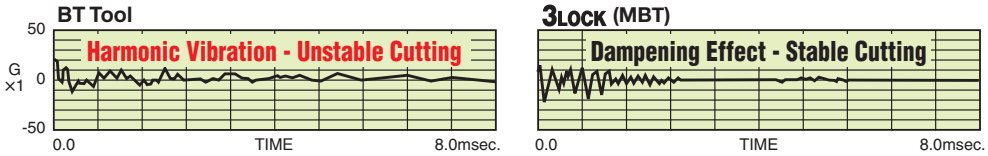

2. The mechanism which generates the excellent cutting performance -Internal Expanding Pressure System

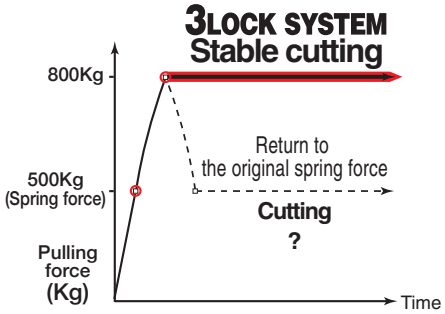

Internal Expanding Mechanism System for instantly locking the maximum pulling force

- Tool clamping mechanism that use a disc springs experience lower clamping force during continuous use.
- 3LOCK is a system for locking the maximum pulling force that is instantly produced during tool pulling.
- Cutting torque is greatly reduced compared to BT tooling for more comfortable cutting.

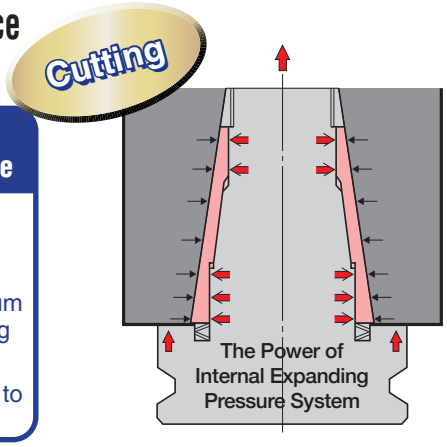

Machine spindle expansion due to the centrifugal force at the high speed rotation or heat expansion

3. The taper sleeve follows the expansion and maintains perfect contact with the taper and flange.

Taper Contact : Flange Contact = 90% : 10%

4. 2LOCK / 3LOCK ⊕ Power of TiN Bearing Nut



5. Excellent Rigidity

Rigidity

3LOCK tool performs the excellent rigidity, when the extended tool is used on the horizontal M/C.

Deep Hole Boring

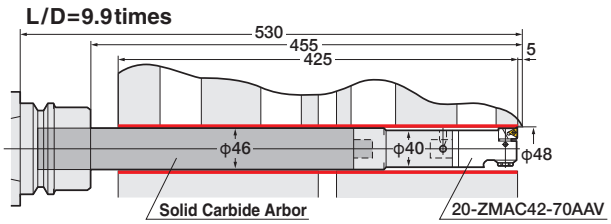

Material: Aluminum
Stock Removal: 0.23~0.27mm/dia.

V : 450m/min.
S : 3,000r/min
F : 180mm/min.

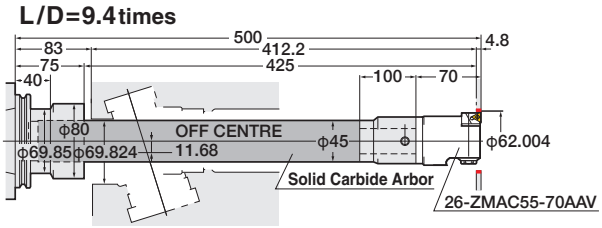

Material: Aluminum
Stock Removal: 0.5mm/dia.

V : 545m/min.
S : 3,000r/min
F : 210mm/min.

BT DOUBLE FACE CONTACT SPINDLE

NIKKEN

The NIKKEN 3LOCK tooling can be used as the triple face contact (taper, flange and internal taper expansion) on the M/C with BT double face contact spindle. The NIKKEN 2LOCK tooling can be used as the double face contact on the M/C with BT double face contact spindle.

#30



#40

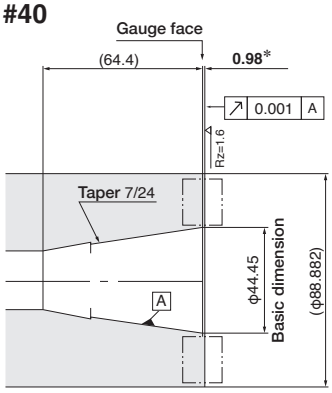

#50

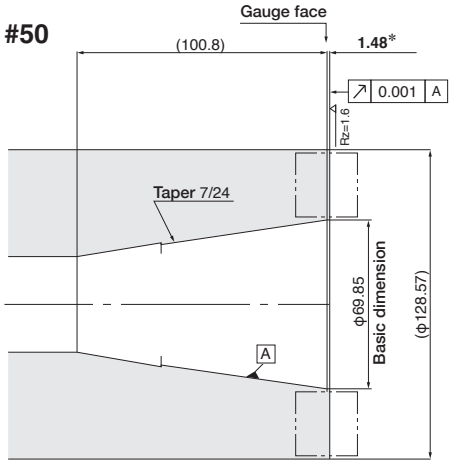

＊ **mark**: The tolerances of the extension of the spindle flange from gauge face depend on the M/C.

3LOCK TECHNICAL INFORMATION

NIKKEN

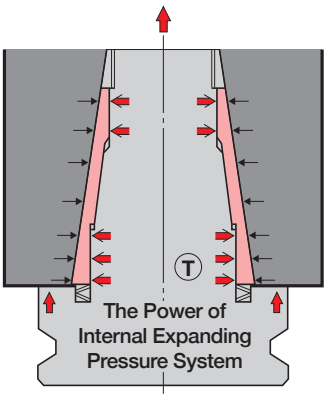

1. When 3LOCK tool is inserted into 3LOCK spindle (before clamping) , the gap between the spindle flange and the tool flange is ; #40 : 0.2mm, #50 : 0.5mm
2. When the tool is clamped, the taper cone pre-loaded by the disc springs deforms radially and slides to reach the face contact between the spindle flange and the tool flange.

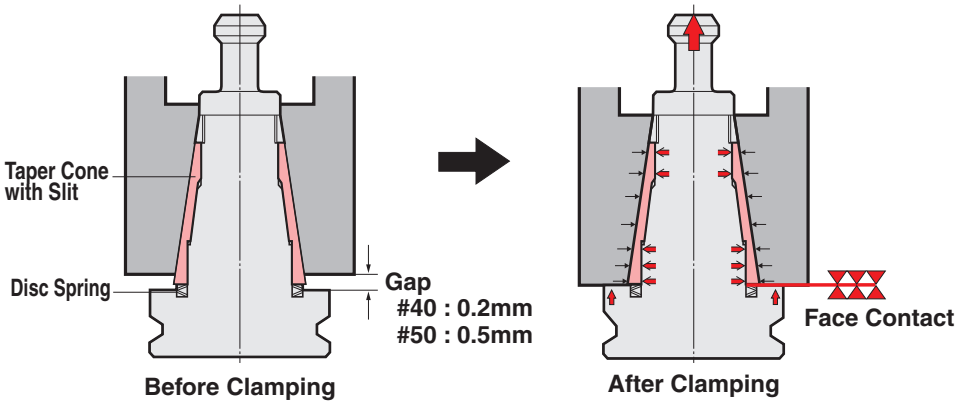

Deep Profiling Tool for Die Mould

Strong track record even for plunge cutting cutters with a long expanded length

3LOCK MBT MULTI LOCK MILLING CHUCK

NIKKEN

C

High Pressure
Centre Through
(MAX. 7MPa)

The cutting chips show us the actual machining capability.

Quiet,
high speed heavy milling

Stable finishing



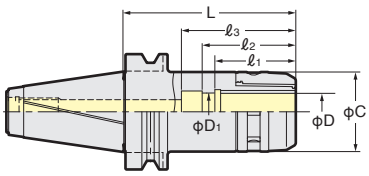

Standard

TAPER	Code No.	D	C	L	ℓ1	ℓ2	ℓ3	Weight (kg)	Collet
No.40	MBT40-C12- 90	12	33	90	48	53	58	1.6	KM12 CCK12
	-120			120				1.9	
	-C16- 60	16	44	63	50	58	65	1.4	KM16 CCK16
	- 90			90				1.7	
	-120			120				2.0	
	-C20- 70	20	52	71	57	66	80	1.6	KM20 CCK20 CCNK20 NK20
	- 90			90				1.8	
	-120			120				2.2	
	-C25- 70	25	60	70	60	72		1.8	KM25 CCK25 CCNK25 NK25
	- 90			90				2.1	
	-120			120				2.5	
	-C32- 85*	32	69	85	64	71	75	2.1	KM32 CCK32 CCNK32 NK32
	-105			105	70	81	81	2.5	
	-120			120	70	81	81	2.8	
No.50	MBT50-C12-105	12	33	105	48	53	53	4.0	KM12 CCK12
	-165			165				4.6	
	-C16-105	16	44	105	50	58	58	4.2	KM16 CCK16
	-165			165				4.8	
	-200			200				5.1	
	-C20-105	20	52	105	57	66	66	4.5	KM20 CCK20 CCNK20 NK20
	-165			165				5.1	
	-200			200				5.7	
	-C25-105	25	60	105	60	72	72	4.8	KM25 CCK25 CCNK25 NK25
	-135			135				5.2	
	-165			165				5.6	
	-C32- 90	32	69	90	70	81	81	4.3	KM32 CCK32 CCNK32 NK32
	-105			105				4.6	
	-120			120				5.1	
	-135			135				5.6	
	-165			165				6.4	
	-200			200				7.8	
	-250			250				9.2	
	-300			300				10.6	
	-C42- 95*	42	86	95	73	80	85	5.5	KM42 CCK42 CCNK42 NK42
	-120			120		105	110	6.6	
	-135			135		115	125	7.2	
	-165			165				8.6	
	-200			200				9.5	
	-250			250				11.7	
	-300			300				14.0	

★Spanner is available as an option.
C12 : 9HC12A C16 : 9HC16 C20 : 9HC22
C25 : 9HC25 C32 : 9HC32 C42 : 9HC42

★Please note the acceptable shank tolerance is h6~7.
★**For heavy duty milling, please grip the cutter shank longer than ℓ1.**
★**NK and CCNK collet can not be used for the chucks marked ＊.**
★For **C32**, ℓ2 dimension longer than standard is available.
MBT40-C32D- 105 MBT50-C32D- 105
★Centre through tool coolant is available for all models. When the cutter shank length is shorter than ℓ1, please use **the stooper for direct chucking** or **CCK/CCNK** collet.
The Code No. of **the Stopper for direct chucking** is : **C20 : 9MC20, C25 : 9MC25, C32 : 9MC32, C42 : 9MC42**
★**GFS** type is possible only for **C25** to **C42,** except for **BT30.**
The **GFS** type is available with or without **J** grooves, and the code numbers are **GFSJ** for with **J** grooves and **GFS** for without grooves.
★**Please refer ☞P.273 for Milling Chuck Coolant Solution.**

★Please refer ☞**P.274, P.275** for **KM** and **CCK** collet.
★Please add "**F**" for the flange through tool coolant type.

Stopper for Direct Chucking



Explanation of the Code No.

MBT40 - C20 - 70

- Nominal Gauge Length
- Chucking Capacity
- Symbol of Milling Chuck
- Shank No.

FS type
For machining of aluminum
JAPAN PAT.

3LOCK MBT HIGH SPEED MILLING CHUCK NIKKEN

C-G

High Pressure Centre Through (MAX. 7MPa)

ANNIVERSARY Type
−Powerful gripping torque−
- **High rigidity**
- **High precision**
- **Compact design**



High Speed

TAPER	Code No.	D	C	L	ℓ1	ℓ2	ℓ3	Weight (kg)	MAX. (r/min)	Collet
No.40	MBT40-C12- 90G	12	33	90	48	53	58	1.6	25,000	KM12 CCK12
	-C16- 60G	16	40	63	50	58	65	1.4		KM16 CCK16
	- 90G			90				1.7		
	-C20- 70G	20	48	71	57	66	80	1.6		KM20 CCK20 CCNK20 NK20
	- 90G			90				1.8		
	-C25- 70G	25	55	70	60	72	75	1.8	20,000	KM25 CCK25 CCNK25 NK25
	- 90G			90				2.1		
	-120G			120				2.5		
	-C32- 85G*	32	68	85	64	71	81	2.1		KM32 CCK32 CCNK32 NK32
	-105G			105	70	81		2.5		
No.50	MBT50-C12-105G	12	33	105	48	53	58	4.0	20,000	KM12 CCK12
	-C16-105G	16	40	105	50	58	65	4.2		KM16 CCK16
	-C20-105G	20	48	105	57	66	80	4.5		KM20 CCK20 CCNK20 NK20
	-C25-105G	25	55	105	60	72		4.8	15,000	KM25 CCK25 CCNK25 NK25
	-C32- 90G	32	68	90	70	81	81	4.3		KM32 CCK32 CCNK32 NK32
	-105G			105				4.6		
	-120G			120				5.1		
	-C42- 95P*	42	86	95	73	80	85	5.5	12,000	KM42 CCK42 CCNK42 NK42
	-120P			120		105	110	6.6		

★Please note the acceptable shank tolerance is h6.
★Please refer ☞**P.274, P.275** for **KM** and **CCK** collet.
★**GH Handle** is available as an option. ☞**P.293**
C12G : GH12, C16G : GH16, C20G : GH20, C25G : GH25, C32G : GH32
★Spanner for **C42P** is **9HC42**.
★**NK and CCNK collet can not be used for the chucks marked ＊.**
★Centre through tool coolant is available for all models. When the cutter shank length is shorter than ℓ1, please use **the stooper for direct chucking** or **CCK/CCNK** collet.
The Code No. of the Stopper for direct chucking is : **C20 : 9MC20, C25 : 9MC25, C32 : 9MC32, C42 : 9MC42**
★**GFS** type is possible only for **C25** to **C42,** except for **BT30.**
The **GFS** type is available with or without **J** grooves, and the code numbers are **GFSJ** for with **J** grooves and **GFS** for without grooves.
★**Please refer ☞P.273 for Milling Chuck Coolant Solution.**

Explanation of the Code No.

MBT40 - C20 - 70 G

- Symbol of High Speed
- Nominal Gauge Length
- Chucking Capacity
- Symbol of Milling Chuck
- Shank No.

FS type
For machining of aluminum
JAPAN PAT.

3LOCK MBT SLIM CHUCK

NIKKEN

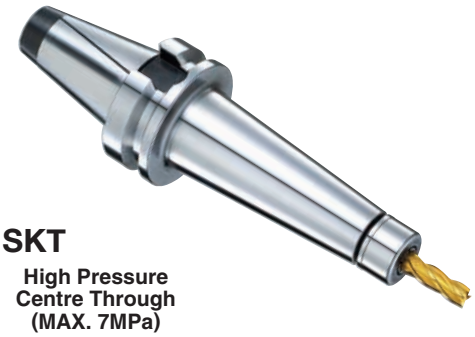

SKT

High Pressure Centre Through (MAX. 7MPa)

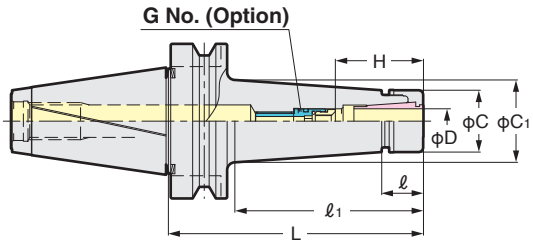

Standard

- **When SK J type nut is used, the total chuck length will be extended by 6mm.**
- **When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.**

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	Weight (kg)	SK Collet
No.40	MBT40-SKT 6C- 90	0.7～6.0	90	19.8	60	19.5	25.2	26～31	SKG 6- 6HG	1.1	SK 6
	-120		120		90		29.4			1.4	
	-SKT10C- 90	1.75～10.0	90	22	60	27.5	32.9	35～41	SKG10-10HG	1.2	SK10
	-120		120		90		37.1			1.4	
	-150		150		120		41.3			1.6	
	-SKT13C- 90	2.75～13.0	90	26	60	33	37.8	39～51	SKG13-10HG	1.4	SK13
	-120		120		90		42.0			1.6	
	-150		150		120		46.2			1.8	
	-SKT16C- 90	2.75～16.0	90	27	60	40	44.7	45～57	SKG16-12HG	1.5	SK16
	-120		120		90		48.9			1.7	
	-150		150		120		53.1			1.9	
	-SKT20C- 90	3.5～20.0	90	28.5	60	48.5	53.0	47～63	SKG20-18HG	1.6	SK20
	-120		120		92		57.4			2.0	
	-SKT25C- 90	7.5～25.4	90	31	62.6	55	59.5	60～65	SKG25-18HGD	1.8	SK25
	-120		120		92.2		59.3			2.4	
No.50	MBT50-SKT 6C-105	0.7～6.0	105	19.8	62	19.5	25.5	26～31	SKG 6- 6HG	3.8	SK 6
	-165		165		122		33.8			4.0	
	-SKT10C-105	1.75～10.0	105	22	62	27.5	33.1	35～41	SKG10-10HG	4.2	SK10
	-165		165		122		41.5			4.6	
	-SKT13C-105	2.75～13.0	105	26	62	33	38.1	39～51	SKG13-10HG	4.5	SK13
	-165		165		122		46.5			4.9	
	-SKT16C-105	2.75～16.0	105	27	62	40	44.9	45～57	SKG16-12HG	4.7	SK16
	-165		165		122		53.3			5.1	
	-SKT20C-105	3.5～20.0	105	28.5	62	48.5	53.2	47～63	SKG20-18HG	4.3	SK20
	-165		165		122		61.6			5.0	
	-SKT25C-105	7.5～25.4	105	31	62	55	59.4	60～70	SKG25-24HG	5.2	SK25
	-165		165		122		67.8			5.6	

★Collet, adjust screw (G No.) and **GH Handle** are available as an option.
★**Please refer ☞P.277, P.278 for SK Collet and SK-AC Collet.**
The Code No. of the **GH Handle** is **SKT6C-P: GH6, SKT10C-P: GH10, SKT13C-P: GH12, SKT16C-P: GH16, SKT20C-P: GH20, SKT25C-P: GH25**
★**Please use P class collet or A type collet. ☞P.277**
★All models are high pressure centre through tool coolant type.
SKT6: ϕ4～ϕ6, SKT10: ϕ6～ϕ10,SKT16: ϕ10～ϕ16,SKT20: ϕ6～ϕ20,SKT25: ϕ16～ϕ25
★Please add "**F**" for the flange through tool coolant type;
e.g. MBT40-SK10F-90
★**Please refer ☞P.282 for the adjust screw (G No.)**
★**Please refer ☞P.279 for SK, MDSK Coolant Solution.**

GH Handle ☞ P.293

Explanation of the Code No.

MBT40 - SKT10 C - 90

- 90: Nominal Gauge Length
- C: Centre Through Tool Coolant
- 10: Chucking Capacity
- SKT: Symbol of New Slim Chuck
- 40: Shank No.

3LOCK MBT HIGH SPEED SLIM CHUCK

NIKKEN

SKT-P

High Pressure Centre Through (MAX. 7MPa)

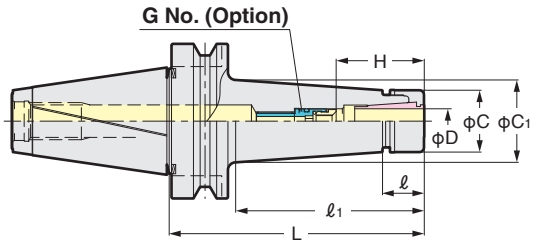

High Speed

- **When SK J type nut is used, the total chuck length will be extended by 6mm.**
- **When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.**

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	Weight (kg)	MAX. (r/min)	SK Collet
No.40	MBT40-SKT 6C- 90P	0.7～6.0	90	19.8	60	19.5	25.2	26～31	SKG 6- 6HG	1.1	30,000	SK 6
	-120P		120		90		29.4			1.4		
	-SKT10C- 90P	1.75～10.0	90	22	60	27.5	32.9	35～41	SKG10-10HG	1.2		SK10
	-120P		120		90		37.1			1.4		
	-150P		150		120		41.3			1.6		
	-SKT13C- 90P	2.75～13.0	90	26	60	33	37.8	39～51	SKG13-10HG	1.4		SK13
	-120P		120		90		42.0			1.6		
	-150P		150		120		46.2			1.8		
	-SKT16C- 90P	2.75～16.0	90	27	60	40	44.7	45～57	SKG16-12HG	1.5	25,000	SK16
	-120P		120		90		48.9			1.7		
	-150P		150		120		53.1			1.9		
	-SKT20C- 90P	3.5～20.0	90	28.5	60	48.5	53.0	47～63	SKG20-18HG	1.6		SK20
	-120P		120		92		57.4			2.0		
	-SKT25C- 90P	7.5～25.4	90	31	62.6	55	59.5	60～65	SKG25-18HGD	1.8	20,000	SK25
	-120P		120		92.2		59.3			2.4		
No.50	MBT50-SKT 6C-105P	0.7～6.0	105	19.8	62	19.5	25.5	26～31	SKG 6- 6HG	3.8	20,000	SK 6
	-165P		165		122		33.8			4.0		
	-SKT10C-105P	1.75～10.0	105	22	62	27.5	33.1	35～41	SKG10-10HG	4.2		SK10
	-165P		165		122		41.5			4.6		
	-SKT13C-105P	2.75～13.0	105	26	62	33	38.1	39～51	SKG13-10HG	4.5		SK13
	-165P		165		122		46.5			4.9		
	-SKT16C-105P	2.75～16.0	105	27	62	40	44.9	45～57	SKG16-12HG	4.7		SK16
	-165P		165		122		53.3			5.1		
	-SKT20C-105P	3.5～20.0	105	28.5	62	48.5	53.2	47～63	SKG20-18HG	4.3		SK20
	-165P		165		122		61.6			5.0		
	-SKT25C-105P	7.5～25.4	105	31	62	55	59.4	60～70	SKG25-24HG	5.2	15,000	SK25
	-165P		165		122		67.8			5.6		

★Collet, adjust screw (G No.) and **GH Handle** are available as an option.
★**Please refer ☞P.277, P.278 for SK Collet and SK-AC Collet.**
The Code No. of the **GH Handle** is **SKT6C-P: GH6, SKT10C-P: GH10, SKT13C-P: GH12, SKT16C-P: GH16, SKT20C-P: GH20, SKT25C-P: GH25**
★**Please use P class collet or A type collet. ☞P.277**
★All models are high pressure centre through tool coolant type.
SKT6: φ4～φ6, SKT10: φ6～φ10,SKT16: φ10～φ16,SKT20: φ6～φ20,SKT25: φ16～φ25
★**Please refer ☞P.282 for the adjust screw (G No.)**
★**Please refer ☞P.279 for SK, MDSK Coolant Solution.**

GH Handle ☞ P.293

Explanation of the Code No.

MBT40 - SKT10 C - 90 P

- P: High Speed Rotation
- 90: Nominal Gauge Length
- C: Centre Through Tool Coolant
- SKT10: Chucking Capacity
- SKT: Symbol of New Slim Chuck
- MBT40: Shank No.

3LOCK MBT MINI-MINI CHUCK ADVANCED ALPHA

NIKKEN

MMC

High Pressure Centre Through (MAX. 7MPa)

High Speed

The best chuck for the small dia.cutting tool

30,000r/min&G2.5
Gripping from Front Nose
Run-Out Accuracy : 3μm at 4D

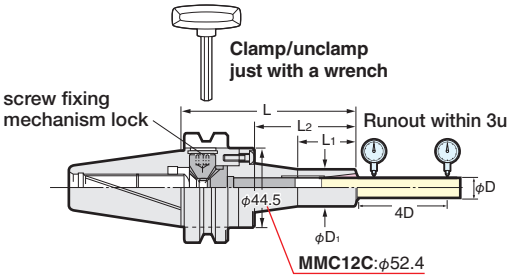

JAPAN PAT.

TAPER	Code No.	Chucking Range φD	φD1	L	L1	L2	Collet	MAX. (r/min)	Weight (kg)
No.40	MBT40-MMC 4 - 90-AA	1～ 4	15	90	30	43	MPK 4	30,000	1.2
	-MMC 8C- 90-AA	2～ 8	20		36	42	PMK 8 VMK 8		1.4
	-120-AA			120	43	72			1.5
	-MMC12C- 90-AA	4～12	30	90	35	44	PMK12 VMK12		1.7
	-120-AA			120	60	74			1.8
No.50	MBT50-MMC 4 -105-AA	1～ 4	15	105	30	43	MPK 4	20,000	3.8
	-MMC 8C-105-AA	2～ 8	20		36	42	PMK 8 VMK 8		4.4
	-135-AA			135	43	72			4.5
	-165-AA			165		102			4.6
	-MMC12C-105-AA	4～12	30	105	35	44	PMK12 VMK12		4.6
	-135-AA			135	60	74			4.7
	-165-AA			165	70	104			4.8

Wrench **EA573KL-6** : **MMCL4, 8** **MMCL12-M6W : MMC12(BT30, BT40, HSK50, HSK63)**
MMCL12-M6T62 : MMC12(BT50, HSK100) is attached as standard.
★**MPK, PMK, VMK** collet is available as an option. Please refer ☞ **P.284**
★Center through coolant type MINI-MINI Chuck is available for **MMC8** and **MMC12** type only.
★Please add "**F**" for the flange through tool coolant type ; **MBT40-MMC 8F- 90-AA,120-AA** **MBT50-MMC 8F-105-AA,135-AA,165-AA**
-MMC12F- 90-AA,120-AA **-MMC12F-105-AA,135-AA,165-AA**

★**Please refer ☞P.283 for MPK, PMK, VMK Coolant Solution.**

Explanation of the Code No.
MBT40 - MMC8 - 90
- 90: Nominal Gauge Length
- MMC8: Chucking Capacity
- MMC: Symbol of Mini Mini Chuck
- MBT40: Shank No.

3LOCK MBT VC HOLDER

NIKKEN

VC

Centre Through

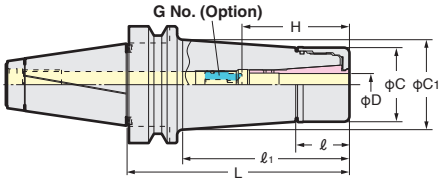

High Speed

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	Weight (kg)	MAX. (r/min)	Collet
No.40	MBT40-VC 6- 60	2.0～6.0	60	23	30	27.5	30.0	35～45	VCG 6- 8A	1.1	30,000	VCK 6
	- 90		90		60		32.7			1.3		
	-120		120		90		36.9			1.5		
	-VC13- 60	3.0～12.0	60	29	31	40	40.3	50～60	VCG13-15A	1.2		VCK13
	- 90		90		60		44.3			1.5		
	-120		120		90		48.5			1.9		
No.50	MBT50-VC 6-105	2.0～6.0	105	23	62	27.5	33.0	35～45	VCG 6- 8A	3.9	20,000	VCK 6
	-135		135		92		37.1			4.1		
	-165		165		122		41.3			4.4		
	-VC13-105	3.0～12.0	105	29	62	40	44.6	50～60	VCG13-15A	4.1		VCK13
	-135		135		92		48.8			4.5		
	-165		165		122		53.0			4.9		

★Collet, adjust screw (G No.) ☞ **P.282,P284** and **GH Handle** are available as an option.
The Code No. of the **GH Handle** is **VC6: GH10, VC13: GH16** ☞**P.293**
★When the axial stopper is required, please use Adjust Screw (G No.)
★**MBT40-VC 6-150, MBT40-VC13-150, MBT50-VC13- 90, -120** are available as semi-standard.
★TiN Bearing Nut is supplied as standard.
★Please add "**-RP**" at the end of Code No. for Rust Proof Treatment **VC** Holder. **e.g.MBT40-VC13-60-RP**
★**Please use VC J type Nut & Cap for Centre Through Coolant.**
When VC J type Nut is used, the total holder length will be extended to 6mm.
★Please refer ☞**P.40** for **VCK** collet.

Please refer ☞**P.293**

Explanation of the Code No.
MBT40 - VC6 - 90
- 90: Nominal Gauge Length
- VC6: Chucking Capacity
- VC: Symbol of VC Holder
- MBT40: Shank No.

3LOCK MODULAR TYPE BORING BASE HOLDER

NIKKEN

Q



Fig.1



Fig.2



Fig.3

TAPER	Code No.	Coupling ϕQ	L	C	C_1	H	H_1	Coupling Bolt No.	Fig.	Weight (kg)
No.40	MBT40-Q26- 50,95,140	26	50, 95,140	50	-	20,65,110	-	B26N	1	1.1 , 1.7 , 2.5
	(MIT40)-Q34- 95,110	34	95,110	64	62	68,83	55,70	B34	3	2.2 , 2.6
	-Q42- 95	42	95	83	62	68	55	B42		2.8
No.50	MBT50-Q26- 65,140,170N	26	65,140,170	50	65	27,47,112	-	B26N	1,2,2	3.7 , 5.3 , 5.4
	(MIT50)-Q34-140,170,200	34	140,170,200	64	80	102,120,150		B34		5.6 , 6.5 , 7.1
	-Q42-125,190	42	125,190	83	-	87,152		B42	1	6.5 , 9.1

★ϕC of Q26 base holder has been increased from 45mm to 50mm due to improvement of its rigidity.
★All base holders have a centre through-tool coolant hole.
★The Coupling screw & wrench are supplied as standard.

★MBT50-Q42-225A, 275A, 325A and 375A are the arbor with tapered shape.
★When L length is required longer than standard, please specify the boring depth M.



Q No.

★Blank arbor with 3LOCK shank is available.
MIN. order quantity of blank arbor is 5 off.

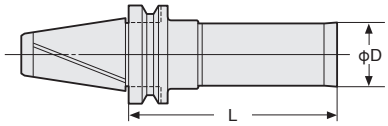

Please specify ;
・Hardness of arbor : Raw or HRC40±2
・ϕD×L
e.g. ϕD=50mm, L=200mm MBT50-BLK50-200

3LOCK DJ BORING HEAD with DJ BORING BIT

NIKKEN

Coolant Through type is available.
Please contact us.

Easy to Set Micron Accuracy

DJ
Centre Through



▲1Graduation:0.01mm on dia.

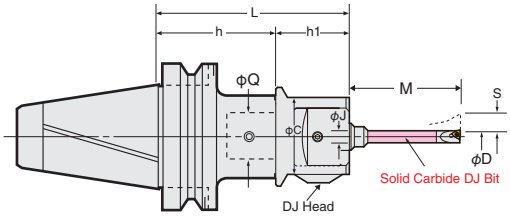

TAPER	Code No.	Boring Range	Boring Depth	L	C	Bit Hole Size	Shank Code No.	Head Code No.	Bit Stroke	DJ Bit Code No.
	MBTNo.-MinD-L	D	M			J	MBTNo.Q-h	Q-MinD-h_1	S	
No.40	MBT40-DJ3- 90A	3～28	14～ 80	90	50	10	MBT40-Q26- 50	Q26-DJ3-40A	5.2	J10
	(MIT40) -135A			135			- 95			
	-DJ8- 94AN	3～50	14～130	94	59	16	MBT40-Q26- 50	-DJ8-44AN	6.0	J16
	-139AN			139			- 95			
No.50	MBT50-DJ3-105A	3～28	14～ 80	105	50	10	MBT50-Q26- 65	Q26-DJ3-40A	5.2	J10
	(MIT50) -210A			210			-170N			
	-DJ8-109AN	3～50	14～130	109	59	16	MBT50-Q26- 65	-DJ8-44AN	6.0	J16
	-214AN			214			-170N			

★MIN. dial readout on dia.: 0.01mm, Sub scale: 0.005mm, 0.8mm/rev.
★Each boxed set of **DJ3** and **DJ8** Boring Bars include 4 pcs of **DJ** Boring Bits as standard.
Bits included for **MBT40-DJ8-94A : J16-8-40, J16-18-80C, J16-28-85, J16-38-85**
Bits included for **MBT40-DJ8-94AN :** The standard set bites will be replaced by those with C(with oil hole) as soon as the stock of those without C(without oil hole) runs out. ☞ **P.88**
★**DJ** Boring Bar without Boring Bits is also available. Please add **"-BD"** at the end of Code No. **e.g. MBT40-DJ3-90A-BD**
★Shank and **DJ** Head (including Boring Bits) are delivered in separate packages.
★Please refer ☞ **P.88** for Boring Bits. Please refer ☞ **P.102** for cutting condition.

3LOCK BALANCE-CUT BORING ARBOR

NIKKEN

3Lock

Boring for Roughing

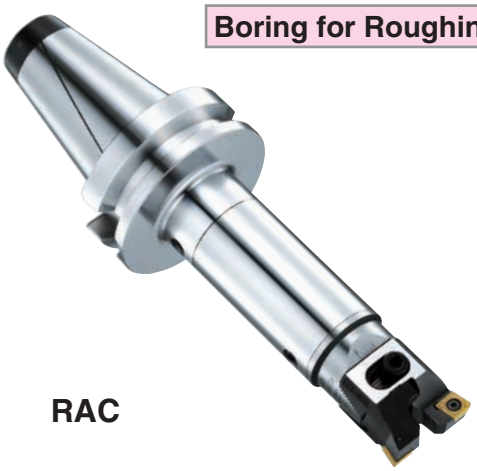

RAC

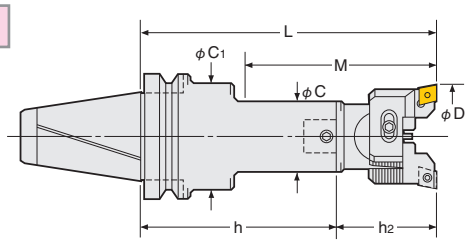

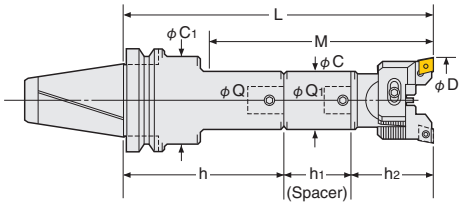

Power of Shoulder Support

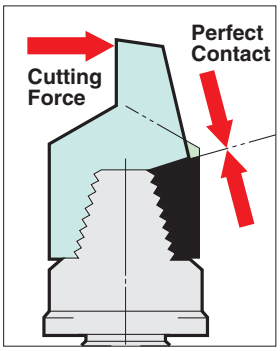

TAPER	Code No. MBTNo.- Min.D -L	Boring Range D	Boring Depth M	Coupling Dia Q	C	C1	P.60 Head No. Q- Min.D -h2	Insert No.	Weight (kg)
No.40	MBT40-RAC 25-135E, 165E, 180E	25～32	67, 105, 112	12	24	35	12-RAC 25- 55E	CC07	2.0, 2.1, 2.1
	-RAC 32-150E, 180E, 195E	32～45	77, 110, 122	16	31	42	16-RAC 32- 55E	CC08	2.4, 2.6, 2.6
	-RAC 43-150E, 180E, 210E	43～55	97, 130, 157	20	40	50	20-RAC 43- 70E	CC12	2.7, 2.9, 3.2
	-RAC 53-165E, 210E, 225E	53～70	135, 180, 195	26	50	50	26-RAC 53- 70E		2.5, 3.3, 3.2
	-RAC 70-180E, 195E, 240E	70～100	180, 195, 240	34	64	64	34-RAC 70- 85E		4.8, 5.2, 6.2
	-RAC100-195E	100～130	195	42	83	62	42-RAC100-100E		6.8
No.50	MBT50-RAC 25-150E, 180E, 195E	25～32	67, 105, 112	12	24	44	12-RAC 25- 55E	CC07	4.7, 4.9, 4.8
	-RAC 32-180E, 210E, 225E	32～45	77, 110, 122	16	31	50	16-RAC 32- 55E	CC08	5.4, 5.6, 5.6
	-RAC 43-180E, 195E, 225E, 240E	43～55	97, 130, 142, 157	20	40	60	20-RAC 43- 70E	CC12	5.7, 5.8, 6.1, 6.2
	-RAC 53-210E, 240E, 270E	53～70	117, 182, 177	26	50	65	26-RAC 53- 70E		6.9, 7.0, 7.6
	-RAC 70-255E, 285E, 315E	70～100	205, 235,265	34	64	80	34-RAC 70- 85E		9.5, 9.9, 10.9
	-RAC100-225E, 290E, 325E＊	100～130	225, 290, 325	42	83	83	42-RAC100-100E		12.5, 12.5, 16.5

★**"C" grade (Coated)** inserts are supplied as standard with the head. ☞**P.62** Please refer ☞**P.102** for cutting condition.
★Please refer ☞**P.154** for base holder, ☞**P.90** for spacer and ☞**P.67** for head.
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. MBT40-RAC53-165E-C**
★Cartridges & Insert tips for the Heavy Duty Boring of Iron and Cast Iron (No letter) , for Aluminum **(A)** , and for Through Hole & Multiple Sheets **(K)** are available. Please refer ☞**P.68** for cartridges. Please add the letter "No letter" , **"A"** or **"K"** at the end of Code No. **e.g. MBT40-RAC53-165A**
★**Cartridge & Insert for Alloy Steel (E) is recommended for boring on steel and stainless steel.**
★＊ **: MBT50-RAC100-375E, 425E and 475E are also available.**

Code No. of **RAC25** and **RAC32** with **CC** inserts are changed to **RAC25E** and **RAC32E**.
Please refer ☞**P.59, P.60**
★**When L length is required longer than standard, please specify the boring depth M.**

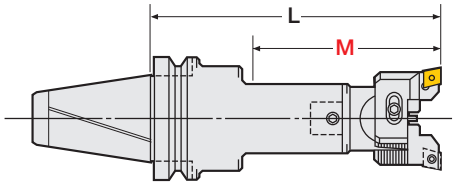

Coolant Through Tool

3LOCK ZMAC ADVANCED BORING ARBOR (ZMAC-V) NIKKEN

JAPAN PAT.

Boring for Finishing

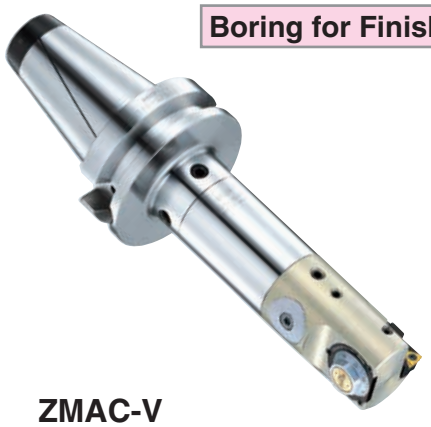

ZMAC-V
Photo shows **ZMACα-V**.

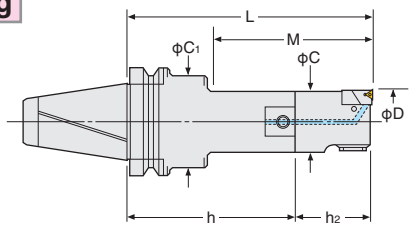

No Micro Vibration due to Double-Contact Support of Cartridge. Long Tool-Life & High Accuracy.



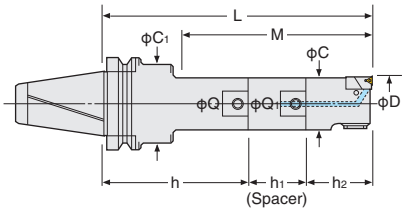

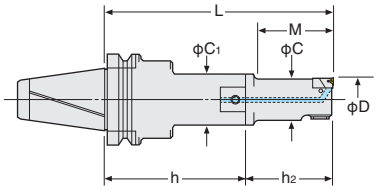

Only for ZMAC16-V

All codes shown are for heads with triangular inserts For heads with rhomboid inserts please add the letter "R" to the code No. e.g. MBT40-ZMAC32 R -150V

TAPER	Code No. MBTNo.- Min.D - L	Boring Range D	Boring Depth M	Coupling Dia Q	C	C1	P.103 Head No. Q- Min.D -h2	Insert No.	Weight (kg)
No.40	MBT40-ZMAC 16-125V, 135V	15.9～20.2	38, 48	12	15	24	12-ZMAC16-45V, 55V	3MP	1.9, 1.9
	-ZMAC 20-120V, 135V, 150V	19.8～25.2	45, 67, 75	9	19	30	9-ZMAC20-40V		1.9, 1.9, 2.0
	-ZMAC 25-120V, 150V, 165V	24.8～32.2	52, 90, 97	12	24	35	12-ZMAC25-40V		2.0, 2.1, 2.1
	-ZMAC 32-150V, 180V, 195V	31.8～42.2	77, 110, 122	16	31	42	16-ZMAC32-55V	4MP	2.5, 2.7, 2.7
	-ZMAC 42-150V, 180V, 210V	41.8～55.2	97, 130, 157	20	40	50	20-ZMAC42-70V	6MP	3.0, 3.2, 3.5
	-ZMAC 55-165V, 210V, 225V	54.8～70.2	135, 180, 195	26	53	50	26-ZMAC55-70V		3.9, 4.6, 4.6
	-ZMAC 70-165V, 180V, 225V	69.8～85.2	165, 180, 225	34	67	64	34-ZMAC70-70V		5.4, 5.8, 6.8
	-ZMAC 85-195V	84.8～100.2	195	42	83	62	42-ZMAC85-100V		9.0
No.50	MBT50-ZMAC 16-140V, 150V	15.9～20.2	38, 48	12	15	24	12-ZMAC16-45, 55V	3MP	4.7, 4.7
	-ZMAC 20-150V, 165V, 180V	19.8～25.2	45, 67, 75	9	19	40	9-ZMAC20-40V		4.8, 4.8, 4.9
	-ZMAC 25-135V, 165V, 180V	24.8～32.2	52, 90, 97	12	24	44	12-ZMAC25-40V		4.8, 4.8, 4.9
	-ZMAC 32-180V, 210V, 225V	31.8～42.2	77, 110, 122	16	31	50	16-ZMAC32-55V	4MP	5.5, 5.6, 5.7
	-ZMAC 42-180V, 195V, 225V, 240V	41.8～55.2	97, 130, 142, 157	20	40	60	20-ZMAC42-70V	6MP	6.0, 6.0, 6.4, 6.5
	-ZMAC 55-210V, 240V, 270V	54.8～70.2	117, 182, 177	26	53	65	26-ZMAC55-70V		7.5, 7.6, 8.1
	-ZMAC 70-240V, 270V, 300V	69.8～85.2	190, 220, 250	34	67	80	34-ZMAC70-70V		10.0, 10.6, 11.5
	-ZMAC 85-225V, 290V, 315V	84.8～100.2	182, 247, 272	42	83	83	42-ZMAC85-100V		12.5, 15.0, 16.0
	-ZMAC100-225V, 290V*	99.5～140.5	225, 290				42-ZMAC100-100V		13.8, 16.5
	-ZMAC140-225V, 290V*	139.5～180.5					42-ZMAC140-100V		14.6, 17.3

★MIN. dial readout : **ZMAC25-V** & smaller is 0.02mm on diameter. **ZMAC32-V** and larger are 0.01mm on diameter.
★**"C" grade (Coated) insert for Steel, Stainless & Cast Iron is supplied as Standard with the head (Smooth boring & Long tool-life).**
We would recommend "**B**" grade (**CBN**) insert for Hardened Steel & High Speed boring of Cast Iron. Please refer ☞**P.101** for cutting condition.
★Please refer ☞**P.154** for Shank, and ☞**P.90** for Spacer, and ☞**P.75** for Head.
★Centre Through Coolant function is available as standard.
★* **: MBT50-ZMAC100-325V, 375V, 425V, 475V are also available.**
MBT50-ZMAC140-325V, 375V, 425V, 475V
★**When L length is required longer than standard, please specify boring depth M.**



High Speed Boring ZMACα-V

Special Hardened Light Alloy Metal Head with Balancing for Anti-Vibration. MAX12,000r/min



ZMAC-V for Multi-Stage Boring Bar

Please contact us for the special boring bar.

Photo. shows **NC5** shank.

Coolant Through Tool

Please add "AA" at the end of Code No. for the boring arbor with ZMACα-V head. ☞ **P.76**
e.g. MBT40-ZMAC42-150AAV

3LOCK BALANCE-CUT RAC BORING ARBOR for LARGE DIA. NIKKEN

RAC

For Roughing

- With slight adjust screw
- Boring Dia:ϕ130～580mm

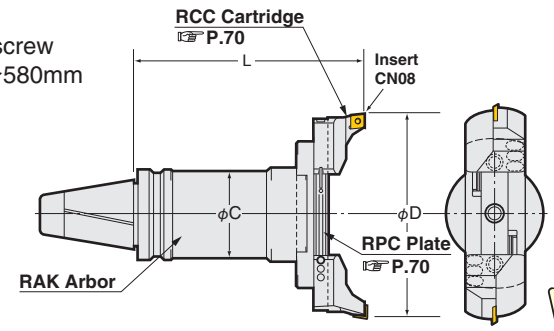

P.62

Boring Dia:ϕ130～580mm **for Roughing.**

TAPER	Code.No	D MIN.～MAX.	L	C	Arbor No.	RPC Plate No.	Cartridge No. for Large dia.	Weight (kg)
No.40	MBT40 -RAC130-205	130～180	205	61	MBT40-RAK-130A	RPC-130	For Heavy Duty Boring of Iron and Cast Iron RCC-130 ×2 Insert Tip CN08	6.8
	(MIT40)-RAC180-205	180～230				-180		7.8
No.50	MBT50 -RAC130-185, 235, 285	130～180	185, 235, 285	90	MBT50-RAK-110A, -160A, -210A	RPC-130		11.3, 12.8, 15.8
	(MIT50)-RAC180-185, 235, 285	180～230				-180		11.8, 13.3, 16.3
	-RAC230-185, 235, 285	230～280				-230		12.3, 13.8, 16.8
	-RAC280-185, 235, 285	280～330				-280		12.8, 14.3, 17.3
	-RAC330-210*	330～380	210 (220*)	98	MBT50-RAK330-125 MIT50-RAK330-135	RPC-330		15.5
	-RAC380-210*	380～430				-380		16.5
	-RAC430-210*	430～480				-430		17.5
	-RAC480-210*	480～530				-480		18.5
	-RAC530-210*	530～580				-530		19.5

★The Code No. on above table are the boring arbors with **RCC-130** cartridge (Inset tip: **CN08**) the Heavy Duty Boring of Iron and Cast Iron . Please refer ☞**P.100** for cutting condition.
★Boring arbor with cartridges & insert for Steel, Stainless Steel and Cast Iron **(E)** , for Aluminum **(A)** and for Through Hole & Multi Sheets **(K)** are available. Please refer ☞**P.70** for cartridges. **e.g. MBT50-RAC130-185E**
★Please refer ☞ **P.70** for Arbor (**RAK**) and Plate (**RPC**).
★Arbor, Plate and Cartridge are delivered in separate packages.
★When ordering, please let us know machine maker and model no. to avoid the interference with tool magazine of **ATC**.
★The location of cutting edge is same as drive key in standard. The different location is available, please specify **θ** in Code No. **e.g. MBT50-RAC180-235 (90°)**
★The boring arbors marked ＊with **MIT50**, L (gauge length) is 220. **e.g. MIT50-RAC330-220**
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. MBT50-RAC130-185-C**

3LOCK BALANCE-CUT BAC ADVANCED BORING ARBOR for LARGE DIA. NIKKEN

JAPAN PAT.

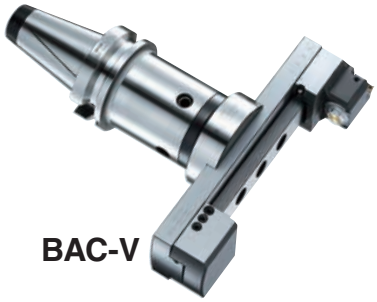

BAC-V

For Finishing

- Min. dial read out:main scale dia. 0.01mm, sub scale dia.0.005mm
- Boring Dia:ϕ130～595mm

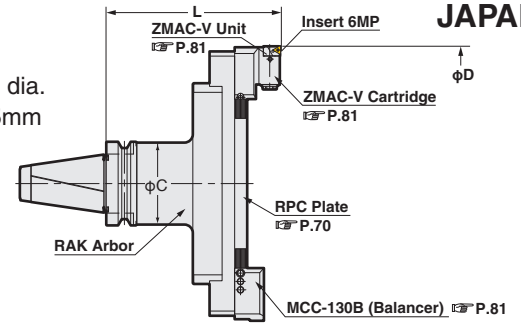

P.103

Boring Dia:ϕ130～595mm **for Finishing.**

TAPER	Code.No	D MIN.～MAX.	L	C	Arbor No.	RPC Plante No	Cartridge (Balancer)	Weight (kg)
No.40	MBT40 -BAC130-205V	130～195	205	61	MBT40-RAK-130A	RPC-130	MCCZ-130V (MCC-130B) Insert Tip 6MP	6.8
	(MIT40)-BAC180-205V	180～245				-180		7.8
No.50	MBT50 -BAC130-185V, 235V, 285V	130～195	185, 235, 285	90	MBT50-RAK-110A, -160A, -210A	RPC-130		13.0, 14.5, 17.5
	(MIT50)-BAC180-185V, 235V, 285V	180～245				-180		13.5, 15.0, 18.0
	-BAC230-185V, 235V, 285V	230～295				-230		14.0, 15.5, 18.5
	-BAC280-185V, 235V, 285V	280～345				-280		14.5, 16.0, 19.0
	-BAC330-210V*	330～395	210 (220*)	98	MBT50-RAK330-125 MIT50-RAK330-135	RPC-330		16.2
	-BAC380-210V*	380～445				-380		16.5
	-BAC430-210V*	430～495				-430		17.5
	-BAC480-210V*	480～545				-480		18.5
	-BAC530-210V*	530～595				-530		19.5

★**"C" grade (Coated)** Inserts are supplied as standard. Please refer ☞ **P.101** for cutting condition.
★Unit **"M5HZ-55V"** is provided as standard, please refer ☞**P.70** for Arbor (**RAK**) and Plate (**RPC**).
★Arbor, Plate and Cartridge are delivered in separate packages.
★When ordering, please let us know machine maker and model no. to avoid the interfererce with tool magazine of **ATC**.
★The location of cutting edge is same as drive key in standard. The different location is available, please specify **θ** in Code No. **e.g. MBT50-BAC180-235V (90°)**
★The boring arbors marked＊with **MIT50**, L (gauge length) is 220. **e.g. MIT50-BAC330-220V**
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. MBT50-BAC130-185-C**



3LOCK MBT FACE MILL ARBOR / SHOULDER CUTTER ARBOR NIKKEN

FMA
Photo. shows with face mill cutter.

JIS B4113 Face Mill Cutter

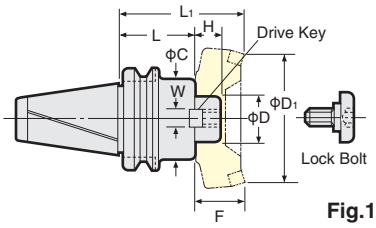

Fig.1

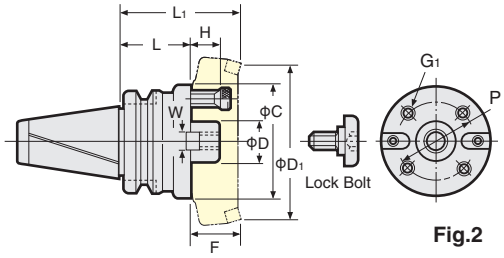

Fig.2

TAPER	Code No. (ΦD -L)	Arbor H	Arbor C	Arbor W	Weight (kg)	With Cutter L1	With Cutter D1	With Cutter F	Drive Key	Lock Bolt	Fig.
No.40	MBT40-FMA25.4 -45	22	50	9.5	1.5	95	80	50	FW 5	FM12	1
	-FMA25.4 -90				3.1	140					
	-FMA31.75 -45	30	60	12.7	1.7	105	100	60	FW13	FM16	
	-FMA31.75 -75				3.1	135					
	-FMA38.1 -60	34	80	15.9	2.9	120	125		FW18	FM20	
No.50	MBT50-FMA25.4 -45	22	58	9.5	3.7	95	80	50	FW 5	FM12	1
	-FMA25.4 -90				4.6	140					
	-FMA25.4 -150				5.5	200					
	-FMA31.75 -45	30	70	12.7	4.5	105	100	60	FW12,13	FM16	
	-FMA31.75 -75				5.3	135					
	-FMA31.75 -105				6.1	165					
	-FMA38.1 -45	34	80	15.9	4.3	105	125		FW18,19	FM20	
	-FMA38.1 -75				5.6						
	-FMA50.8 -45	36	100	19	4.9	135	160		FW23,24	FM24	
	-FMA50.8 -75				6.8						
	-FMA47.625-75*	38	128.57	25.4	7.7		200		FW26	4×9GM16-55	2

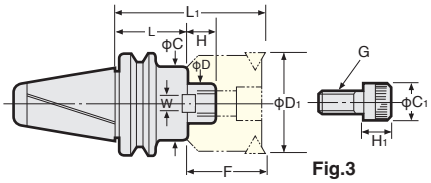

Fig.3

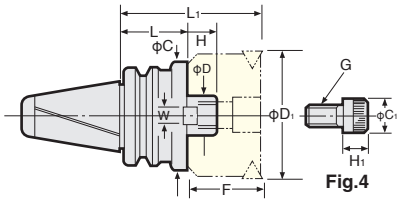

Fig.4

FMC

TAPER	Code No. (ΦD -L)	Arbor H	Arbor C	Arbor W	Weight (kg)	With Cutter L1	With Cutter D1	With Cutter F	With Cutter G Cap Bolt	C1	H1	Fig.
No.40	MBT40-FMC22-45	18	45	10	1.3	85	50	40	9GM10-30	16	10	3
	-FMC22-90				2.0	130						
	-FMC27-60	20	60	12	1.5	110	80	50	9GM12-35	18	12	4
	-FMC27-90				2.2	140						
	-FMC32-60	22	85	14	2.3	110	125		9GM16-35	24	16	
	-FMC32-75				2.6	125						
No.50	MBT50-FMC22-60	18	45	10	4.2	100	50	40	9GM10-30	16	10	3
	-FMC22-105				4.7	145						
	-FMC22-150				5.3	190						
	-FMC27-45	20	70	12	4.1	95	80	50	9GM12-35	18	12	
	-FMC27-90				5.5	140						
	-FMC27-150				7.3	200						
	-FMC32-45	22	85	14	4.2	95	125		9GM16-35	24	16	
	-FMC32-75				5.5	125						
	-FMC32-105				7.0	155						

★Drive keys, L wrench and bolt are supplied as standard.
★The arbor weight is only for the arbor.
★The different type of the cap bolt may be used for the recent cutter. Please check the specification.
★The arbor marked * requires 4 fixing bolts (**FMA47.625 : M16, P=101.6**)
★Extended length is available as an option. **MBT50-FMA25.4 -200, 250,…500**
-FMA31.75-150, 200,…500
-FMA38.1 -150, 200,…500

3LOCK MBT ZERO FIT TYPE MILLING CHUCK

NIKKEN

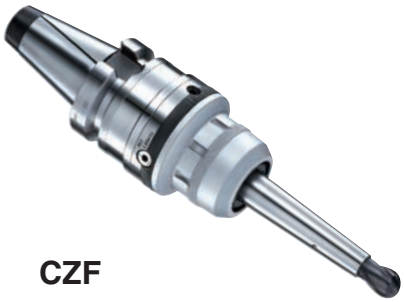

CZF

Centre Through

Fig.1



Fig.2

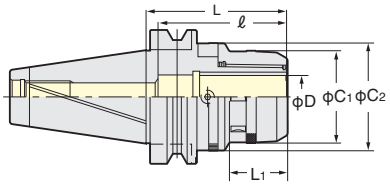

Explanation of the Code No.

MBT40 – CZF20 – 105

- Nominal Gauge Length
- Chucking Capacity φD
- Zero Fit Type Milling Chuck
- Shank No.

TAPER	Code No.	C1	C2	L	L1	L2	ℓ	Weight(kg)	Fig.	Collet
No.40	MBT40-CZF20-105, 120	51.5	66.5	105, 120	35	64.5	80	2.1, 2.5	1	KM20 CCK20
	-CZF25-105, 120	59.5	74.5			68		2.4, 2.9		KM25 CCK25
	-CZF32-120	69	80.5	120	42	81	105	2.8		KM32 CCK32
No.50	MBT50-CZF20-105, 165	51.5	66.5	105, 165	35	–	80	4.6, 6.0	2	KM20 CCK20
	-CZF25-105, 165	59.5	74.5					5.0, 6.8		KM25 CCK25
	-CZF32-105, 165	69	80.5		42		105	5.3, 7.4		KM32 CCK32

★Spanner is available as an option.
CZF20 type : 9HC22, CZF25 type : 9HC25, CZF32 type : 9HC32

★Wrench to adjust run-out(**9ZFL**)is available as an option.

Wrench to adjust
9ZFL

★Please note that the acceptable shank tolerance is h6~h7.
★Please add"**P**"at the end of Code No. for the high speed type. **e.g. MBT40-CZF25-105P**
★Please refer ☞**P.273, P.274** for **KM**, **CCK** collet.
★Please refer ☞P.273 for Milling Chuck Coolant Solution.

★Multi-Cam style is available. **e.g. MBT40-CZF32-120-C3**. (3 Cams) Please contact us for more detail.

3LOCK MBT ZERO FIT TYPE SLIM CHUCK

NIKKEN

SZF

High Pressure Centre Through (MAX. 7MPa)

Fig.1

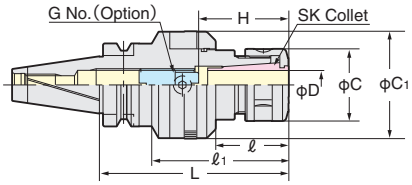

Fig.2

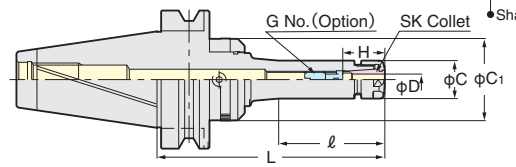

Explanation of the Code No.

MBT40 – SZF10 C – 90

- Nominal Gauge Length
- High Pressure Centre Through
- Chucking Capacity
- Zero Fit Type Slim Chuck
- Shank No.

・When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No.(Option)	Weight(kg)	Fig.	Collet
No.40	MBT40-SZF 6C- 90,150	0.7~6.0	90, 150	37, 60	–	19.5	40.5,48.5	26~31	SKG 6- 6HG	1.3, 1.7	2	SK 6
	-SZF10C- 90,150	1.75~10.0		37, 97		27.5	48.5	35~41	SKG10-10HG	1.5, 1.9		SK10
	-SZF16C- 90,150	2.75~16.0				40	59.5	45~57	SKG16-12HG	1.8, 2.2		SK16
	-SZF25C-120,150	7.5~25.4	120, 150	55, 86	84, 114	55	66.5	60~65	SKG25-18HGD	2.4, 2.9	1	SK25
No.50	MBT50-SZF 6C-105,165	0.7~6.0	105, 165	41, 63	–	19.5	40.5,59.5	26~31	SKG 6- 6HG	4.0, 4.2	2	SK 6
	-SZF10C-105,165	1.75~10.0		41, 101		27.5	48.5	35~41	SKG10-10HG	4.5, 4.9		SK10
	-SZF16C-105,165	2.75~16.0				40	59.5	45~57	SKG16-12HG	5.0, 5.4		SK16
	-SZF25C-135,165	7.5~25.4	135, 165	71, 101		55	66.5	60~70	SKG25-24HG	5.8, 6.0		SK25

★Adjust screw(G No.), wrench to adjust run-out(**9ZFL**)and **SKL** spanner are available as an option. **SZF6C: SKL-6W, SZF10C: SKL-10, SZF16C: 9HC16, SZF25C: 9HC25**

★Please use "P" class or "A" type SK collet. ☞**P.277**
★For centre through coolant application please use **SK J** type nut and cap for your preference. Please note that the length of **J** type nut is 6mm longer than the standard **SK** Nut.☞ **P.279**
★For High Speed type, Code No. is "**SZF-P**". **e.g. MBT40-SZF10C-90P**
In this case, **GH Handle** is required. ☞**P.293**
★Multi-Cam style is available. **e.g. MBT40-SZF16C-90-C3**. (3 Cams) Please contact us for more detail.
★Please refer ☞P.279 for SK, MDSK Coolant Solution.

・Drill chuck, side lock holder or morse taper sleeve are not supplied with **3LOCK** shank. To prevent the swarf contamination to the gap between spindle flange and tool flange, these kinds of chucks with **2LOCK** shank is available.

3LOCK MBT FMH FACE MILL ARBOR

NIKKEN

For Oil Hole Cutter For High Feed Cutter

FMH

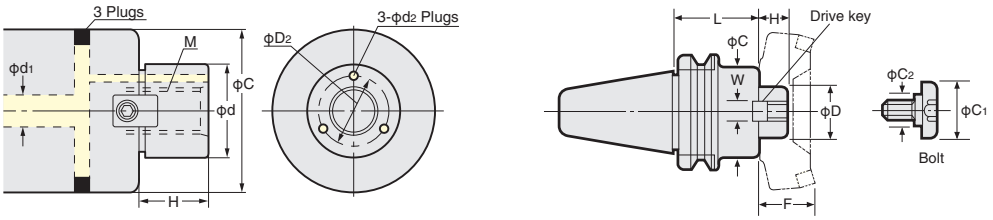

Code No.	Cutter Dia.	φd	φC	M	H	Coolant Hole		
						φD2	φd1	φd2
FMH22(22.225)	φ50, φ52	22(22.225)	47	M10 P1.5	18(17)	16	6～8	3
	φ63, φ66		60					
FMH27(25.4)	φ80	27(25.4)	76(70)	M12 P1.75	20(22)	19.5(18.5)	8～10	3.5
FMH32(31.75)	φ100	32(31.75)	96	M16 P2.0	22(30)	24	10～13	4
FMH40(38.1)	φ125	40(38.1)	100	M20 P2.5	26(34)	30(29)	10～15	5
FMH50.8	φ160	50.8		M24 P3.0	36	37.5	15～20	7

★Fixing dimension is basically based on **FMA/FMC**. ★The combination of the other cutter dia. are also available.

FMH High Feed Cutter Arbor with Coolant Hole

TAPER	Code No. (φD-φC-L)	Arbor							Weight (kg)	Drive Key	Lock Bolt	G Cap Bolt
		H	C	W	C1	C2	H1	H2				
No.40	MIT40-FMH22 - 47- 45	18	47	10	16	–	10	–	1.3	FW 8	–	9GM10-30
	- 60- 45		60						1.4			
	-FMH27 - 60- 60	20	60	12	18	–	12	–	1.8	FW11	–	9GM12-35
	- 76- 60		76						2.2			
	-FMH32 - 96- 60	22	96	14	24	–	16	–	2.9	FW16	–	9GM16-35
	-FMH40 -100- 60	26	100	16	50	27	14	6	3.1	FW22	FM20	–
No.50	MIT50-FMH22 - 47- 60	18	47	10	16	–	10	–	4.2	FW 8	–	9GM10-30
	- 60- 60		60						4.5			
	-FMH27 - 60- 45	20	60	12	18	–	12	–	3.9	FW10	–	9GM12-35
	- 76- 45		76						4.1			
	-FMH32 - 96- 45	22	96	14	24	–	16	–	4.2	FW15	–	9GM16-35
	-FMH40 -100- 45	26	100	16	50	27	14	6	5.1	FW20	FM20	–
	-FMH50.8 -100- 45	36	100	19	65	37	14	10	4.4	FW23	FM24	–

★**FMH22.225, FMH25.4, FMH31.75, FMH38.1** are also available.

★**For FMH22, there are two types of φC, φ47 and φ60.**
For FMH27, there are two types of φC, φ60 and φ76.

3LOCK SPINDLE FLANGE CLEANER

NIKKEN

CLEF

Spindle Flange Cleaner for 3LOCK Tooling and NC5 Tooling.

Let's clean your spindle flange just before the fine machining to keep ATC repeatability accuracy higher.

Do not rotate your spindle, just supply the 0.5MPa dry air from the stopper block in approx. 30sec., then the intermittent jet air blow from the spindle flange cleaner will clean your spindle flange surface.

MBT40-CLEF- 92
MBT50-CLEF-113

MIT40-CLEF- 92
MIT50-CLEF-113

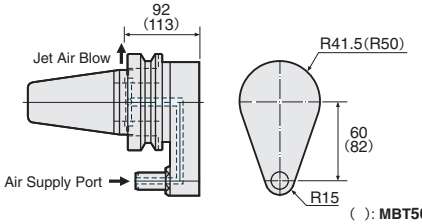

( ): MBT50, MIT50

★Stopper Block is not included. When ordering, please specify the name of M/C builder, model No. and the drawing of the spindle flange ☞ P.324

SPINDLE TAPER CLEANER

NIKKEN

CLE

Let's clean your spindle taper just before the fine machining.

Rotate your spindle at 50～150r/min, then the spindle cleaner will rotate to clean your spindle taper.
Please be careful, MAX. rotation speed of your spindle is 150r/min.

BT40-CLE-100
BT50-CLE-120

IT40-CLE-100
IT50-CLE-120

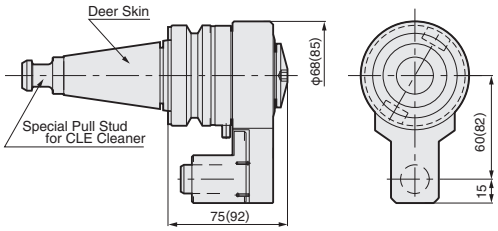

★Special Pull Stud for CLE Cleaner is supplied as standard. Please specify the Pull Stud Code No.
★Stopper Block is not included. When ordering, please specify the name of M/C builder, model No. and the drawing of the spindle flange. ☞ P.324

AUTOMATIC OIL SUPPLY HOLDER

NIKKEN

ZP

For Improvement of Tap run-out accuracy and extended tap life.

Automatic oil or grease supply of a required amount can be done with this holder before your tapping operation.

TAPER	Code No.	φD1	φD2	L	Capacity of tank	Discharge /Stroke	Weight (kg)	Nozzle (Standard Accessories)
No.30	BT30-ZP60-200	60	64	200	100cm³	0～3.0cm³	1.2	ZP-10, ZP-10G, ZP-20
No.40	BT40-ZP80-279	80	84	279	300cm³	0～3.5cm³	3.3	ZP-10, ZP-10G, ZP-20, ZP-30
No.50	BT50-ZP95-312	96	100	312	500cm³	0～3.5cm³	6.0	

MIT TOOLING SYSTEM

NIKKEN

What is MIT Shank Tooling?



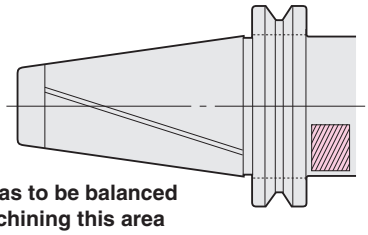

IT-X has to be balanced by machining this area due to the unsymmetrical design of **IT** (Drive Key Slot and V Notch).

MIT Shank is **3LOCK SYSTEM** for IT shank.
IT shank is based on ISO 7388/1-'83 (DIN69871-'90) and its flange has an unsymmetrical shape.
-Depth of Drive Key Slots are different.
-V Notch on one side.
Therefore, MIT shank Multi-Lock Milling Chuck, MINI-MINI Chuck, Slim Chuck and VC Holder have a flat cut just under the V flange for mass balancing as standard.

3LOCK MIT MULTI LOCK MILLING CHUCK

NIKKEN

C
High Pressure Centre Through (MAX. 7MPa)

The cutting chips show us the actual machining capability.

Quiet, high speed heavy-milling



Stable finishing



ANNIVERSARY Type
—Powerful gripping torque—
- High rigidity
- High precision
- Compact design

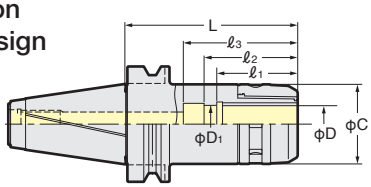

TAPER	Code No.	C1	D	D1	L	ℓ1	ℓ2	ℓ3	Collet	Weight (kg)
No.40	MIT40-C12- 90	33	12	12	90	48	53	58	KM12 CCK12	1.6
	-120*1				120					1.9
	-C16- 60	44	16	16	60	51	58	65	KM16 CCK16	1.4
	- 90*1				90					1.7
	-120				120					2.0
	-C20- 80	52	20	20	80	59	66	80	KM20 CCK20 CCNK20 NK20	1.6
	- 90				90					1.8
	-120				120					2.2
	-C25- 85	60	25	25	85	61	70	75	KM25 CCK25 CCNK25 NK25	2.1
	-120				120		72	80		2.5
	-C32- 95*	64	32	25	95	67	82	-	KM32 CCK32 CCNK32 NK32	2.1
	-105				105		81	95		2.5
	-120				120		77	107		2.8
No.50	MIT50-C12-105	33	12	12	105	48	53	58	KM12 CCK12	4.0
	-165*1				165					4.6
	-C16-105	44	16	16	105	51	58	65	KM16 CCK16	4.2
	-165*1				165					4.8
	-200*1				200					5.1
	-C20-105	52	20	20	105	59	66	80	KM20 CCK20 CCNK20 NK20	4.5
	-165*1				165					5.1
	-200*1				200					5.7
	-C25-105	60	25	25	105	61	72	80	KM25 CCK25 CCNK25 NK25	4.8
	-135*1				135					5.2
	-165*1				165					5.6
	-C32- 90	69	32	25	90	70	81	107	KM32 CCK32 CCNK32 NK32	4.3
	-105				105					4.6
	-120				120					5.1
	-135				135					5.6
	-165				165					6.4
	-C42- 95*	86	42	42	95	74	80	85	KM42 CCK42 CCNK42 NK42	5.5
	-120*1				120		100	110		6.6
	-135*1				135		115	125		7.2
	-165*1				165		115	125		8.6

★Spanner is available as an option. **C12(φ30) : 9HC12, C12A(φ33) : 9HC12A, C16:9HC16, C20:9HC20, C25:9HC25, C32&φC1=64:9HC25, C32:9HC32, C42:9HC42**
★Please note the acceptable shank tolerance is h7.
★Please refer ☞ **P.274, P.275** for **KM**, **CCK** and **CCNK** collets.
★**For heavy duty milling, please grip the end mill shank longer than ℓ1.**
★Stopper for direct chucking can not beused for **MIT40-C32- 95*** and **MIT50-C42- 95*** **The Code No. of the stopper C20:9MC20, C25:9MC25, C32:9MC32, C42:9MC42**
★**NK** and **CCNK** Collet can not be used for **MIT50-C42- 95***.
★**MIT Milling Chucks marked *1 are available as an option.**
★**MIT50-C32-200, 250** and **MIT50-C42-200, 250** are available as an option.
★**C22** style is available.
★Please add"**F**"for the flange through tool coolant type;
MIT40-C20F- 90, MIT50-C20F-105
-C25F- 90, -C25F-105
-C32F-105, -C32F-105
-C42F-120

★**Please refer ☞ P.273 for Milling Chuck Coolant Solution.**

3LOCK MIT HIGH SPEED MILLING CHUCK NIKKEN

C-G

High Pressure Centre Through (MAX. 7MPa)

ANNIVERSARY Type
—Powerful gripping torque—
- High rigidity
- High precision
- Compact design

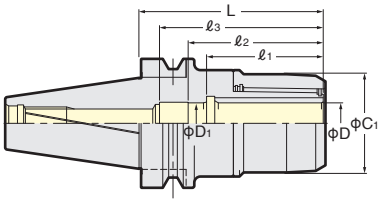

High Speed

TAPER	Code No.	C1	D	D1	L	ℓ1	ℓ2	ℓ3	MAX. (r/min)	Collet	Weight (kg)
No.40	MIT40-C12- 90G	33	12	12	90	48	53	58	30,000	KM12 CCK12	1.6
	-C16- 60G	44	16	16	60	50	57	65	25,000	KM16 CCK16	1.4
	-C20- 80G	52	20	20	80	59	66	80	25,000	KM20 CCK20 CCNK20	1.6
	-C25- 85G	60	25	25	85	61	70	75	20,000	KM25 CCK25 CCNK25	2.1
	-C32- 95G*	64	32	25	95	67	82	-	20,000	KM32 CCK32 CCNK32	2.1
	-105G				105		81	95			2.5
No.50	MIT50-C12-105G	33	12	12	105	48	53	58	20,000	KM12 CCK12	4.0
	-C16-105G	44	16	16		51	58	65	20,000	KM16 CCK16	4.2
	-C20-105G	52	20	20		59	66	80	20,000	KM20 CCK20 CCNK20	4.5
	-C25-105G	60	25	25		61	72	80	20,000	KM25 CCK25 CCNK25	4.8
	-C32- 90G*	69	32	25	90	70	81	107	15,000	KM32 CCK32 CCNK32	4.3
	-105G				105						4.6
	-120G				120						5.1
	-C42- 95P*	86	42	42	95	74	80	85	15,000	KM42 CCK42 CCNK42	5.5

★Please note the acceptable shank tolerance is h6.
★**GH Handle** is available as an option. ☞ **P.293**
C12G : GH12, C16G : GH16, C20G : GH20, C25G : GH25, C32G : GH32
★Spanner for **C42P** is **9HC42**.
★Please note the acceptable shank tolerance is h7.
★Please refer ☞ **P.274, P.275** for **KM**, **CCK** and **CCNK** collets.
★**For heavy duty milling, please grip the end mill shank longer than ℓ1.**
★Stopper for direct chucking can not be used for MIT40-C32- 95* and MIT50-C42- 95*
The Code No. of the stopper C20:9MC20, C25:9MC25, C32:9MC32, C42:9MC42
★**NK** and **CCNK** Collet can not be used for MIT50-C42- 95*.
★**Please refer ☞ P.273 for Milling Chuck Coolant Solution.**

Explanation of the Code No.

MIT40 - C20 - 70 G
- Symbol of High Speed
- Nominal Gauge Length
- Chucking Capacity
- Symbol of Milling Chuck
- Shank No.

3LOCK MIT MINI-MINI CHUCK ADVANCED ALPHA NIKKEN

High Pressure Centre Through (MAX. 7MPa)

The best chuck for the small dia.cutting tool

MAX. 30,000r/min&G2.5
Gripping from Front Nose
Run-Out Accuracy:3μm at 4D

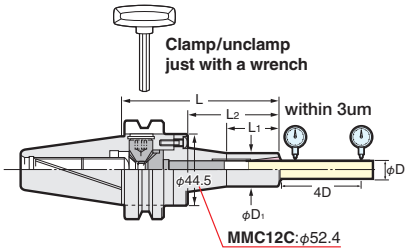

MMC

JAPAN PAT. ★ : MMC12=φ52.4

TAPER	Code No.	Chucking Range φD	L	φD1	L1	Collet	MAX.(r/min)	Weight (kg)
No.40	MIT40-MMC 8C- 90-AA	2～ 8	90	20	33	PMK 8	30,000	1.4
	-120-AA		120		40	PMK 8		1.5
	-MMC12C- 90-AA	4～12	90	30	35	PMK12	30,000	1.7
	-120-AA		120		60	VMK12		1.8
No.50	MIT50-MMC 8C-105-AA	2～ 8	105	20	33	PMK 8	20,000	4.4
	-135-AA		135		40	PMK 8		4.5
	-165-AA		165					4.6
	-MMC12C-105-AA	4～12	105	30	35	PMK12	20,000	4.6
	-135-AA		135		60	VMK12		4.7
	-165-AA		165		70			4.8

★Wrench **MMCL4, 8 : EA573KL-6** **MMC12 : MMCL12-M6W (MIT40) :**
MMC12 : MMCL12-M6T62 (MIT50) is attached as standard.
★**MPK, PMK, VMK** collet is available as an option. Please refer ☞ **P.284**
★Please add "**F**" for the flange through tool coolant type; MIT40-MMC 8F- 90-AA,120-AA -MIT50-MMC 8F-105-AA,120-AA
-MMC12F- 90-AA,120-AA -MMC12F-105-AA,120-AA
★**Please refer ☞ P.283 for MPK, PMK, VMK Coolant Solution.**

3LOCK MIT SLIM CHUCK

NIKKEN

High precision
High speed
Powerful gripping

Dampening effect
⊕
Jet Spray Coolant Supply
II
Over 3 times of extended Tool life
(for HSS & Carbide Drills)

SK

High Pressure
Centre Through
(MAX. 7MPa)

Perfect Sealing

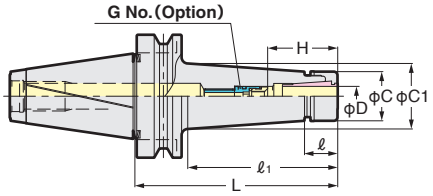

- When SK **J** type nut is used, the total chuck length will be extended by 6mm.
- When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No.(Option)	Weight(kg)	SK Collet
No.40	MIT40-SKT 6C- 90	0.7～6.0	90	19.8	60	19.5	25.2	26～31	SKG 6- 6HG	1.1	SK 6
	-120		120		90		29.4			1.4	
	-SKT10C- 90	0.9～10.0	90	22	60	27.5	32.9	35～41	SKG10-10HG	1.2	SK10
	-120		120		90		37.1			1.4	
	-150		150		120		41.3			1.6	
	-SKT13C- 90	2.75～13.0	90	26	52	33.0	36.6	39～51	SKG13-10HG	1.4	SK13
	-120		120		85		41.2			1.6	
	-150		150		110		44.7			1.8	
	-SKT16C- 90	2.75～16.0	90	27	60	40.0	44.7	45～57	SKG16-12HG	1.5	SK16
	-120		120		90		48.9			1.7	
	-150		150		120		53.1			1.9	
	-SKT20C- 90	3.5～20.0	90	28.5	60	48.5	53.0	47～63	SKG20-18HG	1.6	SK20
	-120		120		92		57.4			2.0	
	-SKT25C- 90	7.5～25.4	90	31	62.6	55.0	59.5	60～65	SKG25-18HGD	1.8	SK25
	-120		120		92.2		59.3			2.4	
No.50	MIT50-SKT 6C-105	0.7～6.0	105	19.8	62	19.5	25.5	26～31	SKG 6- 6HG	3.8	SK 6
	-165		165		122		33.8			4.0	
	-SKT10C-105	0.9～10.0	105	22	62	27.5	33.1	35～41	SKG10-10HG	4.2	SK10
	-165		165		122		41.5			4.6	
	-SKT13C-105	2.75～13.0	105	26	65	33.0	38.4	39～51	SKG13-10HG	4.0	SK13
	-165		165		125		46.8			4.3	
	-SKT16C-105	2.75～16.0	105	27	62	40.0	44.9	45～57	SKG16-12HG	4.7	SK16
	-165		165		122		53.3			5.1	
	-SKT20C-105	3.5～20.0	105	28.5	62	48.5	53.2	47～63	SKG20-18HG	4.3	SK20
	-165		165		122		61.6			5.0	
	-SKT25C-105	7.5～25.4	105	31	62	55.0	59.4	60～70	SKG25-24HG	5.2	SK25
	-165		165		122		67.8			5.6	

★Collet, adjust screw(G No.)and **GH Handle** are available as an option.
The Code No. of the **GH Handle** is **SKT6C-P: GH6, SKT10C-P: GH10, SKT13C-P: GH12, SKT16C-P: GH16, SKT20C-P: GH20, SKT25C-P: GH25**

★Please refer ☞ **P.277** for **SK** collet and please refer ☞ **P.41** for **J** type nut, .
★All chucks are high pressure centre through tool coolant type.
SK6C:φ4～φ6, SK10C:φ6～φ10, SK16C:φ10～φ16, SK25C:φ16～φ25
★Please add"**F**"for the flange through tool coolant type;

MIT40-SK 6F- 90,120	MIT50-SK 6F-105,165
-SK10F- 90,120	-SK10F-105,165
-SK13F- 90,120	-SK13F-105,165
-SK16F- 90,120	-SK16F-105,165
-SK25F-120	-SK25F-105,165

★**Please refer ☞ P.279 for SK, MDSK Coolant Solution.**

High Speed SLIM CHUCK

GH Handle ☞ P.293

Code No.	MAX. (r/min)	Code No.	MAX. (r/min)
MIT40-SKT 6C- 90P, 120P	30,000	MIT50-SKT 6C-105P, 165P	20,000
-SKT10C- 90P, 120P		-SKT10C-105P, 165P	
-SKT13C- 90P, 120P		-SKT13C-105P, 165P	
-SKT16C- 90P, 120P	25,000	-SKT16C-105P, 165P	
-SKT20C- 90P, 120P		-SKT20C-105P, 165P	
-SKT25C- 90P, 120P	20,000	-SKT25C-105P, 165P	15,000

★The extended gauge length(**L**)is available. Please contact with us.

3LOCK MIT VC HOLDER

NIKKEN

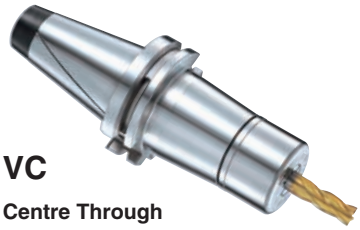

VC

Centre Through

With TiN Bearing Nut
MAX.40,000r/min&G2.5
Run-Out Accuracy:3μm at 4D

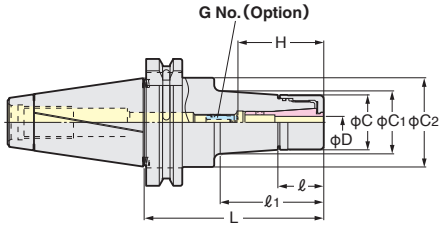

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	C2	H	G No. (Option)	Weight (kg)	MAX. (r/min)	Collet
No.40	MIT40-VC 6- 60	2.0~6.0	60	23	23	27.5	27.5	44.7	35~45	VCG 6- 8A	1.1	30,000	VCK 6
	- 90		90		51.9		31.5				1.3		
	-120		120		81.9		35.7				1.5		
	-VC13- 60	3.0~12.0	60	29	29	40	40.0		50~60	VCG13-15A	1.2		VCK13
	- 90		90		70		44.7				1.5		
	-120		120		100						1.9		
No.50	MIT50-VC 6-105	2.0~6.0	105	23	64.9	27.5	33.4	70.1	35~45	VCG 6- 8A	3.9	20,000	VCK 6
	-135		135		94.9		37.6				4.1		
	-165		165		124.9		41.8				4.4		
	-VC13-105	3.0~12.0	105	29	64.9	40	45.0		50~60	VCG13-15A	4.1		VCK13
	-135		135		94.9		49.2				4.5		
	-165		165		124.9		53.4				4.9		

★TiN Bearing Nut is supplied as standard.
★When the axial stopper is required, please use Adjust Screw(**G No.**)
★Please add**"-RP"**at the end of Code No. for Rust Proof Treatment **VC** Holder. **e.g.** MIT40-VC13-60-RP
★Please use **VC J** type Nut & Cap for Centre Through Coolant.
When **VC J** type Nut is used, the total holder length will be extended to 6mm.
★MIT40-VC 6-150, MIT40-VC13-150, MIT50-VC13- 90, -120 are available as semi-standard.
★Please refer ☞ **P.40** for **VCK** collet.
★Collet, Adjust Screw(G No.)and **GH Handle** are available an option.
★All series are for High Speed Rotation.

GH Handle ☞ **P.293**

3LOCK MIT FACE MILL ARBOR

NIKKEN

Photo. shows with face mill cutter.

JIS B4113 Face Mill Cutter

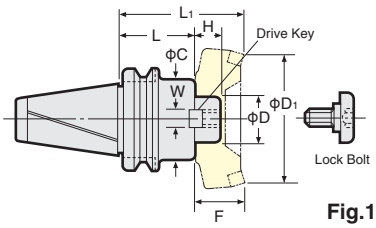

Fig.1

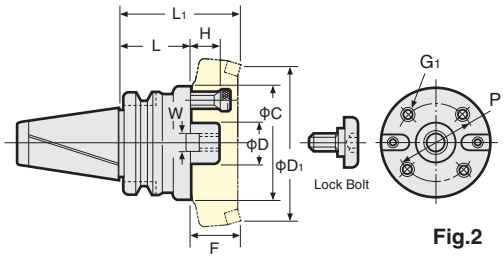

Fig.2

FMA

TAPER	Code No. (φD-L)	Arbor H	Arbor C	Arbor W	Weight (kg)	With Cutter L1	With Cutter D1	With Cutter F	Drive Key	Lock Bolt	Fig.
No.40	MIT40-FMA25.4 - 45	22	50	9.5	1.5	95	80	50	FW 5	FM12	1
	- 90				3.1	140					
	-FMA31.75 - 45	30	60	12.7	1.7	105	100	60	FW12	FM16	
	- 75				3.1	135			FW13		
	-FMA38.1 - 60	34	80	15.9	2.9	120	125	60	FW18	FM20	
No.50	MIT50-FMA25.4 - 45	22	58	9.5	3.7	95	80	50	FW 5	FM12	1
	- 90				4.6	140					
	-150				5.5	200					
	-FMA31.75 - 45	30	70	12.7	4.5	105	100	60	FW12	FM16	
	- 75				5.3	135			FW13		
	-105				6.1	165					
	-FMA38.1 - 45	34	80	15.9	4.3	105	125	60	FW18	FM20	
	- 75				5.6	135			FW19		
	-FMA50.8 - 45	36	100	19	4.9	105	160	60	FW23	FM24	
	- 75				6.8	135			FW24		
	-FMA47.625- 75	38	128.57	25.4	7.7	135	200	60	FW26	*	2

3LOCK MIT SHOULDER CUTTER ARBOR

NIKKEN

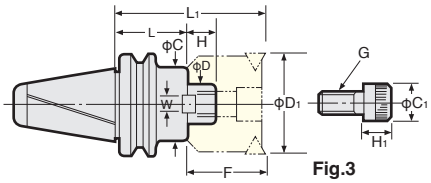

Fig.3

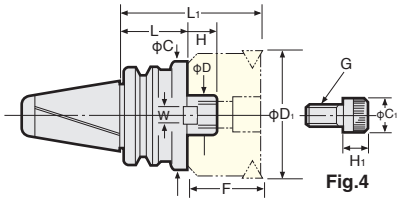

Fig.4

FMC FMA For SANDVIK T-MAX Shoulder Face Mill/SUMITOMO CHE5,000 Series

TAPER	Code No. (φD-L)	Arbor H	Arbor C	Arbor W	Weight (kg)	With Cutter L1	With Cutter D1	With Cutter F	With Cutter G Cap Bolt	C1	H1	Fig.
No.40	MIT40-FMC22- 45	18	45	10	1.3	85	50	40	9GM10-30	16	10	3
	- 90				2.0	130						
	-FMC27- 60	20	60	12	1.5	110	80	50	9GM12-35	18	12	4
	- 90				2.2	140						
	-FMC32- 60	22	85	14	2.3	110	125	50	9GM16-35	24	16	
	- 75				2.6	125						
No.50	MIT50-FMC22- 60	18	45	10	4.2	100	50	40	9GM10-30	16	10	3
	-105				4.7	145						
	-150				5.3	190						
	-FMC27- 45	20	70	12	4.1	95	80	50	9GM12-35	18	12	
	- 90				5.5	140						
	-150				7.3	200						
	-FMC32- 45	22	85	14	4.2	95	125	50	9GM16-35	24	16	
	- 75				5.5	125						
	-105				7.0	155						

★Drive keys, L wrench and bolt are supplied as standard.
★The arbor weight is only for the arbor.
★The different type of the cap bolt may be used for the recent cutter. Please check the specification.
★The arbor marked ＊ requires 4 fixing bolts**(FMA47.625 : M16, P=101.6)**
★Extended length is available as an option. **MIT50-FMA25.4 -200, 250,···500**
-FMA31.75-150, 200,···500
-FMA38.1 -150, 200,···500

High Feed Cutter Arbor with Coolant Hole

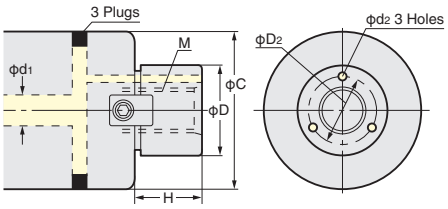

Code No.	Cutter Dia.	φD	φC	M	H	Coolant Hole φD2	Coolant Hole φd1	Coolant Hole φd2
FMH22(22.225)	φ50, φ52 φ63, φ66	22(22.225)	47 60	M10 P1.5	18(17)	16	6~8	3
FMH27(25.4)	φ80	27(25.4)	76(70)	M12 P1.75	20(22)	19.5(18.5)	8~10	3.5
FMH32(31.75)	φ100	32(31.75)	96	M16 P2.0	22(30)	24	10~13	4
FMH40(38.1)	φ125	40(38.1)	100	M20 P2.5	26(34)	30(29)	10~15	5
FMH50.8	φ160	50.8	100	M24 P3.0	36	37.5	15~20	7

★Fixing dimension is basically based on **FMA/FMC**. ★The combination of the other cutter dia. are also available.

FMH High Feed Cutter Arbor with Coolant Hole

TAPER	Code No. (φD-L)	Arbor H	Arbor C	Arbor W	Arbor C1	Arbor C2	Arbor H1	Arbor H2	Weight (kg)	Drive Key	Lock Bolt	G Cap Bolt
No.40	MIT40-FMH22 - 47- 45	18	47	10	16	–	10	–	1.3	FW 8	–	9GM10-30
	- 60- 45		60						1.4			
	-FMH27 - 60- 60	20	60	12	18	–	12	–	1.8	FW11	–	9GM12-35
	- 76- 60		76						2.2			
	-FMH32 - 96- 60	22	96	14	24	–	16	–	2.9	FW16	–	9GM16-35
	-FMH40 -100- 60	26	100	16	50	27	14	6	3.1	FW22	FM20	–
No.50	MIT50-FMH22 - 47- 60	18	47	10	16	–	10	–	4.2	FW 8	–	9GM10-30
	- 60- 60		60						4.5			
	-FMH27 - 60- 45	20	60	12	18	–	12	–	3.9	FW10	–	9GM12-35
	- 76- 45		76						4.1			
	-FMH32 - 96- 45	22	96	14	24	–	16	–	4.2	FW15	–	9GM16-35
	-FMH40 -100- 45	26	100	16	50	27	14	6	5.1	FW20	FM20	–
	-FMH50.8 -100- 45	36	100	19	65	37	14	10	4.4	FW23	FM24	–

★**FMH22.225, FMH25.4, FMH31.75, FMH38.1** are also available.
★**For FMH22, there are two types of φC, φ47 and φ60.**
For FMH27, there are two types of φC, φ60 and φ76.

2LOCK TOOLING SYSTEM

NIKKEN

2LOCK tool(NBT)is created from the technology of the **3LOCK** tool(MBT)with its acclaimed cutting and safe and reliable triple contact type. A series of MAJOR DREAM Holders and high speed tooling were created using the **2LOCK** tool system.

- MIN. Z-axis displacement at high speed rotation
- Improved run-out accuracy of ATC repeatability

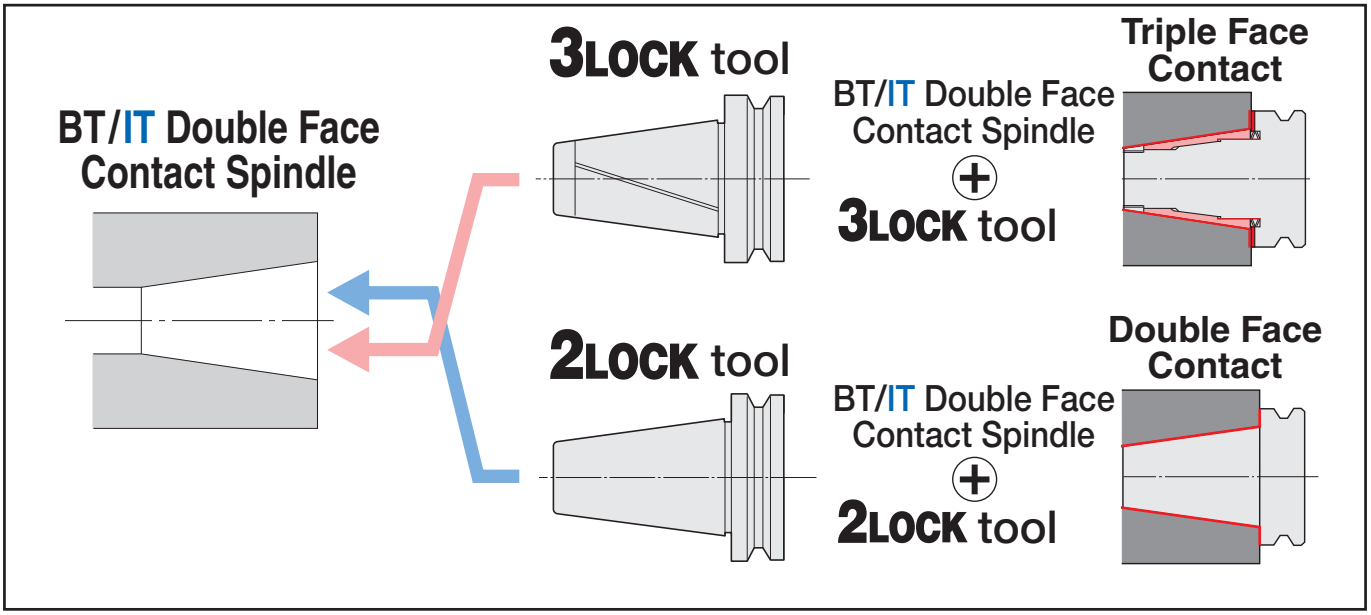

2LOCK tool can also be used on the machine with BT/IT standard spindle.

The Nikken 2LOCK tooling system is not a simple taper/flange double face contact tool. The built-in dampening mechanism and front chucking mechanism have a variety of features.

MAJOR DREAM Holder ☞ P.177 · · · · Dampening Mechanism ⊕ TiN Bearing Nut (HV2,200)

The dampening effect generates the excellent cutting.

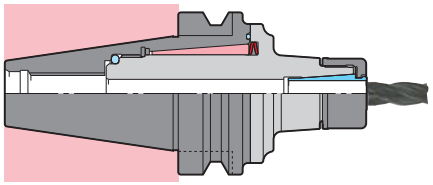

It has a built-in internal damping mechanism that is not found in BT double contact tool.

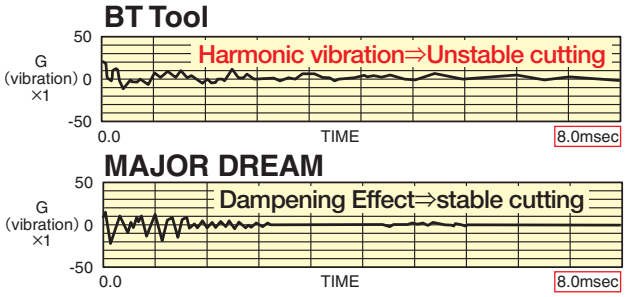

High Speed Milling Chuck ☞P.171

Same Appearance, but a remarkable improvement can be found when cutting.

High Speed Slim Chuck ☞P.175, Anniversary type VC Holder ☞P.180

Unstable accuracy caused by tightening torque and the possibility of rust.

The Tin coated bearing plate reduced friction. This is the best for the thrust load.

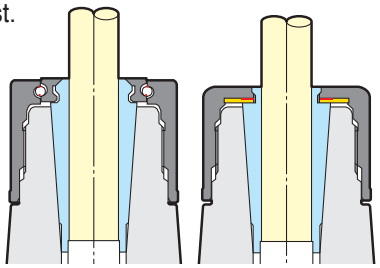

Competitors NIKKEN

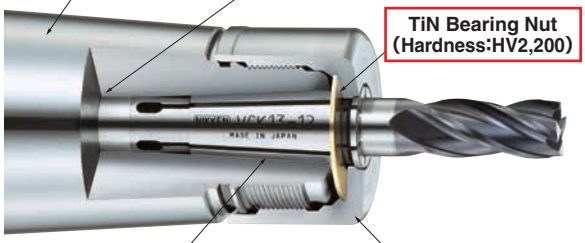

Mini-Mini Chuck ☞P.179…Expert for Small Dia. End Milling

30,000r/min&G2.5

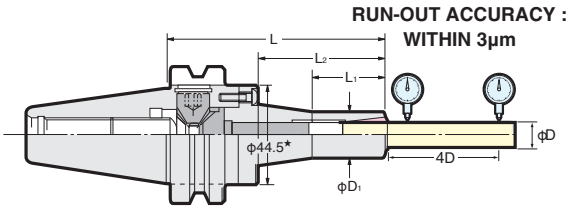

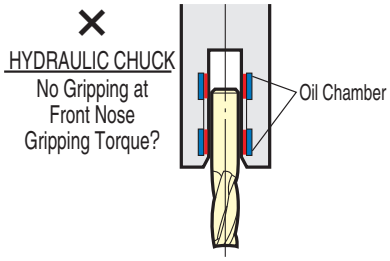



⚠ Caution Please read.

If chattering instability occurs during processing with the BT/IT double face contact tool(eg, if the M/C pulling force is reduced), be sure to select the 3LOCK tool of the internal expanding mechanism. This enables stable cutting by the taper, flange and the internal expanding mechanism.

MBT40, MIT40: Pulling force of 500 kg or greater
MBT50, MIT50: Pulling force of 1,500 kg or greater

2LOCK MILLING CHUCK

NIKKEN

C

High Pressure Centre Through (MAX. 7MPa)

C12

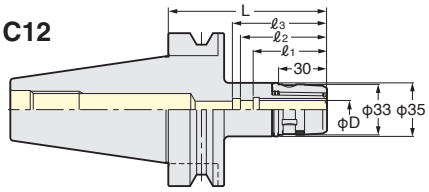

C16～C42

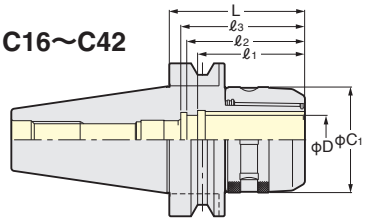

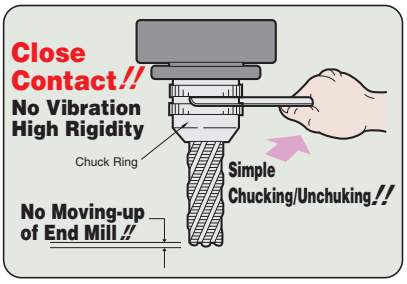

TAPER	Code No.	D	C_1	L	ℓ_1	ℓ_2	ℓ_3	Collet	Weight (kg)
No.30	NBT30-C12- 55	12	33	58	48	53	58	KM12 CCK12	0.6
	-C16- 55	16	44	57	50	58	65	KM16 CCK16	0.7
	- 70			70					0.8
	-C20- 65*1	20	52	67	57	66	80	KM20 NK20 CCK20 CCNK20	1.0
	- 75			75					1.1
	-C25- 75*2	25	55*4	75	56	65	68	KM25 NK25 CCK25 CCNK25	1.2
	- 80			82	56	65	68		1.3
	- 90			90	60	72	80		1.4
	-C32- 90*3	32	64*4	90	67	66	68	KM32 NK32*5 CCK32 CCNK32*5	1.4
	-100			100		77	76		1.5
No.40	NBT40-C12- 65	12	33	65	48	53	58	KM12 CCK12	1.3
	- 90			90					1.6
	-120			120					1.9
	-C16- 60	16	44	63	50	58	65	KM16 CCK16	1.4
	- 75			75					1.6
	- 90			90					1.7
	-105			105					1.9
	-120			120					2.0
	-C20- 70	20	52	70	57	66	80	KM20 NK20 CCK20 CCNK20	1.6
	- 90			90					1.8
	-105			105					2.0
	-120			120					2.2
	-C25- 70	25	60	70	60	72		KM25 NK25 CCK25 CCNK25	1.8
	- 90			90					2.1
	-105			105					2.3
	-120			120					2.5
	-C32- 85	32	69	85	64	77	77	KM32 NK32 CCK32 CCNK32	2.1
	-105			105	70	81	81		2.5
	-120			120	70	81	81		2.8
	-135			135	70	81	81		3.1

★Please refer ☞ **P.170** for heavy duty type milling chuck with larger arbor diameter.
★*5 **NK32** and **CCNK32** collet can not be used on **NBT30-C32-90.**
★Please refer ☞ **P.274, P.275** for **KM**, **NK**, **CCK**, **CCNK** collet.
★**CKFN-D** and **CKFN-DC**(With O-ring)can be used for the direct chucking application, when centre through tool coolant. **CCK** collet and **CKFN** nut can be used for collet application.
★For **"L"** dimension of centre through coolant type milling chuck is same as the above standard, however , refer ☞ **P.34** for Code No.
★For **"L"** dimension of flange through coolant type milling chuck is same as the above standard, however , refer ☞ **P.34** for Code No.
★Spanner is available as an option. **C12 : 9HC12A, C16: 9HC16, C20: 9HC22, C25 (ΦC1=55mm) : 9HC22, C25 (ΦC1=60mm) , C32 (ΦC1=64mm) : 9HC25, C32 (ΦC1=69mm) : 9HC32, C42: 9HC42**
***4 C25(ΦC1=55mm): 9HC22, *4 C32(ΦC1=64mm): 9HC25.**



★Please note the acceptable shank tolerance is h7.
★The milling chucks marked *1, *2 and *3 may not be used by the restriction of the diameter under V flange of your M/C.
★FS(Face Seal)types are available for **C25～C42** of **NBT40/NBT50**. There are 2 types; **FSJ**: With J groove, **FS**: Without J groove

FS type
For machining of aluminum
JAPAN PAT.

2LOCK MILLING CHUCK

NIKKEN

TAPER	Code No.	D	C_1	L	ℓ_1	ℓ_2	ℓ_3	Collet	Weight (kg)
No.50	NBT50-C12-105	12	33	105	48	53	58	KM12 CCK12	4.0
	-135			135					4.3
	-165			165					4.6
	-C16-105	16	44	105	50	58	65	KM16 CCK16	4.2
	-135			135					4.5
	-165			165					4.8
	-200			200					4.8
	-C20-105	20	52	105	57	66	80	KM20 NK20 CCK20 CCNK20	4.5
	-135			135					4.8
	-165			165					5.1
	-180			180					5.4
	-200			200					5.4
	-C25-105	25	60	105	60	72		KM25 NK25 CCK25 CCNK25	4.8
	-135			135					5.2
	-165			165					5.6
	-200			200					5.6
	-C32- 90	32	69	90	70	81	81	KM32 NK32 CCK32 CCNK32	4.3
	-105			105					4.6
	-120			120					5.1
	-135			135					5.6
	-165			165					6.4
	-200			200					7.8
	-250			250					9.2
	-300			300					10.6
	-400			400					13.4
	-500			500					16.2
	-C42- 95	42	86	95	73	115	125	KM42 NK42 CCK42 CCNK42	5.5
	-105			105					5.8
	-120			120					6.6
	-135			135					7.2
	-165			165					8.6
	-200			200					9.5
	-250			250					11.7
	-300			300					14.0
	-400			400					18.4
	-500			500					22.8

★**MULTI LOCK Milling Chuck is a Base Holder for machining centre.**
The following straight shank tooling to suit Milling Chucks are available.

[**S-C**] Milling Chuck (Extension Type) ☞ **P.274**
[**K-MMP**] MINI-MINI Chuck ☞ **P.270**
[**K-MMC**] MINI-MINI Chuck ☞ **P.43**
[**K-SK**] Slim Chuck ☞ **P.271**
[**S-SK**] Long Size Slim Chuck ☞ **P.271**
[**D-NPU**] NC Drill Chuck ☞ **P.45**
[**NZ**] Tapper Chuck ☞ **P.270**
[**K-MT**] Morse Taper Socket ☞ **P.49**
[**K-ZMAC-V**] ZMAC-V Boring Bar ☞ **P.93**
[**K-RAC**] RAC Boring Bar ☞ **P.93**
[**S-ZMACX-V**] ZMAC-V Boring Bar for Deep Hole ☞ **P.94**
[**K-DJ**] DJ Boring Bar ☞ **P.95**
[**K-SCA**] Stub Arbor ☞ **P.112**
[**S-MDPE**] PRO-END MILL ☞ **P.111**
[**MS○-A○-○**] Straight shank shrink fit holder ☞ **P.182**

Explanation of the Code No.

NBT40 – **C32** – **85** – ☐

- NONE : Standard / FS : Face Sealed
- Nominal Gauge Length
- Chucking capacity
- Symbol of milling chuck
- Shank No.

★Please refer ☞ **P.169** for heavy duty type milling chuck with larger arbor diameter.
★Please refer ☞ **P.274, P.275** for **KM**, **NK**, **CCK**, **CCNK** collet.
★**CKFN-D** and **CKFN-DC**(With O-ring)can be used for the direct chucking application, when centre through tool coolant. **CCK** collet and **CKFN** nut can be used for collet application.
★For **"L"** dimension of centre through coolant type milling chuck is same as the above standard, however , refer ☞ **P.34** for Code No.
★For **"L"** dimension of flange through coolant type milling chuck is same as the above standard, however , refer ☞ **P.34** for Code No.
★Spanner is available as an option. **C12 : 9HC12A, C16: 9HC16, C20: 9HC22, C25 (ϕC1=55mm) : 9HC22,**
C25 (ϕC1=60mm) , C32 (ϕC1=64mm) : 9HC25, C32 (ϕC1=69mm) : 9HC32, C42: 9HC42



★Please note the acceptable shank tolerance is h7.
★FS(Face Seal)types are available for **C25～C42** of **NBT40/NBT50**. There are 2 types; **FSJ**: With J groove, **FS**: Without J groove
★**Heavy duty type milling chucks with larger arbor diameter are available. Please add"R"at the end of Code No.**
NBT50-C32-200R, 250R, 300R
-C42-200R, 250R, 300R

FS type
For machining of aluminum
JAPAN PAT.

★**Please refer ☞ P.273 for Milling Chuck Coolant Solution.**

2LOCK HIGH SPEED MILLING CHUCK

NIKKEN

Anniversary type & High Speed
Applicable for High Pressure
Centre Through Coolant by CCK Collet

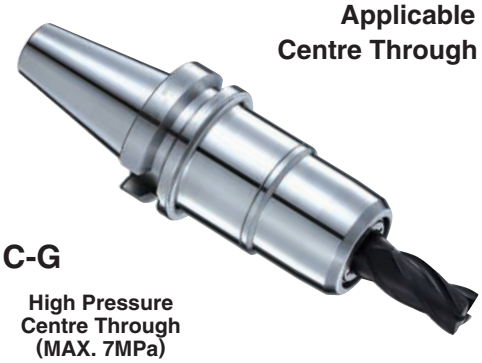

C-G

High Pressure Centre Through (MAX. 7MPa)

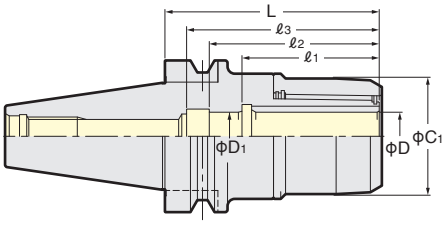

GFS type
For machining of aluminum
JAPAN PAT.

High Speed

TAPER	Code No.	D	D_1	C_1	L	ℓ_1	ℓ_2	ℓ_3	MAX. (r/min)	Collet	Weight (kg)
No.30	NBT30-C12- 55G	12	12	33	58	48	53	58	40,000	KM12 CCK12	0.5
	-C16- 55G	16	16	40	57	50	58	65		KM16 CCK16	0.6
	- 70G				70						0.7
	-C20- 65G*1	20	20	48	67	57	66	80	30,000	KM20 NK20 CCK20 CCNK20	0.8
	- 75G				75						0.9
	-C25- 75G*2	25	25	55	75	56	65	68	25,000	KM25 NK25 CCK25 CCNK25	1.0
	- 80G				82	56		68			1.2
	- 90G				90	60		80			1.3
	-C32- 90G*3	32	32	62	90	67	66	68	10,000	KM32*4 NK32 CCK32 CCNK32*4	1.4
	-100G				100		77	76			1.5
No.40	NBT40-C12- 65G	12	12	33	65	48	53	58	30,000	KM12 CCK12	1.1
	- 90G				90						1.3
	-C16- 60G	16	16	40	63	50	58	65	25,000	KM16 CCK16	1.2
	- 75G				75						1.4
	- 90G				90						1.5
	-105G				105						1.7
	-120G				120						1.9
	-C20- 70G	20	20	48	71	57	66	80		KM20 NK20 CCK20 CCNK20	1.4
	- 90G				90						1.7
	-105G				105						1.9
	-120G				120						2.1
	-C25- 70G	25	25	55	70	60	72		20,000	KM25 NK25 CCK25 CCNK25	1.6
	- 90G				90						2.0
	-105G				105						2.3
	-120G				120						2.6
	-C32- 85G	32	32	68	85	64	77	107		KM32 NK32 CCK32 CCNK32	1.9
	-105G				105	70	81				2.3
	-120G				120	70	81				2.9
	-135G				135	70	81				3.2

★**GH Handle** is available as an option. Please refer ☞ **P.293**
C12-G:GH12, C16-G:GH16, C20-G:GH20, C25-G:GH25, C32-G(φC1=68mm):GH32, C32-G (φC1=62mm):GH32S,
★Please note the acceptable shank tolerance is h6.
★Please add **"RP"** at the end of Code No. for **Rust Proof Treatment Milling Chuck**.
e.g. NBT40-C32-85G-RP
★Centre Through Coolant application;
For direct chucking, **CKFN-D nut** is recommended.
With a collet, **CCK collet** and **CKFN nut** are recommended.
★**NBT30-C20-65G** marked ∗1 may not be used by the M/C restriction. In this case, please use **NBT30-C20-75G**.
★**NBT50-C42-110P** is also available.
★Please refer ☞ **P.274, P.275** for **KM, NK, CCK** and **CCNK** collet.
★The milling chucks marked ∗1, ∗2 and ∗3 may not be used by the restriction of the diameter under V flange of your M/C.
★∗4 **NK32** and **CCNK32** collet can not be used on **NBT30-C32-90.**
★**Please refer ☞ P.273 for Milling Chuck Coolant Solution.**

CCK collet & CKFN nut
The Jet Coolant Pressure creates a tornado effect, ensuring efficient swarf dispersal.

Explanation of the Code No.

NBT40 - C16 - 60 G

- G / GFS : High Speed / High Speed and Face Sealed
- Nominal Gauge Length
- Chucking Capacity
- Symbol of Milling Chuck
- Shank No.

2LOCK HIGH SPEED MILLING CHUCK

NIKKEN

High Speed

TAPER	Code No.	D	D_1	C_1	L	ℓ_1	ℓ_2	ℓ_3	MAX. (r/min)	Collet	Weight (kg)
No.50	NBT50-C12-105G	12	12	33	105	48	53	58	20,000	KM12 CCK12	3.9
	-135G				135						4.2
	-165G				165						4.5
	-C16-105G	16	16	40	105	50	58	65		KM16 CCK16	4.1
	-135G				135						4.4
	-165G				165						4.7
	-200G				200						5.1
	-C20-105G	20	20	48	105	57	66	80		KM20 NK20 CCK20 CCNK20	4.4
	-135G				135						4.8
	-165G				165						5.2
	-180G				180						5.4
	-200G				200						5.7
	-C25-105G	25	25	55	105	60	72			KM25 NK25 CCK25 CCNK25	4.6
	-135G				135						5.2
	-165G				165						5.8
	-200G				200						6.3
	-C32- 90G	32	32	68	90	70	81	107	15.000	KM32 NK32 CCK32 CCNK32	4.3
	-105G				105						4.7
	-120G				120						5.2
	-135G				135						5.7
	-165G				165						6.5
	-200G				200						7.6
	-C42- 95P*5	42	42	86	95	73	115	125	12.000	KM42 NK42 CCK42 CCNK42	5.5
	-105P*5				105						5.8
	-120P*5				120						6.6

★**GH Handle** is available as an option. Please refer ☞ **P.293**
C12-G:GH12, C16-G:GH16, C20-G:GH20, C25-G:GH25, C32-G(φC1=68mm):GH32, C32-G(φC1=62mm):GH32S,
★Please note the acceptable shank tolerance is h6.
★Please add **"RP"** at the end of Code No. for **Rust Proof Treatment Milling Chuck**. **e.g. NBT40-C32-85G-RP**
★Centre Through Coolant application; For direct chucking, **CKFN-D nut** is recommended. With a collet, **CCK collet** and **CKFN nut** are recommended.
★**NBT50-C42-110P** is also available.
★Please refer ☞ **P.274, P.275** for **KM, NK, CCK** and **CCNK** collet.
★*5 spaner for **C42:9HC42**
★**Please refer ☞ P.273 for Milling Chuck Coolant Solution.**

2LOCK FLANGE THROUGH COOLANT TYPE HOLDER

NIKKEN

MILLING CHUCK for Flange Through

High Pressure Frange Through (MAX. 7MPa)

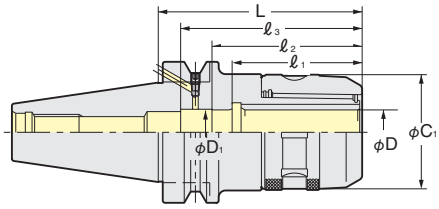

TAPER	Code No.	C_1	D_1	ℓ_1	ℓ_2	ℓ_3	Stopper (Option)	Collet	Weight (kg)
No.40	NBT40-C20F- 90,105	52	20	58	66	80	9MC20H	CCK20 CCNK20	1.9, 2.0
	-C25F- 90,105	60	25	61	70		9MC25H	CCK25 CCNK25	2.0, 2.2
	-C32F-105,120	69		70	81	107	9MC32H	CCK32 CCNK32	2.5, 2.8
No.50	NBT50-C20F-105,135,165	52	20	58	66	80	9MC20H	CCK20 CCNK20	4.2, 4.4, 4.8
	-C25F-105,135,165	60	25	61	72		9MC25H	CCK25 CCNK25	4.5, 5.1, 5.7
	-C32F-105,120,135,165	69		70	81	107	9MC32H	CCK32 CCNK32	4.6, 5.1, 5.5, 6.4
	-C42F-120,135,165	86	42		105, 115, 115	125	9MC42H	CCK42 CCNK42	5.8, 6.1, 6.8

★Spanner is available as an option. **C20 : 9HC22, C25 : 9HC25**
C32 : 9HC32, C42 : 9HC42

★Shank of High Speed Milling Chuck (G) is **2LOCK**. **e.g. NBT40-C20F-105G**
GH Handle ☞ **P.293** is necessary for High Speed Milling Chuck.

★Please refer ☞ **P.275** for **CCK** and **CCNK** Collet. ★In case of Heavy End Milling operation, please chuck the End Mill longer than ℓ_1 without using stopper.
★Please add **"RP"** at the end of Code No. for Rust Proof Treatment Milling Chuck. **e.g. BT40-C20F-75-RP**. ★Please note the acceptable shank tolerance is h7.

★**GH Handle** ☞ **P.293**

2LOCK SLIM CHUCK

NIKKEN

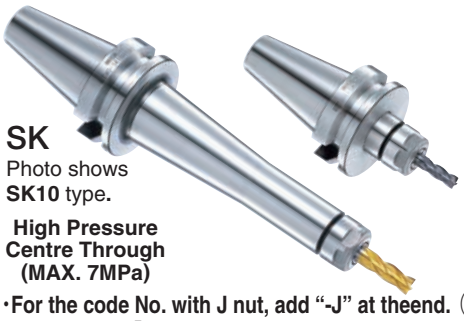

SK
Photo shows **SK10** type.

High Pressure Centre Through (MAX. 7MPa)

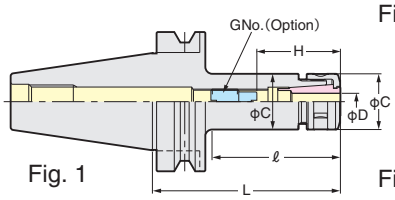

Fig. 1



Fig. 2



Fig. 3

- For the code No. with J nut, add "-J" at theend. (SKJ cap is not included.) EX.) NBT40-SK10F-90-J
- **When SK J type nut is used, the total chuck length will be extended by 6mm.**
- **When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.**

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	Weight (kg)	Fig	Collet
No.30	NBT30-SK 6C- 60	0.7 ～ 6.0	60	33	33	19.5	19.5	26～31	SKG 6- 6HG	0.7	1	SK 6
	- 90		90	56	65		32			0.7	2	
	-120		120	62	95					0.8		
	-150		150	123	123		19.5			0.9	1	
	-SK10C- 45	1.75～10.0	45	22	22	27.5	27.5	33～41	SKG10-10HG	0.8	1	SK10
	- 60		60	35	35					0.9		
	- 75		75	50	50					1.0		
	- 90		90	65	65					1.0		
	-120		120	95	95					1.1		
	-150		150	125	125					1.2		
	-SK13 - 48	2.75～13.0	48	26	26	33	33	32～50	VCG13-15A	0.9		SK13
	-SK13C- 60		60	35	35			39～51	SKG13-10HG	1.0		
	- 75		75	65	65					1.1		
	- 90		90	65	65					1.1		
	-120		120	95	95					1.2		
	-150		150	125	125					1.4		
	-SK16 - 52	2.75～16.0	51	29	29	40	40	45～49	SKG-12 L	1.0		SK16
	-SK16C- 60		60	37	37			47～52	SKG16-12HGE	1.1		
	- 75		75	52	52			45～52	SKG16-10HG	1.2		
	- 90		90	67	67			45～57	SKG16-12HG	1.2		
	-120		120	97	97					1.3		
	-SK20 - 60*	3.5～20.0	60	37	37	48.5	48.5	65～70	SKG-12S	0.7		SK20
	-SK20C- 75		75	52	52			50～55	SKG20-12HGE	0.9		
	- 90		90	67	67			47～63	SKG20-12HG	1.2		
	-SK25 - 90*	7.5～25.4				55	55	55～75	SKG-12	1.5		SK25
No.40	NBT40-SK 6C- 60	0.7～ 6.0	60	30	30	19.5	19.5	26～31	SKG 6- 6HG	1.0	1	SK 6
	- 90		90	51	60		32			1.1	2	
	-120		120	60	90					1.4		
	-150		150		120		25			1.5	3	
	-SK10C- 60	1.75～10.0	60	32	32	27.5	27.5	33～41	SKG10-10HG	1.1	1	SK10
	- 75		75	45	45					1.2		
	- 90		90	48	60		40			1.2	2	
	-120		120	73	90					1.4		
	-150		150		118		34.5			1.6	3	
	-180		180		148		39			1.6		
	-200		200		168					2.0		
	-250		250		218					2.3		
	-SK13C- 60	2.75～13.0	60	28	28	33	33	39～51	SKG13-10HG	1.2	1	SK13
	- 75		75	43	43					1.3		
	- 90		90	58	58					1.4		
	-120		120	88	88					1.6		
	-150		150		118		40			1.8	3	
	-180		180		148					1.8		
	-200		200		168					2.2		
	-250		250		218					2.6		
	-SK16C- 60	2.75～16.0	60	32	32	40	40	45～51	SKG16-10HG	1.3	1	SK16
	- 75		75	43	43			45～57	SKG16-12HG	1.5		
	- 90		90	58	58					1.5		
	-120		120	88	88					1.7		
	-150		150	118	118					1.9		
	-180		180	148	148					2.0		
	-200		200	168	168					2.3		
	-250		250	218	218					2.8		
	-SK20C- 60	3.5～20.0	60	32	32	48.5	48.5	57～63	SKG20-16HG	1.3		SK20
	- 75		75	45	45			47～63	SKG20-18HG	1.4		
	- 90		90	60	60					1.6		
	-120		120	90	90					2.0		
	-SK25C- 75	7.5～25.4	75	47	47	55	55	60～65	SKG25-18HGE	1.7		SK25
	- 90		90	61	61				SKG25-18HGD	1.8		
	-120		120	91	91			60～70	SKG25-24HG	2.0		

★ *Mark is not compatible with high pressure center through (Center through support)

NEXT PAGE

2LOCK SLIM CHUCK

NIKKEN

SK
Photo shows
SK16 type.

High Pressure Centre Through (MAX. 7MPa)

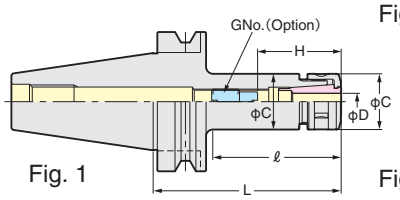

Fig. 1

Fig. 2



Fig. 3



- **For the code No. with J nut, add "-J" at theend. (SKJ cap is not included.) EX.) NBT40-SK10F-90-J**
- **When SK J type nut is used, the total chuck length will be extended by 6mm.**
- **When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.**

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	Weight (kg)	Fig	Collet
No.50	NBT50-SK 6C-105, -135	0.7 ～ 6.0	105,135	55,60	64,92	19.5	32	26～31	SKG 6- 6HG	3.8,3.9	2	SK 6
	-165, -200		165,200	60	114,151		32,30			4.0,4.2	2,3	
	-SK10C-105, -135	1.75～10.0	105,135	57,70	57,92	27.5	27.5,32	33～41	SKG10-10HG	4.2,4.4	1,2	SK10
	-165, -200		165,200	75	114,151		32,36			4.6,4.8	2,3	
	-225, -250		225,250		178,207		40			5.0,5.2	3	
	-300		300		257		60			5.5		
	-SK13C-105, -135	2.75～13.0	105,135	62,92	62,92	33	33	39～51	SKG13-10HG	4.5,4.7	1	SK13
	-165, -200		165,200	92	122,157		45			4.9,5.2	2,3	
	-250, -300		250,300		207,257					5.7,6.7	3	
	-SK16C-105, -135	2.75～16.0	105,135	62,92	62,92	40	40	45～57	SKG16-12HG	4.7,4.9	1	SK16
	-165, -200		165,200	90	122,157		50,52			5.1,5.5	2,3	
	-250, -300		250,300		207,257		52,60			6.2,6.7	3	
	-SK20C-105, -135	3.5～20.0	105,135	62,92	62,92	48.5	48.5	47～63	SKG20-18HG	4.3,4.6	1	SK20
	-165, -200		165,200	122,157	122,157					5.0,5.4		
	-250, -300		250,300	207,257	207,257					6.2,7.0		
	-SK25C-105, -135	7.5～25.4	105,135	62,92	62,92	55	55	60～70	SKG25-24HG	5.2,5.4		SK25
	-165, -200		165,200	122,157	122,157					5.6,6.0		
	-250, -300		250,300	207,257	207,257					6.8,7.5		

★Please refer ☞P.277 for SK collet.
★Collet, adjust screw (G No.) and spanner are available as an option.
★**Please refer ☞P.274, P.275 for High Speed Slim Chuck(40,000r/min&G2.5)**
★All Slim Chucks can be used for Centre Through Coolant type. Please refer ☞**P.282** for Centre Through Coolant Adjust Screw and ☞**P.314** for Centre Through Pull Stud.
★Please add **"-RP"** at the end of Code No. for Rust Proof Treatment Slim Chuck. **e.g. NBT40-SK10-90-RP**
★Extended gauge length slim chucks with the straight arbor like as **Fig.1** are available. **NBT50-SK10C-200ST, -250ST. -300ST NBT50-SK13C-200ST, -250ST, -300ST NBT50-SK16C-200ST, -250ST, -300ST**
★Please refer ☞**P.279** for **SK, MDSK** Coolant Solution.

2LOCK SLIM CHUCK for Flange Through

NIKKEN

High Pressure Flange Through (MAX. 7MPa)

SK-F

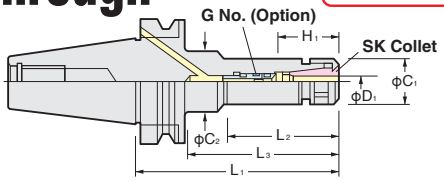

- **For the code No. with J nut, add "-J" at theend. (SKJ cap is not included.) EX.) BT40-SK10F-90-J**
- **When SK J type nut is used, the total chuck length will be extended by 6mm.**
- **When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.**

TAPER	Code No.	D1	H1	L2	L3	C1	C2	G No. (Option)	Weight (kg)	Collet
No.40	NBT40-SK 6F- 90,120	4～6	26～31	51,60	60,90	19.5	32,32	SKG6-6HG	1.1,1.4	SK 6
	-SK10F- 90,120,150,180	5～10	33～41	48,73,73,73	60,90,118,148	27.5	40,40,34.5,39	SKG10-10HG	1.2,1.4,1.6,1.7	SK10
	-SK13F- 90,120,150,180	5～13	39～51	58,88,88,88	-,-,118,148	33	-,-,40,40	SKG13-10HG	1.4,1.7,1.8,1.9	SK13
	-SK16F- 90	10～16	45～50	58	-	40	-	SKG16-12HGB	1.5	SK16
	-120,150,180		45～57	88,118,148				SKG16-12HG	1.7,1.9,2.0	
	-SK20F- 90,120	10～20	57～63,47～63	60,90		48.5		SKG20-18HGB,SKG20-18HG	1.4,2.0	SK20
	-SK25F- 90,120	16～25	50～58,55～65	61,91		55		SKG25-18HGC,SKG25-24HGA	1.8,2.0	SK25
No.50	NBT50-SK 6F-105,165	4～6	26～31	55,60	64,114	19.5	32,32	SKG6-6HG	3.8,4.0	SK 6
	-SK10F-105,165,200,225	5～10	33～41	57,75,75,75	-,114,151,178	27.5	-,32,36,40	SKG10-10HG	4.2,4.6,4.8,5.1	SK10
	-SK13F-105,165,200	5～13	39～51	62,92,92	-,122,157	33	-,45,45	SKG13-10HG	4.5,4.9,5.2	SK13
	-SK16F-105,165,200	10～16	45～57	62,90,90	-,122,157	40	-,50,52	SKG16-12HG	4.7,5.1,5.5	SK16
	-SK20F-105,165	10～20	47～63	62,122	-	48.5	-	SKG20-18HG	4.3,5.0	SK20
	-SK25F-105,165	16～25	55～65,55～70	62,122		55		SKG25-24HGA,SKG25-24HG	5.2,5.6	SK25

★Collet, adjust screw (G No.) and spanner are available as an option.
★Please refer ☞**P.277** for **SK** Collet.
★Please refer ☞**P.279** for **SK, MDSK** Coolant Solution.
★Please add **"RP"** at the end of Code No. for Rust Proof Treatmeant Slim Chuck. **e.g. BT40-SK10F-90-RP**.
★When cutter shank dia. is smaller than MIN. of D1, special adjust screw (G No.) is required. ☞**P.282**

2LOCK HIGH SPEED SLIM CHUCK (STRAIGHT TYPE) NIKKEN

MAX.40,000r/min&G2.5

SK-P
High Pressure Centre Through (MAX. 7MPa)

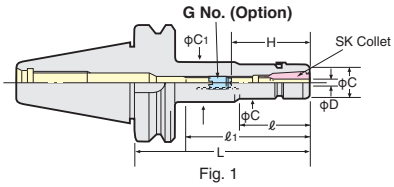

Fig. 1

Explanation of the Code No.

NBT40 - SK 10 C - 90 P

- Symbol of High Speed
- Nominal Gauge Length mm
- Centre Through Tool Coolant
- Chucking Capacity
- Symbol of New Slim Chuck
- Shank No.

- **When SK J type nut is used, the total chuck length will be extended by 6mm.**
- **When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.**

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	MAX. r/min	Collet	Weight (kg)
No.30	NBT30-SK 6C- 60P	0.7～6.0	60	33	33	19.5	19.5	26～31	SKG 6- 6HG	40,000	SK 6	0.7
	- 90P		90	56	65		32					0.7
	-SK10C- 45P	0.9～10.0	45	22	22	27.5	27.5	33～41	SKG10-10HG		SK10	0.8
	- 60P		60	35	35							0.9
	- 75P		75	50	50							1.0
	- 90P		90	65	65							1.0
	-SK13C- 60P	2.75～13.0	60	35	35	33	33	39～51	SKG13-10HG		SK13	1.0
	- 75P		75	50	50							1.1
	- 90P		90	65	65							1.1
	-SK16C- 60P	2.75～16.0	60	37	37	40	40	47～52	SKG16-12HGE	30,000	SK16	1.1
	- 75P		75	52	52			45～52	SKG16-10HG			1.2
	- 90P		90	67	67			45～57	SKG16-12HG			1.2
	-SK20 - 60P*	3.5～20.0	60	37	37	48.5	48.5	65～70	SKG-12S		SK20	0.7
	-SK20C- 75P		75	52	52			50～55	SKG20-12HGE			0.9
	- 90P		90	67	67			47～63	SKG20-12HG			1.2
	-SK25 - 90P*	7.5～25.4	90	67	67	55	55	55～75	SKG-12		SK25	1.5
No.40	NBT40-SK 6C- 60P	0.7～6.0	60	30	30	19.5	19.5	26～31	SKG 6- 6HG	30,000	SK 6	1.0
	- 90P		90	51	60		32					1.1
	-120P		120	60	90							1.4
	-SK10C- 60P	0.9～10.0	60	32	32	27.5	27.5	33～41	SKG10-10HG		SK10	1.1
	- 75P		75	45	45							1.2
	- 90P		90	48	60		40					1.2
	-120P		120	73	90							1.4
	-150P		150		118		34.5					1.6
	-SK13C- 60P	2.75～13.0	60	28	28	33	33	39～51	SKG13-10HG		SK13	1.2
	- 75P		75	43	43							1.3
	- 90P		90	58	58							1.4
	-120P		120	88	88							1.6
	-150P		150		118		40					1.8
	-SK16C- 60P	2.75～16.0	60	32	32	40	40	45～51	SKG16-10HG	25,000	SK16	1.3
	- 75P		75	43	43			45～57	SKG16-12HG			1.5
	- 90P		90	58	58							1.5
	-120P		120	88	88							1.7
	-150P		150	118	118							1.9
	-SK20C- 60P	3.5～20.0	60	32	32	48.5	48.5	57～63	SKG20-16HG		SK20	1.3
	- 75P		75	45	45			47～63	SKG20-18HG			1.4
	- 90P		90	60	60							1.6
	-120P		120	90	90							2.0
	-SK25C- 75P	7.5～25.4	75	47	47	55	55	60～65	SKG25-18HGE	20,000	SK25	1.7
	- 90P		90	61	61				SKG25-18HGD			1.8
	-120P		120	91	91			60～70	SKG25-24HG			2.0
No.50	NBT50-SK 6C-105P	0.7～6.0	105	55	64	19.5	32	26～31	SKG 6- 6HG	20,000	SK 6	3.8
	-135P		135	60	92							3.9
	-165P		165		114							4.0
	-SK10C-105P	0.9～10.0	105	57	57	27.5	27.5	33～41	SKG10-10HG		SK10	4.2
	-135P		135	70	92		32					4.4
	-165P		165	75	114							4.6
	-SK13C-105P	2.75～13.0	105	62	62	33	33	39～51	SKG13-10HG		SK13	4.5
	-135P		135	92	92							4.7
	-165P		165		122		45					4.9
	-SK16C-105P	2.75～16.0	105	62	62	40	40	45～57	SKG16-12HG		SK16	4.7
	-135P		135	92	92							4.9
	-165P		165	90	122		50					5.1
	-SK20C-105P	3.5～20.0	105	62	62	48.5	48.5	47～63	SKG20-18HG		SK20	4.3
	-135P		135	92	92							4.6
	-165P		165	122	122							5.0
	-SK25C-105P	7.5～25.4	105	62	62	55	55	60～70	SKG25-24HG	15,000	SK25	5.2
	-135P		135	92	92							5.4
	-165P		165	122	122							5.6

★Please refer ☞ P.279 for TiN Bearing Nut. ★Please add "RP" at the end of the Code No. for **Rust Proof Treatment Slim Chuck. e.g. NBT40-SKT10C-90P-RP**
★Collet, adjust screw(G No.)and **GH Handle** are available as an option. ★Please use **MDSK J type nut & cap for the Centre through tool coolant.** ☞ P.279
The Code No. of the **GH Handle** is **SK6C-P: GH6, SK10C-P: GH10, SK13C-P: GH12, SK16C-P: GH16, SK20C-P: GH20, SK25C-P: GH25**
★P class or A type SK collet is highly recommended to use. ☞ P.277 ★Code No. marked * are not centre coolant tool coolant type.
★Please refer ☞ P.279 for **SK** Coolant Solution.


GH Handle
☞ P.293

2LOCK HIGH SPEED SLIM CHUCK (TAPER TYPE)

NIKKEN

MAX.40,000r/min&G2.5

SKT-P
High Pressure Centre Through (MAX. 7MPa)

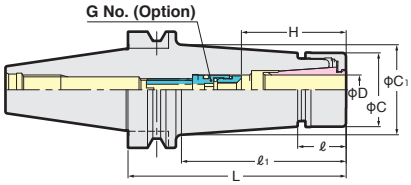

Explanation of the Code No.

NBT40 - SKT 10 C - 90 P

- P: Symbol of High Speed
- 90: Nominal Gauge Length mm
- C: Centre Through Tool Coolant
- 10: Chucking Capacity
- SKT: Symbol of New Slim Chuck
- NBT40: Shank No.

- **When SK J type nut is used, the total chuck length will be extended by 6mm.**
- **When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.**

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	MAX. r/min	Collet	Weight (kg)
No.30	NBT30-SKT 6C- 60P	0.7～6.0	60	19.8	35	19.5	21.7	26～31	SKG6-6HG	40,000	SK 6	0.7
	- 75P		75		50		23.8					0.7
	- 90P		90		65		25.9					0.7
	-SKT10C- 60P	0.9～10.0	60	22	35	27.5	29.4	35～41	SKG10-10HG		SK10	0.9
	- 75P		75		50		31.5					1.0
	- 90P		90		65		33.6					1.0
	-SKT13C- 60P	2.75～13.0	60	26	35	33	34.3	39～51	SKG13-10HG		SK13	1.0
	- 75P		75		50		36.4					1.1
	- 90P		90		65		38.5					1.1
	-SKT16C- 60P	2.75～16.0	60	27	37	40	41.4	47～52	SKG16-12HGE	30,000	SK16	1.1
	- 75P		75		52.6		43.6	45～52	SKG16-10HG			1.2
	- 90P		90		62.8		45	45～57	SKG16-12HG			1.2
No.40	NBT40-SKT 6C- 60P	0.7～6.0	60	19.8	30	19.5	21.0	26～31	SKG6-6HG	30,000	SK 6	1.0
	- 75P		75		45		23.1					1.1
	- 90P		90		60		25.2					1.1
	-120P		120		90		29.4					1.4
	-SKT10C- 60P	0.9～10.0	60	22	30	27.5	28.7	35～41	SKG10-10HG		SK10	1.1
	- 75P		75		45		30.8					1.2
	- 90P		90		60		32.9					1.2
	-120P		120		90		37.1					1.4
	-150P		150		120		41.3					1.6
	-SKT13C- 60P	2.75～13.0	60	26	30	33	33	39～51	SKG13-10HG		SK13	1.1
	- 75P		75		45		35.7					1.3
	- 90P		90		60		37.8					1.3
	-120P		120		90		42					1.6
	-150P		150		120		46.2					1.8
	-SKT16C- 60P	2.75～16.0	60	27	30	40	40	45～51	SKG16-10HG	25,000	SK16	1.3
	- 75P		75		45		42.6	45～57	SKG16-12HG			1.5
	- 90P		90		60		44.7					1.5
	-120P		120		90		48.9					1.7
	-150P		150		120		53.1					1.9
	-SKT20C- 60P	3.5～20.0	60	28.5	30	48.5	48.5	57～63	SKG20-16HG		SK20	1.3
	- 75P		75		45		50.9	47～63	SKG20-18HG			1.4
	- 90P		90		60		53.0					1.6
	-120P		120		92		57.4					2.0
	-SKT25C- 75P	7.5～25.4	75	31	47	55	57.3	60～65	SKG25-18HGE	20,000	SK25	1.7
	- 90P		90		62.6		59.5		SKG25-18HGD			1.8
No.50	NBT50-SKT 6C-105P	0.7～6.0	105	19.8	62	19.5	25.5	26～31	SKG6-6HG	20,000	SK 6	3.8
	-135P		135		92		29.6					3.9
	-165P		165		122		33.8					4.0
	-SKT10C-105P	0.9～10.0	105	22	62	27.5	33.1	35～41	SKG10-10HG		SK10	4.2
	-135P		135		92		37.3					4.4
	-165P		165		122		41.5					4.6
	-SKT13C-105P	2.75～13.0	105	26	62	33	38.1	39～51	SKG13-10HG		SK13	4.5
	-135P		135		92		42.3					4.7
	-165P		165		122		46.5					4.9
	-SKT16C-105P	2.75～16.0	105	27	62	40	44.9	45～57	SKG16-12HG		SK16	4.7
	-135P		135		92		49.1					4.9
	-165P		165		122		53.3					5.1
	-SKT20C-105P	3.5～20.0	105	28.5	62	48.5	53.2	47～63	SKG20-18HG		SK20	4.3
	-135P		135		92		57.4					4.6
	-165P		165		122		61.6					5.0
	-SKT25C-105P	7.5～25.4	105	31	62	55	59.4	60～70	SKG25-24HG	15,000	SK25	5.2
	-135P		135		92		63.6					5.4
	-165P		165		122		67.8					5.6

★Please refer ☞ **P.279** for TiN Bearing Nut. ★Please add **"RP"** at the end of the Code No. for **Rust Proof Treatment Slim Chuck. e.g. NBT40-SKT10C-90P-RP**
★Collet, adjust screw(G No.)and **GH Handle** are available as an option. ★Please use **MDSK J type nut & cap for the Centre through tool coolant.** ☞ **P.279**
The Code No. of the **GH Handle** is **SKT6C-P: GH6, SKT10C-P: GH10, SKT13C-P: GH12, SKT16C-P: GH16, SKT20C-P: GH20, SKT25C-P: GH25**
★P class or A type SK collet is highly recommended to use. ☞ **P.277**
★Please refer ☞ **P.279** for **SK** Coolant Solution.

GH Handle
☞ **P.293**

2LOCK MAJOR DREAM HOLDER

NIKKEN

Dampening Effect
TiN Bearing Effect

MDSK
Centre Through

Holder with an adjust screw for axial adjustment is supplied as an option. Please contact us.

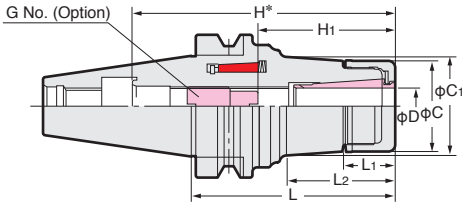

H : MAX. Cutter Shank Length to be inserted

TAPER	Code No.	D	L	L1	L2	C	C1	H*	H1	G No. (Option)	Weight (kg)	Collet
No.30	NBT30-MDSK 6- 50	3.0～6.0	50	16.2	19.5	19.5	20.0	73	21～35	SKG- 8	0.5	SK 6 A
	- 60		60		25.5		20.8	83			0.6	
	- 75		75		40.5		22.9	98			0.7	
	- 90		90		55.5		25.0	113			0.8	
	-MDSK10- 50	3.0～10.0	50	18.0	19.0	27.5	27.5	72	30～50	SKG-12L	0.5	SK10 A
	- 60		60		25.7		28.6	82			0.6	
	- 75		75		42.9		31.0	97			0.8	
	- 90		90		58.7		33.2	112			0.8	
	-MDSK13- 60	3.0～13.0	60	22.0	29.0	33.0	34.0	83	31～43	SKG-15	0.8	SK13 A
	- 75		75		45.0		36.2	98	31～60		0.8	
	- 90		90		60.0		38.3	113			0.8	
	-MDSK16- 75	3.0～16.0	75	23.0	47.5	40.0	40.0	60	45～60	SKG-12L	1.1	SK16 A
	- 90		90		62.5			75	45～70	SKG-12	1.3	
No.40	NBT40-MDSK 6- 60	3.0～6.0	60	16.2	18.0	19.5	19.5	86	21～35	SKG- 8	0.8	SK 6 A
	- 75		75		33.0		21.9	101			0.9	
	- 90		90		48.0		24.0	116			1.1	
	-105		105		63.0		26.1	131			1.2	
	-120		120		78.0		28.2	146			1.4	
	-MDSK10- 60	3.0～10.0	60	18.0	19.0	27.5	27.5	86	30～50	SKG-12L	1.1	SK10 A
	- 75		75		33.0		29.6	101			1.3	
	- 90		90		48.0		31.7	116			1.5	
	-105		105		63.0		33.8	131			1.6	
	-120		120		78.0		35.9	146			1.8	
	-150		150		110.0		40.4	176			2.2	
	-MDSK13- 65	3.0～13.0	65	22.0	24.0	33.0	33.0	91	31～60	SKG-15	1.2	SK13 A
	- 75		75		33.0		34.6	101			1.4	
	- 90		90		48.0		36.7	116			1.7	
	-105		105		63.0		38.8	131			1.8	
	-120		120		78.0		40.9	146			2.0	
	-150		150		110.0		45.4	176			2.4	
	-180		180		144.0		50.1	206			2.6	
	-MDSK16- 65	3.0～16.0	65	23.0	24.0	40.0	40.0	91	45～60	SKG-18L	1.2	SK16 A
	- 75		75		33.0		41.4	101	45～70		1.5	
	- 90		90		48.0		43.5	116			1.9	
	-105		105		64.0		45.8	131			2.0	
	-120		120		80.0		48.0	146			2.2	
	-150		150		113.0		52.6	176			2.5	
	-MDSK20- 75	4.0～20.0	75	25.2	41.2	48.0	51.3	80	50～73	SKG-12	1.9	SK20 A
	- 90		90		55.0		53.2	95		SKG-12-55L	2.1	
	-105		105		70.0		52.2	110		SKG-12-70L	2.3	
	-120		120		85.0		53.2	125		SKG-12-85L	2.6	

★**Please use A type SK collet for the end milling operation.** ☞ **P.277**
★Please refer ☞ **P.279** for the Jet coolant system, **J** type nut and cap.
★**GH handle** is available as an option. ☞ **P.293** Please order with the Code No. **MDSK6 : GH6 &, MDSK10 : GH10, MDSK13 : GH12, MDSK16 : GH16, MDSK20 : GH20, MDSK25 : GH25**
★**Please add "P" at the end of Code No. for high speed specification, e.g NBT40-MDSK10-60P**
★**Holder with an adjust screw for axial adjustment is supplied as an option. Please contact us.**
★Please refer ☞ **P.279** for **SK** Coolant Solution.

Explanation of the Code No.

NBT40 - **MDSK10** - **90**

- Nominal Gauge Length
- Chucking Capacity
- MAJOR DREAM HOLDER
- Shank No.

2LOCK MAJOR DREAM HOLDER

NIKKEN

Dampening Effect
TiN Bearing Effect

MDSK
Centre Through

Holder with an adjust screw for axial adjustment is supplied as an option. Please contact us.

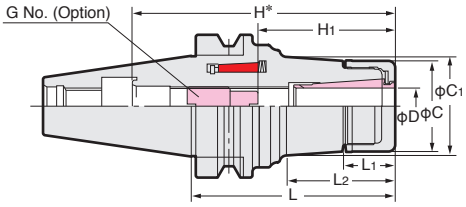

H : MAX. Cutter Shank Length to be inserted

TAPER	Code No.	D	L	L1	L2	C	C1	H*	H1	G No. (Option)	Weight (kg)	Collet
No.50	NBT50-MDSK 6-105	3.0～6.0	105	16.2	48.0	19.5	24.0	116	21～35	SKG- 8	3.6	SK 6 A
	-120		120		63.0		26.1	131			3.7	
	-MDSK10-105	3.0～10.0	105	18.2	48.0	27.5	31.7	116	30～50	SKG-12L	4.3	SK10 A
	-120		120		63.2		33.8	131			4.4	
	-135		135		78.2		35.9	146			4.7	
	-165		165		110.2		40.4	176			5.0	
	-195		195		141.2		44.8	206			5.3	
	-MDSK13-105	3.0～13.0	105	22.0	48.0	33.0	36.7	116	31～60	SKG-15	4.2	SK13 A
	-120		120		63.0		38.8	131			4.7	
	-135		135		78.0		40.9	146			5.0	
	-165		165		110.0		45.4	176			5.3	
	-195		195		144.0		50.1	206			5.6	
	-MDSK16-105	3.0～16.0	105	23.0	48.0	40.0	43.5	116	45～70	SKG-18L	4.1	SK16 A
	-120		120		64.0		45.8	131			4.9	
	-135		135		80.1		48.0	146			5.2	
	-165		165		114.7		52.6	176			5.5	
	-195		195		144.6		52.8	206			5.8	
	-MDSK20-105	4.0～20.0	105	25.2	42.3	48.0	51.4	159	47～80	SKG-22	4.9	SK20 A
	-135		135		72.0		55.6	175			5.3	
	-165		165		102.0		59.8	205			5.9	
	-195		195		132.0		64.0	235			6.7	
	-MDSK25-105	8.0～25.4	105	27.0	42.3	55.0	57.2	159	55～85	SKG-28	4.9	SK25 A
	-135		135		74.0		61.6	175			5.7	
	-165		165		105.0		66.0	205			6.5	
	-195		195		135.0		70.2	235			7.5	

★**Please use A type SK collet for the end milling operation.** ☞ **P.277**
★Please refer ☞ **P.279**for the Jet coolant system, **J** type nut and cap.
★**GH handle** is available as an option. ☞ **P.293** Please order with the Code No. **MDSK6 : GH6 &, MDSK10 : GH10, MDSK13 : GH12, MDSK16 : GH16, MDSK20 : GH20, MDSK25 : GH25**
★**Please add "P" at the end of Code No. for high speed specification, e.g NBT40-MDSK10-60P**
★**Holder with an adjust screw for axial adjustment is supplied as an option. Please contact us.**
★Please refer☞**P.279** for **SK** Coolant Solution.

Explanation of the Code No.

NBT40 - **MDSK10** - **90**

- Nominal Gauge Length
- Chucking Capacity
- MAJOR DREAM HOLDER
- Shank No.

MAX. r/min

Code No.	MAX. r/min	Code No.	MAX. r/min	Code No.	MAX. r/min
NBT30-MDSK 6-P	30,000	NBT40-MDSK 6-P	25,000	NBT50-MDSK 6-P	20,000
-MDSK10-P		-MDSK10-P		-MDSK10-P	
-MDSK13-P		-MDSK13-P		-MDSK13-P	
-MDSK16-P	25,000	-MDSK16-P	20,000	-MDSK16-P	
		-MDSK20-P		-MDSK20-P	
				-MDSK25-P	15,000

2LOCK MINI-MINI CHUCK ADVANCED ALPHA

NIKKEN

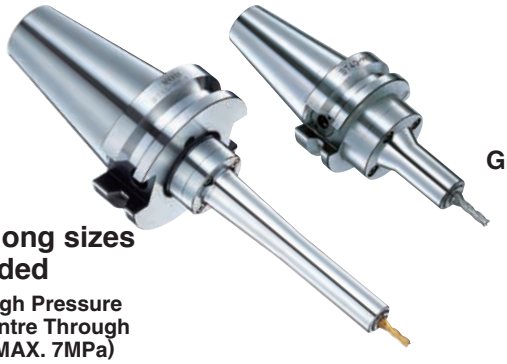

MMC
Extra-long sizes are added

High Pressure Centre Through (MAX. 7MPa)

High Speed

EXPERT for SMALL DIA. END MILLING

30,000r/min&G2.5 Gripping from Front Nose Run-Out Accuracy : 3μm at 4D

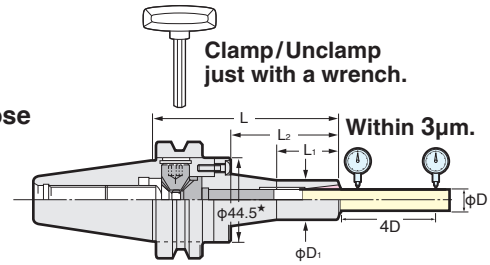

Dimension marked ★ is 52.4 for **MMC12**.

JAPAN PAT.

TAPER	Code No.	D	L	D1	L1	L2	Collet	MAX.r/min	Weight(kg)
No.30	NBT30-MMC 4C-105-AA	1～4	105	15	30	43	MPK 4	30,000	0.9
	-135-AA		135			73			
	MMC 8C-105-AA	2～8	105	20	33	42	PMK 8 VMK 8		
	MMC12C-105-AA	4～12		30	35	44	PMK12 VMK12		1.1
No.40	NBT40-MMC 4C- 90-AA	1～4	90	15	30	43	MPK 4	30,000	1.2
	8C- 90-AA	2～8		20	33	42	PMK 8 VMK 8		1.2
	-120-AA		120		40	72			1.3
	-150-AA		150			102			1.4
	-180-AA		180		70	132			1.5
	12C- 90-AA	4～12	90	30	35	44	PMK 8 VMK 8		1.4
	-120-AA		120		60	74			1.5
	-150-AA		150		70	104			1.6
	-180-AA		180		100	134			1.7
No.50	NBT50-MMC 4 -105-AA	1～4	105	15	30	43	MPK 4	20,000	3.8
	8C-105-AA	2～8		20	33	42	PMK 8 VMK 8		3.8
	-135-AA		135		40	72			3.9
	-165-AA		165			102			4.0
	-195-AA		195		70	132			4.1
	12C-105-AA	4～12	105	30	35	44	PMK12 VMK12		4.0
	-135-AA		135		60	74			4.1
	-165-AA		165		70	104			4.2
	-195-AA		195		100	134			4.3

★Wrench **MMC4, 8 : EA573KL-6** **MMC12 : MMCL12-M6W(BT30, BT40, HSK50, HSK63) : MMC12 : MMCL12-M6T62(BT50, HSK100)** is attached as standard.
★**MMC4C**, **MMC8C** and **MMC12C** with **"C"** at the end of code are compatible with high pressure centre through.
★**Extra-long sizes are added ＊Extra-long sizes : longer +30～60mm than conventional.**
★Collet is available as an option. Please refer ☞**P.284**
★Please refer ☞**P.283** for **MPK, PMK, VMK** Coolant Solution.

EA573KL-6

Explanation of the Code No.

NBT40 - MMC4 - 90 - AA

- AA: Advanced alpha
- 90: Nominal Gauge Length
- MMC4: Chucking Capacity
- MMC: Symbol of MINI-MINI chuck
- NBT40: Shank No.

MINI-MINI CHUCK ADVANCED ALPHA for Flange Through (MAX. 7MPa)

NIKKEN

VMK-J

High Pressure Frange Through (MAX. 7MPa)

30,000r/min&G2.5 Gripping from Front Nose Run-out Accuracy: Within 3μm

High Speed

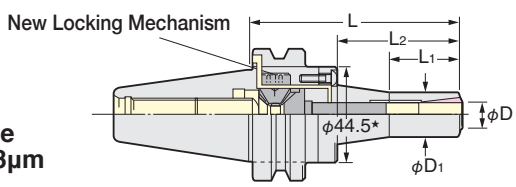

★ : MMC12 :φ52.4

JAPAN PAT.

TAPER	Code No.	φD	φD1	L1	L2	Collet	MAX. r/min	Weight (kg)
No.40	BT40-MMC 8F- 90-AA,120-AA,150-AA,180-AA	2～ 8	20	33, 40, 40, 70	42, 72,102,132	VMK 8	30,000	1.2,1.3,1.4, 1.5
	-MMC12F- 90-AA,120-AA,150-AA,180-AA	4～12	30	35, 60, 70,100	44, 74,104,134	VMK12		1.4,1.5,1.6, 1.7
No.50	BT50-MMC 8F-105-AA,135-AA,165-AA,195-AA	2～ 8	20	33, 40, 40, 70	42, 72,102,132	VMK 8	20,000	3.8,3.9,4.0,4.1
	-MMC12F-105-AA,135-AA,165-AA,195-AA	4～12	30	35, 60, 70,100	44, 74,104,134	VMK12		4.0,4.1,4.2,4.3

★Wrench is supplied as standard. Collet is available as an option. ☞**P.284**
★**Please use VMK Collet for the cutter with oil hole, and use VMK-J Collet for the cutter without oil hole.**
★Photo shows **MINI-MINI Chuck** & **VMK Collet** chucking with φ2.7mm oil hole drill.

2LOCK ANNIVERSARY TYPE VC HOLDER

NIKKEN

With TiN Bearing Nut
MAX. 40,000r/min&G2.5
Run-Out Accuracy : Within 3μm at 4D

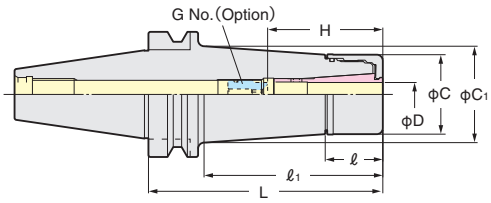

VC

Centre Through

High Speed

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	Weight (kg)	MAX. r/min	Collet
No.30	NBT30-VC 6- 45	2.0～ 6.0	45	23	23	27.5	27.5	35～45	VCG 6- 8A	0.5	40,000	VCK 6
	- 60		60		35		31.7			0.6		
	- 90		90		65		33.4			0.8		
	-VC13- 60	3.0～12.0	60	29	37	40	41.1	50～60	VCG13-15A	0.7		VCK13
	- 90		90		67		41.3			0.9		
	-120		120		97		42.4			1.2		
No.40	NBT40-VC 6- 60	2.0～ 6.0	60	23	30	27.5	30.0	35～45	VCG 6- 8A	1.1	30,000	VCK 6
	- 90		90		60		32.7			1.3		
	-120		120		90		36.9			1.5		
	-VC13- 60	3.0～12.0	60	29	31	40	40.3	50～60	VCG13-15A	1.2		VCK13
	- 90		90		60		44.3			1.5		
	-120		120		90		48.5			1.9		
No.50	NBT50-VC 6-105	2.0～ 6.0	105	23	62	27.5	33.0	35～45	VCG 6- 8A	3.9	20,000	VCK 6
	-135		135		92		37.1			4.1		
	-165		165		122		41.3			4.4		
	-VC13-105	3.0～12.0	105	29	62	40	44.6	50～60	VCG13-15A	4.1		VCK13
	-135		135		92		48.8			4.5		
	-165		165		122		53.0			4.9		

★When the axial stopper is required, please use Adjust Screw (G No.)
★All series are for High Speed Rotation.
★Collet, Adjust Screw (G No.) ☞ **P.282,P.284** and **GH Handle** are available as an option.
The Code No. of the **GH Handle** is **VC6: GH10, VC13: GH16** ☞ **P.293**
★Please add "**-RP**" at the end of Code No. for Rust Proof Treatment **VC** Holder. **e.g:NBT40-VC13-60-RP**
★Please use **VC J** type Nut & Cap for Centre Through Coolant. When **VC J** type Nut is used, the total holder length will be extended to 6mm.
★**NBT40-VC 6-150, NBT40-VC13-150, NBT50-VC13- 90, -120** are available as semi-standard.

GH Handle ☞ **P.293**

Explanation of the Code No.

NBT40 - **VC6** - **90**

- Nominal Gauge Length mm
- Chucking Capacity
- Symbol of VC Holder
- Shank No.

2Lock

MAJOR DREAM HOLDER

2LOCK MAJOR DREAM PRO-ENDMILL

NIKKEN

JAPAN PAT.

Centre Through

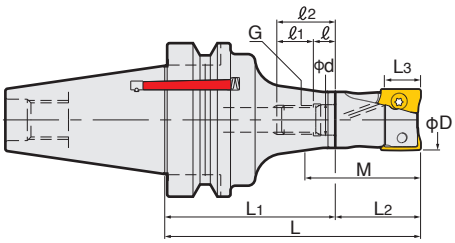

NBT-MDPE (Arbor+Head)

TAPER	Code No.	φD	L	L1	L2	MAX. Depth L3	M	Arbor Code No.	Head Code No.
No.30	NBT30-MDPE16- 75	16	75	45	30	10	37.5	NBT30-MDPE-M 8- 45	M 8-MDPE16-30
	-MDPE20- 75	20						-MDPE-M10- 45	M10-MDPE20-30
	-MDPE25- 80	25	80		35	15	43.4	-MDPE-M12- 45	M12-MDPE25-35
	-MDPE32- 95	32	95	55	40		52.5	-MDPE-M16- 55	M16-MDPE32-40
No.40	NBT40-MDPE16- 85,105,120	16	85,105,120	55, 75, 90	30	10	37.4	NBT40-MDPE-M 8- 55, 75, 90	M 8-MDPE16-30
	(NIT40)-MDPE20- 90,105,120	20	90,105,120	60, 75, 90			40.0	-MDPE-M10- 60, 75, 90	M10-MDPE20-30
	-MDPE25- 90,105,120	25		55, 70, 85	35	15	45.3,47.5,47.5	-MDPE-M12- 55, 70, 85	M12-MDPE25-35
	-MDPE32-105,120,135	32	105,120,135	65, 80, 95	40		52.5	-MDPE-M16- 65, 80, 95	M16-MDPE32-40
No.50	NBT50-MDPE16-100,120,135	16	100,120,135	70, 90,105	30	10	37.4	NBT50-MDPE-M 8- 70, 90,105	M 8-MDPE16-30
	(NIT50)-MDPE20-105,120,135	20	105,120,135	75, 90,105			40.0	-MDPE-M10- 75, 90,105	M10-MDPE20-30
	-MDPE25-105,120,135	25		70, 85,100	35	15	45.3,47.5,47.5	-MDPE-M12- 70, 85,100	M12-MDPE25-35
	-MDPE32-120,135,150	32	120,135,150	80, 95,110	40		52.5	-MDPE-M16- 80, 95,110	M16-MDPE32-40

★2pcs of tip clamp bolt and tip clamp wrench are supplied as standard. ★Please refer ☞ P.238 for cutting condition.
★Insert tip is available as an option .
★Centre through tool coolant is available for all series.

NBT-MDPE-M (Arbor)

TAPER	Code No.	φD	L1	ID φd	Arbor Front Dia.	ℓ	ℓ1	ℓ2	Screw G
No.30	NBT30-MDPE-M 8- 45	16	45	8.5	14.7	9	11	20	M 8
	-MDPE-M10- 45	20		10.5	18.7		12	21	M10
	-MDPE-M12- 45	25		12.5	23.0		15	24	M12
	-MDPE-M16- 55	32	55	17.0	30.0		16	25	M16
No.40	NBT40-MDPE-M 8- 55, 75, 90	16	55, 75, 90	8.5	14.7		11	20	M 8
	(NIT40)-MDPE-M10- 60, 75, 90	20	60, 75, 90	10.5	18.7		12	21	M10
	-MDPE-M12- 55, 70, 85	25	55, 70, 85	12.5	23.0		15	24	M12
	-MDPE-M16- 65, 80, 95	32	65, 80, 95	17.0	30.0		16	25	M16
No.50	NBT50-MDPE-M 8- 70, 90,105	16	70, 90,105	8.5	14.7		11	20	M 8
	(NIT50)-MDPE-M10- 75, 90,105	20	75, 90,105	10.5	18.7		12	21	M10
	-MDPE-M12- 70, 85,100	25	70, 85,100	12.5	23.0		15	24	M12
	-MDPE-M16- 80, 95,110	32	80, 95,110	17.0	30.0		16	25	M16

★Head is available as an option. ★Centre through tool coolant is available for all series.
★This is interchangeable with DEPO. When the connection interface (Screw G and ID φd) is same, the cutter head of other carbide makers can be used.

INTERCHANGABLE PRO-ENDMILL HEAD

NIKKEN

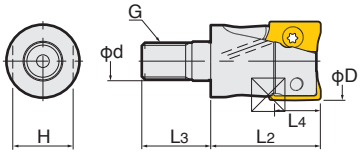



AOMT (Insert Tip)

Insert Tip Code No.	L11	L12	L13	S1	F1
AOMT123608PEER-M	12	6.6	10	3.6	1.2
AOMT184808PEER-M	18	9	15	4.8	1.4

★Only Nose R = 0.8 is available. Please contact Mitsubishi for the rigid type insert tip and the insert tip with other Nose R.
★Only grade of **VP15TF** (for steel, cast iron, hardened steel) is available. Please contact Mitsubishi for **VP20RT** (for stainless steel) and **TF15** (for aluminum).
★Minimum order quantity: 10pcs.

M-MDPE (Head)

φD	Code No.	L2	L3	MAX. Depth L4	φd	G	No. of Teeth	Insert Tip	Tip Clamp Bolt	Tip Clamp wrench	Spanner Width H
16	M 8-MDPE16-30	30	18	10	8.5	M 8	2	AOMT123608PEER-M	TPS-25	TIP07F	10
20	M10-MDPE20-30		19		10.5	M10	3				14
25	M12-MDPE25-35	35	22	15	12.5	M12	2	AOMT184808PEER-M	TPS-4	TIP15W	19
32	M16-MDPE32-40	40	23		17.0	M16	3				24

★2pcs of tip clamp bolt and tip clamp wrench are supplied as standard. ★Please refer ☞ P.238 for cutting condition.
★Insert tip is available as an option .
★Centre through tool coolant is available for all series.

MASAMUNE SHRINK FIT HOLDER

NIKKEN

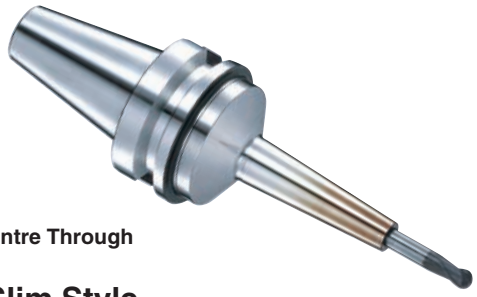

Centre Through

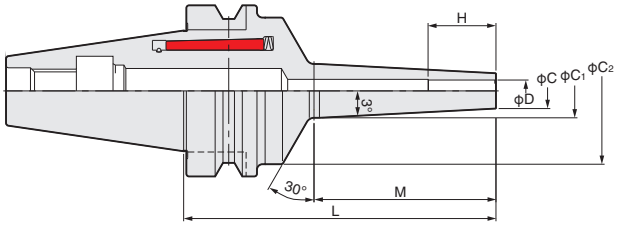

S Slim Style

TAPER	Code No.	φD	φC	φC1	φC2	L	M	H
No.30	NBT30-MDMS 3S- 80, -105	3	6	10.2, 12.8	41	80, 105	42, 67	10
	-MDMS 4S- 80, -105	4	7	11.2, 13.8				13
	-MDMS 6S- 80, -105	6	9	13.2, 15.8				19
	-MDMS 8S- 80, -105	8	13	17.2, 19.8				25
	-MDMS10S- 80	10	16	20.2		80	42	31
No.40	NBT40-MDMS 3S- 90, -115	3	6	10.2, 12.8	54	90, 115	42, 67	10
	(NIT40) -MDMS 4S- 90, -115	4	7	11.2, 13.8				13
	-MDMS 6S- 90, -115	6	9	13.2, 15.8				19
	-MDMS 8S- 90, -115	8	13	17.2, 19.8				25
	-MDMS10S- 90, -115	10	16	20.2, 22.8				31
	-MDMS12S- 90, -115	12	19	23.2, 25.8				31
No.50	NBT50-MDMS 3S-130	3	6	12.8	54	130	67	10
	(NIT50) -MDMS 4S-105, -130	4	7	11.2, 13.8		105, 130	42, 67	13
	-MDMS 6S-105, -130	6	9	13.2, 15.8				19
	-MDMS 8S-105, -130	8	13	17.2, 19.8				25
	-MDMS10S-105, -130	10	16	20.2, 22.8				31
	-MDMS12S-105, -130	12	19	23.2, 25.8				31

R Standard

TAPER	Code No.	φD	φC	φC1	φC2	L	M	H
No.30	NBT30-MDMS 4R - 80, -105	4	10	14.2, 16.8	41	80, 105	42, 67	13
	-MDMS 6RN*1- 80, -105	6	15*1	16.2, 18.8				19
	-MDMS 8R - 80, -105	8	18	22.2, 24.8				25
	-MDMS10R - 80, -105	10	22	26.2, 28.8				31
No.40	NBT40-MDMS 4R - 90	4	10	14.2	54	90	42	13
	(NIT40) -MDMS 6RN*1- 90, -115	6	15*1	16.2, 18.8		90, 115	42, 67	19
	-MDMS 8R - 90, -115	8	18	22.2, 24.8				25
	-MDMS10R - 90, -115	10	22	26.2, 28.8				31
	-MDMS12R - 90, -115	12	26	30.2, 32.8				31
No.50	NBT50-MDMS 6RN*1-105, -130	6	15*1	16.2, 18.8	54	105, 130	42, 67	19
	(NIT50) -MDMS 8R -105, -130	8	18	22.2, 24.8				25
	-MDMS10R -105, -130	10	22	26.2, 28.8				31
	-MDMS12R -105, -130	12	26	30.2, 32.8				31

★Please note the acceptable shank tolerance is h6.
★Carbide tool can be used and **HSS** tool can not be used.
★The tool will became very hot during heat shrinking. Please use glove for safety.
★**HSK** shank masamune shrink fit holder are **available. Please contact with us.**
★ID=φ16, φ20 and φ25mm are available.
★The capacity of the drier is approx. 3kW.
★Inductive style of the heat shrinking unit is recommended.

*1 MDMS6R(tip outer diameter φ12) is changed to **MDMS6RN(tip outer diameter φ15)**. Please be careful of interference.

2LOCK NBT ZERO FIT TYPE MILLING CHUCK

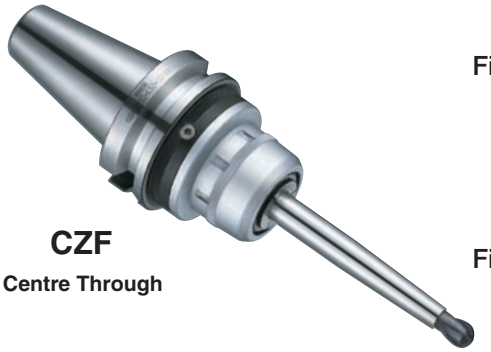

CZF
Centre Through

Fig.1

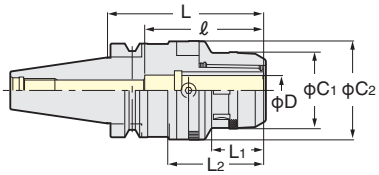

Fig.2

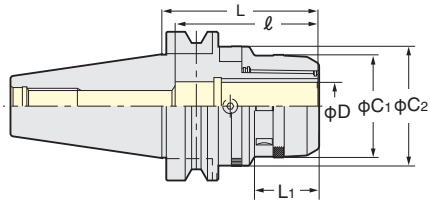

Explanation of the Code No.

NBT40 CZF32 – 120

- Nominal Gauge Length
- Chucking Capacity φD
- Zero Fit Type Milling Chuck
- Shank No.

MAX. run-out at 100mm	
CZF20	0.050mm/φ
CZF25	0.050mm/φ
CZF32	0.030mm/φ

TAPER	Code No.	C1	C2	L	L1	L2	ℓ	Weight(kg)	Fig.	Collet
No.30	NBT30-CZF20-100	51.5	66.5	100	35	68	80	1.5	1	KM20 CCK20
	-CZF25-100	59.5	74.5					1.6		KM25 CCK25
No.40	NBT40-CZF20-105, 120	51.5	66.5	105, 120	35	64.5	80	2.1, 2.5		KM20 CCK20
	(NIT40)-CZF25-105, 120	59.5	74.5			68		2.4, 2.9		KM25 CCK25
	-CZF32-120	69	80.5	120	42	78	105	2.8		KM32 CCK32
No.50	NBT50-CZF20-105, 165	51.5	66.5	105, 165	35	–	80	4.6, 6.0	2	KM20 CCK20
	(NIT50)-CZF25-105, 165	59.5	74.5					5.0, 6.8		KM25 CCK25
	-CZF32-105, 165	69	80.5		42		105	5.3, 7.4		KM32 CCK32

★Please refer ☞ **P.274, P.275** for **KM**, **CCK** collet.
★Spanner is available as an option.
CZF20 type : 9HC22, CZF25 type : 9HC25, CZF32 type : 9HC32

★Wrench to adjust run-out(**9ZFL**)is available as an option.

Wrench to adjust
9ZFL

★Multi-Cam style is available. **e.g. NBT40-CZF32-120-C3**. (3 Cams) Please contact us for more detail.

★Please note that the acceptable shank tolerance is h6~h7.
★Please add"**P**"at the end of Code No. for the high speed type. **e.g. NBT40-CZF25-105P**
★Please refer ☞ **P.273** for Milling Chuck Coolant Solution.

2LOCK NBT ZERO FIT TYPE SLIM CHUCK

NIKKEN

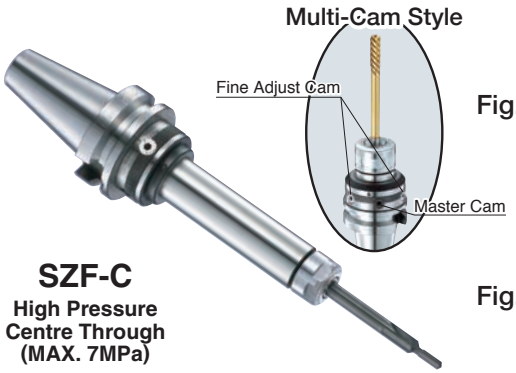

SZF-C
High Pressure
Centre Through
(MAX. 7MPa)

Fig.1

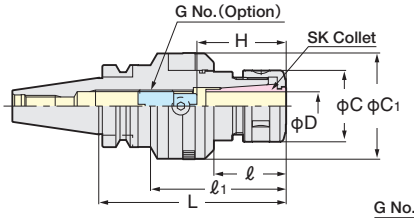

Fig.2

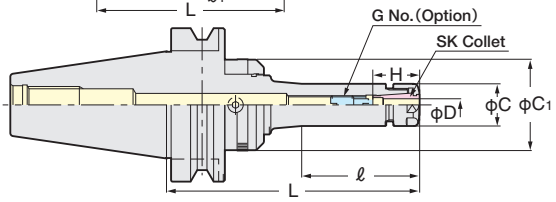

Explanation of the Code No.

NBT40 SZF10 – 90

- Nominal Gauge Length
- Chucking Capacity
- Zero Fit Type Slim Chuck
- Shank No.

MAX. run-out at 100mm		
SZF 6	L<150	0.050mm/φ
	L≧150	0.040mm/φ
SZF10		0.050mm/φ
SZF16		0.040mm/φ
SZF25		0.025mm/φ

High Pressure Centre Through Coolant type

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	Weight (kg)	Fig.	Collet
No.30	NBT30-SZF 6C- 90	0.7~6.0	90	42	–	19.5	40.5	26~31	SKG 6- 6HG	0.9	2	SK 6
	-SZF10C- 90	1.75~10.0		35	61	27.5	48.5	35~41	SKG10-10HG	1.3	1	SK10
	-SZF16C-105	2.75~16.0	105	40	76	40	59.5	45~57	SKG16-12HG	1.6		SK16
No.40	NBT40-SZF 6C- 90,150	0.7~6.0	90, 150	37, 60	–	19.5	40.5,48.5	26~31	SKG 6- 6HG	1.3, 1.7	2	SK 6
	(NIT40)-SZF10C- 90,150	1.75~10.0		37, 97		27.5	48.5	35~41	SKG10-10HG	1.5, 1.9		SK10
	-SZF16C- 90,150	2.75~16.0				40	59.5	45~57	SKG16-12HG	1.8, 2.2		SK16
	-SZF25C-120,150	7.5~25.4	120, 150	55, 86	84, 114	55	66.5	60~65	SKG25-18HGD	2.4, 2.9	1	SK25
No.50	NBT50-SZF 6C-105,165	0.7~6.0	105, 165	41, 63	–	19.5	40.5,59.5	26~31	SKG 6- 6HG	4.0, 4.2	2	SK 6
	(NIT50)-SZF10C-105,165	1.75~10.0		41, 101		27.5	48.5	35~41	SKG10-10HG	4.5, 4.9		SK10
	-SZF16C-105,165	2.75~16.0				40	59.5	45~57	SKG16-12HG	5.0, 5.4		SK16
	-SZF25C-135,165	7.5~25.4	135, 165	71, 101		55	66.5	60~70	SKG25-24HG	5.8, 6.0		SK25

★Adjust screw(G No.), wrench to adjust run-out(**9ZFL**)and **SKL** spanner are available as an option. **SZF6C: SKL-6W, SZF10C: SKL-10, SZF16C: 9HC16, SZF25C: 9HC22**

★**Please use "P" class or"A"type SK collet.** ☞ **P.277**
★For centre through coolant application please use **SK J** type nut and cap for your preference. Please note that the length of **J** type nut is 6mm longer than the standard **SK** Nut.
★For High Speed type, Code No. is **"SZF-P". e.g. NBT40-SZF10C-90P**
In this case, **GH Handle** is required. ☞ **P.293**
★Multi-Cam style is available. **e.g. NBT40-SZF16C-90-C3**. (3 Cams) Please contact us for more detail.
★Please refer ☞ **P.279** for **SK** Coolant Solution.

2LOCK NPU DRILL CHUCK

NIKKEN

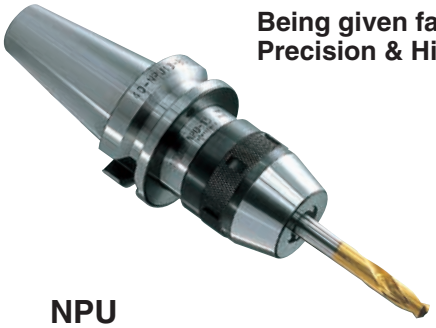

NPU

Being given favorable reception its Compactness, High Precision & High Rigidity.

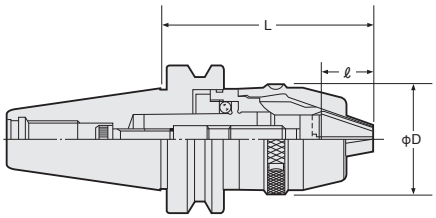

Explanation of the Code No.

NBT40 - NPU10 - 90

- Nominal Gauge Length
- Chucking Capacity
- Symbol of Drill Chuck
- Shank No.

ℓ : Chucking Length
NPU 8 : 18.8mm
NPU13 : 26.5

TAPER	Code No.	Chucking Range	D	L MIN.	L MAX.	Weight(kg)
No.30	NBT30-NPU 8- 70	0.3～8	38	76.5	83.5	0.7
	-NPU13- 95	1～13	48.5	102.1	113.1	1.2
No.40	NBT40-NPU 8- 70	0.3～8	38	76.5	83.5	1.2
	(NIT40) -110			115.5	122.5	1.5
	-155			160.5	167.5	1.7
	-NPU13- 80	1～13	48.5	86.1	97.1	1.5
	-130			137.1	148.1	2.2
	-175			182.1	193.1	2.7
No.50	NBT50-NPU 8- 85	0.3～8	38	87.5	94.5	3.8
	(NIT50) -110			115.5	122.5	3.9
	-170			175.5	182.5	4.3
	-NPU13- 90	1～13	48.5	97.1	108.1	4.1
	-130			137.1	148.1	4.6
	-190			197.1	208.1	5.2

★Wrench is available as an option. **NPU 8: NPUL- 8**
NPU13: NPUL-13

2LOCK SIDE LOCK HOLDER

NIKKEN

SLA

A TYPE(for END MILL)

Fig.1

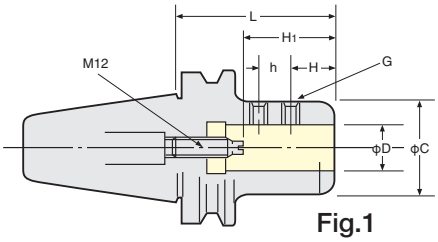

Fig.1

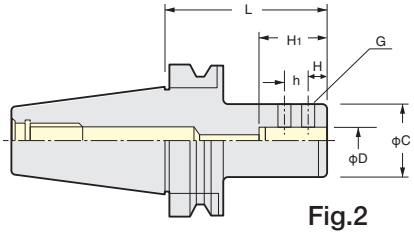

Fig.2

TAPER	Code No.	D	L	C	h	H	H_1 MIN.～MAX.	G	Weight(kg)
No.30	NBT30-SLA20- 75	20	75	50	21	15	55～ 70	M14 P=1.5	1.3
No.40	NBT40-SLA20- 90	20	90	50	21	24	55～ 70	M14 P=1.5	1.8
	(NIT40)-SLA25- 90	25							1.7
	-SLA32- 90,135*	32	90,135	60	25	25		M16 P=1.5	1.9,2.3
No.50	NBT50-SLA20-105,135*	20	105,135	50	21	24	55～ 70	M14 P=1.5	4.8,5.2
	(NIT50)-SLA25-105,135*,165*	25	105,135,165						4.7,5.2,5.7
	-SLA32-105,135*,165*	32		60	25	25	65～ 80	M16 P=1.5	4.0,4.9,5.5
	-SLA42-115*,150*	42	115,150	90	32	30	85～100	M20 P=2.0	6.6,7.5

★**Code No. of Side Lock Holder for Combination Shank is DM.**
★The Code No.of Centre Through Coolant type is **"SLOC".** ☞P.48

NBT50-DM32-120
-DM50.8-120

★* marked is available semi-atandard.

B TYPE(for DRILL)

Fig.2

TAPER	Code No.	D	L	L_1 MIN.～MAX.	H	C	W	DSA Socket-MT.No.	Weight(kg)
No.30	NBT30-SLB26-105	26	105	117～142	40	50	5	DSA26-MT1,MT2	1.5
									1.4
No.40	NBT40-SLB26-105	26	105	117～142	40	50	5	DSA26-MT1,MT2	2.1
									2.0
	-SLB35-135	35	135	147～182	55	60	6	DSA35-MT2,MT3	3.3
									3.2
No.50	NBT50-SLB26-105	26	105	117～142	40	50	5	DSA26-MT1,MT2	4.8
									4.7
	-SLB35-120	35	120	132～167	55	60	6	DSA35-MT2,MT3	5.4
									5.3
	-SLB35-135	35	135	147～182	55	60	6		5.7
									5.6
	-SLB48-165	48	165	181～227	65	80	8	DSA48-MT3,MT4	8.4
									8.1

★Please refer ☞P.47 for Collet and Sleeve.

2LOCK NPU DRILL CHUCK for Flange Through NIKKEN

Flange Through (MAX. 1MPa)

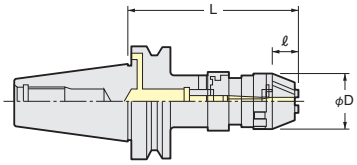

TAPER	Code No.	φDmm	φD	ℓ	L	Weight (kg)
No.40	NBT40-NPU13F-105	6～13	48.5	26.5	112.1～123.1	1.9
	150				157.1～168.1	2.4
No.50	NBT50-NPU13F-110				117.1～128.1	4.4
	150				157.1～168.1	4.8

★Wrench is available as an option. **NPU8: NPUL-8, NPU13: NPUL-13.**
★MIN. Chucking Dia. for centre through coolant is φ6mm.

★Please use Slim Chuck ☞ P.39 for high pressure coolant (MAX. 7Mpa).

2LOCK SIDE LOCK HOLDER (for DRILL) for Flange Through NIKKEN

Flange Through (MAX. 1MPa)



TAPER	Code No.	D	L	C	h	H	H1	G	Collet	Weight (kg)
No. 40	NBT40-SL20FN- 90	20	90	50	16	12	44.5	M10	—	1.8
	-SL25FN- 90	25		55	17	14	54.5	M12 = P1.25	OK25	1.7
	-SL32FN- 90	32		60	16	15	59.5	M12 = P1.25	OK32	1.9
No. 50	NBT50-SL20FN-105	20	105	50	16	12	44.5	M10	—	4.8
	-SL25FN-105	25		55	17	14	54.5	M12 = P1.25	OK25	4.7
	-SL32FN-105	32		60	16	15	59.5	M12 = P1.25	OK32	4.9
	-SL40FN-105	40		88	19	18	70	M12 = P1.25	OK40	5.2

★For OK25, OK32 and OK40 Collet, please refer ☞ P.115.

2LOCK MORSE TAPER ADAPTER A TYPE NIKKEN

MTA

■Taper contact area of more than 80% ensures high repeatability run-out accuracy.

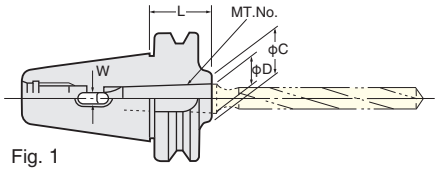

Fig. 1

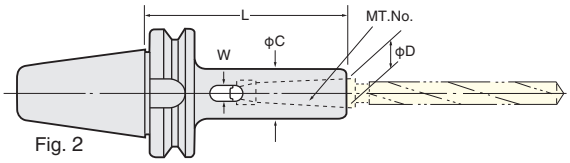

Fig. 2

TAPER	Code No. -L	MT. No.	D	L	C	W	Fig	Weight(kg)
No.30	NBT30-MTA1- 45, 105	1	12.065	45, 105	20, 25	5.6	1, 2	0.8, 0.9
	-MTA2- 60, 120	2	17.780	60, 120	30	6.6		0.9, 1.2
	-MTA3- 80	3	23.825	80	40	8.4	1	1.0
No.40	NBT40-MTA1- 45, 120	1	12.065	45, 120	25	5.6	1, 2	1.0, 1.3
	(NIT40)-MTA2- 60, 120	2	17.780	60, 120	32	6.6		1.1, 1.4
	-MTA3- 75, 135	3	23.825	75, 135	40	8.4		1.2, 1.8
	-MTA4- 95, 165	4	31.267	95, 165	50	12.4		1.4, 2.4
No.50	NBT50-MTA1- 45, 120, 180	1	12.065	45, 120, 180	25	5.6	1, 2, 2	4.0, 4.3, 4.3
	(NIT50)-MTA2- 45, 135, 180	2	17.780	45, 135, 180	32	6.6		4.0, 4.4, 4.6
	-MTA3- 45, 150, 180	3	23.825	45, 150, 180	40	8.4		3.9, 4.7, 4.9
	-MTA4- 75, 180	4	31.267	75, 180	50	12.4	1, 2	4.0, 5.4
	-MTA5-105	5	44.399	105	65	16.5	1	4.6

2LOCK TAPPER CHUCK

NIKKEN

AUTO. DEPTH CONTROL

FLOATING

- Most suitable for tapping gas threads, blind-end threads and light alloys.
- When normal rotation of machine is stopped at specified position, the Tapper Chuck runs idle after progressing by its elongation (4mm for ZL12 type). Simply rotate the machine in the reverse direction, and the tap depth will be made uniform within a high-precision.

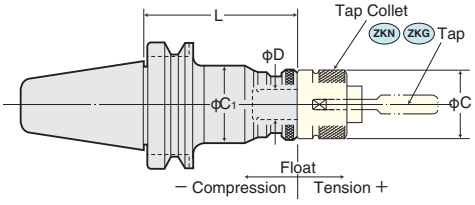

ZL AUTO. DEPTH CONTROL

TAPER	Code No.	Tapping Capability M	Tapping Capability U	Tapping Capability P	D	L	C	Float F1	Float F2	Tap Collet	Weight (kg)
No.40	NBT40-ZL 8-120*1	M 2～ 8	1/8～1/4	—	13	120	34	3	3	ZKN 8 *1	1.6
	(NIT40)-ZL12-100	M 2～12	1/8～1/2	P1/16～1/4	19	100	58	5	4	ZKG12	1.9
	-ZL12-130					130					2.3
	-ZL16-150	M 3～16	1/8～5/8	P1/8～3/8	25	150	60			ZKG16	2.9
	-ZL24-160	M 8～24	1/2～ 1	P1/4～5/8	30	160	73	6	7	ZKG24	3.3
	-ZL38-190	M18～38	3/4～13/8	P3/8～ 1	45	190	92	8	10	ZKN38	6.0
No.50	NBT50-ZL 8-130*1	M 2～ 8	1/8～1/4	—	13	130	34	3	3	ZKN 8 *1	4.2
	(NIT50)-ZL12- 85	M 2～12	1/8～1/2	P1/16～1/4	19	85	58	5	4	ZKG12	3.4
	-ZL12-130					130					4.3
	-ZL16-135	M 3～16	1/8～5/8	P1/8～3/8	25	135	60			ZKG16	4.6
	-ZL24-100	M 8～24	1/2～ 1	P1/4～5/8	30	100	73	6	7	ZKG24	4.5
	-ZL24-142					142					5.8
	-ZL38-150	M18～38	3/4～13/8	P3/8～ 1	45	150	92	8	10	ZKN38	6.9

★In case of **NIT40, NIT40-ZL16-160** and **NIT40-ZL24-175** are standard.
★In case of **NIT50, NIT50-ZL12-130, NIT50-ZL24-142** and **NIT50-ZL38-180** are standard.
★Marked *1 **ZL8** Tapper Chuck and **ZK8** Tap Collet are available as semi-standard.
★Please refer ☞ **P.287 (ZKG)～P.288 (ZK) for ISO, IMPERIAL, DIN Tap Collet,** ☞ **P.285 (ZKG)～P.286 (ZKN) for JIS Tap Collet**, and ☞ **P.285** for **Long Size Tap Collet.**

Z FLOATING

TAPER	Code No.	Tapping Capability M	Tapping Capability U	Tapping Capability P	D	L	C	C1	Float F1	Float F2	Tap Collet	Weight (kg)
No.40	NBT40-Z 8- 90*1	M 2～ 8	1/8～1/4	—	13	90	23	33	5	15	ZKN 8 *1	1.4
	(NIT40)-Z12- 90	M 2～ 12	1/8～1/2	P1/16～1/4	19	90	32	45	5	15	ZKG12	1.5
	-Z12-130					130			15			1.6
	-Z16-109	M 3～ 16	1/8～5/8	P1/8～3/8	25	109	39	55	8	20	ZKG16	2.0
	-Z24-100	M 8～ 24	1/2～ 1	P1/4～5/8	30	100	46	68	10	20	ZKG24	2.1
	-Z24-187					187		63	20			3.5
	-Z38-140	M18～ 38	3/4～13/8	P3/8～ 1	45	140	78	85	8	22	ZKN38	6.7
No.50	NBT50-Z 8-105*1	M 2～ 8	1/8～1/4	—	13	105	23	33	5	15	ZKN 8 *1	4.2
	(NIT50)-Z12-130	M 2～ 12	1/8～1/2	P1/16～1/4	19	130	32	45	15	15	ZKG12	4.3
	-Z12-175					175						4.8
	-Z12-220					220						5.0
	-Z16-135	M 3～ 16	1/8～5/8	P1/8～3/8	25	135	39	55	8	20	ZKG16	5.2
	-Z24-142	M 8～ 24	1/2～ 1	P1/4～5/8	30	142	46	63	20	20	ZKG24	5.8
	-Z24-187					187						6.2
	-Z38-175	M18～ 38	3/4～13/8	P3/8～ 1	45	175	78	98	10	25	ZKN38	8.3
	-Z65-160	M36～100	1 ～33/4	P1 ～ 3	68	160	110*2 (125)	110	10	25	ZKN65	9.0

★In case of **NIT40, IT40-ZL8-95*1** and **NIT40-ZL24-1255** are standard.
★In case of **NIT50, IT50-ZL8-105*1**, **NIT50-ZL38-187** and **NIT50-ZL65-165** are standard.
★Marked *1 **Z8** Tapper Chuck and **ZK8** Tap Collet are available as semi-standard.
★Please refer ☞ **P.287 (ZKG)～P.288 (ZK) for ISO, IMPERIAL, DIN Tap Collet,** ☞ **P.285 (ZKG)～P.286 (ZKN) for JIS Tap Collet**, and ☞ **P.285** for **Long Size Tap Collet.**
★Marked *2 ( ) dimension is for M65 or more size of **ZK** Tap Collet.

2LOCK BALANCE-CUT BORING ARBOR

NIKKEN

Boring for Roughing

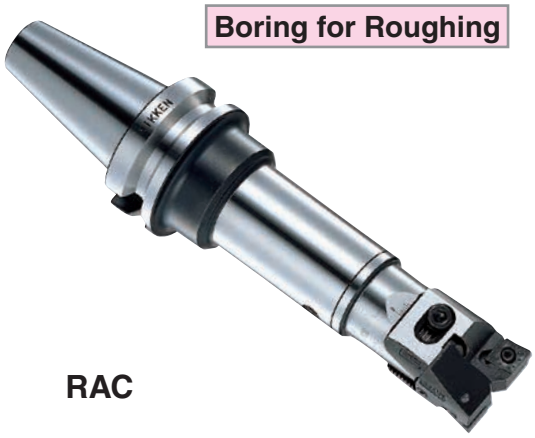

RAC

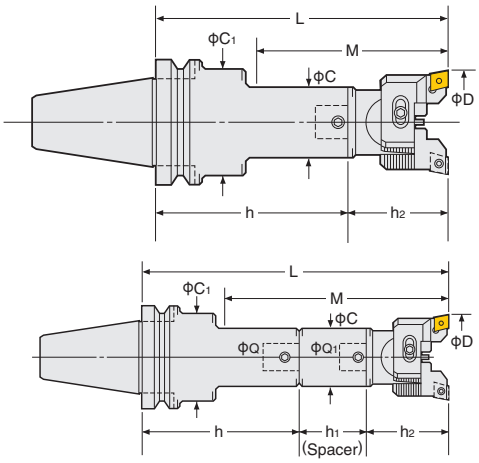

Power of Shoulder Support

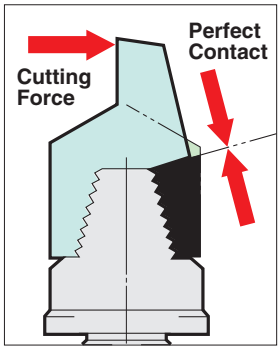

TAPER	Code No.	Boring Range D	Boring Depth M	Coupling Dia Q	C	C1	P.60 Head No.	Tip No.	Weight (kg)
	NBTNo.- Min.D -L						Q- Min.D -h2		
No.40	NBT40-RAC 25-135E, 165E, 180E	25～32	67, 105, 112	12	24	35	12-RAC 25- 55E	CC07	2.0, 2.1, 2.1
	(NIT40)-RAC 32-150E, 180E, 195E	32～45	77, 110, 122	16	31	42	16-RAC 32- 55E	CC08	2.4, 2.6, 2.6
	-RAC 43-150E, 180E, 210E	43～55	97, 130, 157	20	40	50	20-RAC 43- 70E	CC12	2.7, 2.9, 3.2
	-RAC 53-165E, 210E, 225E	53～70	135, 180, 195	26	50		26-RAC 53- 70E		2.5, 3.3, 3.2
	-RAC 70-180E, 195E, 240E	70～100	180, 195, 240	34	64	64	34-RAC 70- 85E		4.8, 5.2, 6.2
	-RAC100-195E	100～130	195	42	83	62	42-RAC100-100E		6.8
No.50	NBT50-RAC 25-150E, 180E, 195E	25～32	67, 105, 112	12	24	44	12-RAC 25- 55E	CC07	4.7, 4.9, 4.8
	(NIT50)-RAC 32-180E, 210E, 225E	32～45	77, 110, 122	16	31	50	16-RAC 32- 55E	CC08	5.4, 5.6, 5.6
	-RAC 43-180E, 195E, 225E, 240E	43～55	97, 130, 142, 157	20	40	60	20-RAC 43- 70E	CC12	5.7, 5.8, 6.1, 6.2
	-RAC 53-210E, 240E, 270E	53～70	117, 182, 177	26	50	65	26-RAC 53- 70E		6.9, 7.0, 7.6
	-RAC 70-255E, 285E, 315E	70～100	205, 235,265	34	64	80	34-RAC 70- 85E		9.5, 9.9, 10.9
	-RAC100-225E, 290E, 325E*	100～130	225, 290, 325	42	83	83	42-RAC100-100E		12.5, 15.2, 16.5

★**"C" grade (Coated)** inserts are supplied as standard with the head. ☞**P.62** Please refer ☞**P.100** for cutting condition.
★Please refer ☞**P.189** for base holder, ☞**P.90** for spacer and ☞**P.67** for head.
★**For centre through coolant type, please add"-C"at the end of Code No. e.g. NBT40-RAC53-165-C**
★Cartridges & Insert tips for the Heavy Duty Boring of Iron and Cast Iron (No letter), for Aluminum **(A)**, and for Through Hole & Multiple Sheets **(K)** are available.
Please refer ☞**P.68** for cartridges. Please add the letter"No letter", **"A"** or **"K"** at the end of Code No. **e.g. NBT40-RAC53-165A**
★＊**: NBT50-RAC100-375E, 425E and 475E are also available.**
Code No. of **RAC25** and **RAC32** with **CC** inserts are changed to **RAC25E** and **RAC32E**. Please refer ☞**P.59, P.60**
★**When L length is required longer than standard, please specify the boring depth M and Q No.**



2LOCK MAJOR DREAM HOLDER BASE HOLDER for MODULAR TYPE

NIKKEN

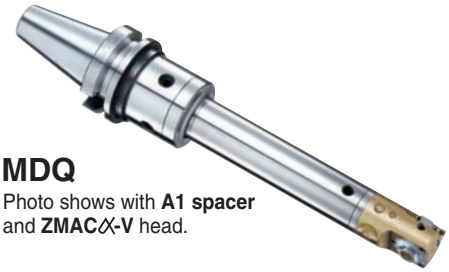

MDQ
Photo shows with **A1 spacer** and **ZMAC**α**-V** head.



Fig.1



Fig.2

TAPER	Code No.	Q	L	C	C1	H	Weight (kg)	ZMAC-V Boring Range	Fig
No.30	NBT30-MDQ26- 60	26	60	50	50	37.5	-	16～70	1
No.40	NBT40 (NIT40)-MDQ26- 65	26	65	50	54	30.0	1.3	16～70	2
No.50	NBT50-MDQ26- 80	26	80	50	87	22.0	4.6	16～70	2
	(NIT50)-MDQ34- 90	34	90	64	87	32.0	4.9	16～85	
	-MDQ42-100	42	100	83	87	45.0	5.7	16～180	

★All base holders are used for centre through coolant. ★Coupling bolt and wrench are supplied as standard.
★**ZMAC**α**-V** head is recommended to use with the **MAJOR DREAM** base holder for anti-vibration.
★**When L length is required longer than standard, please specify the boring depth M and Q No.**



Q No.

2LOCK ZMAC ADVANCED BORING ARBOR (ZMAC-V) NIKKEN

Boring for Finishing

ZMAC-V

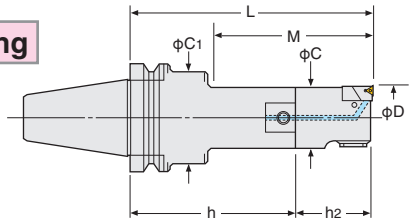

JAPAN PAT.

No Micro Vibration due to Double-Contact Support of Cartridge.Long Tool-Life & High Accuracy.



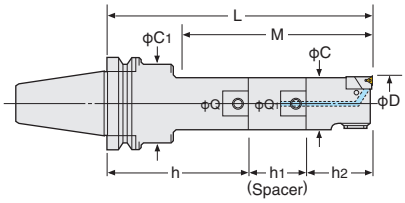

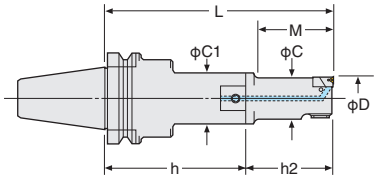

Only ZMAC16-V

All codes shown are for heads with triangular inserts For heads with rhomboid inserts please add the letter "R" to the code No. e.g. NBT40-ZMAC32 R -150V

TAPER	Code No. NBTNo.- Min.D - L	Boring Range D	Boring Depth M	Coupling Dia Q	C	C1	P.103 Head No. Q- Min.D -h2	Insert No.	Weight (kg)
No.40	NBT40-ZMAC 16-125V, 135V	15.9～20.2	38, 48	12	15	24	12-ZMAC16-45V, 55V	3MP	1.9, 1.9
	(NIT40)-ZMAC 20-120V, 135V, 150V	19.8～25.2	45, 67, 75	9	19	30	9-ZMAC20-40V		1.9, 1.9, 2.0
	-ZMAC 25-120V, 150V, 165V	24.8～32.2	52, 90, 97	12	24	35	12-ZMAC25-40V		2.0, 2.1, 2.1
	-ZMAC 32-150V, 180V, 195V	31.8～42.2	77, 110, 122	16	31	42	16-ZMAC32-55V	4MP	2.5, 2.7, 2.7
	-ZMAC 42-150V, 180V, 210V	41.8～55.2	97, 130, 157	20	40	50	20-ZMAC42-70V	6MP	3.0, 3.2, 3.5
	-ZMAC 55-165V, 210V, 225V	54.8～70.2	135, 180, 195	26	53		26-ZMAC55-70V		3.9, 4.6, 4.6
	-ZMAC 70-165V, 180V, 225V	69.8～85.2	165, 180, 225	34	67	64	34-ZMAC70-70V		5.4, 5.8, 6.8
	-ZMAC 85-195V	84.8～100.2	195	42	83	62	42-ZMAC85-100V		9.0
No.50	NBT50-ZMAC 16-140V, 150V	15.9～20.2	38, 48	12	15	24	12-ZMAC16-45V, 55V	3MP	4.7, 4.7
	(NIT50)-ZMAC 20-150V, 165V, 180V	19.8～25.2	45, 67, 75	9	19	40	9-ZMAC20-40V		4.8, 4.8, 4.9
	-ZMAC 25-135V, 165V, 180V	24.8～32.2	52, 90, 97	12	24	44	12-ZMAC25-40V		4.8, 4.8, 4.9
	-ZMAC 32-180V, 210V, 225V	31.8～42.2	77, 110, 122	16	31	50	16-ZMAC32-55V	4MP	5.5, 5.6, 5.7
	-ZMAC 42-180V, 195V, 225V, 240V	41.8～55.2	97, 130, 142, 157	20	40	60	20-ZMAC42-70V	6MP	6.0, 6.0, 6.4, 6.5
	-ZMAC 55-210V, 240V, 270V	54.8～70.2	117, 182, 177	26	53	65	26-ZMAC55-70V		7.5, 7.6, 8.1
	-ZMAC 70-240V, 270V, 300V	69.8～85.2	190, 220, 250	34	67	80	34-ZMAC70-70V		10.0, 10.6, 11.5
	-ZMAC 85-225V, 290V, 315V	84.8～100.2	182, 247, 272	42	83	83	42-ZMAC85-100V		12.5, 15.0, 16.0
	-ZMAC100-225V, 290V*	99.5～140.5	225, 290				42-ZMAC100-100V		13.8, 16.5
	-ZMAC140-225V, 290V*	139.5～180.5					42-ZMAC140-100V		14.6, 17.3

★MIN. dial readout : **ZMAC25-V** & smaller is 0.02mm on diameter. **ZMAC32-V** and larger are 0.01mm on diameter.
★**"C" grade (Coated) insert for Steel, Stainless & Cast Iron is supplied as Standard with the head (Smooth boring & Long tool-life).** ☞ **P.103** Please refer ☞ **P.101** for cutting condition.
We would recommend"**B**"grade(**CBN**)insert for Hardened Steel & High Speed boring of Cast Iron.
★Please refer ☞**P.189, P.90** for Shank&Spacer, and ☞**P.75, P.76** for Head.
★Centre Through Coolant function is available as standard.
★For **NBT30**, modular connection system is applied. Please refer ☞ **P.189** for Base Holder.
★**＊ : NBT50-ZMAC100-325V, 375V, 425V, 475V are also available. NBT50-ZMAC140-325V, 375V, 425V, 475V**
★**When L length is required longer than standard, please specify boring depth M.**



Coolant Through Tool

High Speed Boring ZMACα-V

Special Hardened light alloy metal head with balancing for preventing from high frequency vibration.
Ultra high speed boring:MAX.12,000r/min&G2.5



ZMAC-V for Multi-Stage Boring Bar

Please contact us for the special boring bar.

Photo. shows **NC5** shank.

Please contact us for your application with the boring diameter. ☞ **P.76**

e.g. NBT40-ZMAC42-150AAV
Boring dia.:φ43.5mm

2LOCK BASE HOLDER for MODULAR TYPE

NIKKEN

Q



Fig.1



Fig.2



Fig.3



Fig.4

TAPER	Code No.	Coupling Dia Q	L	C	C1	H	H1	Coupling Bolt No.	Fig.	Weight(kg)
No.30	NBT30-Q 9- 50	9	50	19	30	20	-	B19	2	0.5
	-Q12- 65	12	65	24	-	40		B12	1	
	-Q16- 50	16	50	31		25		B16		
	-Q20- 50	20		40		26		B20		
	-Q26- 40	26	40	50	45	18	6	B26N	3	
No.40	NBT40-Q 9- 80, 95N	9	80,95	19	30	5,27	-	B19	2	1.2, 1.2
	(NIT40)-Q12- 80,110	12	80,110	24	35	12,50		B12		1.2, 1.3
	-Q16- 95,125	16	95,125	31	42	22,55		B16		1.5, 1.6
	-Q20- 80,110	20	80,110	40	50	27,60		B20		1.5, 1.7
	-Q26- 50, 95,140	26	50,95,140	50	-	20,65,110		B26N	1	1.1, 1.8, 2.4
	-Q34- 95,110	34	95,110	64	62	68,83	55,70	B34	3	2.2, 2.6
	-Q42- 95	42	95	83	62	68	55	B42		2.8
No.50	NBT50-Q 9-110,125N	9	110,125	19	40	5,27	-	B19	2	4.1, 4.1
	(NIT50)-Q12- 95,125	12	95,125	24	44	12,50		B12		4.0, 4.0
	-Q16-125N,155	16	125,155	31	50	22,55		B16		4.5, 4.6
	-Q20-110,125	20	110,125	40	60	27,60		B20		4.6, 4.5
	-Q26- 65,140,170N	26	65,140,170	50	65	27,47,112		B26N	1,2,2	3.7, 5.3, 5.4
	-Q34-140,170,200	34	140,170,200	64	80	102,120,150		B34	1,2,2	5.6, 6.5, 7.1
	-Q42-125,190	42	125,190	83	-	87,152		B42	1	6.5, 9.1
	-Q42-225A,275A 325A,375A		225,275 325,375	83	98	-			4	12.9, 15.6 18.3, 21.0

★ϕC of **Q**26 base holder has been increased from 45mm to 50mm due to improvement of its rigidity.
★All base holders have a centre through-tool coolant hole.
★The Coupling screw & wrench are supplied as standard.

★When L length is required longer than standard, please specify the boring depth M.



Q No.

2LOCK DJ BORING BAR

NIKKEN

For both wide range small quantity production and mass production
Boring Head with **Power of Solid Carbide DJ Bit**

DJ

Coolant Through Tool is available. Please contact us.

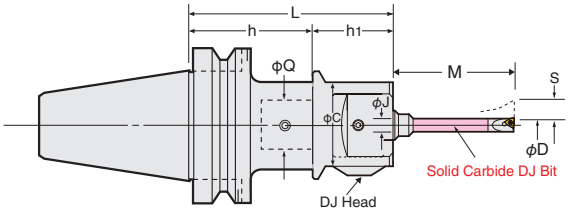

TAPER	Code No.	Boring Range	Boring Depth	L	C	Bit Hole Size	Shank Code No.	Head Code No.	Bit Stroke	DJ Bit Code No.
	NBTNo.-MinD-L	D	M			J	NBTNo.Q-h	Q-MinD-h1	S	
No.30	NBT30-DJ3- 80A	3～28	14～ 80	80	50	10	NBT30-Q26- 40	Q26-DJ3-40A	5.2	J10
	-DJ8- 84AN	3～50	14～130	84	59	16		-DJ8-44AN	6.0	J16
No.40	NBT40-DJ3- 90A	3～28	14～ 80	90	50	10	NBT40-Q26- 50	Q26-DJ3-40A	5.2	J10
	(NIT40) -135A			135			- 95			
	-DJ8- 94AN	3～50	14～130	94	59	16	NBT40-Q26- 50	-DJ8-44AN	6.0	J16
	-139AN			139			- 95			
No.50	NBT50-DJ3-105A	3～28	14～ 80	105	50	10	NBT50-Q26- 65	Q26-DJ3-40A	5.2	J10
	(NIT50) -210A			210			-170N			
	-DJ8-109AN	3～50	14～130	109	59	16	NBT50-Q26- 65	-DJ8-44AN	6.0	J16
	-214AN			214			-170N			

★MIN. dial readout on dia.: 0.01mm, Sub scale: 0.005mm, 0.8mm/rev.
★Each boxed set of **DJ3** and **DJ8** Boring Bars include 4 pcs of **DJ** Boring Bits as standard.
Bits included for **NBT40-DJ8-94A : J16-8-40, J16-18-80C, J16-28-85, J16-38-85**
Bits included for **NBT40-DJ8-94AN :** The standard set bites will be replaced by those with C(with oil hole) as soon as the stock of those without C(without oil hole) runs out. ☞**P.88**
★**DJ** Boring Bar without Boring Bits is also available. Please add"**-BD**"at the end of Code No. **e.g. NBT40-DJ3-90A-BD**
★Shank and **DJ** Head(including Boring Bits)are delivered in separate packages.
★Please refer ☞**P.88** for Boring Bits. Please refer ☞**P.102** for cutting condition.

2LOCK BALANCE-CUT RAC BORING ARBOR for LARGE DIA. NIKKEN

RAC

For Roughing

■With slight adjust screw
Boring Dia:ϕ130～580mm

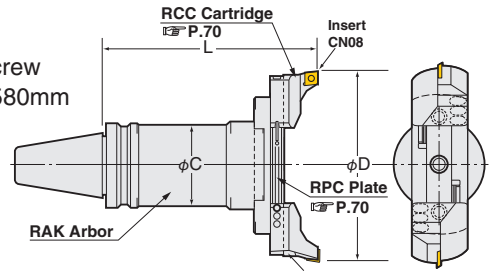

P.62

Boring Dia:ϕ130～580mm **for Roughing.**

TAPER	Code.No	D MIN.～MAX.	L	C	RAK Arbor Code No.	PPC Plante No	Cartridge No. for Large dia.	Weight (kg)
No.40	NBT40 -RAC130-205	130～180	205	61	NBT40-RAK-130A	RPC-130	For Heavy Duty Boring of Iron and Cast Iron RCC-130 ×2 Insert Tip CN08	6.8
	(NIT40) -RAC180-205	180～230				-180		7.8
No.50	NBT50 -RAC130-185, 235, 285	130～180	185, 235, 285	90	NBT50-RAK-110A, 160A, 210A	RPC-130		11.3, 12.8, 15.8
	(NIT50) -RAC180-185, 235, 285	180～230				-180		11.8, 13.3, 16.3
	-RAC230-185, 235, 285	230～280				-230		12.3, 13.8, 16.8
	-RAC280-185, 235, 285	280～330				-280		12.8, 14.3, 17.3
	-RAC330-210*	330～380	210 (220*)	98	NBT50-RAK330-125 NIT50-RAK330-135*	RPC-330		15.5
	-RAC380-210*	380～430				-380		16.5
	-RAC430-210*	430～480				-430		17.5
	-RAC480-210*	480～530				-480		18.5
	-RAC530-210*	530～580				-530		19.5

★The Code No. on above table are the boring arbors with **RCC-130** cartridge (Inset tip: **CN08**) the Heavy Duty Boring of Iron and Cast Iron . Please refer ☞ **P.100** for cutting condition.
★Boring arbor with cartridges & insert for Steel, Stainless Steel and Cast Iron **(E)**, for Aluminum **(A)** and for Through Hole & Multi Sheets **(K)** are available.
Please refer ☞ **P.70** for cartridges. **e.g. NBT50-RAC130-185E**
★Arbor, Plate and Cartridge are delivered in separate packages. ★When ordering, please let us know machine maker and model no. to avoid the interference with tool magazine of **ATC**.
★The location of cutting edge is same as drive key in standard. The different location is available, please specify **θ** in Code No. **e.g. NBT50-RAC180-235 (90˚)**
★The boring arbors marked*with **NIT50**, L (gauge length) is 220. **e.g. NIT50-RAC330-220**
★For centre through coolant type, please add "-C" at the end of Code No. e.g. NBT50-RAC130-185-C

2LOCK BALANCE-CUT BAC ADVANCED BORING ARBOR for LARGE DIA. NIKKEN

JAPAN PAT.

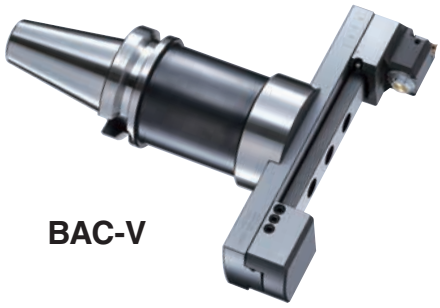

BAC-V

For Finishing

■Min. dial read out:main scale dia. 0.01mm,sub scale dia.0.005mm

■Boring Dia:ϕ130～595mm

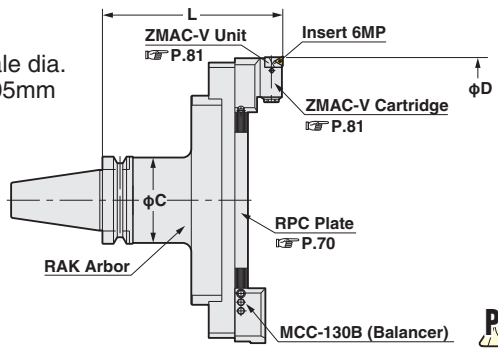

P.103

Boring Dia:ϕ130～595mm **for Finishing.**

TAPER	Code.No	D MIN.～MAX.	L	C	RAK Arbor Code No.	PPC Plante No	Cartridge (Balancer)	Weight (kg)
No.40	NBT40 -BAC130-205V	130～195	205	61	NBT40-RAK-130A	RPC-130	MCCZ-130V (MCC-130B) Insert Tip 6MP	6.8
	(NIT40) -BAC180-205V	180～245				-180		7.8
No.50	NBT50 -BAC130-185V, 235V, 285V	130～195	185, 235, 285	90	NBT50-RAK-110A, 160A, 210A	RPC-130		13.0, 14.5, 17.5
	(NIT50) -BAC180-185V, 235V, 285V	180～245				-180		13.5, 15.0, 18.0
	-BAC230-185V, 235V, 285V	230～295				-230		14.0, 15.5, 18.5
	-BAC280-185V, 235V, 285V	280～345				-280		14.5, 16.0, 19.0
	-BAC330-210V*	330～395	210 (220*)	98	NBT50-RAK330-125 NIT50-RAK330-135*	RPC-330		16.2
	-BAC380-210V*	380～445				-380		16.5
	-BAC430-210V*	430～495				-430		17.5
	-BAC480-210V*	480～545				-480		18.5
	-BAC530-210V*	530～595				-530		19.5

★**"C" grade (Coated)** Inserts are supplied as standard. ★Please refer ☞ **P.101** for cutting condition.
★Unit **"M5HZ-55V"** is provided as standard, please refer ☞ **P.70** for Arbor (**RAK**) and Plate (**RPC**).
★Arbor, Plate and Cartridge are delivered in separate packages.
★When ordering, please let us know machine maker and model no. to avoid the interfererce with tool magazine of **ATC**.
★The location of cutting edge is same as drive key in standard.
The different location is available, please specify **θ** in Code No. **e.g. NBT50-BAC180-235V (90°)**
★The boring arbors marked*with **NIT50**, L (gauge length) is 220. **e.g. NIT50-BAC330-220V**
★For centre through coolant type, please add "-C" at the end of Code No. e.g. NBT50-BAC130-185-C



View from Cutting edge.

2LOCK FACE MILL ARBOR

NIKKEN

FMA

For JIS B4113 Face Mill Cutter

■Taper contact area of more than 80% ensures reliable milling with no chattering accompanied

FMH Arbor for High Feed with Coolant Through ☞ P.193, P194

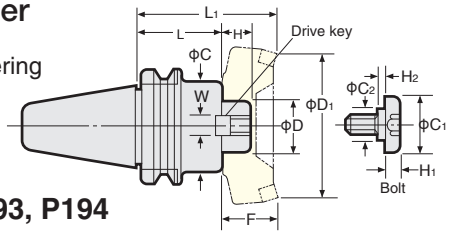

TAPER	Code No. (ΦD -L)	Dimensions H	C	W	C1	C2	H1	H2	Weight (kg)	Demension of Arbor with cutter L1	D1	F	Drive Key	Bolt
No.30	NBT30-FMA25.4 - 45	22	50	9.5	33	23	10	2	1.3	95	80	50	FW 5	FM12
No.40	NBT40-FMA25.4 - 45	22	50	9.5	33	23	10	2	1.5	95	80	50	FW 5	FM12
	-FMA25.4 - 90								3.1	140			FW 5	
	-FMA31.75 - 45	30	60	12.7	40	23	10	6	1.7	105	100	60	FW13	FM16
	-FMA31.75 - 75								3.1	135				
	-FMA38.1 - 60	34	80	15.9	50	27	14	6	2.9	120	125	60	FW18	FM20
No.50	NBT50-FMA25.4 - 45	22	58	9.5	33	23	10	2	3.7	95	80	50	FW 5	FM12
	-FMA25.4 - 90								4.6	140				
	-FMA25.4 -150								5.5	200				
	-FMA31.75 - 45	30	70	12.7	40	23	10	6	4.5	105	100	60	FW12	FM16
	-FMA31.75 - 75								5.3	135			FW13	
	-FMA31.75 -105								6.1	165				
	-FMA38.1 - 45	34	80	15.9	50	27	14	6	4.3	105	125	60	FW18	FM20
	-FMA38.1 - 75								5.6	135			FW19	
	-FMA50.8 - 45	36	100	19	65	37	14	10	4.9	105	160	60	FW23	FM24
	-FMA50.8 - 75								6.8	135			FW24	
	-FMA47.625- 75	38	128.57	25.4	—	—	—	—	7.7	135	200	60	FW26	*

★Drive keys, L-Wrench & Bolt are supplied as standard. ★The arbor marked *requires 4 fixing bolts. ★Above weight is for Arbor only. (Not include Face Mill Cutter)
★**FMA25.4** type Arbor is suitable for NIKKEN PRO-END MILL φ60 (**PE60HC**) and φ80 (**PE80HC**).
★**FMA31.75** type Arbor is suitable for NIKKEN PRO-END MILL φ100 (**PE100HC**). Please refer ☞ **P.111**.
★Code No. of Centre Through Coolant type **FMA** Arbor for NIKKEN PRO-END MILL is : **e.g. NBT40-FMA25.4C-45**
★Extended length Face Mill Arbors are available on request.
NBT50-FMA25.4 -200,-250
-FMA31.75-150,-200
-FMA38.1 -150,-200
★Diameter φC of **NBT50-FMA25.4** and **NBT50-FMA31.75** are enlarged.

★In case of the special cutter, please specify the dimensions below.

Fig.1



Fig.2



2LOCK FACE MILL ARBOR

NIKKEN

FMB

■Taper contact area of more than 80% ensures reliable milling with no chattering accompanied

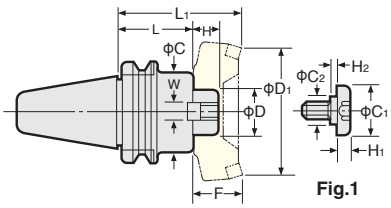

Fig.1

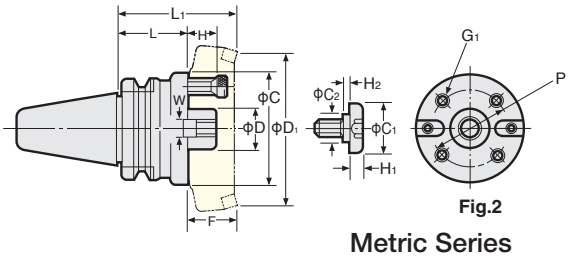

Fig.2

Inch Series

(●)figures for Metric Series

Metric Series

TAPER	Code No. (ΦD -L)	Dimensions H	C	W	C1	C2	H1	H2	G1	P	Weight (kg)	Demension of Arbor with cutter L1	D1	F	Fig.	Code No. (ΦD -L)
No.30	NBT30-FMB25.4 - 45	26	80	9.5(12)	33	23	10	2	—	—	1.7	95	80	50	1	NBT30-FMB27 - 45
No.40	NBT40-FMB25.4 - 60	26	80	9.5(12)	33	23	10	2	—	—	2.5	110	80	50	1	NBT40-FMB27 - 60
	-FMB25.4 - 90										4.7	140				-FMB27 - 90
	-FMB38.1 - 60		85	15.9(16)	50	27	14	6	—	—	7.4	123	125	63		-FMB40 - 60
No.50	NBT50-FMB25.4 - 45	26	80	9.5(12)	33	23	10	2	—	—	4.0	95	80	50	1	NBT50-FMB27 - 45
	-FMB25.4 - 90										5.8	140				-FMB27 - 90
	-FMB25.4 -150										8.2	200				-FMB27 -150
	-FMB38.1 - 45		85	15.9(16)	50	27	14	6	—	—	4.7	108	125	63	1	-FMB40 - 45
	-FMB38.1 - 75										6.1	138				-FMB40 - 75
	-FMB38.1 -105										8.7	168				-FMB40 -105
	-FMB38.1F- 75		110						M12	66.7	6.6	138			2	-FMB40F- 75
	-FMB60 - 75	25	140	25.4	—	—	—	—	M16	101.6	7.9		200	63		-FMB60 - 75

★Drive keys, L-Wrench & Bolt are supplied as standard.
★Above weight is for Arbor only. (Not include Face Mill Cutter)

2LOCK SHOULDER CUTTER ARBOR

NIKKEN

■Taper contact area of more than 80% ensures reliable Milling with no chattering accompanied.

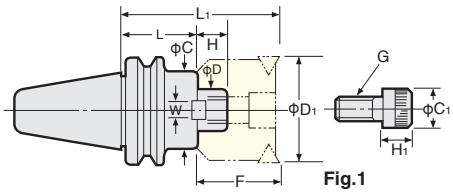

Fig.1

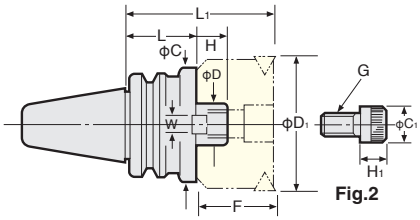

Fig.2

FMC

Inch Series (●)figures for Metric Series Metric Series

TAPER	Code No.(φD -L)	H	C	W	Weight (kg)	L1	D1	F	G CAP bolt	C1	H1	Fig	Code No.(φD -L)
No.30		18	45	10	1.4	80	50	40	9GM 10-30	16	10	1	NBT30-FMC22- 40
No.40		18	45	10	1.3	85	50	40	9GM 10-30	16	10	1	NBT40-FMC22- 45
					2.0	130							FMC22- 90
	NBT40-FMC25.4- 60	20	60	9.4(12)	1.5	110	80	50	9GM 12-35	18	12	2	FMC27- 60
	-FMC25.4- 90				2.2	140							FMC27- 90
	-FMC38.1- 60	22	85	15.5(14)	2.3	110	125	50	9GM 16-35	30 (24)	15(16)		FMC32- 60
	-FMC38.1- 75				2.6	125							FMC32- 75
No.50		18	45	10	4.2	100	50	40	9GM 10-30	16	10	1	NBT50-FMC22- 60
					4.7	145							FMC22-105
					5.3	190							FMC22-150
	NBT50-FMC25.4- 45	20	70	9.4(12)	4.1	95	80	50	9GM 12-35	18	12		FMC27- 45
	-FMC25.4- 90				5.5	140							FMC27- 90
	-FMC25.4-150				7.3	200							FMC27-150
	-FMC38.1- 45	22	85	15.5(14)	4.2	95	125	50	9GM 16-40 (35)	30 (24)	15(16)		FMC32- 45
	-FMC38.1- 75				5.5	125							FMC32- 75
	-FMC38.1-105				7.0	155							FMC32-105

★Drive keys, L-Wrench & Bolt are supplied as standard.
★Above weight is for Arbor only. (Not include Face Mill Cutter)
★**FMC22** type Arbor is suitable for NIKKEN PRO-END MILL φ50(**PE50HC**). ☞**P.111**
★Code No. of Centre Through Coolant type **FMC** Arbor for NIKKEN PRO-END MILL is **e.g. NBT40-FMC22C-45.**

2LOCK SHELL END MILL ARBOR

NIKKEN

SMA

JIS B4214 for SHELL END MILL

■Taper contact area of more than 80% ensures reliable Milling with no chattering accompanied.

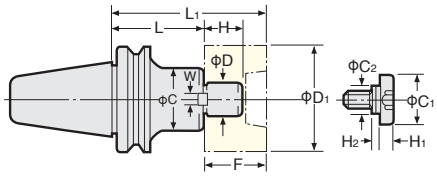

Inch Series (●)figures for Metric Series Metric Series

TAPER	Code No.(φD -L)	H	C	W	C1	C2	H1	H2	Weight (kg)	L1	D1	F	Code No.(φD -L)
No.30	NBT30-SMA15.875-30	17	34	8	20	15	7	2	0.9	60	35	30	NBT30-SMA16-30
	-SMA22.225-30	27	42		28	18	9		1.0	75	45(50)	45	-SMA22-30
No.40	NBT40-SMA15.875-60,120	17	34	8	20	15	7	2	1.3•1.7	90•150	35(40)	30	NBT40-SMA16-60,120
	-SMA22.225-60,120	27	42		28	18	9		1.4•2.1	105•165	45(50)	45	-SMA22-60,120
	-SMA25.4 -45,105	36	50	10	33	23	10		1.4•2.3	105•165	60(75)	60	-SMA27-45,105
	-SMA31.75 -45,75	38	60		40			6	1.6•2.3	106•135	100		-SMA32-45,75
	-SMA38.1 -60		80	12	50	27	14		3.0	120	125		-SMA40-60
No.50	NBT50-SMA15.875-75,120	17	34	8	20	15	7	2	4.2•5.8	105•150	35(40)	30	NBT50-SMA16-75,120
	-SMA22.225-75,120,180	27	42		28	18	9		4.3•4.8•5.5	120•165•225	45(50)	45	-SMA22-75,120,180
	-SMA25.4 -60,105,150	36	50	10	33	23	10		4.3•5.2•5.8	120•165•210	60(75)	60	-SMA27-60,105,150
	-SMA31.75 -45,75,105	38	60		40			6	4.2•5.2•6.2	105•135•165	100		-SMA32-45,75,105
	-SMA38.1 -45,75		80	12	50	27	14		4.3•5.5	105•135	125		-SMA40-45,75

SMB

Inch Series

TAPER	Code No.(φD -L)	H	C	W	C1	C2	H1	H2	Weight (kg)	L1	D1	F
No.30	NBT30-SMB22.225-50	17	40	8	28	18	9	2	1.0	65	50	35
No.40	NBT40-SMB22.225-45,120	17	45	8	28	18	9	2	1.3•2.2	80•155	50	35
	-SMB31.75 -45,75	30	60	12.7	40	23	10	6	1.6•2.3	95•125	75	50
	-SMB38.1 -60	36	80	15.9	50	27	14		2.8	120	100	60
No.50	NBT50-SMB22.225-60,120,180	17	45	8	28	18	9	2	4.3•5.0•5.7	95•155•215	50	35
	-SMB31.75 -45,75,105	30	60	12.7	40	23	10	6	4.2•5.2•6.2	95•125•155	75	50
	-SMB38.1 -45,75,	36	80	15.9	50	27	14		4.3•5.5	105•135	100	60

★Above weight is for Arbor only. (Not include Face Mill Cutter)

2LOCK FMH FACE MILL ARBOR

NIKKEN

■For Oil Hole Cutter
For High Feed Cutter

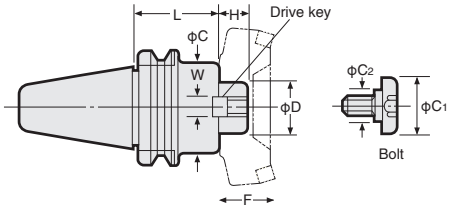

FMH

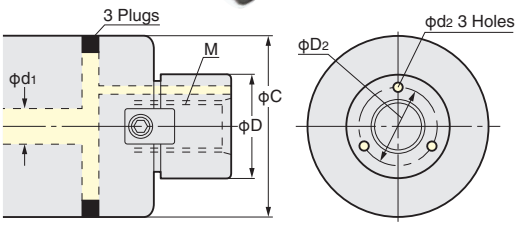

Code No.	Cutter Dia.	φD	φC	M	Coolant Hole φD2	φd1	φd2
FMH22.225	φ50, φ52	22.225	47	M10 P1.5	16	6~8	3
	φ63, φ66		60				
FMH25.4	φ80	25.4	70	M12 P1.75	18.5	8~10	3.5
FMH31.75	φ100	31.75	76,96	M16 P2.0	24	10~13	4
FMH38.1	φ125	38.1	100	M20 P2.5	29	10~15	5
FMH50.8	φ160	50.8	100	M24 P3.0	37.5	15~20	7

★Fixing dimension is basically based on **FMA/FMC.** ★The combination of the other cutter dia. are also available.

FMH Inch Series

TAPER	Arbor Code No.	D	L	H	C	C1	W	Drive Key	Lock Bolt	G Cap Bolt	Weight (kg)
No.40	NBT40-FMH22.225- 47 - 45	22.225	45	17	47	28	8	FW 3	FM10	—	1.3
	(NIT40) - 60		60								1.5
	- 90		90								1.9
	-150		150								2.7
	-FMH22.225- 60 - 45	22.225	45	17	60	28	8	FW 3	FM10	—	1.5
	- 60		60								1.8
	- 90		90								2.5
	-FMH25.4 - 70 - 60	25.4	60	22	70	33	9.5	FW 5	FM12	—	2.0
	- 90		90								2.7
	-105		105								3.1
	-FMH31.75 - 76 - 60	31.75	60	30	76	40	12.7	FW13	FM16	—	2.2
	- 90		90								2.9
	-FMH31.75 - 96 - 60	31.75	60	30	96	40	12.7	FW13	FM16	—	2.5
No.50	NBT50-FMH22.225- 47 - 60	22.225	60	17	47	28	8	FW 3	FM10	—	4.1
	(NIT50) -105		105								4.7
	-150		150								5.3
	-200		200								6.0
	-250		250								6.6
	-300		300								7.7
	-350		350								8.9
	-FMH22.225- 60 - 60	22.225	60	17	60	28	8	FW 3	FM10	—	4.2
	-105		105								5.2
	-150		150								6.2
	-200		200								7.4
	-250		250								8.5
	-300		300								9.6
	-350		350								10.6
	-FMH25.4 - 70 - 45	25.4	45	22	70	33	9.5	FW 5	FM12	—	4.0
	- 60		60								4.5
	- 90		90								5.4
	-150		150								7.2
	-200		200								8.7
	-250		250								10.3
	-300		300								11.8
	-FMH31.75 - 76 - 45	31.75	45	30	76	40	12.7	FW12	FM16	—	4.1
	- 75		75					FW13			5.2
	-105		105								6.3
	-150		150								7.9
	-200		200								9.7
	-250		250								11.6
	-300		300								13.4
	-FMH31.75 - 96 - 45	31.75	45	30	96	40	12.7	FW13	FM16	—	4.3
	- 75		75								6.0
	-105		105								7.7
	-150		150								10.3
	-200		200								13.1
	-250		250								16.4
	-300		300								19.2
	-FMH38.1 -100 - 45	38.1	45	34	100	50	15.9	FW18	FM20	—	4.4
	- 75		75					FW19			6.3
	-105		105								8.1
	-150		150								10.9
	-200		200								14.5
	-250		250								17.5
	-300		300								20.5
	-FMH50.8 -100 - 45	50.8	45	36	100	65	19	FW23	FM24	—	4.4

★Drive keys, L-Wrench & Bolt are supplied as standard.
★Above weight is for Arbor only. (Not include Face Mill Cutter)

2LOCK FMH FACE MILL ARBOR

NIKKEN

■For Oil Hole Cutter
For High Feed Cutter

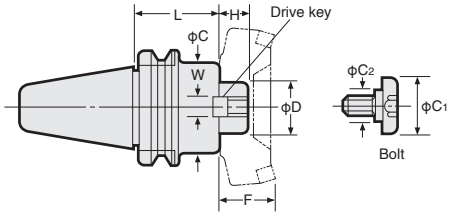

FMH

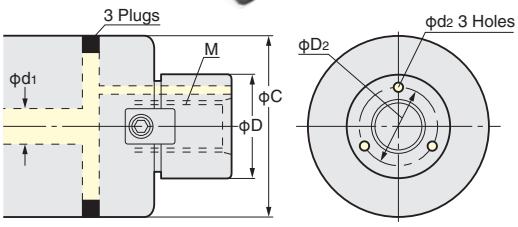

Code No.	Cutter Dia.	φD	φC	M	Coolant Hole φD2	Coolant Hole φd1	Coolant Hole φd2
FMH16	φ40	16	37	M8 P1.25	12	6	2
FMH22	φ50, φ52	22	47	M10 P1.5	16	6~8	3
	φ63,φ66		60				
FMH27	φ80	27	60,76	M12 P1.75	18.5	8~10	3.5
FMH32	φ100	32	96	M16 P2.0	24	10~13	4
FMH40	φ125	40	100	M20 P2.5	29	10~15	5

★Fixing dimension is basically based on **FMA/FMC.** ★The combination of the other cutter dia. are also available.

FMH Metric Series

TAPER	Arbor Code No.	Arbor D	Arbor L	Arbor H	Arbor C	Arbor C1	Arbor W	Drive Key	Lock Bolt	G Cap Bolt	Weight (kg)
No.30	NBT30-FMH16- 37 - 35	16	35	17	37	20	8	FW 3	FM 8	—	0.6
	-FMH22- 47 - 45	22	45	18	47	16	10	FW 8	—	9GM10-30	0.8
	-FMH27- 60 - 45	27	45	20	60	18	12	FW11	—	9M12-35	1.0
No.40	NBT40-FMH16- 37 - 40	16	40	17	37	20	8	FW 3	FM 8	—	1.1
	(NIT40)-FMH22- 47 - 45	22	45	18	47	16	10	FW 8	—	9M10-30	1.3
	- 60		60								1.5
	- 90		90								1.9
	-150		150								2.7
	-FMH22- 60 - 45	22	45	18	60	16	10	FW 8	—	9M10-30	1.5
	- 60		60								1.8
	- 90		90								2.5
	-FMH27- 60 - 45	27	45	20	60	18	12	FW11	—	9M12-35	1.5
	- 60		60								1.8
	- 90		90								2.5
	-FMH27- 76 - 60	27	60	20	76	18	12	FW11	—	9M12-35	2.1
	- 90		90								2.8
	-FMH32- 96 - 60	32	60	22	96	24	14	FW16	—	9M16-35	2.4
No.50	NBT50-FMH16- 37 - 60	16	60	17	37	20	8	FW 3	FM 8	—	3.8
	(NIT50) -105		105								4.1
	-150		150								4.5
	-200		200								4.9
	-FMH22- 47 - 60	22	60	18	47	16	10	FW 8	—	9M10-30	4.1
	-105		105								4.7
	-150		150								5.3
	-200		200								6.0
	-250		250								6.7
	-300		300								7.8
	-350		350								8.9
	-FMH22- 60 - 60	22	60	18	60	16	10	FW 8	—	9M10-30	4.2
	-105		105								5.2
	-150		150								6.3
	-200		200								7.4
	-250		250								8.5
	-300		300								9.6
	-350		350								10.7
	-FMH27- 60 - 45	27	45	20	60	18	12	9FWE27	—	9M12-35	3.9
	- 90		90					FW11			5.0
	-150		150								6.3
	-200		200								7.4
	-250		250								8.5
	-300		300								9.6
	-FMH27- 76 - 45	27	45	20	76	18	12	FW10	—	9M12-35	4.0
	- 90		90					FW11			5.6
	-150		150								7.8
	-200		200								9.7
	-250		250								11.4
	-300		300								13.2
	-FMH32- 96 - 45	32	60	22	96	24	14	FW15	—	9GM16-35	4.2
	- 90		90					FW16			6.8
	-150		150								10.2
	-200		200								13.3
	-250		250								16.1
	-300		300								19.0
	-FMH40-100 - 45	40	45	26	100	50	16	FW22	FM20	—	4.4
	- 75		75								6.2
	-105		105								8.1

★Drive keys, L-Wrench & Bolt are supplied as standard.
★Above weight is for Arbor only. (Not include Face Mill Cutter)

2LOCK MINI-MINI MASTER CHUCK

NIKKEN

MINI-MINI MASTER CHUCK

MMC-ATB

Centre Through

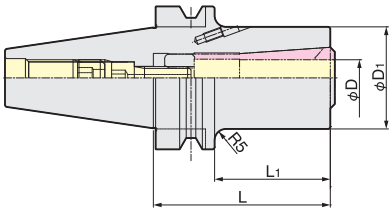

TAPER	Code No.	φD	L	φD1	L1	Collet	Weight (kg)
NBT40	NBT40-MMC16C-80-ATB	10～16	78	45	51	VMK16-SF VMK16-H	1.4
	-MMC20C-85-ATB	12～20	83	50	56	VMK20-SF VMK20-H	1.5
NBT50	NBT50-MMC16C-80-ATB	10～16	78	45	40	VMK16-SF VMK16-H	3.9
	-MMC20C-85-ATB	12～20	83	50	45	VMK20-SF VMK20-H	4.0

★**VMK-H** collet for high torque is recommended.
★Wrench is attached as standard.
★Balance adjustment screw is available as an option. The Code No. of the screw is **9SFB-ASC-M4-3, 4, 6**
★Mounting handle is available as an option. The Code No. of the handle is **9SFB-AL-M2**
★Set Code for handle and all screws are **S.9SFB-ASC-M4**
★The included wrench is for temporary fixing.

High torque specification VMK-H Collet

VMK-H

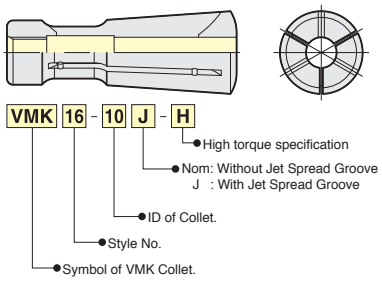

Standard VMK-H collet

VMK-H Collet Code No.	Min.Gripping Length
VMK16-10, 12, 16-**H**	40, 42, 42
VMK20-12, 16, 20-**H**	47, 47, 47

VMK-H collet with Jet coolant groove

VMK-H Collet Code No.	Min.Gripping Length
VMK16-10J, 12J, 16J-**H**	40, 42, 42
VMK20-12J, 16J, 20J-**H**	47, 47, 47

★Please note the acceptable shank tolerance ius h6～h8.

VMK-SF Shrink Fit Holder

VMK-SF

Centre Through

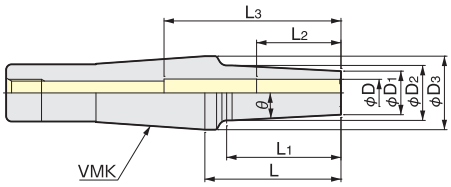

Standard Type

TAPER	Code No.	φD	φD1	φD2	φD3	θ	L	L1	L2	L3	Weight (kg)
VMK16	VMK16-SF 3S- 50	3	7.5	11.7	27	3°	50	42	10	-	0.3
	-SF 4S- 50	4	10	14.2					13		
	-SF 6S- 50	6	15	19.2					19		
	-SF 8S- 50	8	18	22.2					25		0.4
	-SF10S- 50,80,110	10	16	20.2, 23.4, 27			50, 80, 110	42, 72, 105	31	65	0.3, 0.4, 0.5
	-SF12S- 50,80,110	12	19	23.2, 27, 27			50, 80, 110	42, 76.4, 76.4		50	0.3, 0.4, 0.5
	-SF16S- 50,80,110	16	24	27			50, 80, 110	28.7	33		0.4, 0.5, 0.6

High Rigidity Type

TAPER	Code No.	φD	φD1	φD2	φD3	θ	L	L1	L2	L3	Weight (kg)
VMK20	VMK20-SF10R- 50,80,110	10	22	26.2, 29.4, 32	32	3°	50, 80, 110	42, 72, 95.4	31	65	0.5, 0.6, 0.8
	-SF12R- 50,80,110	12	26	30.2, 32, 32			50, 80, 110	42, 57.3, 57.3		80	0.5, 0.7, 0.9
	-SF16R- 50,80,110	16	32	32		-	50, 80, 110	50, 80, 110	33	50	0.6, 0.7, 0.9

★Hybrid Shrink Fit Holder can be built by Mini-Mini Chuck Master and **VMK-SF** Shrink Fit Holder.

2LOCK HYBRID SHRINK-FIT HOLDER

NIKKEN

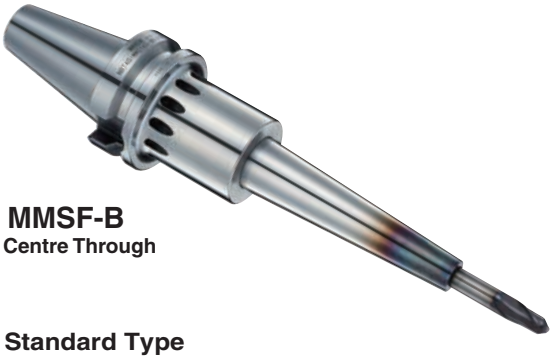

MMSF-B
Centre Through

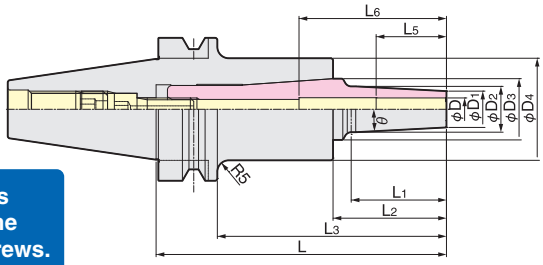

MMSF-B holder is pre-balanced by the balance adjusting screws.
30,000r/min&G2.5

(Cutting tools not fitted)

Standard Type

TAPER	Code No.	φD	φD1	φD2	φD3	φD4	φD5	θ	L	L1	L2	L3	L4	L5	L6	Weight (kg)
NBT40	NBT40-MMSF 3S-128B	3	7.5	11.7	27	45	-	3°	128	42	50	101	-	10	-	1.7
	-MMSF 4S-128B	4	10	14.2										13		
	-MMSF 6S-128B	6	15	19.2										19		
	-MMSF 8S-128B	8	18	22.2										25		
	-MMSF10S-128B	10	16	20.2										31	65	1.8
	-158B			23.4					158	72	80	131				
	-188B			27					188	105	110	161				1.9
	-MMSF12S-128B	12	19	23.2					128	42	50	101			50	1.7
	-158B			27					158	76.4	80	131				1.8
	-188B								188		110	161				1.9
	-MMSF16S-128B	16	24						128	28.7	50	101		33		1.8
	-158B								158		80	131				1.9
	-188B								188		110	161				2.0
NBT50	NBT50-MMSF 3S-128B	3	7.5	11.7	27	45	-	3°	128	42	50	90	-	10	-	4.2
	-MMSF 4S-128B	4	10	14.2										13		
	-MMSF 6S-128B	6	18	19.2										19		
	-MMSF 8S-128B	8		22.2										25		
	-MMSF10S-128B	10	16	20.2										31	65	4.3
	-158B			23.4					158	72	80	120				
	-188B			27					188	105	110	150				4.4
	-MMSF12S-128B	12	19	23.2					128	42	50	90			50	4.2
	-158B			27					158	76.4	80	120				4.3
	-188B								188		110	150				4.4
	-MMSF16S-128B	16	24						128	28.7	50	90		33		4.3
	-158B								158		80	120				4.4
	-188B								188		110	150				4.5

★In the case of products sold as a set, the pre-balance is taken, but once the shrink-fitting holder is removed, the balance cannot be guaranteed.
★The combination of **VMK-SF** Shrink Fit Holder and MINI-MINI MASTER CHUCK constitutes ☞**P.195**, HYBRID SHRINK-FIT HOLDER.

High Rigidity Type

TAPER	Code No.	φD	φD1	φD2	φD3	φD4	φD5	θ	L	L1	L2	L3	L4	L5	L6	Weight (kg)
NBT40	NBT40-MMSF10R-133B	10	22	26.2	32	50	-	3°	133	42	50	106	-	31	65	2.0
	-163B			29.4					163	72	80	136				2.1
	-193B			32					193	95.4	110	166				2.3
	-MMSF12R-133B	12	26	30.2					133	42	50	106			80	2.0
	-163B			32					163	57.3	80	136				2.2
	-193B								193		110	166				2.4
	-MMSF16R-133B	16	32					-	133	50	50	106		33	50	2.1
	-163B								163	80	80	136				2.2
	-193B								193	110	110	166				2.4
NBT50	NBT50-MMSF10R-133B	10	22	26.2	32	50	-	3°	133	42	50	95	-	31	65	4.5
	-163B			29.4					163	72	80	125				4.6
	-193B			32					193	95.4	110	155				4.8
	-MMSF12R-133B	12	26	30.2					133	42	50	95			80	4.5
	-163B			32					163	57.3	80	125				4.7
	-193B								193		110	155				4.9
	-MMSF16R-133B	16	32					-	133	50	50	95		33	50	4.6
	-163B								163	80	80	125				4.7
	-193B								193	110	110	155				4.9

★Hybrid Shrink Fit Holder can be built by Mini-Mini Chuck Master and **VMK-SF** Shrink Fit Holder. ☞**P.195**

NIKKEN

SCA

■Taper contact area of more than 80% ensures reliable milling with no chattering accompanied.

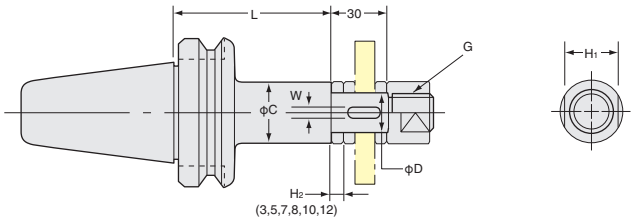

Inch Series (●)figures for Metric Series Metric Series

TAPER	Code No.(ϕD-L)	H_1	C	W	G	Weight(kg)	Code No.(ϕD-L)
No.30	NBT30-SCA12.7 -60	17	20	—	M12	1.0	NBT30-SCA13-60
	-SCA15.875-60	23	26	3.18 (4)	M14	1.1	-SCA16-60
	-SCA22.225-60	29	34	3.18 (6)	M20	1.2	-SCA22-60
	-SCA25.4 -60	32	40	6.35 (7)	M24	1.3	-SCA27-60
No.40	NBT40-SCA12.7 -75	17	20	—	M12	1.2	NBT40-SCA13-75
	(NIT40) -105					1.3	-105
	-SCA15.875-75	23	26	3.18 (4)	M14	1.4	-SCA16-75
	-105					1.5	-105
	-SCA22.225-75	29	34	3.18 (6)	M20	1.7	-SCA22-75
	-120					2.0	-120
	-SCA25.4 -75	32	40	6.35 (7)	M24	2.0	-SCA27-75
	-120					2.4	-120
	-SCA31.75 -90	41	46	7.92 (8)	M30	2.6	-SCA32-90
No.50	NBT50-SCA12.7 -75	17	20	—	M12	4.0	NBT50-SCA13-75
	(NIT50) -105					4.3	-105
	-SCA15.875-90	23	26	3.18 (4)	M14	4.2	-SCA16-90
	-120					4.4	-120
	-SCA22.225-90	29	34	3.18 (6)	M20	4.4	-SCA22-90
	-135					4.7	-135
	-SCA25.4 -90	32	40	6.35 (7)	M24	4.5	-SCA27-90
	-135					4.9	-135
	-SCA31.75 -90	41	46	7.92 (8)	M30	4.7	-SCA32-90
	-135					5.2	-135
	-SCA38.1 -90	46	55	9.52 (10)	M36	4.9	-SCA40-90
	-135					5.9	-135

★JIS B4206, JIS B4107, JIS B4219, JIS B4109 cutters can be attached.
★Key and Collars(H_2=3, 5, 7, 8, 10, 12) are supplied as standard. ☞ P.112
★The Code No. of Nut is unified from **"GN"** to **"GNT"**.

2LOCK HIGH SPEED SPINDLE SPEEDER

NIKKEN

10,000～40,000r/min

- **NIKKEN NX increases the spindle speed by 4 or 5 times, so economically convert your standard M/C to high speed M/C.**
- Inside gears are mirror-finish ground by NIKKEN original Fluid-Dynamic Grinding Process.
- **Run-out accuracy is more stable due to TiN Bearing Nut (standard accessory).**

NX, PX

Explanation of the Code No.

NBT40 - NX 5 160

- Length
- Ratio
- NX:4times, 5 times
  PX:6times, 10 times
- Shank

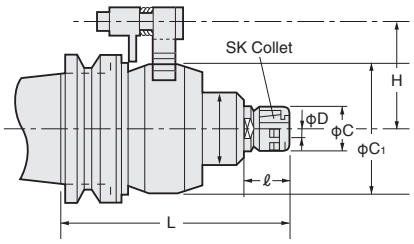



TAPER	Code No.	D	L	C	C_1	ℓ	H	Ratio	MAX. r/min	Weight(kg)	Collet
No.30	NBT30-NX 5-153	1.75～10	153	27.5	85	32	55	5	20,000	2.9	SK 10A
No.40	NBT40-NX 5-153		153				60			5.0	
	(NIT40)-PX 6-150GX	0.5～8.0	149	22	76	14.5		6	30,000	4.1	ETS14
	-PX10-160GX		162.5		98			10	40,000	4.5	
No.50	NBT50-NX 4-192	2.75～16	192	40	118	46	82	4	10,000	11.0	SK 16A
	(NIT50)-NX 5-151	1.75～10	151	27.5	85			5	20,000	7.0	SK 10A
	-PX 6-140GX	0.5～8.0	142	22	76	14.5		6	30,000	6.8	ETS14
	-PX10-155GX		155.5		98			10	40,000	7.2	

NX type

★For End Mill, please use **SK A type collet**. For Drill, please use **SK-P** class collet. ☞ **P.277**
★Wrench, Collet Extractor and **A type SK Collets** are supplied as standard.
NX5: SK10-6A, 8A, 10A NX4: SK16-8A, 10A, 12A, 16A
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.
★Air Clyinder for Cooling (NXE-COOL) is highly recommended to use for the stable milling.

PX type

★Grease lubrication is standard.
★Please add **"MX"** instead of **"GX"** at the end of Code No. for the oil mist lubrication. **e.g. NBT40-PX6-130MX**
★**ETS** collet is supplies as an option.

ETS Collet



Explanation of the Code No.

ETS 14 - 0.5

- MAX. Chucking Dia.
  - ★φd=0.5 ～1.0: Each 0.1mm(Gripping range:0.1mm)
    e.g. ETS14-0.5:0.4～0.5mm
  - ★φd=1.25～2.5: Each 0.25mm(Gripping range:0.25mm)
  - ★φd=3.0 ～8.0: Each 0.5mm(Gripping range:0.5mm)
- Style No.
- Symbol of ETS Collet

Air Cylinder for Cooling with ON/OFF Magnet NXE-COOL

The best cooling is to cool the speeder body directly.

Quick type OffSet Angular Head

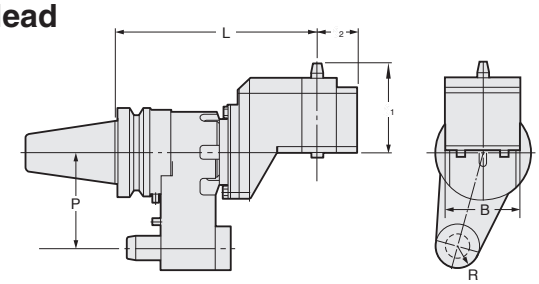

Explanation of the Code No.

NBT40 - AF T 30 - 200

- Length from Gauge Line
- Taper No. of Adapter
- Quick type
- Off-Set type Angular Head
- Shank

AFT

MAX2,000r/min

TAPER	Code No.	Shank	L	P	ℓ1	ℓ2	B	R	Adapter	Weight(kg)
No.40	NBT40 (NIT40)-AFT30-200	NBT40	200	65	85	35	70	17.5	AHK30	7.5
No.50	NBT50 (NIT50)-AFT35-230	NBT50	230	110	85	45	84	25	AHK35	16.0

★Taper Connection System is applied to Stopper Block. (Different from the another FA Tooling)
★All types are available with Oil Hole System. ★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.
★NIT40-AFT30-200 and NIT50-AFT35-230 are also available. ★**When M/C spindle rotates CW, the cutter rotates CW.**

★For adapter, please refer ☞ P.120.
★Test bar is attached as standard.

Quick type 90° Angular Head

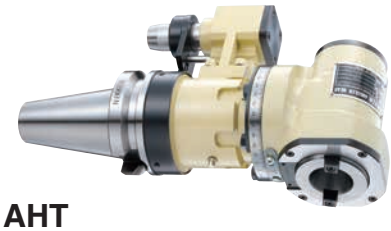

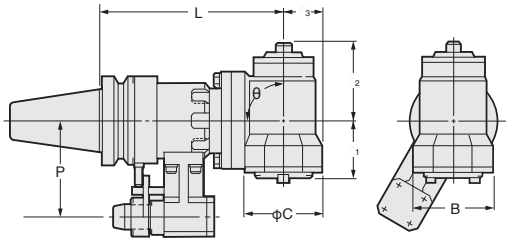

Explanation of the Code No.

NBT40 - AH T 30 - 160 - 90

- Angle
- Length from Gauge Line
- Taper No. of Adapter
- Quick type
- Symbol of Angular Head
- Shank

AHT

MAX2,000r/min

TAPER	Code No. L -θ	Shank	L	P	ℓ1	ℓ2	ℓ3	C	B	θ	Adapter	Weight(kg)
No.40	NBT40-AHT30-160 -90	NBT40	160	65	58	61	37	86	80	90	AHK30	6.5
	(NIT40) -250*-90	NBT40	250									10.5
No.50	NBT50-AHT35-210 -90	NBT50	210	110	65	88	45	100	90	90	AHK35	17.0
	(NIT50) -300*-90	NBT50	300									22.0

★Taper Connection System is applied to Stopper Block. (Different from the another FA tooling)
★All types are available with Oil Hole System.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.
★Models with✻mark : Detailed discussion is needed. ★**When M/C spindle rotates CCW, the cutter rotates CW.**

★For adapter, please refer ☞ P.120.
★Test bar is attached as standard.



Quick type 30°,45°, 60°Angular Head

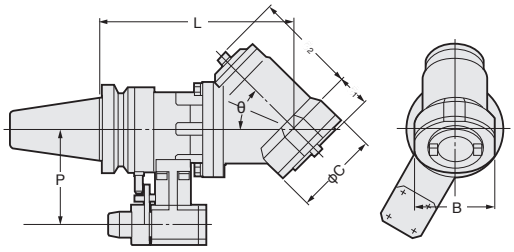

Explanation of the Code No.

NBT40 - AH T 30 - 170 - 45

- Angle
- Length from Gauge Line
- Taper No. of Adapter
- Quick type
- Symbol of Angular Head
- Shank

AHT

Photo shows 30° type.

MAX2,000r/min

TAPER	Code No. L -θ	Shank	L	P	ℓ1	ℓ2	C	B	θ	Adapter	Weight(kg)
No.40	NBT40-AHT30-205 -30	NBT40	205	65	1.5	122	86	80	30	AHK30	6.5
	(NIT40) -170 -45		170		35	88			45		6.5
	-160 -60		160		35	88			60		6.5
	-250*-30	NBT40	250	65	1.5	122	86	80	30	AHK30	10.5
	-45				35	88			45		10.5
	-60				35	88			60		10.5
No.50	NBT50-AHT35-258 -30	NBT50	258	110	0	140	100	90	30	AHK35	17.0
	(NIT50) -225 -45		225		26	110			45		17.0
	-210 -60		210		40	105			60		17.0
	-300*-30	NBT50	300	110	0	140	100	90	30	AHK35	22.0
	-45				26	110			45		22.0
	-60				40	105			60		22.0

★Taper Connection System is applied to Stopper Block.(Different from the another FA tooling)
★All types are available with Oil Hole System.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.
★Models with ✻ mark : Detailed discussion is needed. ★**When M/C spindle rotates CCW, the cutter rotates CW.**

★For adapter, please refer ☞ P.120.
★Test bar is attached as standard.

2LOCK SOLID TYPE ANGULAR HEAD (Free Positioning in 360°) NIKKEN

Solid OffSet type Angular head

AFK, AFC

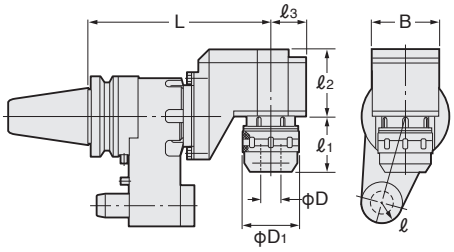

Explanation of the Code No.

NBT40 - AF K 16 - 200

- Length from Gauge Line
- MAX. Chucking Dia.
- Kind of chuck K:Slim Chuck C:Milling Chuck
- OFF SET type Symbol of Angular Head
- Shank

TAPER	Code No. -L	D	D1	ℓ1	ℓ2	ℓ3	B	R	r/min	Weight(kg)	Collet
No.40	NBT40-AFK16-200	2.75～16	40	50	85	35	70	17.5	2,000	8.5	SK 16
	(NIT40)-AFC20-200	2～20	52	56						8.7	KM 20
No.50	NBT50-AFC20-230-NCC	2～20	52	58	85	45	84	25	2,000	17.0	KM 20
	(NIT50)-AFC32-230-NCC	3～32	69	65						17.2	KM 32

★When M/C spindle rotates CW, the cutter rotates CW.
★Those ending in NCC are centre-through compatible as standard.

★Test bar is attached as standard.

Solid - 90°, 45° type Angular head

AHK, AHC

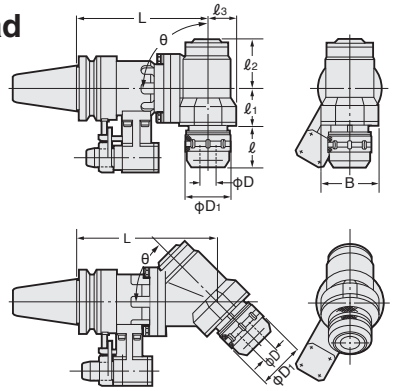

Explanation of the Code No.

NBT40 - AH K 10 - 195 - 90

- angle 30°, 45°, 60°, 90°
- Length from Gauge Line
- MAX chucking Dia
- Kind of chuck K:Slim Chuck C:Milling Chuck
- Symbol of Angular Head
- Shank

TAPER	Code No. -L	D	D1	ℓ	ℓ1	ℓ2	ℓ3	B	r/min	Weight(kg)	Collet
No.30	NBT30-AHK10-120-90	1.75～10	27.5	20	49	50	27.5	55	2,000	3.0	SK 10
No.40	NBT40-AHK10-180,220*-90	1.75～10	27.5	18	45	57	32	60	4,000	8.0, 9.0	SK 10
	(NIT40)-AHK16-180,220*-90	2.75～16	40	25	41	58	35	70		8.7, 9.7	SK 16
	-AHC20-160,250*-90	2～20	52	57	58	61	37	80	2,000	7.1, 11.1	KM20
No.50	NBT50-AHK10-200,240*-90	1.75～10	27.5	18	45	57	32	60	4,000	15.0, 16.0	SK 10
	(NIT50)-AHK16-200,240*-90	2.75～16	40	25	41	58	35	70		15.7, 16.7	SK 16
	-AHK25-210,300*-90	7.5～25.4	55	57	60	82	45	90	2,000	17.2, 22.2	SK 25
	-AHC32-210,300*-90	3～32	69							17.5, 22.5	KM32

★Taper Connection System is applied to Stopper Block. (Different from the another FA Tooling) ★All types are available with Oil Hole System.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.
★For SK10 SK16 SK25, please refer ☞ P.277. For KM20 KM25 and KM32, please refer ☞ P.274.
★Angle 30°, 45°, 60°are also available as an option. ★*Mark is for light cutting.
★When M/C spindle rotates CCW, the cutter rotates CW.
★Please contact with us for the dimension of 30°, 45°, 60° type.

★Test bar is attached as standard.

2LOCK MODULAR TYPE ANGULAR HEAD NIKKEN

Modular type Angular Head AHM

AHM

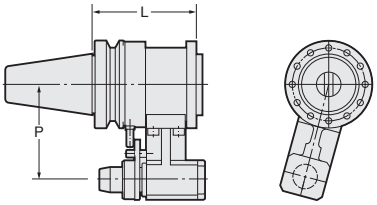

MAX6,000r/min

TAPER	Code No. -L	L	P	Weight(kg)	Suitable Modular Head
No.40	NBT40 (NIT40)-AHM-100	100	65	4.5	
No.50	NBT50 (NIT50)-AHM-120	120	110	11.5	

★Taper Connection System is applied to Stopper Block.(Different from the another FA Tooling) ★All types are available with Oil Hole System.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.

X-Treme Shank 2LOCK NBT X-Treme Chuck

NIKKEN

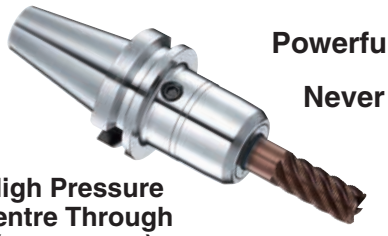

Powerful Gripping & Never Pull-out

High Pressure Centre Through (MAX. 7MPa)

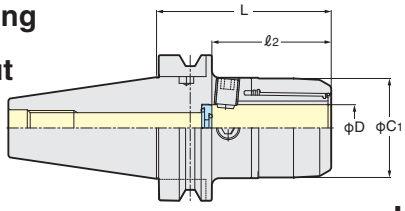

Explanation of the Code No.

NBT50 – C32EX – 121 – J

- J: J-Type (Jet Groove)
- Nominal Gauge Length
- X-Treme Chuck
- Chucking Capacity
- Symbol of Milling Chuck
- Shank No.

JAPAN, USA, EU, CHINA PAT.

TAPER	Code No. (φD - L)	C_1	L	ℓ_2	End mill with oil hole		Handle (Option)	Weight (kg)
					Stopper*	Face cap*		
No.40	NBT40-C12EX- 86	40	86	58	9MC12HEX- 6L	9C12SL-FS-EX-A1	GH16	1.6
	-C16EX- 96	48	96	68	9MC16HEX-6.5L	9C16SL-FS-EX-A1	GH20	1.7
	-C20EX- 96	55	96	71	9MC20HEX- 7L	9C20 -FS-EX-A1	GH25	1.8
No.50	NBT50-C12EX- 96	40	96	58	9MC12HEX- 6L	9C12SL-FS-EX-A1	GH16	4.0
	-C16EX-106	48	106	68	9MC16HEX-6.5L	9C16SL-FS-EX-A1	GH20	4.4
	-C20EX-116	55	116	71	9MC20HEX- 12L	9C20 -FS-EX-A1	GH25	5.0
	-C25EX-116	55	116.3	77.3	9MC25HEX-6.2L	9C25SL-FS-EX-A1	GH25	4.8
	-C32EX-121	68	121.3	83.3	9MC32HEX- 7L	9C32SL-FS-EX-A1	GH32	5.3
	-C42EX-126	86	126	86	9MC42HEX- 9L	9C42SL-FS-EX-A1	9HC42	6.3

Please use direct chucking without KM collet.

★MAX. 7MPa of centre through coolant is available with the stopper.
★Please use **J**-type **X-Treme** chuck, when end mill without oil hole is used. **eg) NBT50-C32EX-121-J**
In case of **J**-type **X-Treme** chuck, **J**-type stopper and **J**-type face cap (with Jet grooves) are attached. **9MC32HEX-7L-J, 9C32L-FS-EX-J**
J-type **X-Treme** chuck is used for the pocket milling and side milling.
★Extended length **X-Treme** chuck is also available. **NBT50-C20EX-135, NBT50-C25EX-135, NBT50-C32EX-135**

GH Handle ☞P.293

2LOCK tooling (NBT) can be used as the double face contact tooling on the M/C where spindle is BT double face contact system.
2LOCK tooling can also be used on the M/C with BT standard spindle.

X-Treme Shank 2LOCK NIT/NCAT X-Treme Chuck

NIKKEN

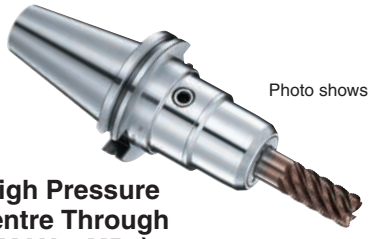

Photo shows **NIT** Shank.

High Pressure Centre Through (MAX. 7MPa)

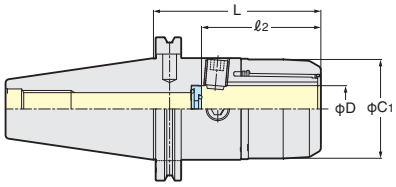

Explanation of the Code No.

NIT50 – C32EX – 116 – J

- J: J-Type (Jet Groove)
- Nominal Gauge Length
- X-Treme Chuck
- Chucking Capacity
- Symbol of Milling Chuck
- Shank No.

JAPAN, USA, EU, CHINA PAT.

TAPER	Code No. (φD - L)	C_1	L	ℓ_2	End mill with oil hole		Handle (Option)	Weight (kg)
					Stopper*	Face cap*		
NIT50	NIT50 -C12EX- 96	40	96	58	9MC12HEX- 6L	9C12SL-FS-EX-A1	GH16	3.4
	-C16EX-106	48	106	68	9MC16HEX-6.5L	9C16SL-FS-EX-A1	GH20	3.8
	-C20EX-106	55	106	71	9MC20HEX- 12L	9C20 -FS-EX-A1	GH25	4.3
	-C25EX-111	55	111.3	77.3	9MC25HEX-6.2L	9C25SL-FS-EX-A1	GH25	4.2
	-C32EX-116	68	116.3	83.3	9MC32HEX- 7L	9C32SL-FS-EX-A1	GH32	4.7
	-C42EX-126	86	136	86	9MC42HEX- 9L	9C42SL-FS-EX-A1	9HC42	6.0
NCAT50	NCAT50-C12EX- 96U	40	96	58	9MC12HEX- 6L	9C12SL-FS-EX-A1	GH16	3.4
	-C16EX-106U	48	106	68	9MC16HEX-6.5L	9C16SL-FS-EX-A1	GH20	3.8
	-C20EX-106U	55	106	71	9MC20HEX- 12L	9C20 -FS-EX-A1	GH25	4.3
	-C25EX-111U	55	111.3	77.3	9MC25HEX-6.2L	9C25SL-FS-EX-A1	GH25	4.2
	-C32EX-116U	68	116.3	83.3	9MC32HEX- 7L	9C32SL-FS-EX-A1	GH32	4.7
	-C42EX-126U	86	126	86	9MC42HEX- 9L	9C42SL-FS-EX-A1	9HC42	6.0

Please use direct chucking without KM collet.

★MAX. 7MPa of centre through coolant is available with the stopper.
★Please use **J**-type **X-Treme** chuck, when end mill without oil hole is used. **eg) NCAT50-C32EX-116U-J**
In case of **J**-type **X-Treme** chuck, **J**-type stopper and **J**-type face cap (with Jet grooves) are attached. **9MC32HEX-7L-J, 9C32L-FS-EX-J**
J-type **X-Treme** chuck is used for the pocket milling and side milling.

GH Handle ☞P.293

X-Treme shank 2LOCK NCAT/HSK X-Treme Chuck(INCH) NIKKEN

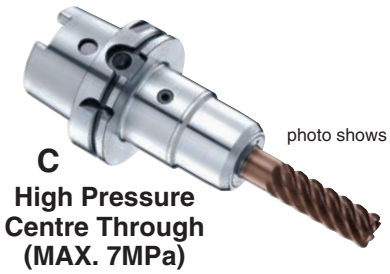

photo shows HSK shank

C
High Pressure Centre Through (MAX. 7MPa)



Explanation of the Code No.

HSK100A – C1 1/4EX – 120 – J

- J: J-Type (Jet Groove)
- Nominal Gauge Length
- X-Treme Chuck
- Chucking Capacity
- Symbol of Milling Chuck
- Shank No.

∗The inch series is a USA specification and is a semi-standard product.

PAT.

TAPER	Code No. (φD - L)	C_1	L	ℓ_2	End mill with oil hole		Handle (Option)	Weight (kg)
					Stopper*	Face cap*		
NCAT50	NCAT50-C 1/2EX- 96U	40	96	58	9MC 1/2HEX- 6L	9C 1/2SL-FS-EX-A1	GH16	4.0
	-C 5/8EX-106U	48	106	68	9MC 5/8HEX-6.5L	9C 16SL-FS-EX-A1	GH20	4.4
	-C 3/4EX-106U	55	106	71	9MC 3/4HEX- 7L	9C 3/4-FS-EX-A1	GH25	5.0
	-C1 EX-111U	55	111.3	77.3	9MC 25HEX-6.2L	9C 1SL-FS-EX-A1	GH25	4.8
	-C1 1/4EX-116U	68	116.3	83.3	9MC1 1/4HEX- 7L	9C1 1/4SL-FS-EX-A1	GH32	5.3
	-C1 1/2EX-126U	86	126	86	9MC1 1/2HEX- 9L	9C1 1/2SL-FS-EX-A1	9HC42	6.6
HSK100A	HSK100A-C 1/2EX- 96	40	96	58	9MC 1/2HEX- 6L	9C 1/2SL-FS-EX-A1	GH16	2.7
	-C 5/8EX-106	48	106	68	9MC 5/8HEX-6.5L	9C 16SL-FS-EX-A1	GH20	3.0
	-C 3/4EX-116	55	116	71	9MC 3/4HEX- 7L	9C 3/4-FS-EX-A1	GH25	3.6
	-C1 EX-116	55	116.3	77.3	9MC 25HEX-6.2L	9C 1SL-FS-EX-A1	GH25	3.5
	-C1 1/4EX-121	68	121.3	83.3	9MC1 1/4HEX- 7L	9C1 1/4SL-FS-EX-A1	GH32	4.0
	-C1 1/2EX-136	86	136	86	9MC1 1/2HEX- 9L	9C1 1/2SL-FS-EX-A1	9HC42	5.7

Please use direct chucking without KM collet.

★MAX. 7MPa of centre through coolant is available with the stopper.
★Please use **J**-type **X-Treme** chuck, when end mill without oil hole is used. **eg)** N**BT50-C32EX-121-J**
In case of **J**-type **X-Treme** chuck, **J**-type stopper and **J**-type face cap (with Jet grooves) are attached. **9MC32HEX-7L-J, 9C32L-FS-EX-J**
J-type **X-Treme** chuck is used for the pocket milling and side milling.
★Extended length **X-Treme** chuck is also available. N**BT50-C20EX-136, NBT50-C25EX-136, NBT50-C32EX-136**

GH Handle ☞P.293

Selection of the accessories NIKKEN

Please select the proper stopper and the face cap according to your application. (end mill with/without coolant hole) The stopper and the face cap for the end mill with oil hole are attached as standard accessory.
Caution : No matter whether using internal coolant through or not,the stopper must be needed when gripping the end mill (If the stopper is not used it is not possible to demonstrate the maximum capacity of **X-Treme CHUCK**)

■Code No.

	End mill with oil hole		End mill without oil hole		Support bolt	Drive bolt
	Stopper	Face cap	Stopper	Face cap		
C12EX	9MC12HEX- 6L(8.5L)∗1	9C12SL-FS-EX-A	9MC12HEX-6L(8.5L)∗1-J	9C12SL-FS-EX-J	—	M10 × 16L-EX
C16EX	9MC16HEX-6.5L(9.5L)∗1	9C16SL-FS-EX-A	9MC16HEX-6.5L(9.5L)∗1-J	9C16SL-FS-EX-J		M12 × 16L-EX
∗C20EX	9MC20HEX-12L(13.5L)∗1	9C20 -FS-EX-A	9MC20HEX-12L(13.5L)∗1-J	9C20 -FS-EX-J	FSMB12-20	M12 × 20L-EX
C25EX	9MC25HEX-6.2L(8.7L)∗1	9C25SL-FS-EX-A	9MC25HEX-6.2L(8.7L)∗1-J	9C25SL-FS-EX-J	FSMB16-20-H8	M16 × 20L-EX
C32EX	9MC32HEX-7L(10L)∗1	9C32SL-FS-EX-A	9MC32HEX-7L(10L)∗1-J	9C32SL-FS-EX-J		
C42EX	9MC42HEX-9L(11.5L)∗1	9C42SL-FS-EX-A	9MC42HEX-9L(11.5L)∗1-J	9C42SL-FS-EX-J		
	 O-ring Please insert the stoper which small hole diameter is located at the end mill side. (**C42EX**: Same hole diameters)		 Cross groove Please insert the stoper which cross groove is located at the end mill side.			

★∗ Stopper for **NBT40-C20EX, C8-C20EX, HSK63A-C20EX** is **9MC20HEX-7L** (with O-ring) or **9MC20HEX-7L-J.**
★∗1 The length in ( ) is used for **Code No.** of extended stopper. **eg. 9MC32HEX-10L** If can be used,when the cutting length of end mill become shorter after re-grinding.

How to exchange the face caps



The face cap is fixed with 3 pieces of M2.5 screws. (**C42EX**: M3) The face cap must be centerlized, when exchanged. The special centering jig fixture and wrench are provided as an option.

	wrench		screw
C12EX, C16EX, C20EX	CME-1.3	Fig.1	CBSS2.5-6
C25EX, C32EX	T-8	Fig.2	M2577
C42EX			SHIM-M3

★As a special specification,there is also an **X-treme** chuck that supports nuts with notches.
★For nut with notches, add "**-A**" at the end EX.)**NBT50-C25EX-116-J-A**

With notched nut **X-Treme Chuck**

■Code No. Handle for Notched nut

Chuck with notched nut	Handle
12EX-○○○-A	9HC16
16EX-○○○-A	9HC22
20EX-○○○-A	9HC25
25EX-○○○-A	9HC25
32EX-○○○-A	9HC32
42EX-○○○	9HC42

2LOCK NIT DOUBLE FACE CONTACT SPINDLE

NIKKEN

The NIKKEN **3LOCK** tooling can be used as the triple face contact(taper, flange and internal taper expansion)on the M/C with **NIT** double face contact spindle. The NIKKEN **2LOCK** tooling can be used as the double face contact on the M/C with **NIT** double face contact spindle.

#40

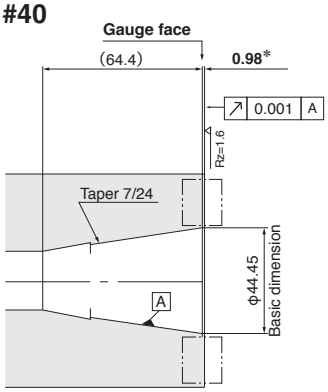

#50

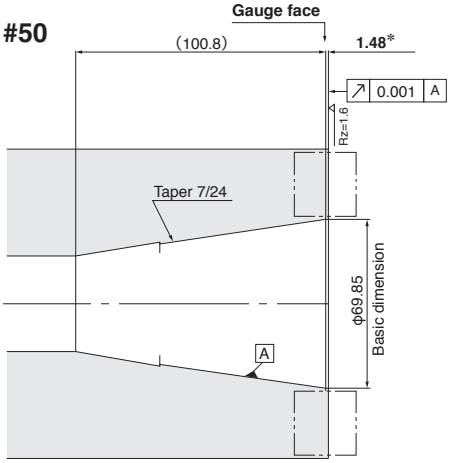

*** mark**: The tolerances of the extension of the spindle flange from gauge face depend on the M/C.

⚠ **Please be careful to check your M/C specification especially for ATC arm and magazine, when NIT tooling is going to use on the M/C with IT standard spindle. Because, the flange thickness of NIT tooling is 1.7mm(NIT50) or 2.2mm(NIT40)larger than the thickness of the IT standard tooling.**

2LOCK NIT MULTI LOCK MILLING CHUCK

NIKKEN

C
High Pressure Centre Through (MAX. 7MPa)

ANNIVERSARY Type
—Powerful gripping torque—
- **High rigidity**
- **High precision**
- **Compact design**

C12

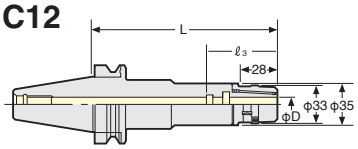

C16~C42

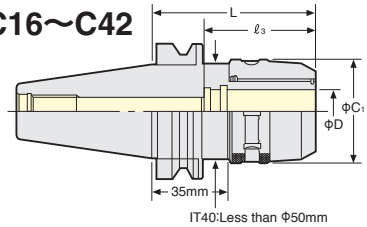

IT40:Less than Φ50mm
IT50:Less than Φ80mm

TAPER	Code No. ITNo. -D -L	C1	L	ℓ3	Collet	Weight (kg)
No.40	NIT40-C12- 65, 90*1, 120*1	33	65, 90, 120	58	KM12 NK12 CCK12	1.3, 1.6, 1.8
	-C16- 60, 90*1, 120*1	44	60, 90, 120	65	KM16 NK16 CCK16	1.4, 1.7, 2.0
	-C20- 80, 90, 105, 120*2	52	80, 90, 105, 120	80	KM20 NK20 CCK20 CCNK20	1.6, 1.8, 2.0, 2.2
	-C25- 85, 105, 120	60	85, 105, 120	80	KM25 NK25 CCK25 CCNK25	2.1, 2.3, 2.5
	-C32- 95, 105, 120	64	95, 105, 120	77, 81, 81	KM32 NK32 CCK32 CCNK32	2.1, 2.5, 2.8
No.50	NIT50-C12-105, 135, 165*1	33	105, 135, 165	58	KM12 NK12 CCK12	4.0, 4.3, 4.6
	-C16-105, 135, 165*1	44	105, 135, 165	65	KM16 NK16 CCK16	4.2, 4.6, 5.1
	-C20-105, 135, 165, 180*1	52	105, 135, 165, 180	80	KM20 NK20 CCK20 CCNK20	4.5, 5.1, 5.7, 6.0
	-C25-105, 135, 165	60	105, 135, 165	80	KM25 NK25 CCK25 CCNK25	4.8, 5.2, 5.6
	-C32- 85, 105, 120, 135, 165	69	85, 105, 120, 135, 165	81	KM32 NK32 CCK32 CCNK32	4.1, 4.6, 5.1, 5.6, 6.4
	-C42- 95*2, 105, 135*1, 165*1	86	95, 105, 135, 165	125	KM42 NK42 CCK42 CCNK42	5.2, 5.5, 7.2, 8.6

★Spanner is available as an option.
C12 : 9HC12A, C16:9HC16, C20: 9HC20, C25: 9HC25, C32&φC1=64:9HC25, C32:9HC32, C42:9HC42

★Please note the acceptable shank tolerance is h7.
★Please refer ☞**P.274, P.275** for **KM, CCK, CCNK** Collet.
★**For heavy duty milling, please grip the end mill shank longer than ℓ1.**
★**For Milling Chucks marked *2, NK Collet, CCNK Collet, ONK Collet and OJK Collet can not be used.**
★**Milling chucks marked *1 are available as an option.**
★**NIT50-C32-200, 250** and **NIT50-C42-200,250** are also available as an option.
★Please add "**F**" for the flange through tool coolant type.
NIT40-C20F- 90, 120*1
-C25F- 90, 120*1
-C32F-105
NIT50-C20F-105, 135, 165*1
-C25F-105, 135, 165*1
-C32F-105, 135, 165
-C42F-120
★Please refer☞**P.273** for Milling Chuck Coolant Solution.

High Speed Milling Chuck

GH Handle ☞**P.293**

Code No.	MAX. (r/min)	Code No.	MAX. (r/min)
NIT40-C12- 65G, 90G	30,000	NIT50-C12-105G, 135G*1	20,000
-C16- 60G, 90G	25,000	-C16-105G, 135G*1	
-C20- 80G, 90G		-C20-105G, 135G*1	
-C25- 85G	20,000	-C25-105G, 135G*1	
-C32- 95G, 105G		-C32- 85G, 105G, 120G	15,000
		-C42- 95P*2, 105P	

★For Milling Chucks except *2, Stopper for Direct Chucking, **ONK** Collet and **OJK** Collet can be used.
★The extended gauge length (**L**) is available. Please contact with us.
★The end mill shank tolerance is recommended to be h6.

2LOCK NIT MINI-MINI CHUCK ADVANCED ALPHA NIKKEN

MMC
High Pressure Centre Through (MAX. 7MPa)

The best chuck for the small dia.cutting tool

MAX. 30,000r/min&G2.5
Gripping from Front Nose
Run-Out Accuracy:3μm at 4D

JAPAN PAT.

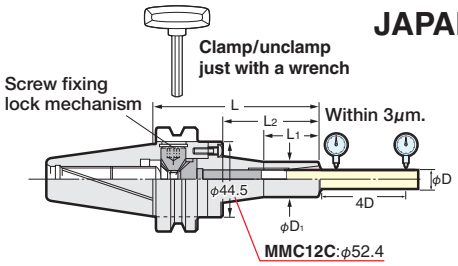

TAPER	Code No.	Chucking Range φD	L	φD1	L1	Collet	MAX.(r/min)	Weight(kg)
No.40	NIT40-MMC 4 - 90-AA	1～ 4	90	15	30	MPK 4	30,000	1.2
	-MMC 8C- 90-AA,120-AA	2～ 8	90,120	20	33,40	PMK 8 VMK 8	30,000	1.4 , 1.5
	-MMC12C- 90-AA,120-AA	4～12	90,120	30	35,60	PMK12 VMK12	30,000	1.7 , 1.8
No.50	NIT50-MMC 4 -105-AA	1～ 4	105	15	30	MPK 4	20,000	3.8
	-MMC 8C-105-AA,135-AA,165-AA	2～ 8	105,135,165	20	33,40,40	PMK 8 VMK 8	20,000	4.4,4.5,4.6
	-MMC12C-105-AA,135-AA,165-AA	4～12	105,135,165	30	35,60,70	PMK12 VMK12	20,000	4.6,4.7,4.8

★Wrench **MMC4, MMC8C : EA573KL-6 MMC12C : MMCL12-M6W (NIT40) :**
MMC12C : MMCL12-M6T62 (NIT50) is attached as standard.
★**MPK, PMK, VMK** collet is available as an option. Please refer ☞**P.284**
★Please add "**F**" for the flange through tool coolant type; **NIT40-MMC 8F- 90-AA,120-AA NIT50-MMC 8F-105-AA,120-AA**
-MMC12F- 90-AA,120-AA -MMC12F-105-AA,120-AA

★Please refer ☞**P.279** for MMC Coolant Solution.
★Center through tool coolant type MINI-MINI Chuck is available for **MMC8** and **MMC12** type only.

2LOCK NIT SLIM CHUCK

Dampening effect
⊕
Jet Spray Coolant Supply
II
Over 3 times of extended Tool life
(for HSS & Carbide Drills)

NIKKEN

High precision
High speed
Powerful gripping

SK
High Pressure Centre Through (MAX. 7MPa)

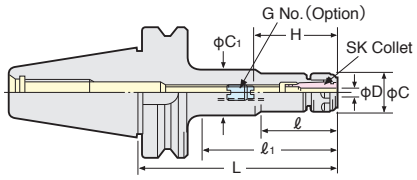

- **When SK J type nut is used, the total chuck length will be extended by 6mm.**
- **When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.**

TAPER	Code No.	D	H	ℓ	ℓ1	C	C1	G No. (Option)	Weight (kg)	SK Collet
No.40	NIT40-SK 6C- 60, 90,120,150	0.7～6.0	26～31	38,48,62,60	-,-,82,112	19.5	-,-,32,25	SKG 6- 6HG	1.0, 1.1, 1.2, 1.4	SK 6
	-SK10C- 60, 90,120,150,180	0.9～10.0	33～41	40,50,60,73,73	-,-,82,112,144	27.5	-,-,32,33.5,39	SKG10-10HG	1.1, 1.2, 1.4, 1.6, 1.6	SK10
	-SK13C- 60, 90,120,150,180	2.75～13.0	39～51	40,50,80,88,88	-,-,-,114,144	33	-,-,-,40,40	SKG13-10HG	1.3, 1.4, 1.6, 1.8, 1.8	SK13
	-SK16C- 60,*1 90,120,150,180	2.75～16.0	45～57*1	40,54,84,114,144	-	40	-	SKG16-12HG*1	1.4, 1.5, 1.7, 2.0, 2.0	SK16
	-SK20C- 90, 120	3.5～20.0	47～63	70,100	-	48.5	-	SKG20-18HG	1.7, 1.9	SK20
	-SK25C- 90,*2 120	7.5～25.4	60～70*2	70,100	-	55	-	SKG25-24HG*2	1.8, 2.0	SK25
No.50	NIT50-SK 6C-105,135,165,200	0.7～6.0	26～31	60,62,62,60	-,93,117,154	19.5	-,32,32,30	SKG 6- 6HG	3.7,3.9,4.1,4.3	SK 6
	-SK10C-105,135,165,200	0.9～10.0	33～41	65,70,75,75	-,95,125,154	27.5	-,32,32,36	SKG10-10HG	4.2, 4.4,4.6, 5.0	SK10
	-SK13C-105,135,165,200	2.75～13.0	39～51	60,100,92,102	-,-,125,160	33	-,-,45,45	SKG13-10HG	4.5, 4.7,4.8, 5.3	SK13
	-SK16C-105,135,165,200	2.75～16.0	45～57	65,95,90,90	-,-,125,160	40	-,-,50,50	SKG16-12HG	4.7,4.9, 5.1, 5.5	SK16
	-SK20C-105,135,165	3.5～20.0	47～63	65,95,125	86,116,146	48.5	70.9	SKG20-18HG	4.8,5.1, 5.4	SK20
	-SK25C-105,135,165,200	7.5～25.4	60～70	65,95,125,160	-	55	-	SKG25-24HG	4.8,5.2, 5.6, 6.0	SK25

★Dimension for **NIT40-SK16C-60** marked*1, H=45～51 **SKG16-10HG**
NIT40-SK25C-90 marked*2, H=60～65 **SKG25-18HG**

★Collet, adjust screw(G No.)and **SKL** spanner are available as an option.
SK6(C=φ18):SKL-6, SK6(C=φ19.5):SKL-6W, SK10:SKL-10, SK13:9HC12A, SK16:9HC16, SK20:9HC22, SK25:9HC22.
★Please refer ☞**P.277** for **SK** collet and please refer ☞**P.279** for **J** type nut.
★Please add "**F**" for the flange through tool coolant type.

NIT40-SK 6F- 90,120	**NIT50-SK 6F-105,165**
-SK10F- 90,120	**-SK10F-105,165**
-SK13F- 90,120	**-SK13F-105,165**
-SK16F- 90,120	**-SK16F-105,165**
-SK20F- 90,120	**-SK20F-105,165**
-SK25F-120	**-SK25F-105,165**

★Please refer ☞**P.279** for **SK** Coolant Solution.

High Speed SLIM CHUCK

GH Handle ☞P.293

Code No.	MAX. (r/min)	Code No.	MAX. (r/min)
NIT40-SK 6C- 60P, 90P, 120P	30,000	NIT50-SK 6C-105P, 165P	20,000
-SK10C- 60P, 90P, 120P		-SK10C-105P, 165P	
-SK13C- 60P, 90P, 120P		-SK13C-105P, 165P	
-SK16C- 60P, 90P, 120P	25,000	-SK16C-105P, 165P	
-SK20C- 90P, 120P		-SK20C-105P, 165P	
-SK25C- 90P, 120P	20,000	-SK25C-105P, 165P	15,000

★The extended gauge length **(L)** is available. Please contact with us.

2LOCK NIT ANNIVERSARY TYPE VC HOLDER

NIKKEN

VC

Centre Through

With TiN Bearing Nut

MAX.30,000r/min&G2.5

Run-Out Accuracy:3μm at 4D

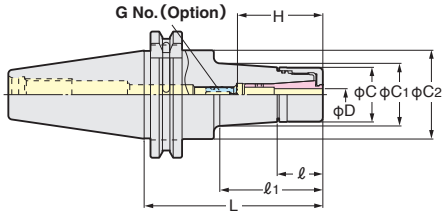

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	C2	H	G No. (Option)	Weight (kg)	MAX. (r/min)	Collet
No.40	NIT40X-VC 6- 60	2.0~6.0	60	23	23	27.5	27.5	44.7	35~45	VCG 6- 8A	1.1	30,000	VCK 6
	- 90		90		51.9		31.5				1.3		
	-120		120		81.9		35.7				1.5		
	-VC13- 60	3.0~12.0	60	29	29	40	40.0		50~60	VCG13-15A	1.2		VCK13
	- 90		90		70		44.7				1.5		
	-120		120		100						1.9		
No.50	NIT50X-VC 6-105	2.0~6.0	105	23	64.9	27.5	33.4	70.1	35~45	VCG 6- 8A	3.9	20,000	VCK 6
	-135		135		94.9		37.6				4.1		
	-165		165		124.9		41.8				4.4		
	-VC13-105	3.0~12.0	105	29	64.9	40	45.0		50~60	VCG13-15A	4.1		VCK13
	-135		135		94.9		49.2				4.5		
	-165		165		124.9		53.4				4.9		

★TiN Bearing Nut is supplied as standard.
★When the axial stopper is required, please use Adjust Screw(G No.)
★Please add **"-RP"** at the end of Code No. for Rust Proof Treatment **VC** Holder.
e.g. NIT40X-VC13-60-RP
★Please use **VC J** type Nut & Cap for Centre Through Coolant.
When **VC J** type Nut is used, the total holder length will be extended to 6mm.
★Please refer ☞**P.179** for **VCK Collet.**

★**NIT40X-VC6-150, NIT40X-VC13-150, NIT50X-VC13-90, -120** are available as semi-standard.
★Collet, adjust screw (G No.) and **GH Handle** are available as an option. ☞**P.293**
The Code No. of the **GH Handle** is **VC6: GH10, VC13: GH16**
★All series are for High Speed Rotation.

2LOCK NIT MAJOR DREAM HOLDER

NIKKEN

MDSK

Centre Through

Difference of the swarfs

With Jet Coolant Splash

With Air Blow

Please use Jet Coolant Splash for better swarf generation. ☞**P. 279**

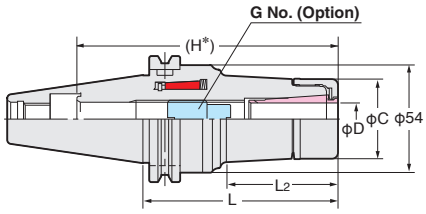

(H*) : MAX. H without adjust screw.

TAPER	Code No.	D	L2	C	H*	H1	G No. (Option)	Weight (kg)	Collet
No.40	NIT40N-MDSK 6- 60, 75, 90	3.0~ 6.0	18,33,48	19.5	86,101,116	21~35	SKG- 8	0.8,0.9,1.1	SK 6-A
	-105,120		63,78		131,146			1.2,1.4	
	-MDSK10- 60, 75, 90,105	3.0~10.0	19,33,48,63	27.5	86,101,116,131	30~50	SKG-12L	1.1,1.3,1.5,1.6	SK10-A
	-120,150,180		78,110,141.2		146,176,206			1.8,2.2,2.4	
	-MDSK13- 65, 75, 90,105	3.0~13.0	24,33,48,63		86,101,116,131	31~60	SKG-15	1.2,1.4,1.7,1.8	SK13-A
	-120,150,180		78,110,144		146,176,206			2.0,2.4,2.6	
	-MDSK16- 65	3.0~16.0	24	40	86	45~60	SKG-18L	1.2	SK16-A
	- 75, 90,105		33,48,64		101,116,131	45~70		1.5,1.9,2.0	
	-120,150,180		80,113,144.6		146,176,206			2.2,2.5,2.8	
	-MDSK20- 75, 90	4.0~20.0	41.2,55	48	80,95	50~73	SKG-12,SKG-12-55L	1.9,2.1	SK20-A
	-105,120		70,85		110,125		SKG-12-70L,SKG-12-85L	2.3,2.6	
No.50	NIT50 -MDSK 6-105,120,135	3.0~ 6.0	48,63,78	19.5	116,131,146	21~35	SKG- 8	3.6,3.7,3.9	SK 6-A
	-MDSK10-105,120,135	3.0~10.0	48,63.2,78.2	27.5	116,131,146	30~50	SKG-12L	4.3,4.4,4.7	SK10-A
	-165,195		110.2,141.2		176,206			5.0,5.3	
	-MDSK13-105,120,135	3.0~13.0	48,63,78	33	116,131,146	31~60	SKG-15	4.2,4.7,5.0	SK13-A
	-165,195		110,144		176,206			5.3,5.6	
	-MDSK16-105,120,135	3.0~16.0	48,64,80.1	40	116,131,146	45~70	SKG-18L	4.1,4.9,5.2	SK16-A
	-165,195		114.7,144.6		176,206			5.5,5.8	
	-MDSK20-105,135	4.0~20.0	42,72	48	159,175	47~80	SKG-22	4.9,5.3	SK20-A
	-165,195		102,132		205,235			5.9,6.7	
	-MDSK25-105,135	8.0~25.4	42,74	55	159,175	55~85	SKG-28	4.9,5.7	SK25-A
	-165,195		105,135		205,235			6.5,7.5	

★**Please use A type SK collet that is available as an option for end milling operation.** ☞**P.277**
★Please refer ☞**P.279** for Jet coolant **J** type nut and cap.
★**GH Handle** is available as an option. ☞**P.293** Please order with the Code No. **MDSK10:GH10, MDSK13:GH12, MDSK16:GH16, MDSK20:GH20, MDSK25:GH25.**
★**Please add "P" at the end of Code No. for high speed holder, e.g. NIT40N-MDSK10-60P.**
★**φC2 of NIT40N is larger than the dimension of the IT40 standard.** ★Please refer ☞**P.279** for **SK** Coolant Solution.

2LOCK NIT FACE MILL ARBOR TYPE A/SHOULDER CUTTER ARBOR

NIKKEN

Photo. shows with face mill cutter.

JIS B4113 Face Mill Cutter

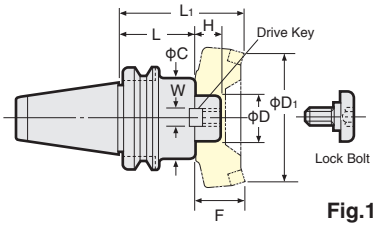

Fig.1

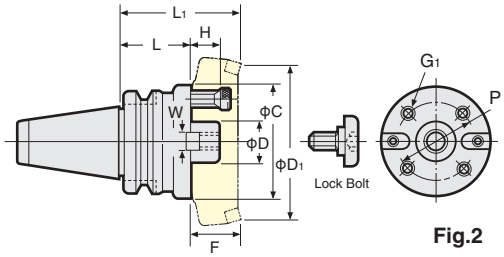

Fig.2

FMA

TAPER	Code No. (φD-L)	Arbor H	Arbor C	Arbor W	Weight (kg)	With Cutter L1	With Cutter D1	With Cutter F	Drive Key	Lock Bolt	Fig.
No.40	NIT40-FMA25.4 - 45, 90	22	50	9.5	1.5 , 3.1	95,140	80	50	FW 5	FM12	1
	-FMA31.75 - 45, 75	30	60	12.7	1.7 , 3.1	105,135	100	60	FW13	FM16	
	-FMA38.1 - 60	34	80	15.9	2.9	120	125	60	FW18	FM20	
No.50	NIT50-FMA25.4 - 45, 90,150	22	58	9.5	3.7,4.6,5.5	95,140,200	80	50	FW 5	FM12	1
	-FMA31.75 - 45, 75,105	30	70	12.7	4.5,5.3,6.1	105,135,165	100	60	FW12,13	FM16	
	-FMA38.1 - 45, 75	34	80	15.9	4.3 , 5.6	105,135	125	60	FW18,19	FM20	
	-FMA50.8 - 45, 75	36	100	19	4.9 , 6.8	105,135	160	60	FW23,24	FM24	
	-FMA47.625- 75*	38	128.57	25.4	7.7	135	200	60	FW26	4×9GM16-55	2

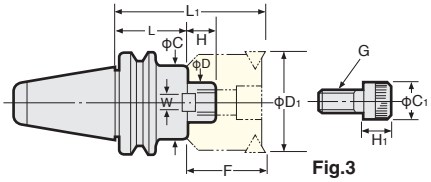

Fig.3

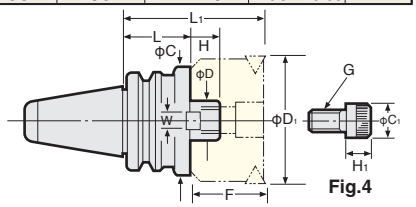

Fig.4

FMC FMA For SANDVIK T-MAX Shoulder Face Mill/SUMITOMO CHE5000 Series

TAPER	Code No. (φD-L)	Arbor H	Arbor C	Arbor W	Weight (kg)	With Cutter L1	With Cutter D1	With Cutter F	With Cutter G Cap Bolt	C1	H1	Fig.
No.40	NIT40-FMC22-45, 90	18	45	10	1.3 , 2.0	85 , 130	50	40	9GM 10-30	16	10	3
	-FMC27-60, 90	20	60	12	1.5 , 2.2	110 , 140	80	50	9GM 12-35	18	12	4
	-FMC32-60, 75	22	85	14	2.3 , 2.6	110 , 125	125	50	9GM 16-35	24	16	
No.50	NIT50-FMC22-60,105,150	18	45	10	4.2,4.7,5.3	100,145,190	50	40	9GM 10-30	16	10	3
	-FMC27-45, 90,150	20	70	12	4.1,5.5,7.3	95,140,200	80	50	9GM 12-35	18	12	
	-FMC32-45, 75,105	22	85	14	4.2,5.5,7.0	95,125,155	125	50	9GM 16-35	24	16	

★Drive keys, L wrench and bolt are supplied as standard.
★The arbor weight is only for the arbor.
★The different type of the cap bolt may be used for the recent cutter. Please check the specification.
★The arbor marked * requires 4 fixing bolts **(FMA47.625 : M16, P=101.6)**
★Extended length is available as an option. NIT50-FMA25.4 -200, 250,···500
-FMA31.75-150, 200,···500
-FMA38.1 -150, 200,···500

FMH High Feed Cutter Arbor with Coolant Hole

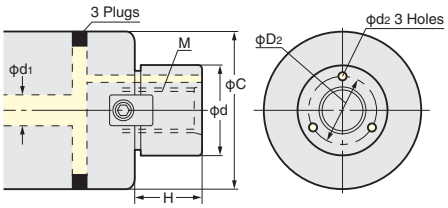

Code No.	Cutter Dia.	φd	φC	M	H	Coolant Hole φD2	Coolant Hole φd1	Coolant Hole φd2
FMH22(22.225)	φ50, φ52 φ63, φ66	22(22.225)	47 60	M10 P1.5	18(17)	16	6~8	3
FMH27(25.4)	φ80	27(25.4)	76(70)	M12 P1.75	20(22)	19.5(18.5)	8~10	3.5
FMH32(31.75)	φ100	32(31.75)	96	M16 P2.0	22(30)	24	10~13	4
FMH40(38.1)	φ125	40(38.1)	100	M20 P2.5	26(34)	30(29)	10~15	5
FMH50.8	φ160	50.8	100	M24 P3.0	36	37.5	15~20	7

★Fixing dimension is basically based on **FMA/FMC**. ★The combination of the other cutter dia. are also available.

FMH

TAPER	Code No. (φD-L)	Arbor H	Arbor C	Arbor W	Arbor C1	Arbor C2	Arbor H1	Arbor H2	Weight (kg)	Drive Key	Lock Bolt	G Cap Bolt
No.40	NIT40-FMH22 - 47(60)-45	18	47(60)	10	16		10		1.3(1.4)	FW 8		9GM 10-30
	-FMH27 - 60(76)-60	20	60(76)	12	18	—	12	—	1.8(2.2)	FW11	—	9GM 12-35
	-FMH32 - 96-60	22	96	14	24		16		2.9	FW16		9GM 16-35
	-FMH40 -100-60	26	100	16	50	27	14	6	3.1	FW22	FM20	—
No.50	NIT50-FMH22 - 47(60)-60	18	47(60)	10	16		10		4.2(4.5)	FW 8		9GM 10-30
	-FMH27 - 60(76)-45	20	60(76)	12	18	—	12	—	3.9(4.1)	FW10	—	9GM 12-35
	-FMH32 - 96-45	22	96	14	24		16		4.2	FW15		9GM 16-35
	-FMH40 -100-45	26	100	16	50	27	14	6	5.1	FW20	FM20	—
	-FMH50.8 -100-45	36		19	65	37		10	4.4	FW23	FM24	

★**FMH22.225, FMH25.4, FMH31.75, FMH38.1** are also available.

★**For FMH22, there are two types of φC, φ47 and φ60.**
For FMH27, there are two types of φC, φ60 and φ76.

NC5 TOOLING SYSTEM

Solid Taper with Dampening Effect
(not hollow Shank)

NIKKEN

Innovational Design! Double Contact・1/10 Short Taper

Since the launch of the NC5 TOOLING SYSTEM at JIMTOF'94, OSAKA the system has proven its outstanding ability is a wide cross-sector of Japanese Industry, with ever-increasing expectation of its being adapted as the Next Generation Tooling Interface.
Please take a moment to look at the NC5 TOOLING SYSTEM before you purchase your next machine. ☞P.207～220

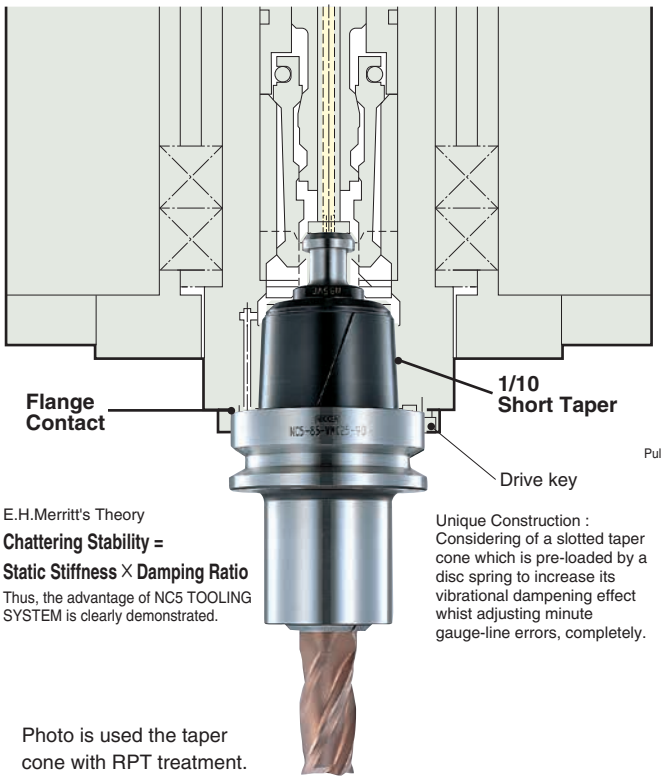

E.H.Merritt's Theory
Chattering Stability = Static Stiffness × Damping Ratio
Thus, the advantage of NC5 TOOLING SYSTEM is clearly demonstrated.

Unique Construction :
Considering of a slotted taper cone which is pre-loaded by a disc spring to increase its vibrational dampening effect whist adjusting minute gauge-line errors, completely.

Photo is used the taper cone with RPT treatment.

NC5 is an abbreviation of New Century arbor with 1/10 taper(5°43' 29").

1/10 and 7/24 Taper

The following diagrams show the correlation between Pulling Force/ Taper Angle and their Static Stiffness. As can be seen, using the same Pulling Force, the smaller the Taper Angle, the greater the Static Stiffness. Therefore, the larger the Taper Angle, the greater the Pulling Force is required. For example, 12kN of Pulling Force is required for a 7/24 taper to obtain the same value of Static Stiffness as a 1/10 taper using a 4kN Pulling Force.

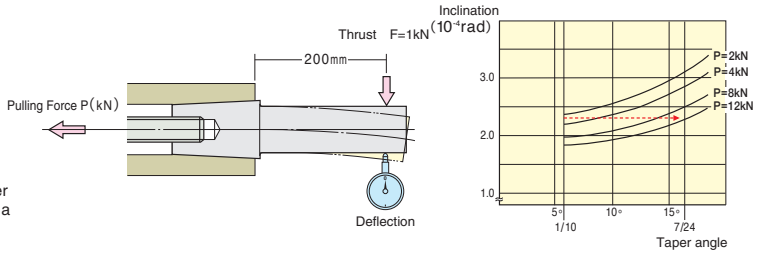

Repeatability

Higher Repeatability is accomplished due to run-out accuracy of contact flange for taper is within 0.002mm.

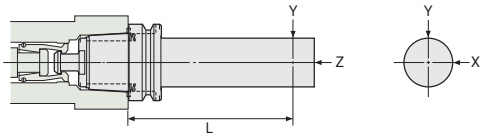

TAPER	Equivalent	L	Repeatability		
			X	Y	Z
NC5- 46	BT30	70	0.003	0.003	0.002
- 63	BT40	120	0.003	0.003	0.002
- 85	BT45	150	0.003	0.003	0.002
-100	BT50	180	0.003	0.003	0.002

Pulling Force and Static Stiffness

The NC5-63 takes advantage of the taper/Pulling Force to increase its Static Stiffness such that under a force of 5.5 kN the Static Stiffness of an NC5-63 and BT40 are almost the same. But at 12kN the Static Stiffness of an NC5-63 is three times that of a BT40.

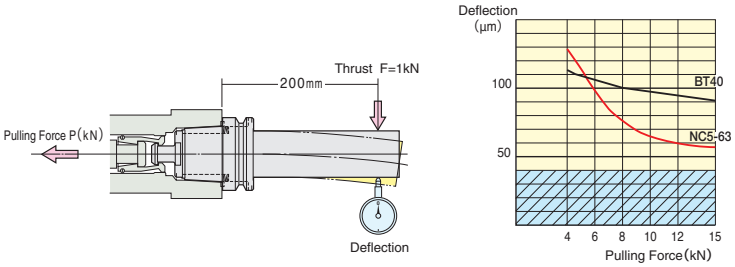

means Deflection of Test Bar itself.

ATC

Clamp Action ··· Cleaning Air is same as Unclamp Action.

①When tool is inserted into a spindle, there is no contact between the taper or flange.

②Taper makes contact and centres.

③Further retraction causes simultaneous contact of the taper and the flange with spindle.

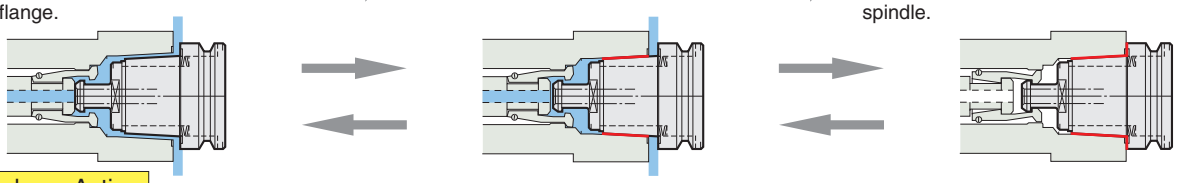

Unclamp Action

④As the pull stud is released, an air blast is activated inside the spindle.

⑤Flange is detached slightly and high pressure air blast cleans the flange.

⑥Taper is detached and air blast cleans the taper.

Innovational Design! Double Contact · 1/10 Short Taper

Face Milling

S53C

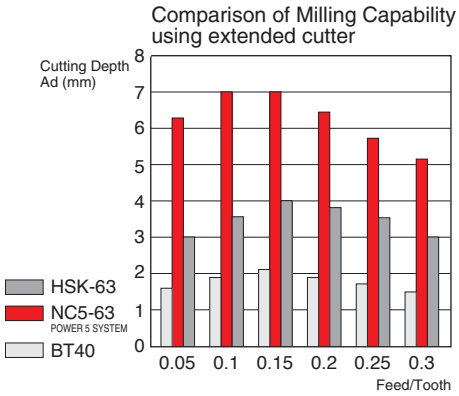

Comparison between HSK-63, NC5-63 & BT40

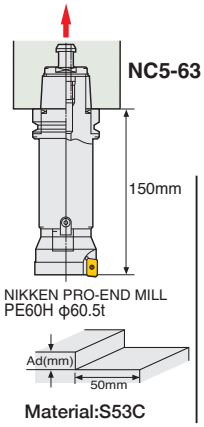

Material:S53C
V=180m/min. Constant

End Milling

1 to 1 Scale Swarf of SCM415



Material:SCM415
V=300m/min. f=0.3mm/tooth
S=3800r/min F=4560mm/min.



Stiffness & Dampening Effect

S53C



NC5-63
Material:S53C
V=500m/min. f=0.25mm/tooth
S=10000r/min F=10000mm/min.

TITAN



NC5-63
Material:TITAN
V=75m/min. f=0.18mm/tooth
S=1500r/min F=1700mm/min.

Drilling

SCM435

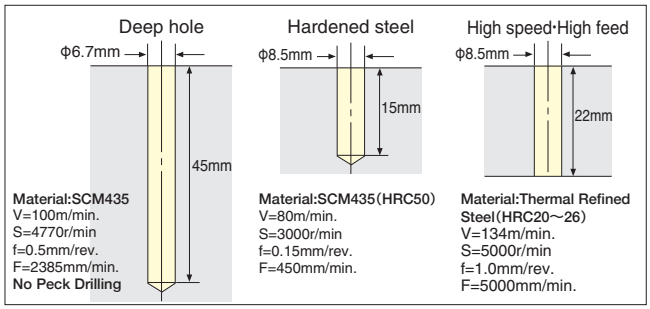

Boring



Current developments in inserts (coated TiAlN & CBN) and their improved capability for high speed cutting is remarkable. However, the results are based on using these inserts with high-speed cutting conditions (their performance is reduced when used for medium or low cutting speeds). The ZMAC Boring Head has been designed to optimise this new high-speed cutting technology.

Cutting data

M/C : VC8
Holder : NC5–63–Q26–50
SP26–12–30
12–ZMAC16–45
External coolant
Insert : 3MP–C Nose/R=0.2
Coating (Coated TiAlN)

Cutting Speed: V=200m/min.,350m/min.
Feed : f=0.05mm/rev.
Removal : ϕ0.5mm

V=350m/min. gave better finish & accuracy

Material:S53C Thermal refined carbon steel.

Material:S53C Thermal refined carbon steel

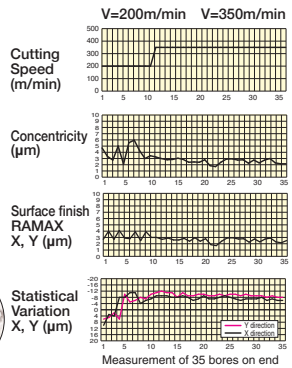

NC5 MILLING CHUCK

NIKKEN

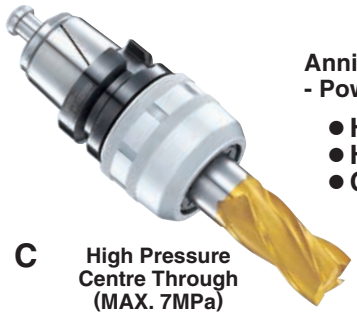

C High Pressure Centre Through (MAX. 7MPa)

Anniversary Type
- Powerful Gripping Torque -

- **High Rigidity**
- **High Precision**
- **Compact Design**

C12



C16～C42



TAPER	Code No.	D1	D2	ℓ1	ℓ2	L	Collet	Stopper	Weight(kg)
NC5- 46	NC5- 46-C12- 55	12	33	56	46	58	KM12 CCK12	—	0.6
	-C16- 70	16	44	63	49	70	KM16 CCK16		0.8
	-120			65		120			1.2
	-C20- 80	20	52	72	57	80	KM20 NK20 CCK20 CCNK20	9MC20HS	1.0
	-C25- 90	25	55	80	60	90	KM25 NK25 CCK25 CCNK25	9MC25H	1.3
	-C32-100*	32	64	75	66	100	KM32 NK32	—	1.6
NC5- 63	NC5- 63-C12- 65	12	33	56	46	65	KM12 CCK12	—	1.2
	-C16- 60	16	44	65	49	63	KM16 CCK16		1.4
	- 70					70			1.5
	-120					120			2.0
	-150					150			2.3
	-C20- 70	20	52	79	57	71	KM20 NK20 CCK20 CCNK20	9MC20H	1.6
	- 80			80		80			1.7
	-120					120			2.3
	-150					150			2.6
	-C25- 70	25	60		60	71	KM25 NK25 CCK25 CCNK25	9MC25H	1.9
	- 90					80			2.1
	-120					120			2.7
	-150					150			3.0
	-C32- 80*	32	69	71	65	82	KM32 NK32 CCK32 CCNK32	—	2.1
	- 90			77	67	90		9MC32HS	2.3
	-120			81	70	120		9MC32H	2.9
	-150			81	70	150		9MC32H	3.2
NC5- 85	NC5- 85-C12- 80	12	33	56	46	80	KM12 CCK12	—	2.2
	-C16- 80	16	44	65	49	80	KM16 CCK16		2.6
	-120					120			3.0
	-160					160			3.3
	-C20- 80	20	52	80	57	80	KM20 NK20 CCK20 CCNK20	9MC20HL	2.8
	-120					120		9MC20H	3.3
	-160					160		9MC20H	3.6
	-C25- 80	25	60		60	80	KM25 NK25 CCK25 CCNK25	9MC25H	2.9
	-120					120			3.7
	-160					160			4.0
	-C32- 85	32	69	81	70	87	KM32 NK32 CCK32 CCNK32	9MC32HS	3.2
	-100					100		9MC32H	3.6
	-160					160		9MC32H	5.3
	-200					200		9MC32H	5.8
	-C42-105*	42	86	93	73	105	KM42 NK42 CCK42 CCNK42	—	4.8
	-125			113		125		9MC42H	5.3
	-160			125		160		9MC42H	6.6
	-200			125		200		9MC42H	7.0

NEXT PAGE

NC5 MILLING CHUCK

NIKKEN

TAPER	Code No.	D_1	D_2	ℓ_1	ℓ_2	L	Collet	Stopper	Weight(kg)
NC5-100	NC5-100-C12-105	12	33	56	46	105	KM12 CCK12	—	4.1
	-C16-105	16	44	65	49	105	KM16 CCK16		4.4
	-135					135			4.7
	-165					165			5.0
	-200					200			5.3
	-C20-105	20	52	80	57	105	KM20 NK20 CCK20 CCNK20	9MC20H	4.6
	-165								5.5
	-200								5.8
	-C25-105	25	60		60	165	KM25 NK25 CCK25 CCNK25	9MC25H	5.0
	-165					200			6.1
	-200								6.4
	-C32- 90	32	69	81	70	90	KM32 NK32 CCK32 CCNK32	9MC32HS	4.8
	-105					105		9MC32H	5.4
	-165					165		9MC32H	7.1
	-200					200		9MC32H	7.5
	-C42- 95*	42	86	105	73	95	KM42 NK42 CCK42 CCNK42	—	5.5
	-115			125		115		9MC42HS	6.1
	-165			125		165		9MC42H	8.6
	-200			125		200		9MC42H	9.0

★For High Speed type, please add"**G**"at the end of Code No. **e.g.NC5-63-C16-60G**
★Spanner is available as an option. **C12 : 9HC12A, C16:9HC16, C20:HC20, C25:9HC25, C32(φ64):9HC25, C32(φ69):9HC32, C42:9HC42**
★**NC5-63-C32-80** may not be used by the M/C restriction. ★**Milling Chuck for Oil Mist is also available.** Please contact with us.
★**CCNK** collet and the stopper can not be used for the chucks marked ✻ . The cutter shank length must be longer than ℓ_2 in case of the direct chucking and centre through coolant application.
★**CCNK** collet can be used for the all chucks except marked ✻ . The stopper (optional accessory)is required, if the cutter shank length is shorter than ℓ_2 and direct chucking,
★The"**D_1**"in the Code No. shows ID of the chuck. ★Please note the acceptable shank tolerance is h7. ★Please refer ☞ **P.275** for **KM,NK, CCK, CCNK** Collet.

Stopper for Direct Chucking

Direct chucking means that chucking φ32mm shank tool into φ32mm ID chuck.
If tool shank length is longer thanR_1, the stopper is not required.

Chuck	Stopper	H_1	C_2
C20C	9MC20H	42～47	17
	9MC20HS		
C25C	9MC25H	50～55	22
C32C	9MC32H	49～59	24
	9MC32HS	55～60	
C42	9MC42H	57～67	24



★**For heavy milling, please insert the cutter shank longer than ℓ_1 into the chuck body. Do not use the stopper.**
★**When the oil hole pitch of the back end is larger than the dia. of O-ring, please contact with us.**

C12 and C16 Milling Chuck with Special Stopper

C12 and **C16** Milling Chucks with the stopper to use with **KM** Collets are available as special option. **e.g. NC5-63-C12-65S, NC5-63-C16-70S**

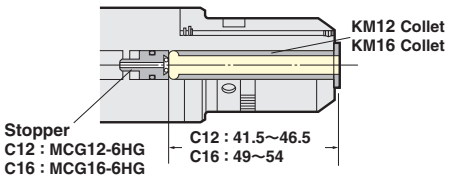

For the types with O-ring on the end flange
add the O-ring type at end of the Code No. **e.g. MCG16-6HG-S6**
For the steel type, add "**-FE**" at the end of Code No. **e.g. MCG16-6HG-FE**

High Speed Milling Chuck

Please add"**G**"at the end of Code No. for High Speed Milling Chuck.

GH Handle ☞ **P.293**

TAPER	Code No.	MAX. (r/min)	TAPER	Code No.	MAX. (r/min)
NC5-46	NC5- 46-C12- 55G	40,000	NC5-85	NC5- 85-C12- 80G	15,000
	-C16- 70G			-C16- 80G	
	-C20- 80G	30,000		-C20- 80G	
	-C25- 90G	20,000		-C25- 80G	
	-C32-100G*	10,000		-C32- 85G	12,000
				-C42-105P*	
NC5-63	NC5- 63-C12- 65G	20,000	NC5-100	NC5-100-C12-105G	15,000
	-C16- 60G, 70G			-C16-105G	
	-C20- 70G, 80G			-C20-105G	
	-C25- 70G, 90G	15,000		-C25-105G	
	-C32- 80G*, 90G			-C32- 90G	12,000
				-C42- 95P*	

★The extended tool length is available as an option. Please contact with us.
★The stopper can not be used for the chucks marked ✻. The cutter shank length must be longer than ℓ_2 in case of the direct chucking and centre through coolant application.
★All chucks except marked ✻ can be used for high pressure centre through coolant application. The stopper (optional accessory) is required, if the cutter shank length is shorter than ℓ_2 and direct chucking.

★**GFS** type ☞ **P.33** is available for **C25** and **C32** except **NC5-46** shank.

Face Seal type
(for Alminium cutting)
GFS
JAPAN PAT.

NC5 SLIM CHUCK

NIKKEN

Wide Variation of the Tool Length

SK High Pressure Centre Through (MAX. 7MPa)



Photo. shows with J type Nut.

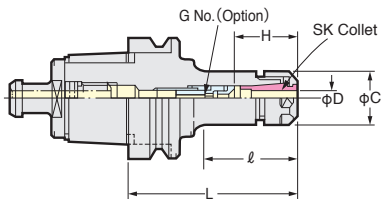

- **When SK J type nut is used, the total chuck length will be extended by 6mm.**
- **When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.**

TAPER	Code No.	Chucking Range φD	ℓ	C	H	G No.(Option)	Weight (kg)	SK Collet
NC5- 46	NC5- 46-SK 6C- 75, 90, 120	0.7 ~ 6.0	48, 56, 72	19.5	26 ~ 31	SKG6-6HG	0.4, 0.5, 0.7	SK 6
	-SK10C- 75, 90, 120	1.75 ~ 10.0	50, 65, 95	27.5	35 ~ 41	SKG10-10HG	0.5, 0.6, 0.8	SK 10
	-SK13C- 90, 120	2.75~ 13.0	65, 95	33	39 ~ 51	SKG13-10HG	0.7, 0.9	SK 13
	-SK16C- 90, 120	2.75 ~ 16.0	67, 97	40	50	SKG16-10HG	0.8, 1.0	SK 16
	-SK20C- 90, 120	3.5 ~ 20.0		48.5	50~55, 47~63	SKG20-12MFHG, -12HG	1.2, 1.6	SK 20
	-SK25 - 90*1	7.5 ~ 25.4	67	55	55 ~ 60	SKG-12MF	1.2	SK 25
NC5- 63	NC5- 63-SK 6C- 90, 150	0.7 ~ 6.0	51, 60	19.5	26 ~ 31	SKG6-6HG	1.2, 1.4	SK 6
	-SK10C- 90, 105, 120 135, 150, 200	1.75 ~ 10.0	48, 73, 73 73, 73, 73	27.5	35 ~ 41	SKG10-10HG	1.4, 1.5, 1.6 1.6, 1.7, 1.9	SK 10
	-SK13C- 90, 150, 200	2.75 ~ 13.0	58, 88, 88	33	39 ~ 51	SKG13-10HG	1.5, 1.7, 1.9	SK 13
	-SK16C- 90, 105, 120 135, 150, 200	2.75 ~ 16.0	58, 73, 88 103, 118, 168	40	45 ~ 57	SKG16-12HG	1.5, 1.6, 1.7 1.8, 2.0, 2.2	SK 16
	-SK20C-105, 150, 200	3.5 ~ 20.0	75, 120, 170	48.5	47 ~ 63	SKG20-18HG	2.0, 2.6, 3.3	SK 20
	-SK25C-135, 180	7.5 ~ 25.4	106, 151	55	60~65, 60~70	SKG25-18HGD, 24HG	2.5, 2.8	SK 25
NC5- 85	NC5- 85-SK 6C-105, 150	0.7 ~ 6.0	55, 60	19.5	26 ~ 31	SKG6-6HG	2.3, 2.7	SK 6
	-SK10C-105, 150, 200	1.75 ~ 10.0	70, 73, 75	27.5	35 ~ 41	SKG10-10HG	2.4, 2.8, 3.2	SK 10
	-SK13C-105, 150, 200	2.75 ~ 13.0	67, 92, 92	33	39 ~ 51	SKG13-10HG	2.6, 3.0, 3.4	SK 13
	-SK16C-105, 150, 200	2.75 ~ 16.0	65, 90, 90	40	45 ~ 57	SKG16-12HG	2.7, 3.2, 3.6	SK 16
	-SK20C-135, 165, 200	3.5 ~ 20.0	97, 127, 162	48.5	47 ~ 63	SKG20-18HG	3.5, 3.9, 4.3	SK 20
	-SK25C-135, 165, 200	7.5 ~ 25.4		55	60~65, 60~70, 60~70	SKG25-18HGD, -24HG, -24HG	3.5, 4.0, 4.4	SK 25
NC5-100	NC5-100-SK 6C-105, 165	0.7 ~ 6.0	55, 60	19.5	26 ~ 31	SKG6-6HG	3.9, 4.3	SK 6
	-SK10C-105, 165, 200	1.75 ~ 10.0	57, 75, 75	27.5	35 ~ 41	SKG10-10HG	4.0, 4.4, 4.8	SK 10
	-SK13C-105, 165, 200	2.75 ~ 13.0	62, 92, 92	33	39 ~ 51	SKG13-10HG	4.2, 4.7, 5.1	SK 13
	-SK16C-105, 165, 200	2.75 ~ 16.0	62, 90, 90	40	45 ~ 57	SKG16-12HG	4.3, 5.0, 5.4	SK 16
	-SK20C-135, 165, 200	3.5 ~ 20.0	92, 122, 157	48.5	47 ~ 63	SKG20-18HG	5.1, 5.5, 6.0	SK 20
	-SK25C-135, 165, 200	7.5 ~ 25.4		55	60 ~ 70	SKG25-24HG	5.1, 5.5, 5.9	SK 25

★The "D" of Code No. shows MAX. gripping diameter. ★The "H" dimension is a figure in case of the MAX.gripping diameter.
★All slim chucks except **NC5-46-SK25-90** marked *1 are High Pressure Centre Through Coolant type (MAX.7MPa).
★For **NC5-46-SK25-90**, the adjust screw **SKG-12MFH** is used for centre through coolant application (1MPa).
The Code No. of the adjust screw for **J** type nut is **SKG-12MF-J**.
★**For the adjust screws for oil hole taps or smaller dia. cutters, please refer ☞P.282.**
★Collet, adjust screw (G No.) and spanner are available as an option.
The Code No. of the spanner is **SK6C(C=φ18): SKL-6, SK6C(C=φ19.5): SKL-6W, SK10C: SKL-10, SK13C: 9HC12A, SK16C: 9HC16, SK20C: 9HC22, SK25C: 9HC22**
★Please refer **☞P.277** for **SK** collet and please refer **☞P.279** for **J** type nut.
SK6C:φ4~φ6, SK10C:φ6~φ10, SK16C:φ10~φ16, SK25C:φ16~φ25
★**Slim Chuck for Oil Mist is also available.** Please contact with us.
★**Please refer ☞ P.279 for sk Coolant Solution.**

High Speed Slim Chuck

"**SK-P**" is the Code No. of High Speed Slim Chuck.

GH Handle ☞ P.293

TAPER	Code No.	MAX. (r/min)	TAPER	Code No.	MAX. (r/min)
NC5-46	NC5- 46-SK 6C- 75P, 90P, 120P	40,000	NC5-85	NC5- 85-SK 6C-105P, 150P	20,000
	-SK10C- 75P, 90P, 120P			-SK10C-105P, 150P, 200P	
	-SK13C- 90P, 120P	30,000		-SK13C-105P, 150P, 200P	
	-SK16C- 90P, 120P			-SK16C-105P, 150P, 200P	
	-SK20C- 90P, 120P			-SK20C-135P, 165P, 200P	
	-SK25 - 90P			-SK25C-135P, 165P, 200P	15,000
NC5-63	NC5- 63-SK 6C- 90P, 150P	30,000	NC5-100	NC5-100-SK 6C-105P, 165P	20,000
	-SK10C- 90P, 150P, 200P			-SK10C-105P, 165P, 200P	
	-SK13C- 90P, 150P, 200P	25,000		-SK13C-105P, 165P, 200P	
	-SK16C-105P, 150P, 200P			-SK16C-105P, 165P, 200P	
	-SK20C-105P, 150P, 200P			-SK20C-135P, 165P, 200P	
	-SK25C-135P, 180P	20,000		-SK25C-135P, 165P, 200P	15,000

NC5 VEGA CHUCK

NIKKEN

VMC

High Pressure Centre Through (MAX. 7MPa)

New Innovation for High Speed Milling

The setting of cutter can be done through the centre hole of the pull stud with wrench.

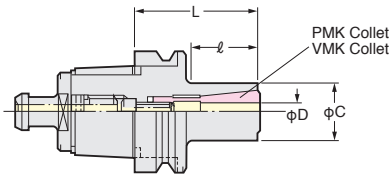

Run-out within 3μm



TAPER	Code No.	Chucking Range φD	C	ℓ	Collet	MAX. (r/min)	Collet Removal Jig	Weight (kg)
NC5- 63	NC5- 63-VMC 8- 60, 120N	2～8	22	30, 30	PMK 8, VMK 8J	40,000	VML-63	1.1,1.4
	-VMC12- 65, 120	4～12	30	35, 47	PMK12, VMK12J			1.2,1.7
	-VMC16- 85, 120	4～16	40	53, 88	VMK16, VMK16J			1.4,1.8
	-VMC20- 85, 120	6～20	47	53, 88	VMK20, VMK20J			1.5,2.0
	-VMC25- 90, 120	8～25	55	60, 90	VMK25, VMK25J			1.7,2.3
NC5- 85	NC5- 85-VMC 8- 75N, 135	2～8	22	30, 30	PMK 8, VMK 8J	20,000	VML-85	2.3,2.7
	-VMC12- 75, 135	4～12	30	39, 42	PMK12, VMK12J			2.4,2.9
	-VMC16- 85, 135	4～16	40	47, 57	VMK16, VMK16J			2.5,3.3
	-VMC20- 85, 135	6～20	47	47, 97	VMK20, VMK20J			2.6,3.3
	-VMC25- 90, 135	8～25	55	52, 97	VMK25, VMK25J			2.8,3.6
	-VMC32-110	12～32	70	72	VMK32, VMK32J			3.6
NC5-100	NC5-100-VMC 8- 90N, 150N	2～8	22	30, 30	PMK 8, VMK 8J	20,000	VML-100	4.0,4.5
	-VMC12- 90, 150	4～12	30	49, 60	PMK12, VMK12J			4.1,4.6
	-VMC16- 90, 150	4～16	40	49, 80	VMK16, VMK16J			4.2,4.9
	-VMC20- 85, 150	6～20	47	42, 95	VMK20, VMK20J			4.2,5.3
	-VMC25- 90, 150	8～25	55	47, 107	VMK25, VMK25J			4.3,5.4
	-VMC32-105	12～32	70	57	VMK32, VMK32J			4.9

★The "D" of the Code No. shows MAX. gripping diameter.
★Please add "P" at the end of Code No. for High Speed Chuck.
e.g. NC5-63-VMC16-85P.

★Collet and collet removal jig are available as an option.
★Please refer ☞**P.284** for Collet.

Collet Removal Jig

VML

Push back the Pull Stud onto the VEGA Chuck and rotate the Chuck to tighten and release. Spanner is available as an option.
NC5-53, NC5-63:9HC22,
NC5-85:9HC32, NC5-100:9HC42



⚠ **PROTECTION MUST BE USED.**

NC5 ANNIVERSARY TYPE VC HOLDER

NIKKEN

VC

Centre Through

With TiN Bearing Nut

MAX.40,000r/min&G2.5

Run-Out Accuracy:3μm at 4D

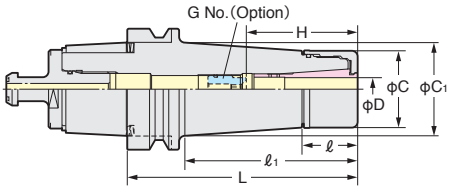

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	Weight (kg)	MAX. (r/min)	Collet
NC5- 46	NC5- 46-VC 6- 45, 60, 90	2.0～6.0	45,60,90	23	23,35,65	28	27.5,31.7,33.4	-,-,35～45	-,-,VCG 6- 8A	0.5,0.6,0.8	40,000	VCK 6
	-VC13- 65, 90, 120	3.0～12.0	65,90,120	29	42,67,97	40	41.8,41.3,42.4	-,-,50～60	-,-,VCG13-15A	0.8,0.9,1.2		VCK13
NC5- 63	NC5- 63-VC 6- 60, 90, 120	2.0～6.0	60,90,120	23	30,60,90	28	30.0,32.7,36.9	35～45	VCG 6- 8A	1.3,1.5,1.7	30,000	VCK 6
	-VC13- 60, 90, 120	3.0～12.0		29	31,60,90	40	40.3,44.3,48.5	-,50～60,50～60	-,VCG13-15A,VCG13-15A	1.4,1.7,2.1		VCK13
NC5- 85	NC5- 85-VC 6-105, 135, 165	2.0～6.0	105,135,165	23	67,97,127	28	33.7,37.8,42.0	35～45	VCG 6- 8A	2.6,2.8,3.1	20,000	VCK 6
	-VC13-105, 135, 165	3.0～12.0		29		40	45.3,49.5,53.7	50～60	VCG13-15A	2.8,3.2,3.6		VCK13
NC5-100	NC5-100-VC 6-105, 135, 165	2.0～6.0	105,135,165	23	62,92,122	28	33.0,37.1,41.3	35～45	VCG 6- 8A	4.3,4.5,4.9	20,000	VCK 6
	-VC13-105, 135, 165	3.0～12.0		29		40	44.6,48.8,53.0	50～60	VCG13-15A	4.5,4.9,5.3		VCK13

★Collet, adjust screw (G No.) ☞ **P.282,P.284** and **GH Handle** are available as an option.
The Code No. of the **GH Handle** is **VC6: GH10, VC13: GH16** ☞**P.293**
★Please refer☞ **P.279** for JET Coolant Splash with **J** type Nut.
★When the axial stopper is required, please use Adjust Screw (G No.)
★Please add **"-RP"** at the end of Code No. for Rust Proof Treatment **VC** Holder. **e.g : NC5-63-VC13-60-RP**
★Please use **VC J** type Nut & Cap for Centre Through Coolant.
When **VC J** type Nut is used, the total holder length will be extended to 6mm.
★**NC5-63-VC 6-150, NC5-63-VC13-150, NC5-100-VC13- 90, -120** are available as semi-standard.
★All series are for High Speed Rotation.

Please refer ☞**P.293**

NC5 ZERO FIT TYPE MILLING CHUCK

NIKKEN

CZF

Centre Through

Fig.1



Fig.2



TAPER	Code No.	C1	C2	L	L1	L2	ℓ	Weight(kg)	Fig.	Collet
NC5- 46	NC5- 46-CZF20-100	51.5	66.5	100	35	68	80	1.4	1	KM20 CCK20
	-CZF25-100	59.5	74.5					1.5		KM25 CCK25
NC5- 63	NC5- 63-CZF20-105	51.5	66.5	105	35	65	80	2.1		KM20 CCK20
	-CZF25-105	59.5	74.5			68		2.4		KM25 CCK25
	-CZF32-120	69	80.5	120	42	81	105	2.9		KM32 CCK32
NC5-100	NC5-100-CZF20-105	51.5	66.5	105	35	–	80	4.9	2	KM20 CCK20
	-CZF25-105	59.5	74.5					5.3		KM25 CCK25
	-CZF32-105	69	80.5		42		105	5.7		KM32 CCK32

★Spanner is available as an option. **CZF20 type:9HC22, CZF25 type:9HC25, CZF32 type:9HC32**
★Wrench to adjust run-out (**9ZFL**) is available as an option. ★Please note that the acceptable shank tolerance is h6~h7.
★Please refer ☞ **P.274, P.275** for **KM**, **CCK** collet.
★Please add **"P"** at the end of Code No. for High Speed Zero Fit Milling Chuck. **e.g. NC5-63-CZF25-105P**
★For center through coolant application:Please use **CKFN-D** Nut for the direct chucking. Please use **CCK** collet and **CKFN** nut for chucking with collet. ☞ **P.275**
★Multi-Cam style is available. **e.g. NC5-63-CZF32-120-C3**. (3 Cams) Please contact us for more detail.
★Please refer ☞ **P.273** for Milling chuck Coolant Solution.

Wrench to adjust
9ZFL

NC5 ZERO FIT TYPE SLIM CHUCK

NIKKEN

SZF

High Pressure Centre Through (MAX. 7MPa)

Fig.1

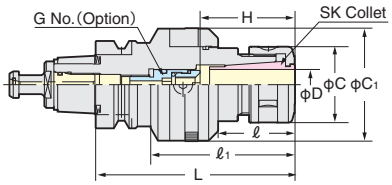

Fig.2

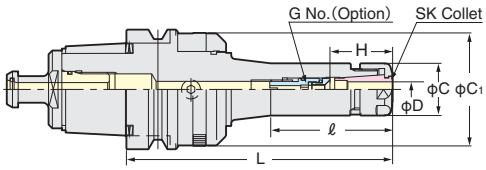

・When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No.(Option)	Weight(kg)	Fig.	Collet
NC5- 46	NC5- 46-SZF 6C- 90	0.7~6.0	90	42	–	19.5	40.5	26~31	SKG6-6HG	0.8	2	SK 6
	-SZF10C- 90	1.75~10.0		27	61	27.5	48.5	35~41	SKG10-10HG	1.2	1	SK10
	-SZF16C-120	2.75~16.0	120	50	86	40	59.5	50	SKG16-10HG	1.7		SK16
NC5- 63	NC5- 63-SZF 6C- 90,150	0.7~6.0	90, 150	37, 60	–	19.5	40.5, 48.5	26~31	SKG6-6HG	1.3, 1.6	2	SK 6
	-SZF10C- 90,150	1.75~10.0		37, 97		27.5	48.5	35~41	SKG10-10HG	1.5, 1.7		SK10
	-SZF16C-105,150	2.75~16.0	105, 150	52, 97		40	59.5	45~57	SKG16-12HG	1.7, 2.0		SK16
	-SZF25C-135,180	7.5~25.4	135, 180	70, 115	99, 144	55	66.5	60~65	SKG25-18HGD, 24HG	2.6, 2.9	1	SK25
NC5-100	NC5-100-SZF 6C-105,165	0.7~6.0	105, 165	41, 63	–	19.5	40.5, 59.5	26~31	SKG6-6HG	4.1, 4.5	2	SK 6
	-SZF10C-105,165	1.75~10.0		41, 101		27.5	48.5	35~41	SKG10-10HG	4.3, 4.7		SK10
	-SZF16C-105,165	2.75~16.0		41, 101		40	59.5	45~57	SKG16-12HG	4.6, 5.3		SK16
	-SZF25C-135,165	7.5~25.4	135, 165	61, 101		55	66.5	60~70	SKG25-24HG	5.5, 5.9		SK25

★Adjust screw (G No.), wrench to adjust run-out (**9ZFL**) and **SKL** spanner are available as an option. **SZF6C: SKL-6W, SZF10C: SKL-10, SZF16C: 9HC16, SZF25C: 9HC25**
★**NC5-85** is also available. **NC5-85-SZF6C-105, -150 NC5-85-SZF10C-105, -150 NC5-85-SZF16C-105, -150 NC5-85-SZF25C-135, -165**
★Please use **"P"** class or **"A"** type **SK** collet. ☞ **P.277.** ★Please add **"P"** at the end of Code No. for High Speed Zero Fit Slim Chuck. **e.g. NC5-63-SZF10C-90P**
★For centre through coolant application, please use **SK J** type nut and cap. ☞ **P.279.** Please note that the total tool length with **J** type nut is extended 6mm longer.
★Multi-Cam style is available. **e.g. NC5-63-SZF16C-105-C3**. (3 Cams) Please contact us for more detail.
★Please refer ☞ **P.279** for sk Coolant Solution.

NC5 NPU DRILL CHUCK

NIKKEN

NPU

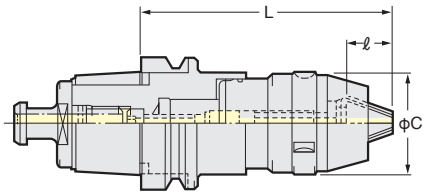

TAPER	Code No.	Chucking Dia. ϕD	C	ℓ	L MIN.	L MAX.	Weight(kg)
NC5- 46	NC5- 46-NPU 8-100	0.3～8	38	18.8	100	104.7	1.0
	-NPU13-120	1 ～13	48.5	26.5	120	131.7	1.4
NC5- 63	NC5- 63-NPU 8- 90	0.3～8	38	18.8	90	94.7	1.3
	-NPU13-110	1 ～13	48.5	26.5	110	121.7	1.7
NC5- 85	NC5- 85-NPU 8- 90	0.3～8	38	18.8	90	94.7	2.8
	-NPU13-110	1 ～13	48.5	26.5	110	121.7	3.4
NC5-100	NC5-100-NPU 8- 90	0.3～8	38	18.8	90	94.7	3.8
	-NPU13-110	1 ～13	48.5	26.5	110	121.7	4.1

★**NPU8** can not be used for Centre Through Coolant application.
★Please add "**C**" to the Code No. for Centre Through Coolant type **NPU13**(1MPa).
e.g. NC5-63-NPU13C-110

★Wrench is available as an option. **NPU8: NPUL-8, NPU13: NPUL-13**.
★When it is used for centre through coolant holder, MIN. Chucking Dia. is 6mm.

NC5

NC5 SIDE LOCK HOLDER

NIKKEN

SL

High Pressure Centre Through (MAX. 7MPa)

Photo shows the holder with **NIKKEN COMBATZ DRILL**.
☞ **P.303**

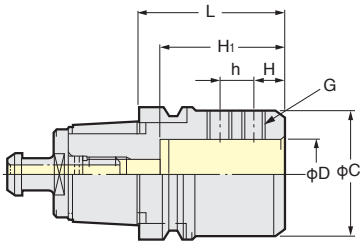

SIDE LOCK HOLDER for Drill

TAPER	Code No.	C	h	H	H_1	G	Weight (kg)
NC5- 63	NC5- 63-SL20CN-55	50	—	14	45	M12(P=1.25)	1.4
	-SL25CN-60	55	15	11	55		1.6
	-SL32CN-70	61	20	12	60		1.7
	-SL40CN-80	70	19	15	70		1.8
NC5- 85	NC5- 85-SL20CN-70	50	16	12	45	M10(P=1.5)	2.8
	-SL25CN-70	55	17	14	55	M12(P=1.25)	2.9
	-SL32CN-70	60	15	15	60		2.8
	-SL40CN-80	84	19	18	70		3.7
NC5-100	NC5-100-SL20CN-80	50	16	12	45	M10(P=1.5)	4.2
	-SL25CN-80	55	17	14	55	M12(P=1.25)	4.4
	-SL32CN-80	60	16	15	60		4.6
	-SL40CN-80	88	19	15	70		5.9

★All holders are High Pressure Centre Through Coolant type. (7MPa).
The Code No. of SIDE LOCK HOLDER for Combination Shank Cutter is"**DM**".
e.g. NC5-100-DM50.8-120
NC5- 85-DM50.8-120



SIDE LOCK HOLDER for End Mill

TAPER	Code No.	C	h	H	H_1	G	Weight (kg)
NC5- 63	NC5- 63-SLS16- 60	48	—	24	60	M14(P=2)	1.4
	-SLS20- 75	52	—	25	70	M16(P=2)	1.7
	-SLS25- 90	63	25	24	75	M18(P=2)	1.9
	-SLS32-105	72	28	24	90	M20(P=2)	2.0
NC5- 85	NC5- 85-SLS16- 70	48	—	24	60	M14(P=2)	2.7
	-SLS20- 70	52	—	25	70	M16(P=2)	3.2
	-SLS25- 95	65	25	24	75	M18(P=2)	3.6
	-SLS32-100	72	28	24	85	M20(P=2)	3.8
	-SLS42-115	90	32	30	95	M20(P=2)	4.7
	-SLS50-120	95	35	35	83	M24(P=2)	6.0
NC5-100	NC5-100-SLS16- 75	48	—	24	60	M14(P=2)	4.0
	-SLS20- 75	52	—	25	70	M16(P=2)	4.5
	-SLS25- 75	65	25	24	75	M18(P=2)	4.7
	-SLS32- 75	72	28	24	90	M20(P=2)	4.9
	-SLS42-115	90	32	30	95	M20(P=2)	6.2
	-SLS50-105	98	34.5	35	90	M24(P=2)	7.5

★The above are suitable for JIS B4005 Shank End Mill.

NC5 BALANCE-CUT BORING ARBOR

NIKKEN

Boring for Roughing

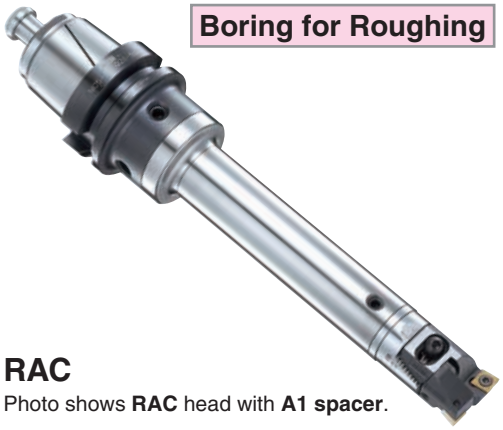

RAC
Photo shows **RAC** head with **A1 spacer**.

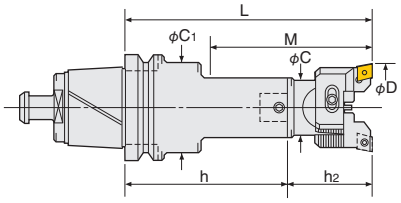

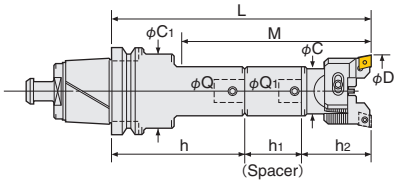

Power of Shoulder Support

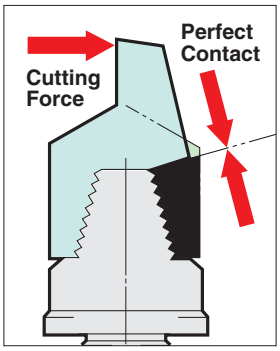

TAPER	Code No.	Boring Range D	Boring Depth M	P.62 Head No.	P.62 Insert No.	Weight (kg)
NC5-63	NC5- 63-RAC 25-135E, 165E, 180E	25～32	67, 105, 112	12-RAC 25- 55E	CC07	1.7, 1.8, 1.8
	-RAC 32-150E, 180E, 195E	32～45	77, 110, 122	16-RAC 32- 55E	CC08	2.1, 2.3, 2.3
	-RAC 43-150E, 180E, 210E	43～55	97, 130, 157	20-RAC 43- 70E	CC12	2.4, 2.6, 2.9
	-RAC 53-165E, 210E, 225E	53～70	135, 180, 195	26-RAC 53- 70E		2.2, 2.9, 3.0
	-RAC 70-180E, 195E, 240E	70～100	180, 195, 240	34-RAC 70- 85E		4.5, 4.9, 5.9
	-RAC100-195E	100～130	195	42-RAC100-100E		6.5
NC5-85	NC5- 85-RAC 25-150E, 180E, 195E	25～32	67, 105, 112	12-RAC 25- 55E	CC07	2.9, 3.0, 3.1
	-RAC 32-180E, 210E, 225E	32～45	77, 110, 122	16-RAC 32- 55E	CC08	3.6, 3.8, 3.8
	-RAC 43-180E, 195E, 225E, 240E	43～55	97, 130, 142, 157	20-RAC 43- 70E	CC12	3.9, 4.0, 4.3, 4.4
	-RAC 53-210E, 240E, 270E	53～70	117, 182, 177	26-RAC 53- 70E		5.1, 5.2, 5.8
	-RAC 70-255E, 285E, 315E	70～100	205, 235, 265	34-RAC 70- 85E		7.7, 8.1, 9.1
	-RAC100-225E, 290E, 315E	100～130	187, 252, 277	42-RAC100-100E		10.7, 10.7, 14.1
NC5-100	NC5-100-RAC 25-150E, 180E, 195E	25～32	67, 105, 112	12-RAC 25- 55E	CC07	3.9, 4.0, 4.1
	-RAC 32-180E, 210E, 225E	32～45	77, 110, 122	16-RAC 32- 55E	CC08	4.6, 4.8, 4.8
	-RAC 43-180E, 195E, 225E, 240E	43～55	97, 130, 142, 157	20-RAC 43- 70E	CC12	4.9, 5.0, 5.3, 5.4
	-RAC 53-210E, 240E, 270E	53～70	117, 182, 177	26-RAC 53- 70E		6.1, 6.2, 6.8
	-RAC 70-255E, 285E, 315E	70～100	205, 235, 265	34-RAC 70- 85E		8.7, 9.1, 10.1
	-RAC100-225E, 290E, 315E	100～130	225, 290, 315	42-RAC100-100E		11.7, 11.7, 15.1

★**"C" grade (Coated)** inserts are supplied as standard with the head. ☞**P.62** Please refer ☞**P.100** for cutting condition.
★Please refer ☞**P.218** for base holder, ☞**P.90** for spacer and ☞**P.67** for head.
★**For centre through coolant type, please add"-C"at the end of Code No. e.g. NC5-63-RAC53-165-C**
★Cartridges & Insert tips for the Heavy Duty Boring of Iron and Cast Iron(No letter), for Aluminum**(A)**, and for Through Hole & Multiple Sheets**(K)** are available.
Please refer ☞**P.67** for cartridges. Please add the letter "No letter ", **"A"** or **"K"** at the end of Code No. **e.g. NC5-63-RAC53-165A**
★**Cartridge & Insert for Alloy Steel (E) is recommended for boring on steel and stainless steel.**
e.g. NC5-63-RAC53-165E
★For **NC5-46,** modular connection system is applied. Please refer☞**P.218** for Base Holder.
Code No. of **RAC25** and **RAC32** with **CC** inserts are changed to **RAC25E** and **RAC32E**.
Please refer ☞**P.59, P.60**
★**When L length is required longer than standard, please specify the boring depth M.**



Coolant Through

NC5 ZMAC ADVANCED BORING ARBOR (ZMAC-V)

NIKKEN

JAPAN PAT.

Boring for Finishing

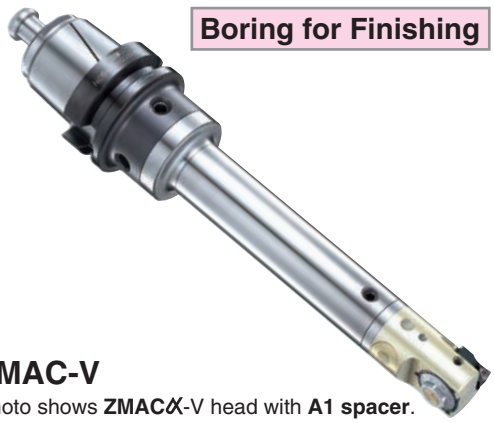

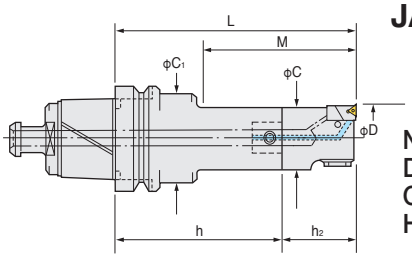

No Micro Vibration due to Double-Contact Support of Cartridge. Long Tool-Life & High Accuracy.



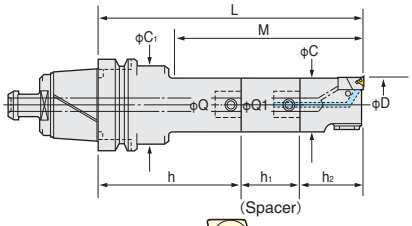

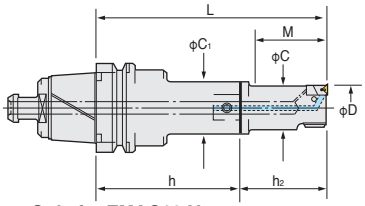

Only for ZMAC16-V

ZMAC-V

Photo shows **ZMACα**-V head with **A1 spacer**.

All codes shown are for heads with triangular inserts. For heads with rhomboid inserts please add the letter "R" to the code No. e.g. NC5-63-ZMAC32 R -150V

TAPER	Code No.	Boring Range D	Boring Depth M	P.103 Head No.	P.103 Insert No.	Weight (kg)
NC5-63	NC5- 63-ZMAC16-125V,135V	15.9~20.2	38, 48	12-ZMAC16-45V,55V	3MP	1.6, 1.6
	-ZMAC20-120V,135V,150V	19.8~25.2	45, 67, 75	9-ZMAC 20- 40V		1.6, 1.6, 1.7
	-ZMAC25-120V,150V,165V	24.8~32.2	52, 90, 97	12-ZMAC 25- 40V		1.7, 1.8, 1.8
	-ZMAC32-150V,180V,195V	31.8~42.2	77, 110, 122	16-ZMAC 32- 55V	4MP	2.2, 2.4, 2.4
	-ZMAC42-150V,180V,210V	41.8~55.2	97, 130, 157	20-ZMAC 42- 70V	6MP	2.7, 2.9, 3.2
	-ZMAC55-165V,210V,225V	54.8~70.2	135, 180, 195	26-ZMAC 55- 70V		3.6, 4.3, 4.3
	-ZMAC70-165V,180V,225V	69.8~85.2	165, 180, 225	34-ZMAC 70- 70V		5.1, 5.5, 6.5
	-ZMAC85-195V	84.8~100.2	195	42-ZMAC 85-100V		8.7
NC5-85	NC5- 85-ZMAC16-140V,150V	15.9~20.2	38, 48	12-ZMAC16-45V,55V	3MP	2.9, 2.9
	-ZMAC20-150V,165V,180V	19.8~25.2	45, 67, 75	9-ZMAC 20- 40V		3.0, 3.0, 3.1
	-ZMAC25-135V,165V,180V	24.8~32.2	52, 90, 97	12-ZMAC 25- 40V		
	-ZMAC32-180V,210V,225V	31.8~42.2	77, 110, 122	16-ZMAC 32- 55V	4MP	3.7, 3.8, 3.9
	-ZMAC42-180V,195V,225V,240V	41.8~55.2	97, 130, 142, 157	20-ZMAC 42- 70V	6MP	4.2, 4.2, 4.6, 4.7
	-ZMAC55-210V,240V,270V	54.8~70.2	117, 182, 177	26-ZMAC 55- 70V		5.7, 5.8, 7.3
	-ZMAC70-240V,270V,300V	69.8~85.2	190, 220, 250	34-ZMAC 70- 70V		8.2, 8.8, 9.7
	-ZMAC85-225V,290V,315V	84.8~100.2	187, 252, 277	42-ZMAC 85-100V		10.7, 13.2.14.2
	-ZMAC100-225V,290V,315V	99.5~140.5	225, 290, 315	42-ZMAC100-100V		12.0, 14.7, 14.6
	-ZMAC140-225V,290V,315V	139.5~180.5		42-ZMAC140-100V		12.8, 15.5, 16.2
NC5-100	NC5-100-ZMAC16-140V,150V	15.9~20.2	38, 48	12-ZMAC16-45V,55V	3MP	3.9, 3.9
	-ZMAC20-150V,165V,180V	19.8~25.2	45, 67, 75	9-ZMAC 20- 40V		4.0, 4.0, 4.1
	-ZMAC25-135V,165V,180V	24.8~32.2	52, 90, 97	12-ZMAC 25- 40V		
	-ZMAC32-180V,210V,225V	31.8~42.2	77, 110, 122	16-ZMAC 32- 55V	4MP	4.7, 4.8, 4.9
	-ZMAC42-180V,195V,225V,240V	41.8~55.2	97, 130, 142, 157	20-ZMAC 42- 70V	6MP	5.2, 5.2, 5.6, 5.7
	-ZMAC55-210V,240V,270V	54.8~70.2	117, 182, 177	26-ZMAC 55- 70V		6.7, 6.8, 8.3
	-ZMAC70-240V,270V,300V	69.8~85.2	190, 220, 250	34-ZMAC 70- 70V		9.2, 9.8,10.7
	-ZMAC85-225V,290V,315V	84.8~100.2	187, 252, 277	42-ZMAC 85-100V		11.7, 14.2.15.2
	-ZMAC100-225V,290V,315V	99.5~140.5	225, 290, 315	42-ZMAC100-100V		13.0, 15.7, 15.6
	-ZMAC140-225V,290V,315V	139.5~180.5		42-ZMAC140-100V		13.8, 16.5, 17.2

★MIN. dial readout : **ZMAC25-V** & smaller is 0.02mm on diameter. **ZMAC32-V** and larger are 0.01mm on diameter.
★**"C" grade (Coated) insert for Steel, Stainless & Cast Iron is supplied as Standard with the head (Smooth boring & Long tool-life).**
We would recommend **"B"** grade (**CBN**) insert for Hardened Steel & High Speed boring of Cast Iron. Please refer ☞**P.101** for cutting condition.
★Please refer ☞**P.218** for Shank, and ☞**P.90** for Spacer, and ☞**P.75, P.76** for Head.
★Centre Through Coolant function is available as standard.
★For **NC5-46,** modular connection system is applied. Please refer ☞**P.218** for Base Holder.
★The location of the cutting edge is same as the drive key for **ZMAC16-V** to **ZMAC42-V**.
★**When L length is required longer than standard, please specify boring depth M.**





High Speed Boring ZMACα-V ☞P.76

NC5

NC5 BALANCE-CUT RAC BORING ARBOR for LARGE DIA. NIKKEN

RAC

For Roughing

- With slight adjust screw
- Boring Dia:ϕ130～580mm

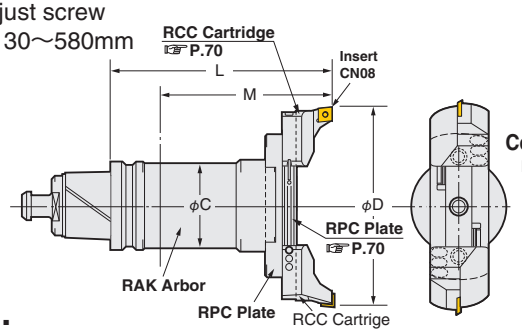

Centre-Through available.
Photo shows with coolant nozzle.

P.62

Boring Dia:ϕ130～580mm **for Roughing.**

TAPER	Code.No	D MIN.～MAX.	L	C	Arbor No.	RPC Plate No.	Cartridge No. for Large dia.	Weight (kg)
NC5- 63	NC5-63 -RAC130-205	130～180	205	61	NC5-63-RAK-130A	RPC-130	For Heavy Duty Boring of Iron and Cast Iron RCC-130 ×2 Insert Tip CN08	6.8
	-RAC180-205	180～230				-180		7.8
NC5- 85 NC5-100	NC5-85 (NC5-100) -RAC130-185, 235, 285	130～180	185, 235, 285	90	NC5-85-RAK-110A, 160A, 210A (NC5-100)	RPC-130		11.3, 12.8, 15.8
	-RAC180-185, 235, 285	180～230				-180		11.8, 13.3, 16.3
	-RAC230-185, 235, 285	230～280				-230		12.3, 13.8, 16.8
	-RAC280-185, 235, 285	280～330				-280		12.8, 14.3, 17.3
	-RAC330-210	330～380	210	98	NC5-85-RAK330-125 (NC5-100)	RPC-330		15.5
	-RAC380-210	380～430				-380		16.5
	-RAC430-210	430～480				-430		17.5
	-RAC480-210	480～530				-480		18.5
	-RAC530-210	530～580				-530		19.5

★The Code No. on above table are the boring arbors with **RCC-130** cartridge (Inset tip: **CN08**) the Heavy Duty Boring of Iron and Cast Iron . Please refer ☞ **P.100** for cutting condition.
★Boring arbor with cartridges & insert for Steel, Stainless Steel and Cast Iron **(E)**, for Aluminum **(A)** and for Through Hole & Multi Sheets **(K)** are available.
Please refer ☞ **P.70** for cartridges. **e.g. NC5-100-RAC130-185E**
★Arbor, Plate and Cartridge are delivered in separate packages
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. NC5-63-RAC180-205-C.**
★When ordering, please let us know machine maker and model no. to avoid the interference with tool magazine of **ATC**.
★The location of cutting edge is same as drive key in standard.
The different location is available, please specify **θ** in Code No. **e.g. NC5-100-RAC180-235 (90°)**

NC5 BALANCE-CUT BAC ADVANCED BORING ARBOR for LARGE DIA. NIKKEN

JAPAN PAT.

BAC-V

For Finishing

- Min. dial read out:main scale dia. 0.02mm,sub scale dia.0.002mm
- Boring Dia:ϕ130～595mm

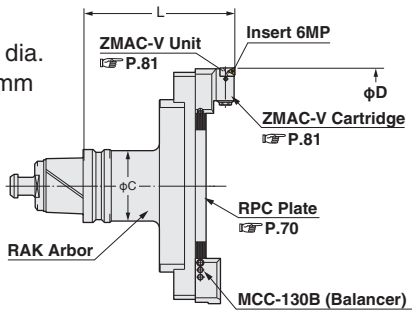

P.103

Boring Dia:ϕ130～595mm **for Finishing.**

TAPER	Code.No	D MIN.～MAX.	L	C	Arbor No.	RPC Plante No	Cartridge (Balancer)	Weight (kg)
NC5- 63	NC5-63 -BAC130-205V	130～195	205	61	NC5-63-RAK-130A	RPC-130	MCCZ-130V (MCC-130B) Insert Tip 6MP	6.8
	-BAC180-205V	180～245				-180		7.8
NC5- 85 NC5-100	NC5-85 (NC5-100) -BAC130-185V, 235V, 285V	130～195	185, 235, 285	90	NC5-85-RAK-110A, 160A, 210A (NC5-100)	RPC-130		13.0, 14.5, 17.5
	-BAC180-185V, 235V, 285V	180～245				-180		13.5, 15.0, 18.0
	-BAC230-185V, 235V, 285V	230～295				-230		14.0, 15.5, 18.5
	-BAC280-185V, 235V, 285V	280～345				-280		14.5, 16.0, 19.0
	-BAC330-210V	330～395	210	98	NC5-85-RAK330-125 (NC5-100)	RPC-330		16.2
	-BAC380-210V	380～445				-380		16.5
	-BAC430-210V	430～495				-430		17.5
	-BAC480-210V	480～545				-480		18.5
	-BAC530-210V	530～595				-530		19.5

★**"C" grade (Coated)** Inserts are supplied as standard. Please refer ☞ **P.101** for cutting condition.
★Arbor, Plate and Cartridge are delivered in separate packages.
★When ordering, please let us know machine maker and model no. to avoid the interfererce with tool magazine of **ATC**.
★The location of cutting edge is same as drive key in standard.
The different location is available, please specify **θ** in Code No. **e.g. NC5-100-BAC180-235V (90°)**
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. NC5-63-BAC180-205V-C.**



View from Cutting edge.

NC5 MODULAR TYPE BASE HOLDER

NIKKEN

Q

Fig.1

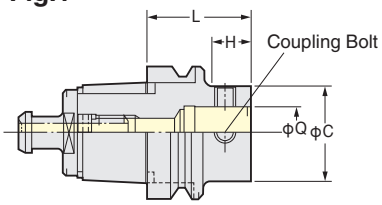

Fig.2



Fig.3



TAPER	Code No.	Coupling Dia Q	L	C	C_1	H	H_1	Coupling Bolt No.	Fig.	Weight(kg)
NC5- 46	NC5- 46-Q26- 40	26	40	50	45	18	6	B26N	3	0.4
NC5- 63	NC5- 63-Q 9- 80, 95	9	80, 95	19	30	48, 63	5, 27	B19	2	1.6, 1.7
	-Q12- 80, 110	12	80, 110	24	35	48, 78	12, 50	B12		1.6, 1.7
	-Q16- 95, 125	16	95, 125	31	42	63, 93	22, 55	B16		1.9, 2.1
	-Q20- 80, 110	20	80, 110	40	50	48, 78	27, 60	B20		2.0, 2.2
	-Q26- 50, 95, 140	26	50, 95, 140	50	—	20, 65, 110	—	B26N	1	0.9, 1.5, 2.3
	-Q34- 95, 110	34	95, 110	64	62	68, 83	55, 70	B34	3	3.0, 3.4
	-Q42- 95	42	95	83	62	68	55	B42		3.6
NC5- 85	NC5- 85-Q 9-110, 125	9	110, 125	19	40	72, 87	5, 27	B19	2	2.9, 3.1
	-Q12- 95, 125	12	95, 125	24	44	57, 87	12, 50	B12		2.5, 3.2
	-Q16-125, 155	16	125, 155	31	50	87, 117	22, 55	B16		3.6, 3.8
	-Q20-110, 125	20	110, 125	40	60	72, 87	27, 60	B20		3.7, 3.8
	-Q26- 65, 140, 170	26	65, 140, 170	50	65	27, 102, 132	—, 40, 110	B26N	1, 2, 2	2.5, 4.6, 4.7
	-Q34-140, 170, 200	34	140, 170, 200	64	80	102, 137, 167	—, 117, 147	B34		4.5, 6.4, 6.8
	-Q42-125, 190	42	125, 190	83	—	87, 152	—	B42	1	8.0
NC5-100	NC5-100-Q 9-110, 125	9	110, 125	19	40	67, 82	5, 27	B19	2	4.0, 4.2
	-Q12- 95, 125	12	95, 125	24	44	52, 82	12, 50	B12		4.1, 4.3
	-Q16-125, 155	16	125, 155	31	50	82, 112	22, 55	B16		4.7, 4.9
	-Q20-110, 125	20	110, 125	40	60	67, 82	27, 60	B20		4.8, 4.9
	-Q26- 65, 140, 170	26	65, 140, 170	50	65	27, 97, 127	—, 45, 110	B26N	1, 2, 2	3.6, 5.7, 5.8
	-Q34-140, 170, 200	34	140, 170, 200	64	80	97, 127, 157	—, 117, 147	B34		5.6, 7.5, 7.9
	-Q42-125, 190	42	125, 190	83	—	87, 152	—	B42	1	9.1

★ϕC of **Q26** base holder has been increased from 45mm to 50mm due to improvement of its rigidity.
★All base holders have a centre through coolant hole.
★The Coupling screw & wrench are supplied as standard.
★When L length is required longer than standard, please specify the boring depth M.



NC5 FACE MILL ARBOR

NIKKEN

FMA

For JIS B4113 Face Mill Cutter
FMH arbor is available. Please contact us.

■For the Face Milling of
ϕ80～ϕ200mm
For the NIKKEN
PRO-END MILL

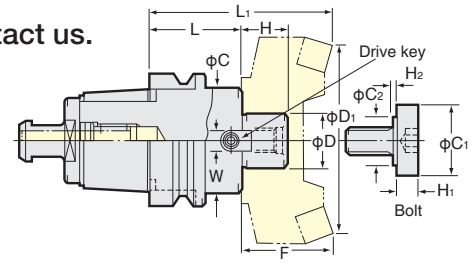

TAPER	Code No. NC5 No. -ϕD -L	H	C	W	C_1	C_2	H_1	H_2	Demension of Arbor with cutter L_1	D_1	F	Drive Key	Bolt	Weight (kg)
NC5- 46	NC5- 46-FMA25.4 -45	22	50	9.5	33	23	10	2	95	80	50	FW5	FM12	0.6
NC5- 63	NC5- 63-FMA25.4 -45,90	22	58	9.5	33	23	10	2	95, 140	80	50	FW5	FM12	1.6, 3.2
	-FMA31.75 -45,90	30	63	12.7	40			6	105, 150	100	60	FW13	FM16	1.7, 3.1
	-FMA38.1 -60	34	80	15.9	50	27	14		120	125		FW18	FM20	2.9
NC5- 85	NC5- 85-FMA25.4 -45,105	22	58	9.5	33	23	10	2	95, 155	80	50	FW5	FM12	2.7, 3.8
	-FMA31.75 -45,105	30	70	12.7	40			6	105, 165	100	60	FW12, FW13	FM16	3.0, 4.3
	-FMA38.1 -45,90	34	80	15.9	50	27	14		105, 150	125		FW18, FW19	FM20	3.4, 4.8
	-FMA47.625-70	38	128.57	25.4	—	—	—	—	130	200		FW26	*	6.3
	-FMA50.8 -65	36	100	19.05	65	37	14	10	125	160		FW23	FM24	5.0
NC5-100	NC5-100-FMA25.4 -45,105	22	58	9.5	33	23	10	2	95, 155	80	50	FW5	FM12	3.7, 5.0
	-FMA31.75 -45,105	30	70	12.7	40			6	105, 165	100	60	FW12, FW13	FM16	4.5, 6.2
	-FMA38.1 -45,95	34	80	15.9	50	27	14		105, 155	125		FW18, FW19	FM20	4.3, 5.8
	-FMA47.625-75	38	128.57	25.4	—	—	—	—	135	200		FW26	*	5.8
	-FMA50.8 -45	36	100	19.05	65	37	14	10	105	160		FW23	FM24	4.9

★The "**D**" in the Code No. shows centre bore dia. of the milling cutter.
★The above arbors are suitable for JIS B4113 milling cutter.
★The arbor marked * requires 4 fixing bolts (9GM16-55).
★Drive keys, wrench and bolt are supplied as standard.
★The above weight is for arbor and pull stud only. (not including milling cutter.)

★FMC22 type arbor is suitable for the NIKKEN PRO-END MILL ϕ50 mm.
NC5-46-FMC22-40, NC5-53-FMC22-40, NC5-63-FMC22-45, NC5-85-FMC22-45, NC5-100-FMC22-60
★Centre through coolant type arbor for the NIKKEN PRO-END MILL is also available.
Please add "**C**" of the Code No. **e.g. NC5-63-FMA25.4C-45**
★Centre Through Coolant type arbor except NIKKEN PRO-END MILL, please provide the drawing of milling cutters.
★For high speed application, balancing must be required after fixing the milling cutter.

NC5 MORSE TAPER SLEEVE TYPE A

NIKKEN

MTA

■For Drill & Reamer with MT No.1～No.4 Shank.



TAPER	Code No.	MT No.	C	W	Weight (kg)
NC5- 46	NC5- 46-MTA1- 85	MT1	25	5.6	0.9
	-MTA2- 95	MT2	32	6.6	1.1
	-MTA3-115	MT3	40	8.4	1.3
NC5- 63	NC5- 63-MTA1- 85	MT1	25	5.6	1.2
	-MTA2- 95	MT2	32	6.6	1.3
	-MTA3-115	MT3	40	8.4	1.6
	-MTA4-140	MT4	50	12.4	2.2

★Please contact with us for the Centre Through Coolant type Sleeve.

TAPER	Code No.	MT No.	C	W	Weight (kg)
NC5- 85	NC5- 85-MTA1- 85	MT1	25	5.6	2.6
	-MTA2- 95	MT2	32	6.6	2.7
	-MTA3-115	MT3	40	8.4	3.0
	-MTA4-140	MT4	50	12.4	3.5
NC5-100	NC5-100-MTA1- 85	MT1	25	5.6	4.1
	-MTA2- 95	MT2	32	6.6	4.2
	-MTA3-115	MT3	40	8.4	4.5
	-MTA4-140	MT4	50	12.4	5.1

NC5 STUB ARBOR

NIKKEN

SCA

■No Vibration at slotting.

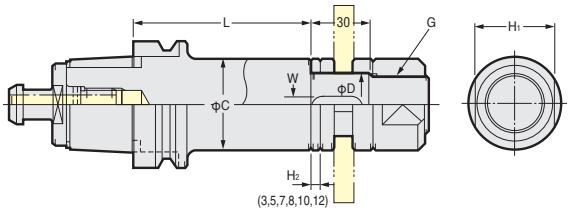

TAPER	Code No.(Inch)	H1	C	W	G	Weight(kg)	Code No.(Metric)
NC5- 63	NC5- 63-SCA12.7 -75	17	20	-	M12	1.2	NC5- 63-SCA13-75
	-SCA15.875-75	23	26	3.18(4)	M14	1.4	-SCA16-75
	-SCA22.225-75	29	34	3.18(4)	M20	1.7	-SCA22-75
	-SCA25.4 -75	32	40	6.35(7)	M24	2.0	-SCA27-75
	-SCA31.75 -90	41	46	7.92(8)	M30	2.6	-SCA32-90
NC5- 85	NC5- 85-SCA12.7 -75	17	20	-	M12	2.6	NC5- 85-SCA13-75
	-SCA15.875-90	23	26	3.18(4)	M14	2.8	-SCA16-90
	-SCA22.225-90	29	34	3.18(4)	M20	3.2	-SCA22-90
	-SCA25.4 -90, 135	32	40	6.35(7)	M24	3.5	-SCA27-90
	-SCA31.75 -90, 135	41	46	7.92(8)	M30	3.9	-SCA32-95
NC5-100	NC5-100-SCA12.7 -75	17	20	-	M12	4.0	NC5-100-SCA13-75
	-SCA15.875-90	23	26	3.18(4)	M14	4.2	-SCA16-90
	-SCA22.225-90	29	34	3.18(4)	M20	4.4	-SCA22-90
	-SCA25.4 -90	32	40	6.35(7)	M24	4.5	-SCA27-90
	-SCA31.75 -95, 135	41	46	7.92(8)	M30	4.7	-SCA32-90
	-SCA38.1 -95, 135	46	55	9.52(10)	M36	4.9	-SCA40-90

★The **SCA**○○ Code No. shows shaft diameter. (**"D"**in the figure) ★Guide Key and Collars are supplied as standard. ★The figures in ( ) of W are for Metric.

NC5 TAPPER CHUCK

NIKKEN

Z

■Built-in Floating Mechanism and Torque-Limiter Mechanism on Tap Collet.

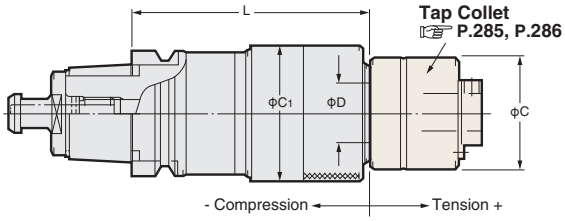

TAPER	Code No.	Tapping Capability M	Tapping Capability U	Tapping Capability P	D	C	C1	Tap Collet	Weight (kg)
NC5- 63	NC5- 63-Z12- 90	M 2～M12	1/8～1/2	P 1/16～1/4	19	32	45	ZKG12	1.5
	-Z16-120	M 3～M16	1/8～5/8	P 1/8～3/8	25	39	55	ZKG16	2.0
	-Z24-120	M 8～M24	1/2～ 1	P 1/4～5/8	30	46	68	ZKG24	2.1
	-Z38-160	M18～M38	3/8～1 3/8	P 3/8～ 1	45	78	85	ZKN38	6.7
NC5- 85	NC5- 85-Z12-105	M 2～M12	1/8～1/2	P 1/16～1/4	19	32	45	ZKG12	3.3
	-Z16-120	M 3～M16	1/8～5/8	P 1/8～3/8	25	39	55	ZKG16	4.5
	-Z24-120	M 8～M24	1/2～ 1	P 1/4～5/8	30	46	68	ZKG24	4.9
	-Z38-175	M18～M38	3/8～1 3/8	P 3/8～ 1	45	78	85	ZKN38	8.4
	-Z65-195	M36～M100	1～3 3/4	P 1～ 3	68	110(125)	110	ZKN65	8.7
NC5-100	NC5-100-Z12-130	M 2～M12	1/8～1/2	P 1/16～1/4	19	32	45	ZKG12	4.3
	-Z16-135	M 3～M16	1/8～5/8	P 1/8～3/8	25	39	55	ZKG16	5.2
	-Z24-125	M 8～M24	1/2～ 1	P 1/4～5/8	30	46	68	ZKG24	5.8
	-Z38-155	M18～M38	3/8～1 3/8	P 3/8～ 1	45	78	85	ZKN38	8.3
	-Z65-195	M36～M100	1～3 3/4	P 1～ 3	68	110(125)	110	ZKN65	9.0

★Please refer ☞ P.285, P.286 for Tap Collet.

★For Synchronized Tapping : **ZH** Tapper Chuck without tension/compression mechanism is available. It improves tap life remarkably by absorbing fine pitch error completely with the small floating mechanism. Please use **ZH** Tapper Chuck only with **ZMK** Tap Collet without torque-limiter mechanism. Please refer ☞ P.289.

★Centre through coolant type with high pressure or oil mist type is available. In these types, **OZMK-OM** collet is used.

NC5 TAPER GAUGE・TEST BAR

NIKKEN

SGT

TB

TAPER	Gauge	Test Bar(φD-L)
NC5- 46	NC5- 46-SGT	NC5- 46-TB40-200
NC5- 63	NC5- 63-SGT	NC5- 63-TB40-300
NC5- 85	NC5- 85-SGT	NC5- 85-TB40-300
NC5-100	NC5-100-SGT	NC5-100-TB40-300

★Above Code No. includes Ring GAUGE(**SG-R**)and Plug Gauge(**SGT-P**).
★Dial Gauge is not included with the Ring Gauge.

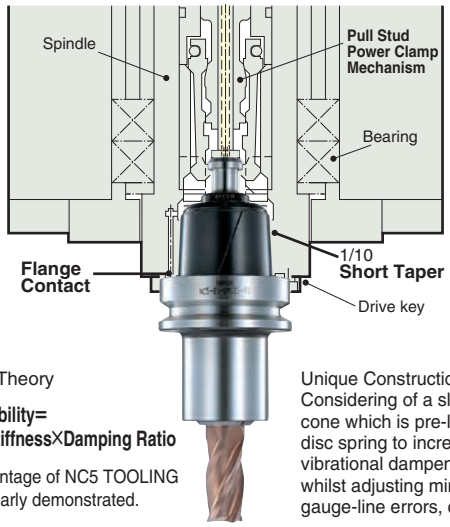

E.H.Merritt's Theory

Chattering Stability=
Static Stiffness×Damping Ratio

Thus, the advantage of NC5 TOOLING SYSTEM is clearly demonstrated.

Unique Construction:
Considering of a slotted taper cone which is pre-loaded by a disc spring to increase its vibrational dampening effect whilst adjusting minute gauge-line errors, completely.

NC5 TOOLING SYSTEM is basically developed for the Machine with Centre Through Coolant capability, however, of course, the system is also suitable for the Machine without Centre Through Coolant capability.

NC5 TOOLING SYSTEM takes advantage of the powerful pulling force to improve its static stiffness. Therefore, please ensure that at least the following pulling force figures in the table are required for each size of **NC5 TOOLING**. The Pulling Force Measuring Tool with special Pull Stud is available for the pulling force measurement.

For manufacturing of **NC5** Machine Spindle, we could supply the Gauge for Machine Spindle as well as any other know-how about Spindle Flange Cleaning, Drive Key Mechanism and so on. Please contact with us for any technical correspondences if required.

CLP-P

Pulling Force Measuring Tool

Even the use with 5m cable, it can be measured both manual tool change and ATC.

☞ **P.297**

Pull Stud Power Clamp & Lock Mechanism

Please ask for the details of **NIKKEN POWER5 SYSTEM**, Powerful Pulling & Locking Mechanism in order to gain maximum performance of the NIKKEN NC5 TOOLING System.

TAPER	Spindle ID	POWER 5 Code No.	Pulling Force (KN)	Measuring Tool	
				Code No.	Pull Stud
NC5- 46	30	POWER5- 46-D30	4.5～ 7	NC5- 46-CLP-D30-P	PS-N46A
	35	-D35	5.5～ 8	-D35-P	-N46
NC5- 63	40	- 63-D40	11～14	- 63-CLP-D40-P	-N63A
	45	-D45	14～17	-D45-P	-N63
NC5- 85	50	- 85-D50	20～23	- 85-CLP-D50-P	-N85
NC5-100	55	-100-D55	24～27	-100-CLP-D55-P	-N100

★Pulling Force is only guideline and depends on the M/C specfication. ★Pull Stud Code No. is without hole.

DIMENSION of NC5 TOOL SHANK

NIKKEN

NC5-100 (BT50 equivalent)

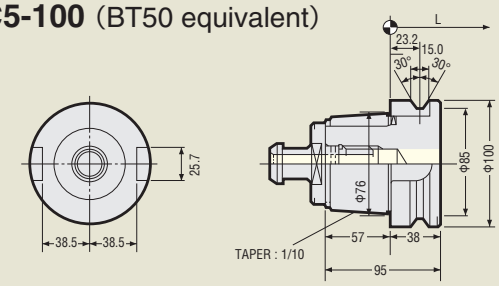

Dimensions of V Flange are same as BT50.

NC5-85 (BT45 equivalent)

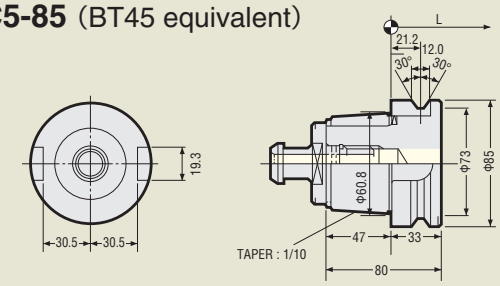

Dimensions of V Flange are same as BT45.

NC5-63 (BT40 equivalent)

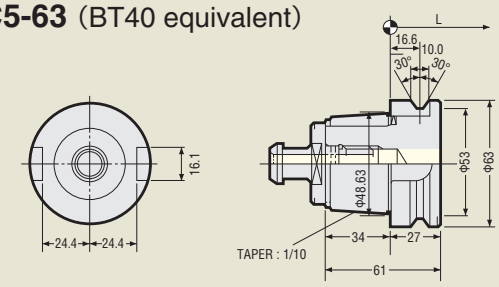

Dimensions of V Flange are same as BT40.

NC5-46 (BT30 equivalent)

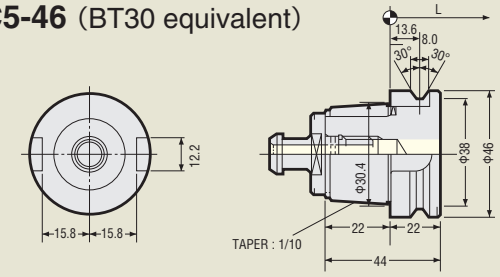

Dimensions of V Flange are same as BT30.
(※Width of drive key grooves are different.)

HSK TOOLING SYSTEM

NIKKEN

HSK A…HSK40A, HSK50A, HSK63A, HSK100A



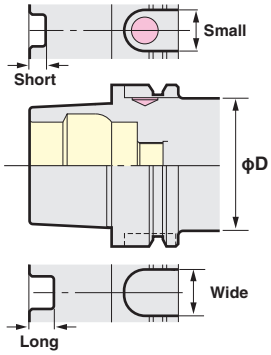

HSK A shank is based on **ISO12164-1 (DIN69893-1)** and Hollow Shank Taper with 1/10 Taper and Double Contact System of Taper & Flange. Its dimension is unsymmetrical shape such as;

- **Depth of Drive Keys Slots are different.**
- **Width of U Groove are different.**
- **V Notch on one side.**

1. **It's not well balanced due to above unsymmetrical shape, therefore NIKKEN HSK A Shank has a hole and a flat for mass balancing as standard.**
2. Hole for manual clamp is not standardized for the size smaller or equal to **HSK50A**. **HSK63A and HSK100A tools without a hole for manual clamp are also available for high speed application.**
3. **HSK100A and HSK63A** will gradually be replaced with ID holes.
4. **HSK** tool is clamped to the main spindle with clamping force more than about 2 times of **BT** tool by intensifying clamp mechanism.

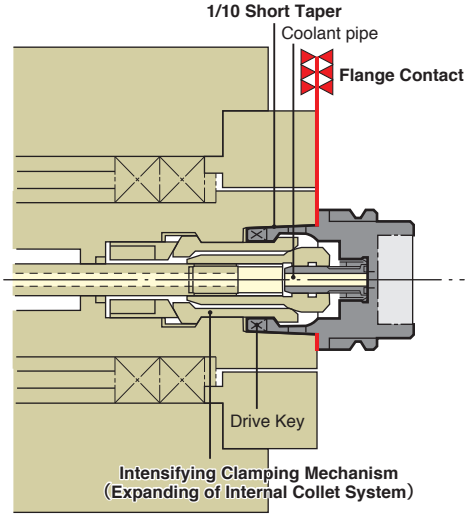

HSK Double Face Contact System

Clamping Force

TAPER	HSK40A	HSK50A	HSK63A	HSK100A
Clamp Force	6.8kN	11kN	18kN	45kN

5. A big clamping force and the double face contact system of 1/10 short taper & flange largely improved the static stiffness as the tool interface.
6. Higher repeatability of **ATC** is accomplished due to the run-out accuracy of contact flange for taper is within 0.002mm.

Repeatability of ATC

TAPER	L	Repeatability		
		X	Y	Z
HSK 25	40	0.002	0.002	0.002
32	50			
40	60			
50	75			
63	100			
100	150			

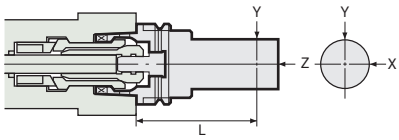

HSK E & HSK F…HSK25E, HSK32E, HSK40E, HSK50E, HSK63E, HSK63F

The ISO standard for **HSK**, "ISO12164-1, 2, 3, 4, 5, 6: 2023", was revised in 2023, with the addition of **E**, **F** types as specified in DIN69893:2003, as well as the **AB** type, which is a balanced type. The main changes are as follows;

- The **A/C** type remains unchanged.
- The **AB** type has been added as a balanced type for the **A** type. This is available as a option.
- The **E** type (DIN) has been added as the **EB** type. The NIKKEN Code No. remains "**E**" (e.g. **HSK63E**).
- The **F** type (DIN) has been added as the **ES** type. The NIKKEN Code No. remains "**F**" (e.g. **HSK50F**).
- The **TA** type has been added as a stationary tool shank with the same restricted dimensions under the flange as the **A** type.

HSK50E **HSK63F**

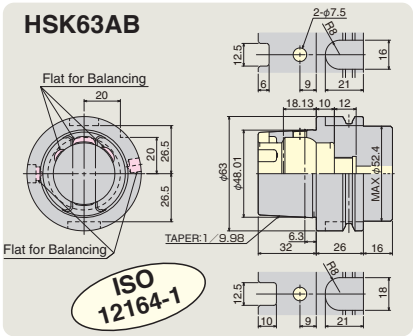

⚠ Caution

- Always ensure that swarf does not attach at the spindle flange surface, because of the double contact system. Generally the inside of the machining envelope is always covered swarf. This means that there is a possibility that the flange of the tooling may collect swarf easily at the ATC. It is therefore important that the machining envelope is regularly cleaned (Clean the ATC arm, the route through which the tooling passes, the tool pot and the spindle surfaces etc.) at least every 3 months.
- Always ensure that M/C has the mechanism to confirm the perfect flange contact.
- Always ensure that M/C has the mechanism to clean the spindle flange surface.

HSK TOOLING SYSTEM

NIKKEN

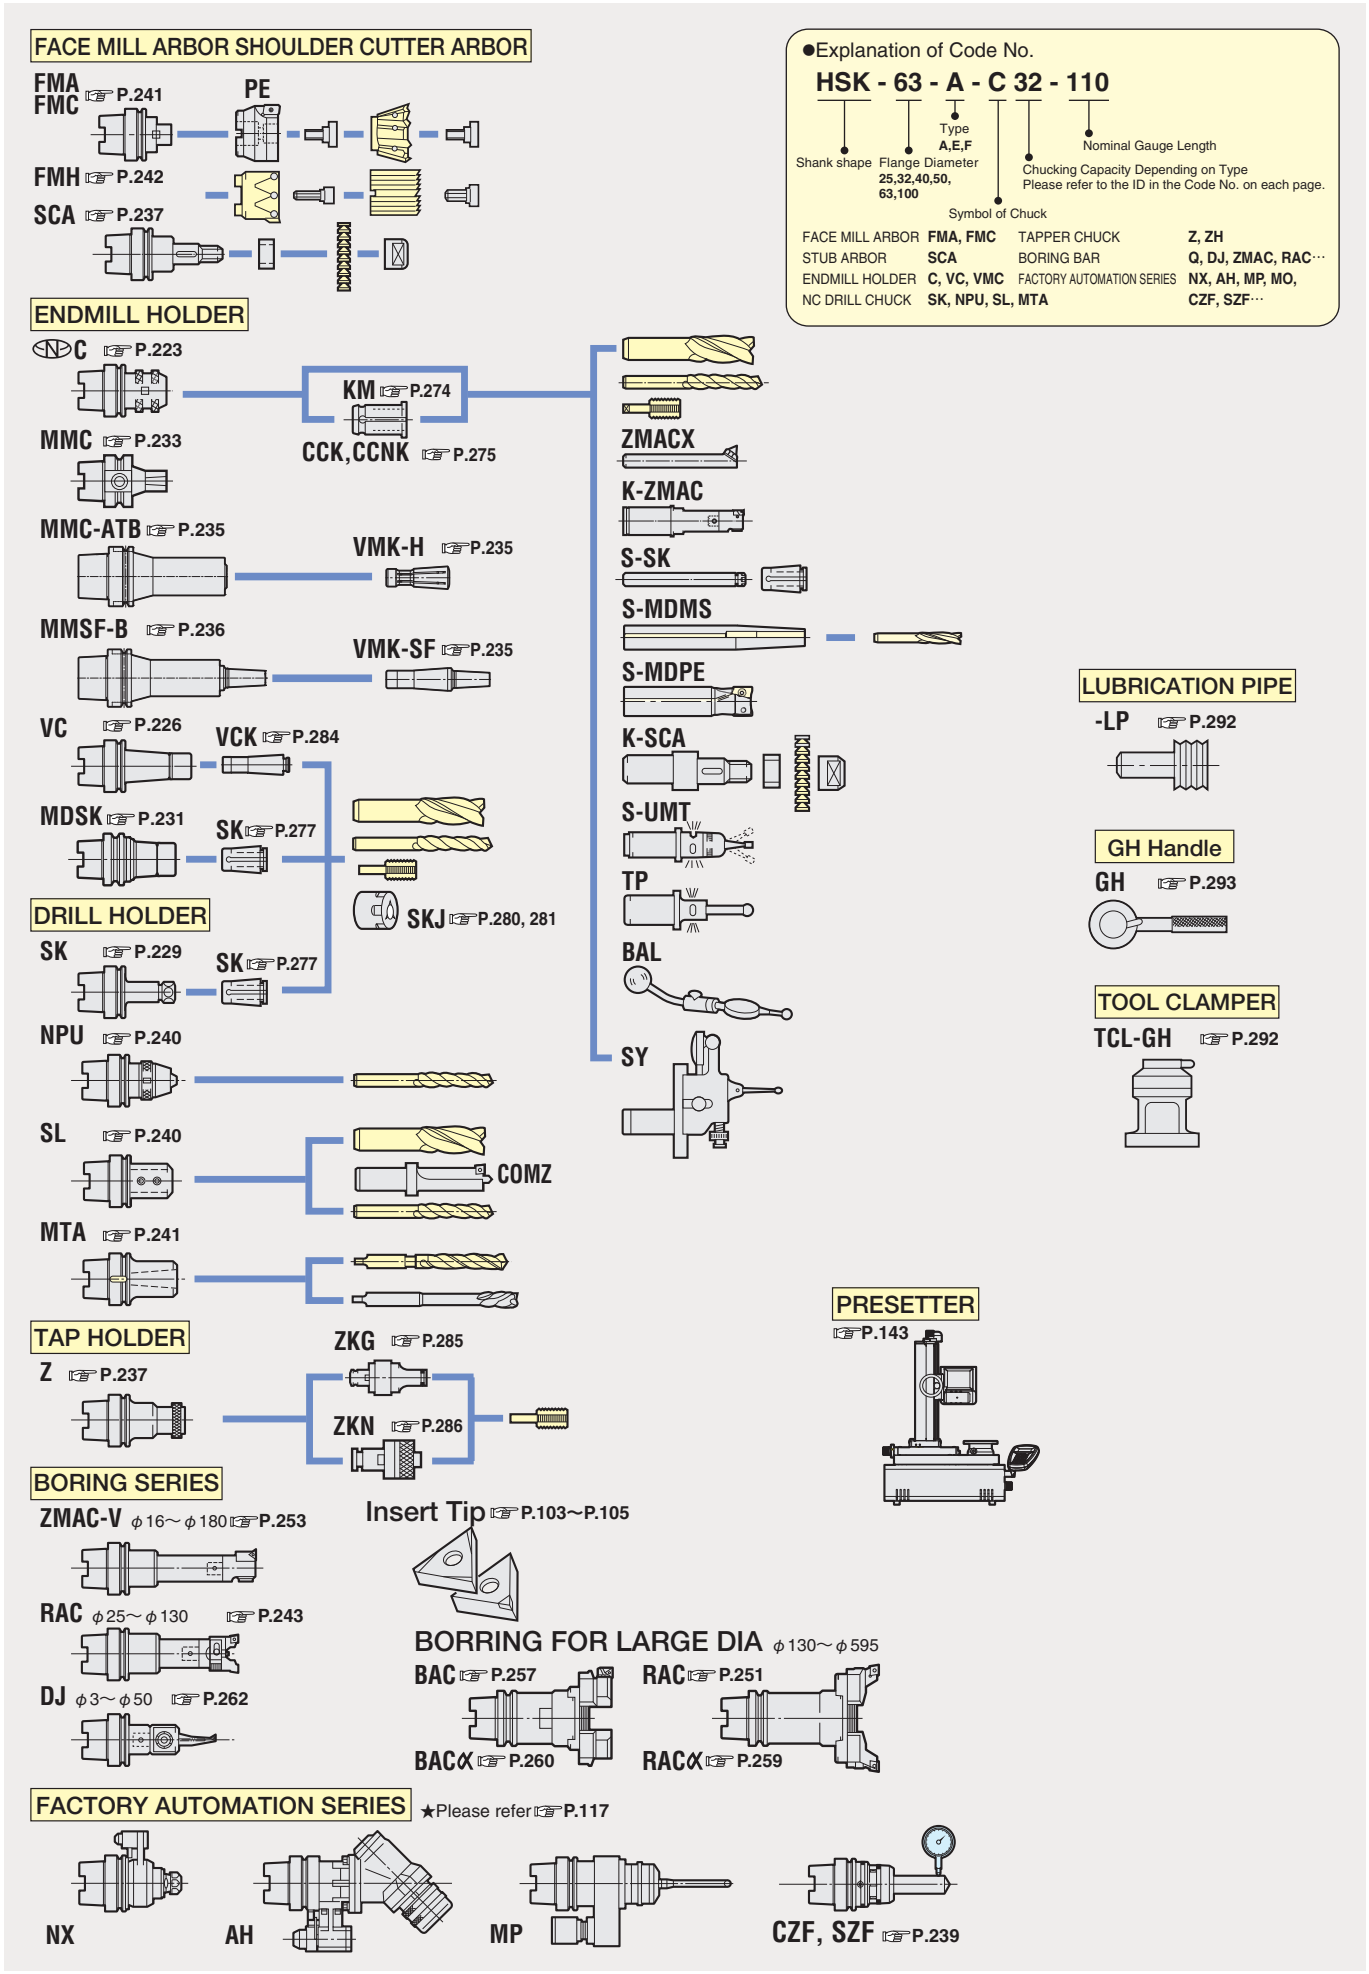

HSK

HSK HIGH SPEED MILLING CHUCK

NIKKEN

C-G
High Pressure Centre Through (MAX. 7MPa)
Photo shows High Speed Milling Chuck

ANNIVERSARY Type
—Powerful gripping torque—
- **High rigidity**
- **High precision**
- **Compact design**



Fig.1



Fig.2

High Speed

TAPER	Code No.	C_1	D	D_1	L	ℓ_1	ℓ_2	ℓ_3	MAX. r/min	Weight (kg)	Fig.	Collet
HSK 40A	HSK 40A-C12- 80G	33	12	12	80	48	53	58	30,000	0.5	2	KM12 CCK12
	-C16- 80G	40	16	16	80	50	57	60		0.7		KM16 CCK16
	-C20-100G*2	48	20	-	100	57	-	-		1.2		KM20 NK20 CCK20 CCNK20
HSK 50A	HSK 50A-C12- 80G	33	12	12	80	48	53	56	30,000	0.8	1	KM12 CCK12
	-C16- 90G	40	16	16	90	50	57	60		1.0	2	KM16 CCK16
	-C20- 95G*2	48	20	20	95	57	65	68		1.2		KM20 NK20 CCK20 CCNK20
HSK 63A	HSK 63A-C12- 90G	33	12	12	90	48	53	58	30,000	1.3	1	KM12 CCK12
	-C16- 75G*2	40	16	-	75	50	-	-	25,000	1.2		KM16 CCK16
	- 90G			16	90		57	60		1.4		
	-120G				120		58	65		1.7		
	-C20- 85G*2	48	20	-	85	60	-	-		1.5		KM20 NK20 CCK20 CCNK20
	- 95G			20	95	57	65	68		1.6		
	-110G*2				110		66	80		1.8		
	-120G				120					1.9		
	-135G				135		72			2.1		
	-C25- 90G	55	25	25	90	57	62	65	20,000	1.7	2	KM25 NK25 CCK25 CCNK25
	-100G				100	60	72	75		1.9		
	-130G				130			80		2.3		
	-C32-110G	68	32	32	110	65	80	83		2.2		KM32 NK32 CCK32 CCNK32
	-130G			32	130	70	77	81		2.6		
	-150G				150					2.6		
HSK 100A	HSK100A-C16- 90G	40	16	16	90	50	57	60	20,000	2.4	1	KM16 CCK16
	-135G				135		58	65		3.0		
	-165G				165					3.4		
	-C20-115G	48	20	20	115	57	66	80		3.0		KM20 NK20 CCK20 CCNK20
	-135G				135					3.6		
	-165G				165					4.1		
	-C25-115G	55	25	25	115	60	72		15,000	3.3		KM25 NK25 CCK25 CCNK25
	-135G				135					3.6		
	-165G				165					4.2		
	-C32-115G	68	32	32	115	65	78	83	12,000	3.2		KM32 NK32 CCK32 CCNK32
	-135G				135	70	77	81		4.0		
	-165G				165					4.8		
	-C42-115P*1	86	42	42	115	73	80	83		4.8	2	KM42 NK42 CCK42 CCNK42
	-135P*1				135		100	103		5.9		
	-165P*1				165		115	125		7.0		

★Please note the acceptable shank tolerance is h6.
★Please refer ☞**P.274, P.275** for **KM** and **CCK** collet.
★**GH Handle** is available as an option. ☞**P.293**
C12G : GH12, C16G : GH16, C20G : GH20, C25G : GH25, C32G : GH32
★**NK, CCNK, ONK and OJK collet can not be used for the chucks marked ＊2.**
★Please contact us for the extra long length.
★Please refer ☞**P.273** for Milling chuck Coolant Solution.
★Lubrication Pipe is optional. Please refer ☞**P.292**

★**GFS** type ☞**P.33** is available for **C25, C32** and **C42**.

GFS type
For machining of aluminum
JAPAN PAT.

HSK

HSK MILLING CHUCK

NIKKEN

C
High Pressure Centre Through (MAX. 7MPa)

ANNIVERSARY Type
—Powerful gripping torque—
- **High rigidity**
- **High precision**
- **Compact design**



Fig.1



Fig.2

TAPER	Code No.	C_1	D	D_1	L	ℓ_1	ℓ_2	ℓ_3	Weight (kg)	Fig.	Collet
HSK 40A	HSK 40A-C12- 80	33	12	12	80	48	53	58	0.5	2	KM12 CCK12
	-C16- 80	44	16	16	80	50	57	60	0.7		KM16 CCK16
	-C20-100 *2	52	20	-	100	57	-	-	1.2		KM20 NK20 CCK20 CCNK20
HSK 50A	HSK 50A-C12- 80	33	12	12	80	48	53	56	0.8	1	KM12 CCK12
	-C16- 90	44	16	16	90	50	57	60	1.0	2	KM16 CCK16
	-C20- 95 *2	52	20	20	95	57	65	68	1.2		KM20 NK20 CCK20 CCNK20
	-C25-100	55 *1	25	25	100	56	72	75	1.5		KM25 NK25 CCK25 CCNK25
	-C32-115	64 *1	32	-	115	66	-	-	1.9		KM32 NK32 CCK32 CCNK32
HSK 63A	HSK 63A-C12- 90	33	12	12	90	48	53	58	1.3	1	KM12 CCK12
	-C16- 75 *2	44	16	-	75	50	-	-	1.2		KM16 CCK16
	- 90			16	90		57	60	1.4		
	-120				120		58	65	1.7		
	-200				200				2.4		
	-C20- 85 *2	52	20	-	85	60	-	-	1.5		KM20 NK20 CCK20 CCNK20
	- 95			20	95	57	65	68	1.6		
	-110				110		66	80	1.8		
	-120				120				1.9		
	-135				135		72		2.1		
	-C25- 90 *2	60	25	25	90	57	62	65	1.7	2	KM25 NK25 CCK25 CCNK25
	-100				100	60	72	75	1.9		
	-130				130			80	2.3		
	-150				150				2.6		
	-C32-110 *2	69	32	32	110	65	80	83	2.2		KM32 NK32 CCK32 CCNK32
	-130				130	70	77	81	2.6		
	-150				150				3.0		
HSK 100A	HSK100A-C16- 90	44	16	16	90	50	57	60	2.4	1	KM16 CCK16
	-135				135		58	65	3.0		
	-165				165				3.4		
	-200				200				3.7		
	-C20-115	52	20	20	115	57	66	80	3.3		KM20 NK20 CCK20 CCNK20
	-135				135				3.6		
	-165				165				4.1		
	-C25-115	60	25	25	115	60	72		3.3		KM25 NK25 CCK25 CCNK25
	-135				135				3.6		
	-165				165				4.2		
	-C32-115	69	32	32	115	65	78	83	3.2		KM32 NK32 CCK32 CCNK32
	-135				135	70	77	81	4.0		
	-165				165				4.8		
	-200				200				5.7		
	-250				250				7.0		
	-300				300				8.9		
	-C42-115	86	42	42	115	73	80	83	4.8	2	KM42 NK42 CCK42 CCNK42
	-135				135		100	103	5.9		
	-165				165		115	125	7.0		
	-200				200				8.5		
	-250				250				10.8		
	-300				300				12.4		

★Spanner is available as an option.
C12 : 9HC12A C16 : 9HC16 C20 : 9HC22
C25 : 9HC25 C32 : 9HC32 C42 : 9HC42
＊1 C25 & φC1=55 : 9HC22, C32 & φC1=64 : 9HC25
★Please note the acceptable shank tolerance is h6～7.
★Please refer ☞**P.273** for Milling chuck Coolant Solution.

★NK, CCNK, ONK and OJK collet can not be used for the chucks marked ＊2.
★Please refer ☞**P.274, P.275** for **KM** and **CCK** collet.
★**C22** style is also available.

★For heavy duty milling, please grip the cutter shank longer than ℓ1.
★Lubrication Pipe is optional. Please refer ☞**P.292**

HSK

HSK- E,F HIGH SPEED MILLING CHUCK

NIKKEN

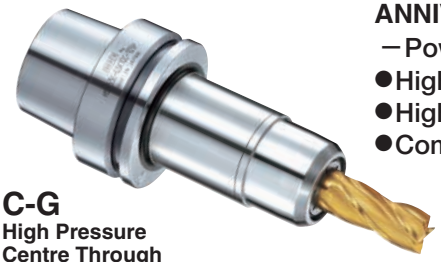

C-G
High Pressure Centre Through (MAX. 7MPa)
Photo shows High Speed Milling Chuck

ANNIVERSARY Type
－Powerful gripping torque－
- High rigidity
- High precision
- Compact design



Fig.1



Fig.2

TAPER	Code No.	C_1	D	D_1	L	ℓ_1	ℓ_2	ℓ_3	MAX.r/min	Weight (kg)	Fig.	Collet
HSK 40E	HSK 40E -C12- 80G	33	12	12	80	49	53	58	30,000	0.5	2	KM12 CCK12
	-C16- 80G	40	16	16	80	51	57	60		0.7		KM16 CCK16
	-C20-100G *2	48	20	-	100	-	-	57		1.2		KM20 NK20 CCK20 CCNK20
HSK 50E	HSK 50E -C12- 80G	33	12	12	80	46	53	56	30,000	0.9	1	KM12 CCK12
	-C16- 80G *3	40	16	16	80	51	57	60		1.0	2	KM16 CCK16
	-C20- 95G	48	20	20	95	58	65	68		1.2		KM20 NK20 CCK20 CCNK20
HSK 63E	HSK 63E -C12- 90G	33	12	12	90	49	53	58	30,000	1.3	1	KM12 CCK12
	-C16- 90G	40	16	16	90	51	57	60	25,000	1.4		KM16 CCK16
	-C20- 95G	48	20	20	95	58	65	68		1.5		KM20 NK20 CCK20 CCNK20
	-110G				110		72	80		1.8		
	-C25-100G	55	25	25	100	61	72	75	20,000	1.9	2	KM25 NK25 CCK25 CCNK25
	-C32-110G	68	32	32	110	66	80	83		2.2		KM32 NK32 CCK32 CCNK32

TAPER	Code No.	C_1	D	D_1	L	ℓ_1	ℓ_2	ℓ_3	MAX.r/min	Weight (kg)	Fig.	Collet
HSK 63F	HSK 63F -C12- 90G	33	12	12	90	49	53	58	30,000	1.3	1	KM12 CCK12
	-C16- 90G	40	16	16	90	51	58	65	25,000	1.4		KM16 CCK16
	-C20- 95G	48	20	20	95	58	65	68		1.5		KM20 NK20 CCK20 CCNK20
	-110G				110		66	80		1.5		
	-C25-100G	55	25	25	100	61	72	75	20,000	1.9	2	KM25 NK25 CCK25 CCNK25
	-C32-110G	68	32	32	110	66	80	83		2.2		KM32 NK32 CCK32 CCNK32

★Please note the acceptable shank tolerance is h6.
★Please refer ☞**P.274, P.275** for **KM** and **CCK** collet.
★**GH Handle** is available as an option. ☞**P.293**
C12G : GH12, C16G : GH16, C20G : GH20, C25G : GH25, C32G : GH32
★**NK, CCNK, ONK and OJK collet can not be used for the chucks marked ＊2.**
★Coolant pipe can not be used for the chuck marked ＊3.
★Please contact us for the extra long length.
★Please refer ☞**P.273** for Milling chuck Coolant Solution.
★Lubrication Pipe is optional. Please refer ☞**P.292**

★**GFS** type ☞**P.33** is available for **C25** and **C32**.

GFS type
For machining of aluminum
JAPAN PAT.

HSK

HSK ANNIVERSARY TYPE VC HOLDER

NIKKEN

VC

Centre Through

With TiN Bearing Nut
MAX.40,000r/min&G2.5
Run-Out Accuracy:3μm at 4D

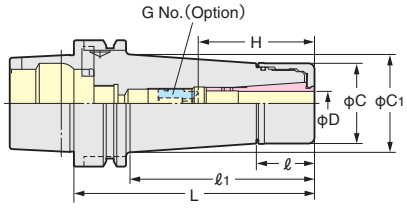

High Speed

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	Weight (kg)	MAX. r/min	Collet
HSK 40A	HSK 40A-VC 6- 65	2.0~6.0	65	23	45	28	33.6	-	-	0.4	40,000	VCK 6
	- 90		90		70			35~45	VCG 6- 8A	0.6		
	-VC13- 90	3.0~12.0	90	29	70	40	40.0	-	-	0.7		VCK13
	- 120		120		100			50~60	VCG13-15A	1.0		
HSK 50A	HSK 50A-VC 6- 70	2.0~6.0	70	23	41	28	33.8	-	-	0.6	40,000	VCK 6
	- 90		90		61		32.8	35~45	VCG 6- 8A	0.8		
	- 120		120		91		37.0			0.9		
	-VC13- 90	3.0~12.0	90	29	64	40	40.0	-	-	0.9		VCK13
	- 120		120		94			50~60	VCG13-15A	1.2		
HSK 63A	HSK 63A-VC 6- 70	2.0~6.0	70	23	41	28	33.8	-	-	0.9	30,000	VCK 6
	- 90		90		61		32.8	35~45	VCG 6- 8A	1.0		
	- 120		120		91		37.0			1.2		
	-VC13- 90	3.0~12.0	90	29	61	40	44.5	-	-	1.2		VCK13
	- 120		120		92		48.8	50~60	VCG13-15A	1.6		
HSK 100A	HSK 100A-VC 6- 105	2.0~6.0	105	23	71	28	34.2	35~45	VCG 6- 8A	2.4	20,000	VCK 6
	- 135		135		101		38.4			2.6		
	- 165		165		131		42.6			2.9		
	-VC13- 105	3.0~12.0	105	29	71	40	45.9	-	-	2.7		VCK13
	- 135		135		101		50.1	50~60	VCG13-15A	3.1		
	- 165		165		131		54.3			3.6		

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	Weight (kg)	MAX. r/min	Collet
HSK 40E	HSK 40E-VC 6- 65	2.0~6.0	65	23	45	28	33.6	-	-	0.5	40,000	VCK 6
	- 90		90		70			35~45	VCG 6- 8A	0.7		
	-VC13- 90	3.0~12.0	90	29	70	40	40.0	-	-	0.8		VCK13
	- 120		120		100			50~60	VCG13-15A	1.1		
HSK 50E	HSK 50E-VC 6- 70	2.0~6.0	70	23	41	28	33.8	-	-	0.7	40,000	VCK 6
	- 90		90		61		32.8	35~45	VCG 6- 8A	0.9		
	- 120		120		91		37.0			1.0		
	-VC13- 90	3.0~12.0	90	29	64	40	40.0	-	-	1.0		VCK13
	- 120		120		94			50~60	VCG13-15A	1.3		
HSK 63E	HSK 63E-VC 6- 70	2.0~6.0	70	23	41	28	33.8	-	-	1.0	30,000	VCK 6
	- 90		90		61		32.8	35~45	VCG 6- 8A	1.1		
	- 120		120		91		37.0			1.3		
	-VC13- 90	3.0~12.0	90	29	61	40	44.5	-	-	1.3		VCK13
	- 120		120		92		48.8	50~60	VCG13-15A	1.7		

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No. (Option)	Weight (kg)	MAX. r/min	Collet
HSK 63F	HSK 63F-VC 6- 65	2.0~6.0	65	23	37	28.0	27.5	-	-	0.8	30,000	VCK 6
	- 90		90		61		30.6	35~45	VCG 6- 8A	0.9		
	- 120		120		91		34.8			1.1		
	-VC13- 90	3.0~12.0	90	29	61	40.0	44.5	-	-	1.2		VCK13
	- 120		120		92		48.8	50~60	VCG13-15A	1.5		

★TiN Bearing Nut is supplied as standard. ★When the axial stopper is required, please use Adjust Screw (**G No.**).
★**GH Handle** are available as an option. ☞**P.293** The Code No. of the **GH Handle** is **VC6:GH10, VC13:GH16**
★**HSK63A-VC6-150, HSK63A-VC13-150, HSK100A-VC13-90, -120** are available as an option.
★Please use **VC J** type Nut & Cap ☞**P.49** for Centre Through Coolant application.
The Code No. of **VC J** type Nut is **VCN-6BJ, VCN-13BJ**.
The Code No. of the Cap is **SKJ10-□, SKJ16-□**
When **VC J** type Nut is used, the total holder length will be extended to 6mm. ★**All series are for High Speed Rotation.** ★Lubrication Pipe is optional. Please refer ☞**P.292**
★Collet is available an option ☞**P284**

GH Handle

HSK

HSK HIGH SPEED SLIM CHUCK

NIKKEN

SK-P
High Pressure Centre Through (MAX. 7MPa)
Photo shows High Speed HSK Slim Chuck



Fig. 1



Fig. 2

H1: MAX. H without adjust screw

High Speed

- Please add "-J" at the end of code No. for the chuck with SK J type nut. (Cap is not included, please order separately) e.g. HSK63A-SK10C-105P-J
- When SK **J** type nut is used, the total chuck length will be extended by 6mm.
- When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.

TAPER	Code No.	φD	H	H1	ℓ	ℓ1	C	C1	G No. (Option)	MAX. r/min	Weight (kg)	Fig.	SK Collet
HSK 40A	HSK 40A-SK 6 - 60P*3	0.7~6.0	40	40	37	-	19.5	-	-	40,000	0.28	1	SK 6
	-SK10 - 75P*2	1.75~10.0	29~36	43	52		27.5		SKG-6L		0.4		SK10
	-SK13 - 75P*3	2.75~13.0	55	55	54		33		-		0.5		SK13
	-SK16 - 80P*3	2.75~16.0	60	60	59		40			30,000	0.6		SK16
HSK 50A	HSK 50A-SK 6 - 60P*3	0.7~6.0	37	37	31	-	19.5	-	-	30,000	0.4	1	SK 6
	-SK 6C- 80P		26~31	46	51				SKG6-6HG		0.5		
	-SK10 - 60P*3	1.75~10.0	35	35	33		27.5		-		0.5		SK10
	-SK10 - 90P*3		35~41	65	63				SKG-12S		0.6		
	-SK13 - 70P*3	2.75~13.0	47	47	43		33		-		0.9		SK13
	-SK13 - 90P*3		65	65	61						1.1		
	-SK13 -105P*2		31~47	80	76				SKG-15		1.2		
	-SK16 - 80P*3	2.75~16.0	52	52	53		40		-	25,000	0.6		SK16
	-SK16 -105P*2		50~58	65	78				SKG-6L-25L		0.9		
HSK 63A	HSK 63A-SK 6 - 60P*3	0.7~6.0	38	38	31	-	19.5	-	-	30,000	0.7	1	SK 6
	-SK 6 - 80P*2		21~35	58	51				SKG-8-18L		0.8		
	-SK 6C-100P		26~31	46	62	71		32	SKG6-6HG		0.9	2	
	-SK 6C-120P					91			SKG6-6HG		1.0		
	-SK10 - 60P*3	1.75~10.0	35	35	31	-	27.5	-	-		0.7	1	SK10
	-SK10C- 90P		33~36	53	53				SKG10-10HGG		1.0		
	-SK10C-105P		33~41	58	74				SKG10-10HG		1.1		
	-SK10C-120P				60	91		32	SKG10-10HG		1.3	2	
	-SK13 - 70P*3	2.75~13.0	45	45	43	-	33	-	-		0.9	1	SK13
	-SK13 - 90P*3		64	64	61						1.1		
	-SK13 -105P*2		31~47	80	74				SKG-15		1.2		
	-SK13C-120P		39~51	68	89				SKG13-10HG		1.5		
	-SK16 - 80P*3	2.75~16.0	52	52	51		40		-	25,000	1.1		SK16
	-SK16 -105P*2		50~58	65	76				SKG-8		1.3		
	-SK16C-120P		45~52	77	91				SKG16-10HG		1.6		
	-SK20 - 90P*3	3.5~20.0	59	59	63		48.5		-		1.4		SK20
	-SK20 -105P*2		50~57	64	78				SKG-8		1.6		
	-SK20C-120P		50~55	74	93				SKG20-12MFHG		1.8		
	-SK20C-135P				108						2.0		
	-SK25 - 90P*3	7.5~25.4	63	63	61		55		-	20,000	1.6		SK25
	-SK25C-135P		60~65	91	108				SKG25-18HGE		1.9		
HSK 100A	HSK100A-SK 6C-105P	0.7~6.0	26~31	46	62	71	19.5	40	SKG6-6HG	20,000	1.2	2	SK 6
	-SK10C-105P	1.75~10.0	33~41	58	57		27.5		SKG10-10HG		2.6		SK10
	-SK10C-120P				74	86					2.9		
	-SK10C-150P				80	116					3.2		
	-SK13 -105P*2	2.75~13.0	63	63	71	-	33	-	SKG-12-30L		2.7	1	SK13
	-SK13C-120P		39~51	68	86				SKG13-10HG		3.1		
	-SK13C-150P				116			45			3.4		
	-SK16 -105P*2	2.75~16.0	45~60	63	71		40	-	SKG-12-30L		2.7		SK16
	-SK16C-120P		45~52	77	86				SKG16-10HG		3.2		
	-SK16C-150P			84	90	116		50	SKG16-12HG		3.5	2	
	-SK20C-120P	3.5~20.0	50~55	74	86	-	48.5	-	SKG20-12MFHG		3.1	1	SK20
	-SK20C-150P		47~3	82	116				SKG20-12HG		3.5		
	-SK20C-200P				166				SKG20-18HG		4.2		
	-SK25 -120P*2	7.5~25.4	55~75	76	86		55		SKG-12-30L	15,000	3.4		SK25
	-SK25C-145P		60~65	91	111				SKG25-18HGE		4.8		

★Nut, adjust screw and collet extractor are supplied as standard. ★Please refer ☞P.277 for **SK** collet and please refer ☞P.279 for **J** type nut.
★Collet, adjust screw (G No.) and **GH Handle** are available as an option. The Code No. of the **GH Handle** is **SK6C-P:GH6, SK10C-P:GH10, SK13C-P:GH12, SK16C-P: GH16, SK20C-P:GH20, SK25C-P:GH25**
★All Slim Chucks are High Pressure Centre Through Coolant type (MAX. 7MPa). **SK6C:φ4~φ6, SK10C:φ6~φ10, SK16C:φ10~φ16, SK25C:φ16~φ25** ☞P.293
★Slim Chucks marked *2 and *3 can be used for the high pressure centre through coolant type with **J** type nut.
★No adjust screw is applied for the Slim Chucks marked *3. ★The "H1" is the MAX. dimension without the adjust screw.
★ is **C** type. ★Please refer ☞P.279 for Milling chuck Coolant Solution. ★Lubrication Pipe is optional. Please refer ☞P.292

HSK-E,F HIGH SPEED SLIM CHUCK

NIKKEN

HSK63E

HSK63F

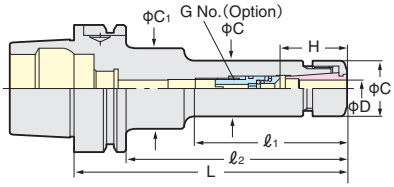

SK-P
High Pressure
Centre Through
(MAX. 7MPa)

High Speed

- Please add "-J" at the end of code No. for the chuck with SK J type nut. (Cap is not included, please order separately) e.g. HSK63A-SK10C-105P-J
- When SK **J** type nut is used, the total chuck length will be extended by 6mm.
- When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.

TAPER	Code No.	φD	H	H1	ℓ	ℓ1	C	C1	G No. (Option)	MAX. r/min	Weight (kg)	SK Collet
HSK 25E	HSK 25E-SK 6 - 45P*3	0.7~6.0	30.5	30.5	35	-	19.5	-	-	50,000	0.1	SK 6
	-SK10 - 55P*3	1.75~10.0	41	41	45		27.5				0.18	SK10
HSK 32E	HSK 32E-SK 6 - 50P*3	0.7~6.0	32	32	29		19.5		-		0.17	SK 6
	-SK10 - 60P*3	1.75~10.0	44	44	41		27.5				0.26	SK10
	- 75P*2		29~36	43	54				SKG-6L		0.30	
HSK 40E	HSK 40E-SK 6 - 60P*3	0.7~6.0	40	40	37		19.5		-	40,000	0.28	SK 6
	-SK10 - 60P*3	1.75~10.0	40	40	39		27.5				0.4	SK10
	- 75P*2		29~36	43	54				SKG-6L		0.5	
	-SK13 - 75P*3	2.75~13.0	55	55	54		33		-		0.6	SK13
	-SK16 - 80P*3	2.75~16.0	59	59	59		40			30,000		SK16
HSK 50E	HSK 50E-SK 6 - 60P*3	0.7~6.0	40	40	33		19.5		-	30,000	0.5	SK 6
	-SK 6C- 80P		26~31	46	51				SKG6-6HG		0.6	
	-SK10 - 60P*3	1.75~10.0	35	35	33		27.5		-		0.5	SK10
	- 90P*2		35~41	65	63				SKG-12S		0.6	
	-SK10C-105P		33~41	58	76				SKG10-10HG		0.7	
	-SK13 - 70P*3	2.75~13.0	47	47	43		33		-		1.0	SK13
	- 90P*3		65	65	61						1.2	
	-105P*2		31~47	80	76				SKG-15		1.3	
	-SK16 - 80P*3	2.75~16.0	52	52	53		40		-	25,000	0.6	SK16
	-SK16C-120P		45~52	77	93				SKG16-10HG		1.1	
HSK 63E	HSK 63E-SK 6 - 80P*2	0.7~6.0	21~35	58	51	-	19.5	-	SKG8-18L	30,000	0.8	SK 6
	-SK 6C-100P		26~31	46	62	71		32	SKG6-6HG		0.9	
	-120P				62	91		32			1.0	
	-SK10C- 90P	1.75~10.0	33~36	53	59	-	27.5	-	SKG10-10HGG		1.0	SK10
	-105P		33~41	58	60	106		32	SKG10-10HG		1.3	
	-120P				75	121		40			1.5	
	-150P				73			34.5			1.7	
	-SK13 - 70P*3	2.75~13.0	45	45	43	-	33	-	-		1.0	SK13
	- 90P*3		64	64	61						1.2	
	-105P*2		31~47	80	74				SKG-15		1.3	
	-SK13C-120P		39~51	68	89				SKG13-10HG		1.6	
	-SK16C-120P	2.75~16.0	45~52	77	91		40		SKG16-10HG		1.7	SK16
	-150P				121						1.8	
	-SK20C-120P	3.5~20.0	50~55	74	93		48.5		SKG20-12MFHG	25,000	1.8	SK20
	-135P				108						2.0	
	-SK25C-135P	7.5~25.4	60~65	91	108		55		SKG25-18HGE	20,000	1.9	SK25
HSK 63F	HSK 63F-SK10 - 90P*3	1.75~10.0	35~45	-	59	-	27.5	-	SKG-12S	30,000	0.6	SK10
	-SK10C-105P		33~41	58	74				SKG10-10HG		1.3	
	-SK13 - 70P*3	2.75~13.0	45	45	43		33		-		1.0	SK13
	-105P*2		31~47	80	74				SKG-15		1.3	
	-SK13C-120P		39~51	68	89				SKG13-10HG		1.6	
	-SK16 - 90P*3	2.75~16.0	67	67	61		40		-		1.2	SK16
	-105P*2		50~58	83	76				SKG-18S		1.7	
	-SK16C-120P		45~52	77	91				SKG16-10HG		1.8	
	-SK20C-120P	3.5~20.0	50~55	74	93		48.5		SKG20-12MFHG	25,000	1.8	SK20
	-SK25 - 90P*3	7.5~25.4	67	67	61		55		-	20,000	1.6	SK25

★Please refer foot note of ☞P.227 for comment.
★Lubrication Pipe is optional. Please refer ☞P.292
★Please refer ☞P.279 for SK, MDSK Coolant Solution.

HSK

HSK SLIM CHUCK

NIKKEN

SK
High Pressure Centre Through (MAX. 7MPa)

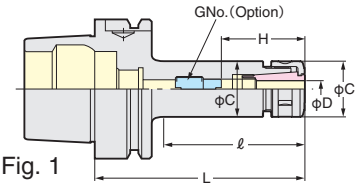

Fig. 1

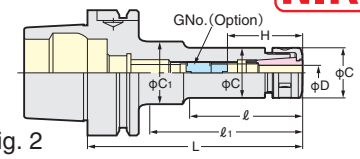

Fig. 2

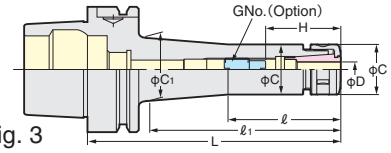

Fig. 3

- Please add "-J" at the end of code No. for the chuck with SK J type nut. (Cap is not included, please order separately) e.g. HSK63A-SK10C-105P-J
- When SK **J** type nut is used, the total chuck length will be extended by 6mm.
- When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.

TAPER	Code No.	φD	H	H1	ℓ	ℓ1	C	C1	G No. (Option)	Weight (kg)	Fig.	SK Collet
HSK 40A	HSK 40A -SK 6 - 60*3	0.7~6.0	40	40	37	-	19.5	-	-	0.28	1	SK 6
	-SK 6C- 80		26~31	46	57				SKG6-6HG	0.32		
	-SK10 - 60*3	1.75~10.0	40	40	39	-	27.5	-	-	0.35		SK10
	-SK10 - 75*2		29~36	43	52				SKG-6L	0.4		
	-SK10C-100		33~41	58	77				SKG10-10HG	0.5		
	-SK13 - 75*3	2.75~13.0	55	55	54	-	33	-	-	0.5		SK13
	-SK13C-120		39~51	68	100				SKG13-10HG	0.8		
	-SK16 - 80*2	2.75~16.0	60	60	59	-	40	-	-	0.6		SK16
	-SK16C-120		45~52	77	99				SKG16-10HG	0.9		
HSK 50A	HSK 50A -SK 6 - 60*3	0.7~6.0	37	37	31	-	19.5	-	-	0.4	1	SK 6
	-SK 6C- 80		26~31	46	51				SKG6-6HG	0.5		
	-SK10 - 60*3	1.75~10.0	35	35	33	-	27.5	-	-	0.5		SK10
	-SK10 - 90*2		35~41	65	63				SKG-12S	0.6		
	-SK10C-105		35~41	58	76				SKG10-10HG	0.7		
	-SK13 - 70*3	2.75~13.0	47	47	43	-	33	-	-	0.9		SK13
	-SK13 - 90*3		65	65	61					1.1		
	-SK13 -105*2		31~47	80	76				SKG-15	1.2		
	-SK13C-120		39~51	68	89				SKG13-10HG	1.4		
	-SK16 - 80*3	2.75~16.0	52	52	53	-	40	-	-	0.6		SK16
	-SK16 -105*2		50~58	65	78				SKG-6L-25L	0.9		
	-SK16C-120		45~52	77	93				SKG16-10HG	1.1		
HSK 63A	HSK 63A -SK 6 - 60*3	0.7~6.0	38	38	31	-	19.5	-	-	0.7	1	SK 6
	-SK 6 - 80*2		21~35	58	51				SKG8-18L	0.8		
	-SK 6C-100		26~31	46	62	71		32	SKG6-6HG	0.9	2	
	-SK 6C-120		26~31	46	62	91		32		1.0		
	-SK 6C-150		26~31	46	60	121		25		1.2	3	
	-SK10 - 60*3	0.9~10.0	35	35	31	-	27.5	-	-	0.7	1	SK10
	-SK10C- 90		33~36	53	59				SKG10-10HGG	0.9		
	-SK10C-105		33~41	58	74				SKG10-10HG	0.9		
	-SK10C-120		33~41	58	60	91		32		1.0	2	
	-SK10C-135		33~41	58	75	106		40		1.1	3	
	-SK10C-150		33~41	58	73	121		34.5		1.2		
	-SK10C-200		33~41	58	73	169		39		1.6		
	-SK13 - 70*3	2.75~13.0	45	45	43	-	33	-	-	0.9	1	SK13
	-SK13 - 90*3		64	64	61					1.0		
	-SK13 -105*2		31~47	80	74				SKG-15	1.0		
	-SK13C-120		39~51	68	89				SKG13-10HG	1.1		
	-SK13C-150				88	119		39		1.35	3	
	-SK13C-200				88	169		40		1.74		
	-SK16 - 80*3	2.75~16.0	52	52	51	-	40	-	-	1.1	1	SK16
	-SK16 -105*2		50~58	65	76				SKG-8	1.2		
	-SK16C-120		45~52	77	91				SKG16-10HG	1.3		
	-SK16C-150		45~57	84	121				SKG16-12HG	1.6		
	-SK16C-200		50~62	99	176	-		-	SKG16-12HG	2.1		
	-SK20 - 90*3	3.5~20.0	59	59	63	-	48.5	-	-	1.4	1	SK20
	-SK20 -105*2		50~57	64	78				SKG-8	1.6		
	-SK20C-120		50~55	74	93				SKG20-12MFHG	1.8		
	-SK20C-135				108					2.0		
	-SK20C-200		47~63	82.5	173	-		-	SKG20-18HG	2.6		
	-SK25 - 90*3	7.5~25.4	63	63	61	-	55	-	-	1.6	1	SK25
	-SK25C-135		60~65	91	108				SKG25-18HGE	1.9		

★Collet, adjust screw (G No.) and spanner are available as an option. ★Please refer ☞ P.277 for **SK** collet and please refer ☞ P.279 for **J** type nut.

HSK SLIM CHUCK

NIKKEN

SK
High Pressure Centre Through (MAX. 7MPa)

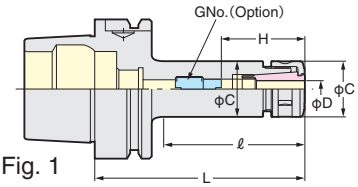

Fig. 1

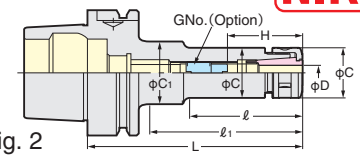

Fig. 2

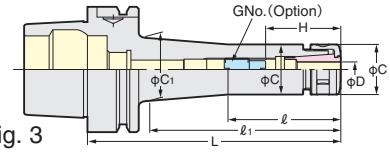

Fig. 3

- **Please add "-J" at the end of code No. for the chuck with SK J type nut. (Cap is not included, please order separately) e.g. HSK63A-SK10C-105P-J**
- **When SK J type nut is used, the total chuck length will be extended by 6mm.**
- **When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.**

TAPER	Code No.	φD	H	H1	ℓ	ℓ1	C	C1	G No. (Option)	Weight (kg)	Fig.	SK Collet
HSK 100A	HSK100A -SK 6C-105	0.7～6.0	26～31	46	62	71	19.5	40	SKG6-6HG	1.2	2	SK 6
	-SK10C-105	1.75～10.0	33～41	58	57	71	27.5	40	SKG10-10HG	2.6	2	SK10
	-SK10C-120				74	86				2.9		
	-SK10C-150				80	116				3.2		
	-SK10C-200				75	166		39		3.5		
	-SK13 -105*2	2.75～13.0	63	63	71	-	33	-	SKG-12-30L	2.7	1	SK13
	-SK13C-120		39～51	68	86				SKG13-10HG	3.1		
	-SK13C-150				92	116		45		3.4	2	
	-SK13C-200				92	166		45		3.8	3	
	-SK16 -105*2	2.75～16.0	45～60	63	71	-	40	-	SKG-12-30L	2.7	1	SK16
	-SK16C-120		45～52	77	86	-		-	SKG16-10HG	3.2		
	-SK16C-150		45～52	84	90	116		50	SKG16-12HG	3.5	2	
	-SK16C-200		45～52	84	90	166		55	SKG16-12HG	3.8	3	
	-SK20C-120	3.5～20.0	50～55	74	86	-	48.5	-	SKG20-12MFHG	3.1	1	SK20
	-SK20C-150		47～63	82	116				SKG20-12HG	3.5		
	-SK20C-200				166				SKG20-18HG	4.2		
	-SK25 -120*2	7.5～25.4	55～75	76	86	-	55	-	SKG-12-30L	3.4	1	SK25
	-SK25C-145		60～65	91	111				SKG25-18HGE	4.8		

★Collet, adjust screw (G No.) and spanner are available as an option. ★Please refer ☞**P.277** for **SK** collet and please refer ☞**P.279** for **J** type nut.
The Code No. of the spanner is **SK6C(C=φ18): SKL-6, SK6C(C=φ19.5):SKL-6W, SK10C:SKL-10, SK13C:9HC12A, SK16C:9HC16, SK20C:9HC22, SK25C:9HC22**

★**H1 means MAX.H without an adjust screw.** ★No adjust screw is applied for the Slim Chucks marked *3.
★All Slim Chucks are High Pressure Centre Through Coolant type (MAX. 7MPa). **SK6C:φ4～φ6, SK10C:φ6～φ10, SK16C:φ10～φ16, SK25C:φ16～φ25**
★Slim Chucks marked *2 and *3 can be used for the high pressure centre through coolant type with **J** type nut. ★ is **C** type. **HSK40A-SK16C-120, HSK50A-SK6C-80, HSK63A-SK25C-135**
★Please refer☞**P.279** for sk Coolant Solution.
★Lubrication Pipe is optional. Please refer ☞**P.292**

HSK MAJOR DREAM HOLDER

NIKKEN

Dampening Effect TiN Bearing Effect

MDSK

Centre Through

H* : MAX. Cutter Shank Length to be inserted

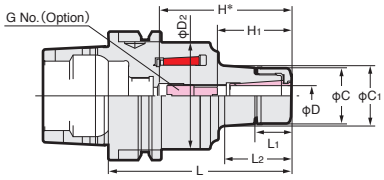

TAPER	Code No.	D	L	L1	L2	C	C1	C2	H*	H1	G No. (Option)	Weight (kg)	Collet
HSK 50A	HSK 50A-MDSK 6- 70	3.0～6.0	70	16.2	18.2	19.5	19.5	41.6	48	48	-	0.7	SK 6 A
	- 90		90		38.2		21.9		68	21～35	SKG- 8	1.0	
	-MDSK10- 70	3.0～10.0	70	18.2	19.2	27.5	27.5		46	46	-	0.7	SK10 A
	- 90		90		38.2		30.3		66	31～45	SKG-12S	1.0	
	-MDSK13- 90	3.0～13.0	90	22.0	40.0	33.0	35.6		66	66	-	1.1	SK13 A
	-MDSK16-115	3.0～16.0	115	23.0	24.0	40.0	40.0	54.0	91	45～70	SKG-18S	1.4	SK16 A
HSK 63A	HSK 63A-MDSK 6- 75	3.0～6.0	75	16.2	18.0	19.5	19.5	52.4	50	21～28	SKG- 8	1.0	SK 6 A
	- 90		90		33.0		21.9		65	21～35		1.1	
	-105		105		48.0		24.0		80			1.4	
	-120		120		63.0		26.1		95			1.6	
	-MDSK10- 75	3.0～10.0	75	18.2	19.0	27.5	27.5		49	49	-	1.1	SK10 A
	- 90		90		33.0		29.6		64	31～40	SKG-12S	1.4	
	-105		105		48.0		31.7		79	31～50		1.6	
	-120		120		63.0		33.8		94	30～50	SKG-12L	1.8	
	-135		135		79.0		36.0		109			2.1	
	-MDSK13- 80	3.0～13.0	80	22.0	24.0	33.0	33.0		54	54	-	1.2	SK13 A
	- 90		90		33.0		34.6		64	64		1.5	
	-105		105		48.0		36.7		79	31～54	SKG-15	1.7	
	-120		120		63.0		38.8		94			1.9	
	-135		135		78.0		40.9		110			2.2	
	-MDSK16- 80	3.0～16.0	80	23.0	24.0	40.0	40.0		54	54	-	1.3	SK16 A
	- 90		90		34.2		41.6		64	64		1.5	
	-105		105		49.3		43.7		79	45～60	SKG-18S	1.7	
	-120		120		64.3		45.8		85			1.9	
	-135		135		79.0		47.9		105		SKG-18L	2.2	
	-MDSK20- 90	4.0～20.0	90	25.2	40.9	48.0	51.2		64	64	-	1.9	SK20 A
	-105		105		54.3		51.1		79	79		2.1	
	-120		120		70.0		50.6		94	47～70	SKG-22	2.4	
	-135		135		85.8		51.2		105			2.5	
HSK 100A	HSK100A-MDSK 6-110	3.0～6.0	110	16.2	33.0	19.5	21.9	54.0	80	21～35	SKG- 8	3.9	SK 6 A
	-125		125		48.0		24.0		95			4.0	
	-140		140		63.0		26.1		110			4.1	
	-165		165		88.0		29.6		135			4.5	
	-MDSK10-110	3.0～10.0	110	18.2	33.0	27.5	29.8		80	30～50	SKG-12L	4.0	SK10 A
	-125		125		48.0		31.7		95			4.1	
	-140		140		63.0		33.8		110			4.2	
	-165		165		89.0		37.4		135			4.6	
	-MDSK13-110	3.0～13.0	110	22.0	33.0	33.0	34.6		75	31～52	SKG-15	4.3	SK13 A
	-125		125		48.0		36.7		90	31～54		4.4	
	-140		140		63.0		38.8		105			4.5	
	-165		165		88.0		42.3		130			5.0	
	-MDSK16-125	3.0～16.0	125	23.0	51.0	40.0	44.0		87	45～65	SKG-18S	4.6	SK16 A
	-140		140		66.0		46.1		104	45～70		4.8	
	-165		165		91.0		49.6		129	40～70	SKG-18L	5.3	
	-MDSK20-140	4.0～20.0	140	25.2	42.0	48.0	51.4	84.0	104	47～70	SKG-22	4.9	SK20 A
	-165		165		67.0		54.9		129	47～80		5.5	
	-MDSK25-140	8.0～25.4	140	27.0	43.0	55.0	57.3		104	55～75	SKG-28	4.9	SK25 A
	-165		165		69.0		60.9		129	55～85		5.6	

★**Please use A type SK collet for the end milling operation.** ☞ **P.277** ★Please refer ☞ **P.279** for the Jet coolant system, **J** type nut and cap.
★**GH Handle** is available as an option. ☞ **P.293** Please order with the Code No. **MDSK6:GH6 &, MDSK10:GH10, MDSK13:GH12, MDSK16:GH16, MDSK20:GH20, MDSK25:GH25**
★**Please add"P"at the end of Code No. for high speed specification, e.g HSK63A-MDSK10-75P**
★**Holder with an adjust screw for axial adjustment is supplied as an option. Please contact us.**
★Please refer ☞ **P.279** for sk Coolant Solution. ★Lubrication Pipe is optional. Please refer ☞ **P.292**

GH Handle ☞ **P.293**

HSK MASAMUNE SHRINK FIT HOLDER

NIKKEN

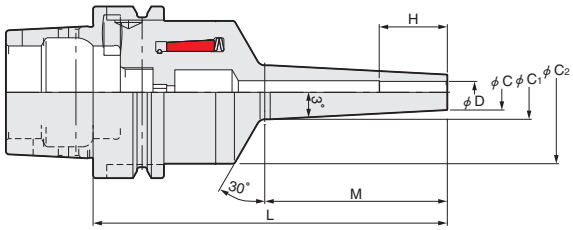

MDMS

Centre Through

S Slim Style

TAPER	Code No.	φD	φC	φC1	φC2	L	M	H
HSK50A	HSK 50A-MDMS 3S-100, -125	3	6	10.2, 12.8	41.6	100, 125	42, 67	10
	-MDMS 4S-100, -125	4	7	11.2, 13.8		100, 125	42, 67	13
	-MDMS 6S-100, -125	6	9	13.2, 15.8		100, 125	42, 67	19
	-MDMS 8S-100, -125	8	13	17.2, 19.8		100, 125	42, 67	25
HSK63A	HSK 63A-MDMS 3S-105, -130	3	6	10.2, 12.8	52.4	105, 130	42, 67	10
	-MDMS 4S-105, -130	4	7	11.2, 13.8		105, 130	42, 67	13
	-MDMS 6S-105, -130	6	9	13.2, 15.8		105, 130	42, 67	19
	-MDMS 8S-105, -130	8	13	17.2, 19.8		105, 130	42, 67	25
	-MDMS10S-105, -130	10	16	20.2, 22.8		105, 130	42, 67	31
	-MDMS12S-105, -130	12	19	23.2, 25.8		105, 130	42, 67	31
HSK100A	HSK100A-MDMS 3S-150	3	6	12.8	54	150	67	10
	-MDMS 4S-125, -150	4	7	11.2, 13.8		125, 150	42, 67	13
	-MDMS 6S-125, -150	6	9	13.2, 15.8		125, 150	42, 67	19
	-MDMS 8S-125, -150	8	13	17.2, 19.8		125, 150	42, 67	25
	-MDMS10S-125, -150	10	16	20.2, 22.8		125, 150	42, 67	31
	-MDMS12S-125, -150	12	19	23.2, 25.8		125, 150	42, 67	31

R Standard

TAPER	Code No.	φD	φC	φC1	φC2	L	M	H
HSK50A	HSK 50A-MDMS 4R -100, -125	4	10	14.2, 16.8	41.6	100, 125	42, 67	13
	-MDMS 6RN*1-100, -125	6	15*1	19.2, 21.8*1		100, 125	42, 67	19
	-MDMS 8R -100, -125	8	18	22.2, 24.8		100, 125	42, 67	25
	-MDMS10R -100	10	22	26.2		100	42	31
HSK63A	HSK 63A-MDMS 3R -105	3	7.5	11.7	52.4	105	42	10
	-MDMS 4R -105	4	10	14.2		105	42	13
	-MDMS 6RN*1-105, -130	6	15*1	19.2, 21.8*1		105, 130	42, 67	19
	-MDMS 8R -105, -130	8	18	22.2, 24.8		105, 130	42, 67	25
	-MDMS10R -105, -130	10	22	26.2, 28.8		105, 130	42, 67	31
	-MDMS12R -105, -130	12	26	30.2, 32.8		105, 130	42, 67	31
	-MDMS16R -105	16	32	36.2		105	42	33
HSK100A	HSK100A-MDMS 6RN*1-125, -150	6	15*1	19.2, 21.8*1	54	125, 150	42, 67	19
	-MDMS 8R -125, -150	8	18	22.2, 24.8		125, 150	42, 67	25
	-MDMS10R -125, -150	10	22	26.2, 28.8		125, 150	42, 67	31
	-MDMS12R -125, -150	12	26	30.2, 32.8		125, 150	42, 67	31
	-MDMS16R -145, -170	16	32	36.2, 38.8	87	145, 170	42, 67	33
	-MDMS20R -145, -170	20	38	42.2, 44.8		145, 170	42, 67	40
	-MDMS25R -145, -170	25	45	49.2, 51.8		145, 170	42, 67	45

★Please note the acceptable shank tolerance is h6.
★Carbide tool can be used and **HSS** tool can not be used.
★The tool will became very hot during heat shrinking. Please use glove for safety.
★**HSK** shank masamune shrink fit holder are **available. Please contact with us.**
★ID=φ16, φ20 and φ25mm are available.
★The capacity of the drier is approx. 3kW.
★Inductive style of the heat shrinking unit is recommended.

*1 MDMS6R(tip outer diameter φ12) is changed to **MDMS6RN(tip outer diameter φ15)**. Please be careful of interference.

HSK MINI-MINI CHUCK ADVANCED ALPHA

NIKKEN

MMC

High Pressure Centre Through (MAX. 7MPa)

Extra-long sizes are added

30,000r/min&G2.5 Gripping from Front Nose Run-Out Accuracy : 3μm at 4D

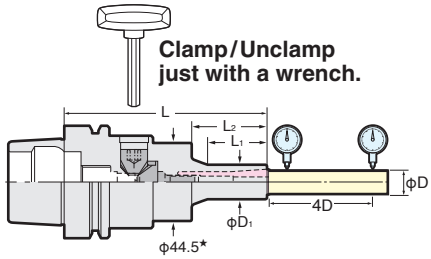

Clamp/Unclamp just with a wrench.

Dimension marked ★ is 52.4 for **MMC12**.

High Speed

JAPAN PAT.

TAPER	Code No.	φD	L	φD1	L1	Collet	MAX.r/min	Weight(kg)
HSK50A	HSK 50A-MMC 4 -128-AA	1～4	128	15	30	MPK 4	30,000	1.4
	8C-127-AA		127		33			1.4
	-157-AA	2～8	157	20	40	PMK 8 VMK 8		1.5
	-187-AA		187					1.6
	12C-129-AA	4～12	129	30	35	PMK12 VMK12		1.6
	-159-AA		159		60			1.7
	-189-AA		189		70			1.8
HSK63A	HSK 63A-MMC 4C-116-AA	1～4	116	15	30	MPK 4	30,000	1.4
	8C-115-AA	2～8	115	20	33	PMK 8 VMK 8		1.4
	-145-AA		145		40			1.5
	-175-AA		175					1.6
	-250-AA		250		33			3.55
	-300-AA		300					4.4
	12C-117-AA	4～12	117	30	35	PMK12 VMK12		1.6
	-147-AA		147		60			1.7
	-177-AA		177		70			1.8
	-250-AA		250		35			3.7
	-300-AA		300					4.5
HSK100A	HSK100A-MMC 4 -131-AA	1～4	131	15	30	MPK 4	30,000	2.9
	8C-130-AA	2～8	130	20	33	PMK 8 VMK 8	20,000	2.9
	-160-AA		160		40			3.0
	-190-AA		190					3.1
	-250-AA		250		33			6.85
	-300-AA		300					8.3
	12C-130-AA	4～12	130	30	35	PMK12 VMK12		3.1
	-160-AA		160		60			3.2
	-190-AA		190		70			3.3
	-250-AA		250		35			7.0
	-300-AA		300					8.45

TAPER	Code No.	φD	L	φD1	L1	Collet	MAX.r/min	Weight(kg)
HSK50E	HSK 50E-MMC 4 -128-AA	1～4	128	15	30	MPK 4	30,000	1.4
	8C-127-AA	2～8	127	20	33	PMK 8 VMK 8		1.4
	12C-129-AA	4～12	129	30	36	PMK12 VMK12		1.6
HSK63E	HSK 63E-MMC 4 -116-AA	1～4	116	15	30	MPK 4	30,000	1.4
	8C-115-AA	2～8	115	20	33	PMK 8 VMK 8		1.4
	12C-117-AA	4～12	117	30	36	PMK12 VMK12		1.6

TAPER	Code No.	φD	L	φD1	L1	Collet	MAX.r/min	Weight(kg)
HSK63F	HSK 63F-MMC 4 -128-AA	1～4	128	15	30	MPK 4	30,000	1.4
	MMC 8C-127-AA	2～8	127	20	33	PMK 8 VMK 8		1.4
	MMC12C-129-AA	4～12	129	30	36	PMK12 VMK12		1.6

★Wrench **MMC4, MMC8C : EA573KL-6 MMC12C : MMCL12-M6W(HSK50A,63A) :**
MMC12C : MMCL12-M6T62(HSK100A) is attached as standard.

★**Extra-long sizes are added**
＊Extra-long sizes : longer +30～90㎜ than conventional.

★Collet is available as an option. Please refer ☞**P.284**

★Please refer☞**P.283** for **MMC** Coolant Solution. ★Lubrication Pipe is optional. Please refer☞**P.292**

★**MMC4C**, **MMC8C** and **MMC12C** with **"C"** at the end of code are compatible with high pressure centre through.

Extra-long sizes are added*

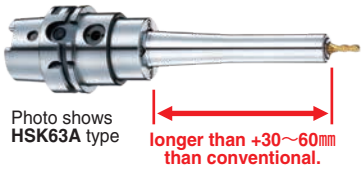

Photo shows **HSK63A** type

Easy to approach a complicated work piece due to compact and extra-long design

HSK Direct Screw Type MINI-MINI CHUCK ADVANCED ALPHA

NIKKEN

MMC-AT

High Pressure Centre Through (MAX. 7MPa)

High Speed

30,000r/min&G2.5
Gripping from Front Nose
Run-Out Accuracy :
3μm at 4D

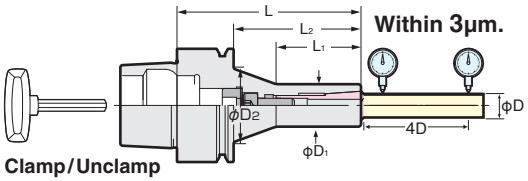

Clamp/Unclamp just with a wrench.

JAPAN PAT.

TAPER	Code No.	φD	L	φD1	φD2	L1	L2	Collet	MAX.r/min	Weight(kg)
HSK25E	HSK 25EN*1-MMC 4 - 60-AT	1～4	60	15	19.3	30	50	MPK 4	30,000	0.1
HSK32E	HSK 32EN*1-MMC 4 - 65-AT		65		26.0		45			0.2
HSK40E	HSK 40EN*1-MMC 4 - 65-AT									0.25
HSK50E	HSK 50E -MMC 4 - 70-AT		70		31.2		44			0.5
HSK63E	HSK 63E -MMC 8C*2-107-AT	2～8	107	20	42.6	36	78	PMK 8 VMK 8	30,000	0.95
	-135-AT		135			64	106			1.0
	HSK 63E -MMC12C*2-110-AT	4～12	110	30	51.8	43	83	PMK12 VMK12	30,000	1.2
	-135-AT		135			68	108			1.3
HSK63F	HSK 63F -MMC 4 - 70-AT	1～4	70	15	31.2	30	44	MPK 4	30,000	0.8
HSK40A	HSK 40AN*1-MMC 4 - 65-AT	1～4	65	15	26.0	30	45	MPK 4	30,000	0.25
HSK50A	HSK 50A -MMC 4 - 70-AT		70		31.2		44			0.5
HSK63A	HSK 63A -MMC 8C*2-107-AT	2～8	107	20	42.6	36	78	PMK 8 VMK 8	30,000	0.95
	-135-AT		135			64	106			1.0
	HSK 63A -MMC12C*2-110-AT	4～12	110	30	51.8	43	83	PMK12 VMK12		1.2
	-135-AT		135			68	108			1.3
HSK100A	HSK100A -MMC 8C*2-117-AT	2～8	117	20	46.3	36	85	PMK 8 VMK 8	20,000	2.35
	-145-AT		145			64	113			2.4
	HSK100A -MMC12C*2-120-AT	4～12	120	30	55.5	43	90	PMK12 VMK12		2.7
	-145-AT		145			68	115			2.8

★Wrench **MMC4→9ZFL,MMC8→EA573KL-15,MMC12→EA573KL-16** is attached as standard.
★Collet is available as an option. Please refer ☞**P.284**
★For the chucks marked*1 lubrication pipe can not be attached. Please use external cooling
★For the chucks marked*2 centre through coolant is available.
★Please refer ☞**P.283** for **MMC** Coolant Solution. ★Lubrication Pipe is optional. Please refer ☞ **P.292**
★**MMC4C**, **MMC8C** and **MMC12C** with **"C"** at the end of code are compatible with high pressure centre through.

9ZFL



EA573KL-15, EA573KL-16

DIRECT SCREW TYPE MINI-MINI CHUCK

NIKKEN

TAPER	Code No.	φD	L	φD1	L1	L2	Collet	MAX.r/min	Weight(kg)
No.30	BT30-MMC8C-65-AT	2～8	65	20	30	40	VMK 8	30,000	0.4

★Wrench **EA573KL-15** is attached as standard. ★Wrench both for chuck and pull stud is available as an option. Code No. is **MMCLA-BT30.**
★Collet is available as an option. Please refer ☞**P.284**

MMCLA-BT30

BT30 Direct Screw Type

Photo shows **BT30-MMC8-65-AT**

High Accuracy and High Gripping Torque by rigid and smooth shape body

HSK

HSK MINI-MINI MASTER CHUCK

NIKKEN

MINI-MINI MASTER CHUCK

MMC-ATB
High Pressure Centre Through (MAX. 7MPa)

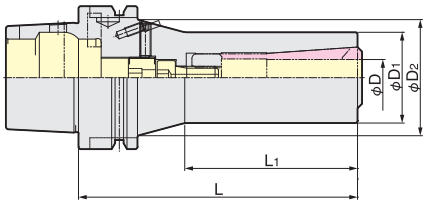

TAPER	Code No.	φD	L	φD1	φD2	L1	Collet	Weight (kg)
HSK63A	HSK 63A-MMC16C-125-ATB	10～16	123	40	52.7	76	VMK16-SF / VMK16-H	1.4
	-MMC20C-125-ATB	12～20		47	52.9	89	VMK20-SF / VMK20-H	1.6
HSK100A	HSK100A-MMC16C-132-ATB	10～16	130	40	70.8	73.5	VMK16-SF / VMK16-H	2.8
	-MMC20C-132-ATB	12～20		47	70.8	85.3	VMK20-SF / VMK20-H	3.0

★**VMK-H** collet for high torque is recommended.
★The included wrench is for temporary fixing.
★Wrench is attached as standard.
★Balance adjustment screw is available as an option. The Code No. of the screw is **9SFB-ASC-M4-3, 4, 6**
★Mounting handle is available as an option. The Code No. of the handle is **9SFB-AL-M2**
★Set Code for handle and all screws are **S.9SFB-ASC-M4**
★Lubrication Pipe is optional. Please refer ☞**P.292**

High torque specification VMK-H Collet

VMK-H



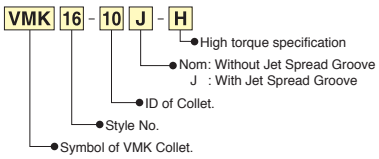

VMK-H Collet Code No.	Min.Gripping Length
VMK16-10, 12, 16-**H**	40, 42, 42
VMK20-12, 16, 20-**H**	47, 47, 47

VMK-H Collet Code No.	Min.Gripping Length
VMK16-10J, 12J, 16J-**H**	40, 42, 42
VMK20-12J, 16J, 20J-**H**	47, 47, 47

★Please note the acceptable shank tolerance is h6～h8.

VMK-SF Shrink Fit Holder

VMK-SF
High Pressure Centre Through (MAX. 7MPa)

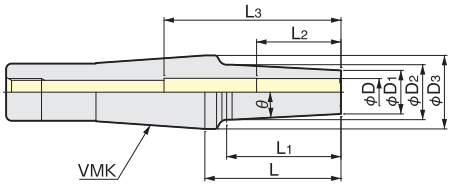

Standard Type

TAPER	Code No.	φD	φD1	φD2	φD3	θ	L	L1	L2	L3	Weight (kg)
VMK16	VMK16-SF 3S- 50	3	7.5	11.7	27	3°	50	42	10	-	0.3
	-SF 4S- 50	4	10	14.2					13		
	-SF 6S- 50	6	15	19.2					19		
	-SF 8S- 50	8	18	22.2					25		
	-SF10S- 50,80,110	10	16	20.2, 23.4, 27			50, 80, 110	42, 72, 105	31	65	0.3, 0.4, 0.5
	-SF12S- 50,80,110	12	19	23.2, 27, 27			50, 80, 110	42, 76.4, 76.4		50	0.3, 0.4, 0.5
	-SF16S- 50,80,110	16	24	27			50, 80, 110	28.7	33		0.4, 0.5, 0.6

High Rigidity Type

TAPER	Code No.	φD	φD1	φD2	φD3	θ	L	L1	L2	L3	Weight (kg)
VMK20	VMK20-SF10R- 50,80,110	10	22	26.2, 29.4, 32	32	3°	50, 80, 110	42, 72, 95.4	31	65	0.5, 0.6, 0.8
	-SF12R- 50,80,110	12	26	30.2, 32, 32			50, 80, 110	42, 57.3, 57.3		80	0.5, 0.7, 0.9
	-SF16R- 50,80,110	16	32	32		-	50, 80, 110	50, 80, 110	33	50	0.6, 0.7, 0.9

★Hybrid Shrink Fit Holder can be built by Mini-Mini Master Chuck and **VMK-SF** Shrink Fit Holder.

HSK HYBRID SHRINK-FIT HOLDER

NIKKEN

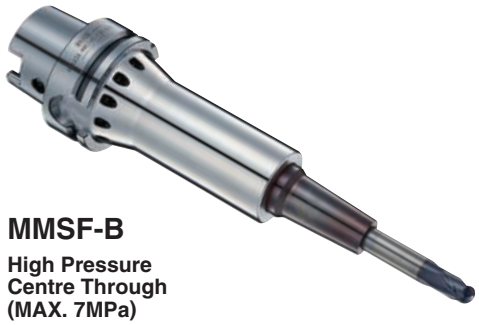

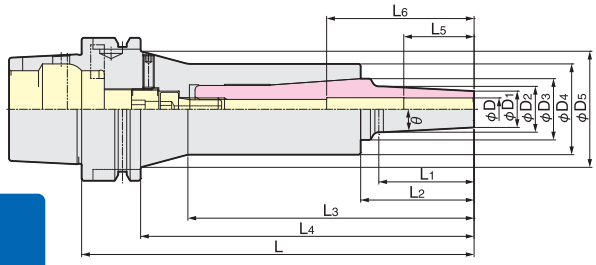

MMSF-B

High Pressure Centre Through (MAX. 7MPa)

MMSF-B holder is pre-balanced by the balance adjusting screws.
30,000r/min&G2.5

Standard Type

TAPER	Code No.	φD	φD1	φD2	φD3	φD4	φD5	θ	L	L1	L2	L3	L4	L5	L6	Weight (kg)
HSK63A	HSK 63A-MMSF 3S-173B	3	7.5	11.7	27	40	51.2	3°	173	42	50	126	147	10	-	1.7
	-MMSF 4S-173B	4	10	14.2										13		
	-MMSF 6S-173B	6	15	19.2										19		
	-MMSF 8S-173B	8	18	22.2										25		
	-MMSF10S-173B	10	16	20.2										31	65	
	-203B			23.4					203	72	80	156	177			1.8
	-233B			27					233	105	110	186	207			1.9
	-MMSF12S-173B	12	19	23.2					173	42	50	126	147		50	1.7
	-203B			27					203	76.4	80	156	177			1.8
	-233B								233		110	186	207			1.9
	-MMSF16S-173B	16	24						173	28.7	50	126	147	33		1.8
	-203B								203		80	156	177			1.9
	-233B								233		110	186	207			2.0
HSK100A	HSK100A-MMSF 3S-180B	3	6	10.2	27	40	55.5	3°	180	42	50	123.5	151	10	-	3.1
	-MMSF 4S-180B	4	7	11.2										13		
	-MMSF 6S-180B	6	9	13.2										19		
	-MMSF 8S-180B	8	13	17.2										25		
	-MMSF10S-180B	10	16	20.2										31	65	
	-210B			23.4					210	72	80	153.5	181			3.2
	-240B			27					240	105	110	183.5	211			3.3
	-MMSF12S-180B	12	19	23.2					180	42	50	123.5	151		50	3.1
	-210B			27					210	76.4	80	153.5	181			3.2
	-240B								240		110	183.5	211			3.3
	-MMSF16S-180B	16	24						180	28.7	50	123.5	151	33		3.2
	-210B								210		80	153.5	181			3.3
	-240B								240		110	183.5	211			3.4

High Rigidity Type

TAPER	Code No.	φD	φD1	φD2	φD3	φD4	φD5	θ	L	L1	L2	L3	L4	L5	L6	Weight (kg)
HSK63A	HSK 63A-MMSF10R-173B	10	22	26.2	32	47	51.3	3°	173	42	50	139	147	31	65	2.1
	-203B			29.4					203	72	80	169	177			2.2
	-233B			32					233	95.4	110	199	207			2.4
	-MMSF12R-173B	12	26	30.2					173	42	50	139	147		80	2.1
	-203B			32					203	57.3	80	169	177			2.3
	-233B								233		110	199	207			2.5
	-MMSF16R-173B	16	32					-	173	50	50	139	147	33	50	2.2
	-203B								203	80	80	169	177			2.3
	-233B								233	110	110	199	207			2.5
HSK100A	HSK100A-MMSF10R-180B	10	22	26.2	32	47	55.5	3°	180	42	50	133.5	151	31	65	3.5
	-210B			29.4					210	72	80	163.5	181			3.6
	-240B			32					240	95.4	110	193.5	211			3.8
	-MMSF12R-180B	12	26	30.2					180	42	50	133.5	151		80	3.5
	-210B			32					210	57.3	80	163.5	181			3.7
	-240B								240		110	193.5	211			3.9
	-MMSF16R-180B	16	32					-	180	50	50	133.5	151	33	50	3.6
	-210B								210	80	80	163.5	181			3.7
	-240B								240	110	110	193.5	211			3.9

★Hybrid Shrink Fit Holder can be built by Mini-Mini Chuck Master and **VMK-SF** Shrink Fit Holder. ☞ **P.235**
★Lubrication Pipe is optional. Please refer ☞ **P.292**

HSK STUB ARBOR

NIKKEN

■Reliable Milling with No Chattering Accomplished.

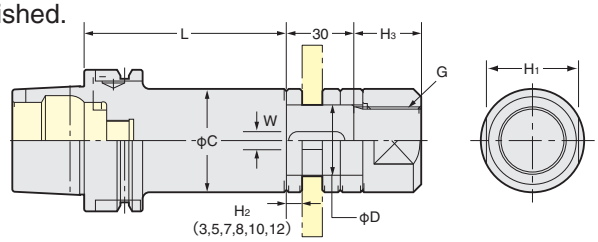

SCA

Inch Series (●)shows for Metric Series. Metric Series

TAPER	Code No.	D	L	C	W	H1	H3	G	Weight(kg)	Code No.
HSK 63A	HSK 63A-SCA25.4 -90	25.4(27)	90	40	6.35(7)	32	25	M24	1.8	HSK 63A-SCA27-90
	SCA31.75-90	31.75(32)		46	7.92(8)	41	30	M30	2.3	HSK 63A-SCA32-90
HSK100A	HSK100A-SCA25.4 -90	25.4(27)	90	40	6.35(7)	32	25	M24	3.2	HSK100A-SCA27-90
	SCA31.75-90	31.75(32)		46	7.92(8)	41	30	M30	3.7	HSK100A-SCA32-90

★JIS B4206, JIS B4107, JIS B4219, JIS B4109 cutters can be attached.
★Key and collars (H_2=3, 5, 7, 8, 10, 12mm) are supplied as standard. For Code No. of collar and nut, please refer ☞**P.112.**
★Lubrication Pipe is optional. Please refer☞**P.292**

HSK

HSK TAPPER CHUCK

NIKKEN

■With the axial NC floating system.

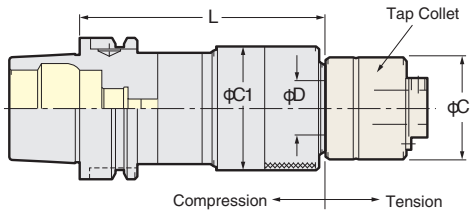

Z

TAPER	Code No.	Tapping Capability M	Tapping Capability U	Tapping Capability P	D	C	C1	Tap Collet	Weight (kg)
HSK 63A	HSK 63A-Z 8-115*1	M 2～M 8	1/8～1/4	—	13	23	33	ZKN 8	2.7
	-Z12-120	M 2～M12	1/8～1/2	P 1/16～1/4	19	32	45	ZKG12	3.2
	-Z16-130	M 3～M16	1/8～5/8	P 1/8～3/8	25	39	55	ZKG16	4.3
	-Z24-140	M 8～M24	1/2～ 1	P 1/4～5/8	30	46	68	ZKG24	4.7
	-Z38-190	M18～M38	3/8～1 3/8	P 3/8～ 1	45	78	85	ZKN38	8.2
HSK100A	HSK100A-Z 8-120*1	M 2～M 8	1/8～1/4	—	13	23	33	ZKN 8	3.5
	-Z12-125	M 2～M12	1/8～1/2	P 1/16～1/4	19	32	45	ZKG12	3.6
	-Z16-140	M 3～M16	1/8～5/8	P 1/8～3/8	25	39	55	ZKG16	5.0
	-Z24-150	M 8～M24	1/2～ 1	P 1/4～5/8	30	46	68	ZKG24	5.8
	-Z38-190	M18～M38	3/8～1 3/8	P 3/8～ 1	45	78	85	ZKN38	8.3
	-Z65-215	M36～M100	1～3 3/4	P 1～ 3	68	110(125)	110	ZKN65	9.0

★Marked ＊1 **Z8** Tapper Chuck and **ZKN8** Tap Collet are available as semi-standard.
★Please refer ☞**P.287** for **ZKG/ZKN** tap collet.
★**For Synchronized Tapping**
★**High pressure centre through coolant type and oil mist type are available. But, OZMK Tap Collet must be used. Please contact us.**
★Lubrication Pipe is optional. Please refer☞**P.292**

ZDS Centre Through
Photo shows "Dream Synchro Tap Holder+**ZDK** Tap Collet"

e.g.HSK 63A-ZDS12-110
ZDS16-120
ZDS24-125
HSK100A-ZDS12-120
ZDS16-130
ZDS24-135

MAJOR DREAM HOLDER

HSK MAJOR DREAM PRO-ENDMILL

JAPAN PAT.

NIKKEN

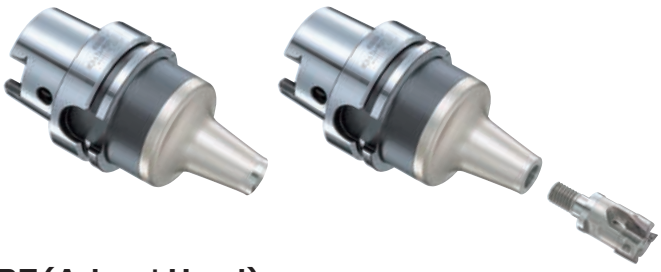

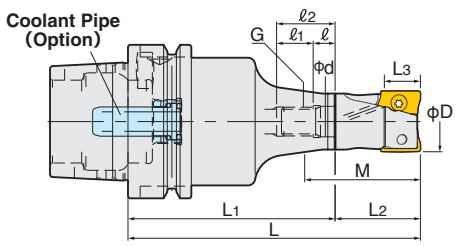

HSK-MDPE (Arbor+Head)

TAPER	Code No.	φD	L	L1	L2	MAX. Depth L3	M	Arbor Code No.	Head Code No.
HSK 63A	HSK 63A-MDPE16-100,120,135	16	100,120,135	70, 90,105	30	10	37.4	HSK 63A-MDPE-M 8- 70, 90,105	M 8-MDPE16-30
	-MDPE20-105,120,135	20	105,120,135	75, 90,105			40.0	-MDPE-M10- 75, 90,105	M10-MDPE20-30
	-MDPE25-105,120,135	25		70, 85,100	35	15	45.3,47.5,47.5	-MDPE-M12- 70, 85,100	M12-MDPE25-35
	-MDPE32-120,135,150	32	120,135,150	80, 95,110	40		52.5	-MDPE-M16- 80, 95,110	M16-MDPE32-40
HSK 100A	HSK100A-MDPE16-120,140,155	16	120,140,155	90,110,125	30	10	37.4	HSK100A-MDPE-M 8- 90,110,125	M 8-MDPE16-30
	-MDPE20-125,140,155	20	125,140,155	95,110,125			40.0	-MDPE-M10- 95,110,125	M10-MDPE20-30
	-MDPE25-125,140,155	25		90,105,120	35	15	45.3,47.5,47.5	-MDPE-M12- 90,105,120	M12-MDPE25-35
	-MDPE32-140,155,170	32	140,155,170	100,115,130	40		52.5	-MDPE-M16-100,115,130	M16-MDPE32-40

★2pcs of tip clamp bolt and tip clamp wrench are supplied as standard.
★Please refer ☞P.238 for cutting condition.
★Insert tip is available as an option . Please refer ☞P.181.
★Centre through coolant is available for all series.

HSK-MDPE-M (Arbor) ★Coolant pipe : Option ☞P.292

TAPER	Code No.	φD	L1	ID φd	Arbor Front Dia.	ℓ	ℓ1	ℓ2	Screw G
HSK 63A	HSK 63A-MDPE-M 8- 70, 90,105	16	70, 90,105	8.5	14.7	9	11	20	M 8
	-MDPE-M10- 75, 90,105	20	75, 90,105	10.5	18.7		12	21	M10
	-MDPE-M12- 70, 85,100	25	70, 85,100	12.5	23.0		15	24	M12
	-MDPE-M16- 80, 95,110	32	80, 95,110	17.0	30.0		16	25	M16
HSK 100A	HSK100A-MDPE-M 8- 90,110,125	16	90,110,125	8.5	14.7		11	20	M 8
	-MDPE-M10- 95,110,125	20	95,110,125	10.5	18.7		12	21	M10
	-MDPE-M12- 90,105,120	25	90,105,120	12.5	23.0		15	24	M12
	-MDPE-M16-100,115,130	32	100,115,130	17.0	30.0		16	25	M16

★Head is available as an option. ☞P.181 ★Centre through coolant is available for all series.
★This is interchangeable with DEPO. When the connection interface (Screw G and ID φd) is same, the cutter head of other carbide makers can be used.
★Lubrication Pipe is optional. Please refer ☞P.292

HSK

CUTTING CONDITION of PRO-ENDMILL

NIKKEN

Side Milling



- The bold figures of cutting speed **V**(m/min.) show the cutting speed when **a**e=0.5 X D. **V**(m/min.) should be reduced to 80%, when **a**e=0.75 X D.
- Feed rate per 1 tooth/ 1 revolution **f**(mm/tooth) should be smaller, when **a**p is getting larger. The feed rate of **f**(mm/tooth) shows the feed rate when **a**e=0.5 X D & **a**p=MAX.

Material		Mild Steel (SS400, S10C)	Carbon Steel (S45C, SCM440)	Cast Iron (FC300)	Ductile Cast Iron (FCD450)	Hardened Steel HRC40~55 (SKD)
Cutting Speed V		**220**(140~270)	**170**(110~210)	**170**(110~210)	**120**(80~150)	**85**(50~100)
f	MDPE16	**0.1**(0.1~0.15)			**0.07**(0.07~0.1)	
	MDPE20	**0.1**(0.1~0.25)			**0.07**(0.07~0.2)	**0.07**(0.07~0.15)
	MDPE25	**0.1**(0.1~0.3)			**0.07**(0.07~0.25)	**0.07**(0.07~0.15)
	MDPE32					

Groove Milling



- Feed rate per 1 tooth/ 1 revolution **f**(m/min) should be smaller, when **a**p is getting larger. The feed rate of **f**(mm/tooth) shows the feed rate when **a**e=0.5 X D & **a**p=MAX.
- MAX. ramping angle is **MDPE16: 15˚, MDPE20: 9˚, MDPE25: 11˚, MDPE32: 7˚**

Material		Mild Steel (SS400, S10C)	Carbon Steel (S45C, SCM440)	Cast Iron (FC300)	Ductile Cast Iron (FCD450)	Hardened Steel HRC40~55 (SKD)
Cutting Speed V		**180**(140~210)	**140**(110~160)	**100**(80~120)	**100**(80~120)	**70**(50~80)
f	MDPE16	**0.1**			**0.07**	
	MDPE20	**0.07**(0.07~0.1)				**0.07**
	MDPE25	**0.07**(0.07~0.15)				**0.07**
	MDPE32					

⚠
- Please clamp the insert tip with the suitable torque.
  AOMT123608 : 1.0Nm , AOMT184808 : 4.0Nm
- For the guide line of insert tip life, the frank wear within 0.3mm under normal cutting will be recommended.

HSK ZERO FIT TYPE MILLING CHUCK

NIKKEN

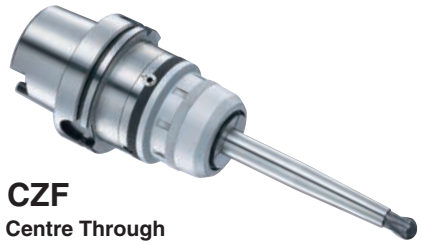

CZF
Centre Through

Fig.1



Fig.2



TAPER	Code No.	C1	C2	L	L1	L2	ℓ	Weight(kg)	Fig.	Collet
HSK 50A	HSK 50A-CZF20-115	51.5	66.5	115	35	73	80	1.8	1	KM20 CCK20
HSK 63A	HSK 63A-CZF20-110			110		68		2		KM20 CCK20
	-CZF25-110	59.5	74.5					2.5		KM25 CCK25
	-CZF32-130	69	80.5	130	42	88	105	2.8		KM32 CCK32
HSK 100A	HSK 100A-CZF20-115	51.5	66.5	115	35	–	80	3.5	2	KM20 CCK20
	-CZF25-115	59.5	74.5					3.8		KM25 CCK25
	-CZF32-115	69	80.5		42		83	4		KM32 CCK32

★Spanner is available as an option. **CZF20 type:9HC22, CZF25 type:9HC25, CZF32 type:9HC32**
★Please note that the acceptable shank tolerance is h6~h7.
★Wrench to adjust run-out (**9ZFL**) is available as an option.
★Please add **"P"** at the end of Code No. for **High Speed Zero Fit Milling Chuck**. **e.g. HSK63A-CZF25-110P**
★Multi-Cam style is available. **e.g. HSK63A-CZF32-130-C3**. (3 Cams) Please contact us for more detail.
★Please refer ☞**P.273** for Milling chuck Coolant Solution.
★Lubrication Pipe is optional. Please refer ☞**P.292**



9ZFL

★Please refer ☞**P.275** for **KM**, **CCK** collet.
★For Centre Through Coolant application:
Please use **CKFN-D Nut** for the direct chucking.
Please use **CCK** collet and **CKFN** nut for chucking with collet.

HSK

HSK ZERO FIT TYPE SLIM CHUCK

NIKKEN

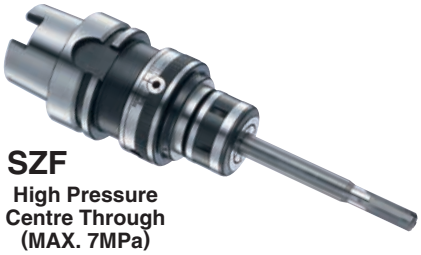

SZF
High Pressure Centre Through (MAX. 7MPa)

Fig.1

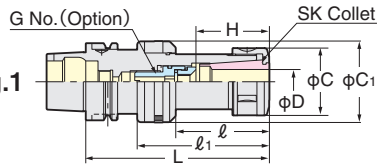

Fig.2

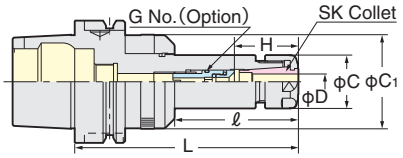

・When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.

TAPER	Code No.	D	L	ℓ	ℓ1	C	C1	H	G No.(Option)	Weight(kg)	Fig.	Collet
HSK 40A	HSK 40A-SZF 6C-105	0.7~6.0	105	32	70	19.5	40.5	26~31	SKG 6- 6HG	0.6	1	SK 6
	-SZF10C-105	1.75~10.0				27.5	48.5	35~41	SKG10-10HG	0.7		SK10
	-SZF16C-120	2.75~16.0	120	48	85	40	59.5	45~52	SKG16-10HG	0.8		SK16
HSK 50A	HSK 50A-SZF 6C-120	0.7~6.0	120	68	-	19.5	40.5	26~31	SKG 6- 6HG	0.9	2	SK 6
	-SZF10C-120	1.75~10.0		46	78	27.5	48.5	35~41	SKG10-10HG	1.1	1	SK10
	-SZF16C-135	2.75~16.0	135	57	93	40	59.5	45~52	SKG16-10HG	1.5		SK16
	-SZF25C-135	7.5~25.4				55	66.5	60~65	SKG25-18HGE	1.8		SK25
HSK 63A	HSK 63A-SZF 6C-120	0.7~6.0	120	68	-	19.5	40.5	26~31	SKG 6- 6HG	1.2	2	SK 6
	-SZF10C-105, 150	1.75~10.0	105, 150	53, 98		27.5	48.5	35~41	SKG10-10HG	1.3, 1.9		SK10
	-SZF16C-150	2.75~16.0	150	76		40	59.5	45~57	SKG16-12HG	2		SK16
	-SZF25C-135	7.5~25.4	135	57	93	55	66.5	60~65	SKG25-18HGE	2.1	1	SK25
HSK 100A	HSK 100A-SZF 6C-120	0.7~6.0	120	54	-	19.5	40.5	26~31	SKG 6- 6HG	2.4	2	SK 6
	-SZF10C-150	1.75~10.0	150	85		27.5	48.5	35~41	SKG10-10HG	3.4		SK10
	-SZF16C-150	2.75~16.0				40	59.5	45~57	SKG16-12HG	3.7		SK16
	-SZF25C-150	7.5~25.4		95		55	66.5	60~65	SKG25-18HGE	4.1		SK25

★Adjust screw (G No.), wrench to adjust run-out (**9ZFL**) and **SKL** spanner are available as an option. **SZF6C:SKL-6W, SZF10C:SKL-10, SZF16C:9HC16, SZF25C:9HC25**

★Spanner for run-out adjustment is available as an option. Code No. is **9ZFL**.
★Please use **"P"** class or **"A"** type **SK** collet. ☞**P.277**
★For High Speed type, Code No. is **"SZF-P"**. **e.g. HSK63A-SZF10C-105P**
★For Centre Through Coolant application, please use **SK J** type nut and cap. ☞**P.279**
Please note that the total tool length with **J** type nut is extended 6mm longer.
★Multi-Cam style is available. **e.g. HSK63A-SZF16C-150-C3**. (3 Cams) Please contact us for more detail.
★Please refer ☞**P.279** for **SK** Coolant Solution.
★Lubrication Pipe is optional. Please refer ☞**P.292**

9ZFL

GH Handle ☞**P.293**

HSK NC DRILL CHUCK

NIKKEN

NPU

■Compact, High Accuracy and Rigidity

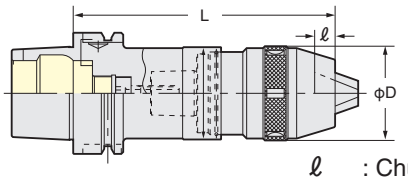

ℓ : Chucking Length
NPU 8 : 18.8mm
NPU13 : 26.5mm

TAPER	Code No	Chucking Dia φ mm	D	L		Weight(kg)
				MIN.	MAX.	
HSK 40A	HSK 40A-NPU 8-114	0.3～8	38	115.5	121.8	0.8
HSK 50A	HSK 50A-NPU 8-118	0.3～8	38	119.5	125.8	1.0
	-NPU13-135	1～13	48.5	136.2	147.6	1.5
HSK 63A	HSK 63A-NPU 8-120	0.3～8	38	121.6	127.9	1.3
	-NPU13-135	1～13	48.5	136.2	147.6	1.9
HSK100A	HSK100A-NPU 8-130	0.3～8	38	131.5	137.8	2.7
	-NPU13-145	1～13	48.5	144.9	156.3	3.4

★Wrench is available as an option. The Code No. of wrench is **NPU8:NPUL-8, NPU13:NPUL-13**
★Centre Through Coolant（MAX. 1MPa）is available for **NPU13** style only. Please add "**C**" at the Code No. **e.g. HSK63A-NPU13C-135**
★When it is used for centre through coolant holder, MIN. Chucking Dia. is 6mm.
★Lubrication Pipe is optional. Please refer☞**P.292**

HSK SIDE LOCK HOLDER

NIKKEN



SLS
Centre Through

■Simple and Rigid



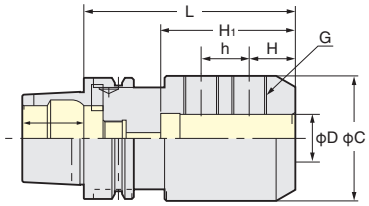

TAPER	Code No	φD	L	C	h	H	H1	G	Weight(kg)
HSK 63A	HSK 63A-SLS 6- 80	6	80	25	-	18	25	M6	0.9
	-SLS 8- 80	8		28			30	M8	0.9
	-SLS10- 80	10		35		20	42	M10	1.0
	-SLS12- 80	12		42		22.5	46	M12	1.2
	-SLS16- 80	16		48		24	52	M14	1.3
	-SLS20- 80	20		52		25	52	M16	1.4
	-SLS25-110	25	110	65	25	24	70	M18	1.8
	-SLS32-110	32		72	28		75	M20	2.6
HSK100A	HSK100A-SLS 6- 80	6	80	25	-	18	25	M6	2.3
	-SLS 8- 80	8		28			30	M8	2.3
	-SLS10- 80	10		35		20	42	M10	2.4
	-SLS12- 80	12		42		22.5	49	M12	2.6
	-SLS16-100	16	100	48		24	52	M14	3.0
	-SLS20-100	20		52		25	54	M16	3.1
	-SLS25-100	25		65	25	24	65	M18	3.7
	-SLS32-100	32		72	28		68	M20	3.9

★JIS B4005 end mill can be gripped.
★The Code No. for ultra heavy duty combination shank end mill is"**DM**". **e.g. HSK100A-DM50.8-120**



★Lubrication Pipe is optional. Please refer☞**P.292**
★Type SL○○CN is also available for drilling.

HSK

HSK FACE MILL ARBOR / HSK SHOULDER CUTTER ARBOR

NIKKEN

■FMA:JIS B 4113 Face Mill Cutter
FMC:Shoulder Cutter (SANDVIK, SUMITOMO etc.)

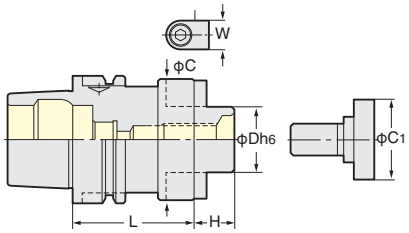

FMA

TAPER	Dimensions							Drive key	Lock bolt	Weight (kg)
	Code No.	D	L	H	C	C1	W			
HSK 40A	HSK 40A-FMA25.4 -50	25.4	50	22	50	33	9.5	FW5	FM12	0.7
HSK 50A	HSK 50A-FMA25.4 -55	25.4	55	22	50	33	9.5	FW5	FM12	0.8
HSK 63A	HSK 63A-FMA25.4 -50	25.4	50	22	50	33	9.5	FW5	FM12	1.2
	-FMA31.75 -60	31.75	60	30	60	40	12.7	FW13	FM16	1.6
	-FMA38.1 -60	38.1		34	80	50	15.9	FW18	FM20	1.8
HSK100A	HSK100A-FMA25.4 -50	25.4	50	22	50	33	9.5	FW5	FM12	2.4
	-FMA31.75 -75	31.75	75	30	70	40	12.7	FW13	FM16	3.4
	-FMA38.1 -75	38.1		34	80	50	15.9	FW19	FM20	3.8
	-FMA50.8 -75	50.8		36	100	65	19	FW24	FM24	4.4
	-FMA47.625-75	47.625		38	128.57	–	25.4	FW26	9GM16-55*	5.3

★The arbor marked * requires 4 fixing bolts. (9GM16-55)

FMC

TAPER	Dimensions							Drive key	G Cap bolt	Weight (kg)
	Code No.	D	L	H	C	C1	W			
HSK 40A	HSK 40A-FMC22-50	22	50	18	45	16	10	FW 8	9GM10-30	0.6
HSK 50A	HSK 50A-FMC22-50	22	50	18	45	16	10	FW 8	9GM10-30	0.7
	-FMC27-60	27	60	20	60	18	12	FW11	9GM12-35	1.1
HSK 63A	HSK 63A-FMC22-45, 60	22	45, 60	18	45	16	10	FW 8	9GM10-30	1.0, 1.2
	-FMC27-60	27	60	20	60	18	12	FW11	9GM12-35	1.4
	-FMC32-60	32		22	80	24	14	FW16	9GM16-35	1.9
HSK100A	HSK100A-FMC22-50	22	50	18	45	16	10	FW 8	9GM10-30	2.4
	-FMC27-50	27		20	60	18	12	FW11	9GM12-35	2.6
	-FMC32-75	32	75	22	80	24	14	FW16	9GM16-35	3.4

★Drive key, L-Wrench & Bolts are supplied as standard.
★The bolt may not be the same as above table, please use the bolt specified by the cutter maker.
★Extended length Face Mill Arbors are available as an option.
HSK100A-FMA25.4 -200, 250
-FMA31.75-150, 200
-FMA38.1 -150, 200

★Above weight is for arbor only. (Not include Face Mill Cutter)
★In case of the special cutter, please specify the dimension below.

★Lubrication Pipe is optional. Please refer ☞P.292

★In case of the special cutter, please specify the dimensions below.

HSK MORSE TAPER ADAPTER A TYPE

NIKKEN

■For Drill & Reamer with MT1～MT5 Shank.
■With Side Lock Screw.

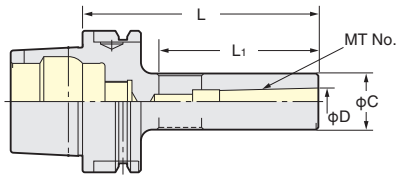

MTA

TAPER	Code No.	MT.No.	D	C	L1	Weight(kg)
HSK 63A	HSK 63A-MTA1-105	1	12.065	25	74	0.9
	-MTA2-120	2	17.780	32	89	1.1
	-MTA3-150	3	23.825	40	119	1.6
	-MTA4-165	4	31.267	50	136	2.2
HSK100A	HSK100A-MTA1-110	1	12.065	25	71	2.3
	-MTA2-125	2	17.780	32	86	2.3
	-MTA3-140	3	23.825	40	106	2.8
	-MTA4-165	4	31.267	50	131	3.6
	-MTA5-195	5	44.399	65	161	4.9

★Lubrication Pipe is optional. Please refer ☞P.292

HSK FMH FACE MILL ARBOR

NIKKEN

FMH

■For Oil Hole Cutter
For High Feed Cutter

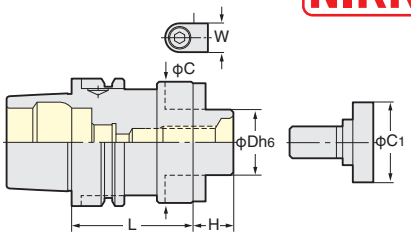

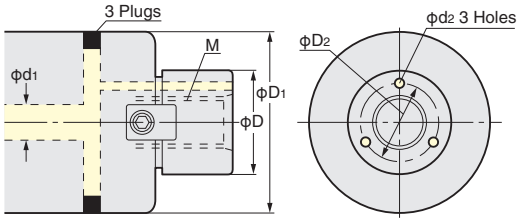

Code No.	Cutter Dia.	φD	φD1	M	Coolant Hole φD2	Coolant Hole φd1	Coolant Hole φd2
FMH22(22.225)	φ50, φ52	22(22.225)	47	M10 P1.5	16	6~8	3
	φ63, φ66		60				
FMH27(25.4)	φ80	27(25.4)	76(70)	M12 P1.75	19.5(18.5)	8~10	3.5
FMH32(31.75)	φ100	32(31.75)	96	M16 P2.0	24	10~13	4
FMH40(38.1)	φ125	40(38.1)	100	M20 P2.5	30(29)	10~15	5
FMH50.8	φ160	50.8	100	M24 P3.0	37.5	15~20	7

★Fixing dimension is basically based on **FMA/FMC.** ★The combination of the other cutter dia. are also available.

FMH Inch Series

★Lubrication Pipe is optional. Please refer ☞P.292

TAPER	Arbor Code No.	D	L	H	C	C1	W	Drive Key	Lock Bolt	G Cap Bolt	Weight (kg)
HSK 63A	HSK 63A-FMH22.225 - 47 - 45	22.225	45	17	47	28	8	FW 3	FM10	—	1.1
	- 60		60								1.3
	- 90		90								1.7
	-150		150								2.5
	-FMH25.4 - 70 - 60	25.4	60	22	70	33	9.5	FW 5	FM12	—	1.8
	- 90		90								2.5
	-150		150								4.1
	-FMH31.75 - 76 - 60	31.75	60	30	76	40	12.7	FW13	FM16	—	2.0
	- 90		90								2.7
HSK100A	HSK100A-FMH22.225 - 47 -105	22.225	105	17	47	28	8	FW 3	FM10	—	3.4
	-150		150								4.0
	-200		200								4.7
	-250		250								5.3
	-FMH22.225 - 60 - 60	22.225	60	17	60	28	8	FW 3	FM10	—	2.9
	-105		105								3.9
	-150		150								4.9
	-200		200								6.1
	-250		250								7.2
	-FMH25.4 - 70 - 60	25.4	60	22	70	33	9.5	FW 5	FM12	—	3.2
	- 90		90								4.1
	-150		150								5.9
	-200		200								7.4
	-FMH31.75 - 76 - 60	31.75	60	30	76	40	12.7	FW13	FM16	—	3.9
	- 90		90								5.5
	-105		105								6.4
	-150		150								9.0
	-200		200								11.8
	-FMH38.1 -100 - 60	38.1	60	34	100	50	15.9	FW19	FM20	—	4.1
	- 90		90								5.9
	-105		105								6.8
	-150		150								9.6

FMH Metric Series

★Lubrication Pipe is optional. Please refer ☞P.292

TAPER	Arbor Code No.	D	L	H	C	C1	W	Drive Key	Lock Bolt	G Cap Bolt	Weight (kg)
HSK 63A	HSK 63A-FMH16 - 37 - 45	16	45	17	37	20	8	FW 3	FM 8	—	1.0
	-FMH22 - 47 - 45	22	45	18	47	16	10	FW 8	—	9GM10-30	1.1
	- 60		60								1.3
	- 90		90								1.7
	-150		150								2.5
	-FMH27 - 60 - 60	27	60	20	60	18	12	FW11	—	9GM12-35	1.6
	- 90		90								2.3
HSK100A	HSK100A-FMH22 - 47 -105	22	105	18	47	16	10	FW 8	—	9GM10-30	3.4
	-150		150								4.0
	-200		200								4.7
	-250		250								5.4
	-FMH22 - 60 - 60	22	60	18	60	16	10	FW 8	—	9GM10-30	2.9
	-105		105								3.9
	-150		150								5.4
	-200		200								6.1
	-250		250								7.2
	-FMH27 - 60 - 60	27	60	20	60	18	12	FW11	—	9GM12-35	2.9
	- 90		90								3.7
	-150		150								5.0
	-FMH27 - 76 - 60	27	60	20	76	18	12	FW11	—	9GM12-35	3.2
	- 90		90								4.3
	-150		150								6.5
	-FMH32 - 96 - 60	32	60	22	96	24	14	FW16	—	9GM16-35	3.8
	- 90		90								5.5
	-150		150								8.9
	-FMH40 -100 - 75	40	75	26	100	50	16	FW22	FM20	—	4.9
	-105		105								6.8

HSK BALANCE-CUT BORING ARBOR (RAC-E)

NIKKEN

Rough Boring— For Steel, Stainless Steel and Cast Iron CC Insert (Positive type)

RAC-E



Fig.1

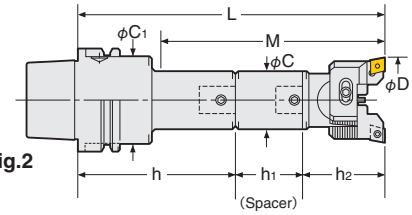

Fig.2

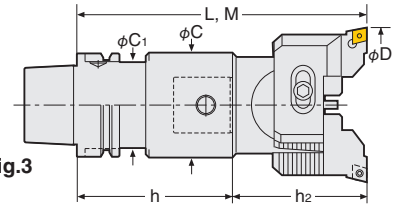

Fig.3

TAPER	Code No.	Boring Range D	Boring Depth M	C	C_1	Shank Code No.	Spacer Code No.	P.244 Head Code No.	P.244 Tip No.	Weight (kg)	Fig
HSK63A	HSK 63A-RAC25-135E	25～32	67	15	24	HSK 63A-Q12- 80	—	12-RAC 25- 55E	CC07	1.7	1
	-165E		105			-Q12-110				1.8	
	-180E		112			-Q12- 80	SP12-12-45			1.8	2
	-RAC32-150E	32～45	77	19	30	-Q16- 95	—	16-RAC 32- 55E	CC08	2.1	1
	-180E		110			-Q16-125				2.3	
	-195E		122			-Q16- 95	SP16-16-45			2.3	2
	-RAC43-150E	43～55	97	40	50	-Q20- 80	—	20-RAC 43- 70E	CC12	2.4	1
	-180E		130			-Q20-110				2.6	
	-210E		157			-Q20- 80	SP20-20-60			2.9	2
	-RAC53-165E	53～70	135	53		-Q26- 95	—	26-RAC 53- 70E		2.2	1
	-210E		180			-Q26-140				3.0	
	-225E		195			-Q26- 95	SP26-26-60			3.0	2
	-RAC70-180E	70～100	180	64	52.4	-Q34- 95	—	34-RAC 70- 85E		4.5	3
	-195E		195			-Q34-110				4.9	
	-240E		240			-Q34- 95	SP34-34-60			5.9	
	-RAC100-195E	100～130	195	83		-Q42- 95	—	42-RAC100-100E		6.5	

★**"C" grade (Coated)** inserts are supplied as standard with the head. ☞ **P.244** Please refer ☞ **P.100** for cutting condition.
★Please refer ☞ **P.261** for base holder, ☞ **P.90** for spacer and ☞ **P.67** for head.
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. HSK63A-RAC53-165E-C**
★For **HSK40A** or **50A**, modular connection system is applied. Please refer ☞ **P.261** for Base Holder.
★**When L length is required longer than standard, please specify the boring depth M.**
★Lubrication Pipe is optional. Please refer ☞ **P.292**



Coolant Through Tool

HSK

HSK BALANCE-CUT BORING ARBOR (RAC-E)

NIKKEN

Balance cut boring bar executes boring in 2 cartridge inserts absorbing the vibration each other. The faster the feed rate, the better swarf ejection. This is ideal for rough and medium boring.

Double Cutting Capability



Please use RAC-K for through hole boring.
☞ **P.249, P.250**

Example of 2 Stepped Balance Cut



Approx. double removal of below cutting condition is possible by **-0.3 Cartridge.**
☞ **P.68**

TAPER	Code No.	Boring Range D	Boring Depth M	C	C_1	Shank Code No.	Spacer Code No.	P.244 Head Code No.	P.244 Tip No.	Weight (kg)	Fig
HSK100A	HSK100A-RAC 25-150E	25～32	67	15	24	HSK100A-Q12- 95	—	12-RAC 25- 55E	CC07	3.9	1
	-180E		105			-Q12-125				4.1	
	-195E		112			-Q12- 95	SP12-12-45			4.0	2
	-RAC 32-180E	32～45	77	31	50	-Q16-125N	—	16-RAC 32- 55E	CC08	4.6	1
	-210E		110			-Q16-155				4.8	
	-225E		122			-Q16-125N	SP16-16-45			4.8	2
	-RAC 43-180E	43～55	97	40	60	-Q20-110	—	20-RAC 43- 70E	CC12	4.9	1
	-195E		130			-Q20-125				5.0	
	225E		142			-Q20-110	SP20-20-45			5.3	2
	-240E		157			-Q20-110	SP20-20-60			5.4	
	-RAC 53-210E	53～70	117	53	65	-Q26-140	—	26-RAC 53- 70E		6.1	1
	-240E		182			-Q26-170N				6.2	
	-270E		177			-Q26-140	SP26-26-60			6.8	2
	-RAC 70-255E	70～100	202	64	80	-Q34-170	—	34-RAC 70- 85E		8.7	1
	-285E		232			-Q34-200				9.1	
	-315E		262			-Q34-170	SP34-34-60			10.1	2
	-RAC100-225E	100～130	225	83	83	-Q42-125	—	42-RAC100-100E		11.7	1
	-290E		290			-Q42-190				11.7	
	-315E		315			-Q42-125	SP42-42-90			15.1	2

★**"C" grade (Coated)** inserts are supplied as standard with the head. ☞**P.244** Please refer ☞**P.100** for cutting condition.
★Please refer ☞**P.261** for base holder, ☞**P.90** for spacer and ☞**P.67** for head.
★**For centre through coolant type, please add"-C"at the end of Code No. e.g. HSK100A-RAC53-210E-C**
★For **HSK40A** or **50A**, modular connection system is applied. Please refer ☞**P.261** for Base Holder.
★**HSK100A-RAC100-375E, 425E and 475E are also available.**
★Lubrication Pipe is optional. Please refer ☞**P.292**

Insert tip for RAC-E

● : best ○ : good

Material			
	Steel	●	
	Stainless Steel	●	
	Cast Iron	○	●
	Aluminium		
		Coated Carbide M	Coated Carbide K
	Grade	C	
	Material / Nose R	AC630M	AC410K

Applicable Arbor	Dimension	Code No.	Nose R	AC630M	AC410K
RAC25E		CC07-○4	0.4	●	●
		CC07-○8	0.8	●	●
RAC25E(CC08), RAC32E		CC08-○4	0.4	●	●
		CC08-○8	0.8	●	●
RAC43E - RAC530E		CC12-○4	0.4	●	●
		CC12-○8	0.8	●	●

★Minimum order quantity : 10pcs.

Please add the grade indication into ○, and add the insert tip material indication at the end off the Code No.
e.g. CC12-C8 (AC630M)

HSK

HSK BALANCE-CUT BORING ARBOR (RAC)

NIKKEN

Rough Boring— For Heavy Duty Boring of Iron and Cast Iron CN Insert (Negative type)

Heavy Duty Boring

RAC



Fig.1

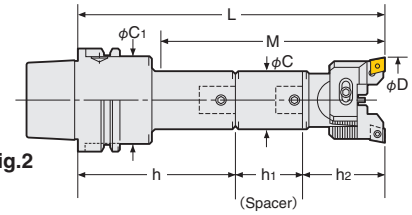

Fig.2

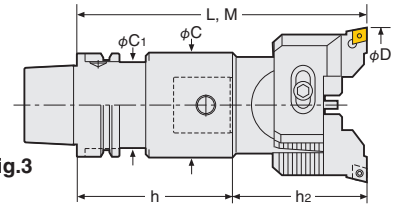

Fig.3

TAPER	Code No.	Boring Range D	Boring Depth M	C	C_1	Shank Code No.	Spacer Code No.	P.246 Head Code No.	P.246 Tip No.	Weight (kg)	Fig
HSK63A	HSK 63A-RAC43-150	43～55	97	40	50	HSK 63A-Q20- 80	—	20-RAC 43- 70	CN08	2.4	1
	-180		130			-Q20-110				2.6	
	-210		157			-Q20- 80	SP20-20-60			2.9	2
	-RAC53-165	53～70	135	53		-Q26- 95	—	26-RAC 53- 70		2.2	1
	-210		180			-Q26-140				3.0	
	-225		195			-Q26- 95	SP26-26-60			3.0	2
	-RAC70-180	70～100	180	64	52.4	-Q34- 95	—	34-RAC 70- 85		4.5	3
	-195		195			-Q34-110				4.9	
	-240		240			-Q34- 95	SP34-34-60			5.9	
	-RAC100-195	100～130	195	83		-Q42- 95	—	42-RAC100-100		6.5	

★**"C" grade (Coated)** inserts are supplied as standard with the head. ☞ **P.246** Please refer ☞ **P.100** for cutting condition.
★Please refer ☞ **P.261** for base holder, ☞ **P.90** for spacer and ☞ **P.67** for head.
★**For centre through coolant type, please add"-C"at the end of Code No. e.g. HSK63A-RAC53-165-C**
★For **HSK40A** or **50A**, modular connection system is applied. Please refer ☞ **P.261** for Base Holder.
★**When L length is required longer than standard, please specify the boring depth M.**
★Lubrication Pipe is optional. Please refer ☞ **P.292**



Coolant Through Tool

HSK

HSK BALANCE-CUT BORING ARBOR (RAC)

NIKKEN

Balance cut boring bar executes boring in 2 cartridge inserts absorbing the vibration each other. The faster the feed rate, the better swarf ejection. This is ideal for rough and medium boring.

Double Cutting Capability



Please use RAC-K for through hole boring.
☞P.249, P.250

Example of 2 Stepped Balance Cut



Approx. double removal of below cutting condition is possible by **-0.3 Cartridge.**
☞P.68

TAPER	Code No.	Boring Range D	Boring Depth M	C	C_1	Shank Code No.	Spacer Code No.	P.246 Head Code No.	P.246 Tip No.	Weight (kg)	Fig
HSK100A	HSK100A-RAC 43-180	43～55	97	40	60	HSK100A-Q20-110	—	20-RAC 43- 70	CN08	4.9	1
	-195		130			-Q20-125				5.0	
	225		142			-Q20-110	SP20-20-45			5.3	2
	-240		157			-Q20-110	SP20-20-60			5.4	
	-RAC 53-210	53～70	117	53	65	-Q26-140	—	26-RAC 53- 70		6.1	1
	-240		182			-Q26-170N				6.2	
	-270		177			-Q26-140	SP26-26-60			6.8	2
	-RAC 70-255	70～100	202	64	80	-Q34-170	—	34-RAC 70- 85		8.7	1
	-285		232			-Q34-200				9.1	
	-315		262			-Q34-170	SP34-34-60			10.1	2
	-RAC100-225	100～130	225	83	83	-Q42-125	—	42-RAC100-100		11.7	1
	-290		290			-Q42-190				11.7	
	-315		315			-Q42-125	SP42-42-90			15.1	2

★**"C" grade (Coated)** inserts are supplied as standard with the head. ☞ **P.246** Please refer ☞ **P.100** for cutting condition.
★Please refer ☞ **P.261** for base holder, ☞ **P.90** for spacer and ☞ **P.67** for head.
★**For centre through coolant type, please add"-C"at the end of Code No. e.g. HSK100A-RAC53-210-C**
★For **HSK40A** or **50A**, modular connection system is applied. Please refer ☞ **P.261** for Base Holder.
★**HSK100A-RAC100-375, 425 and 475 are also available.**
★Lubrication Pipe is optional. Please refer ☞ **P.292**

Insert tip for RAC for Heavy Duty Boring

Material		
	Steel	●
	Stainless Steel	●
	Cast Iron	●
	Aluminium	
		Coated Carbide M
	Grade	C
	Material	AC630M

Applicable Arbor	Dimension	Code No.	Nose R	
RAC43 - RAC530		CN08-○8	0.8	●

★Minimum order quantity : 10pcs.
★**When CN08 insert (CN○○1204○○) in the market is used, please use the eccentric bolt type cartridge (S.RCC-○○Q) ☞P.104. Nikken CN08-○8 insert can be used on the eccentric bolt type cartridge.**

Please add the grade indication into ○, and add the insert tip material indication at the end off the Code No.
e.g. CC08-C8(AC630M)

HSK

HSK BALANCE-CUT BORING ARBOR (RAC-A)

NIKKEN

Rough Boring—For Aluminium

RAC-A

Fig.1



Fig.2

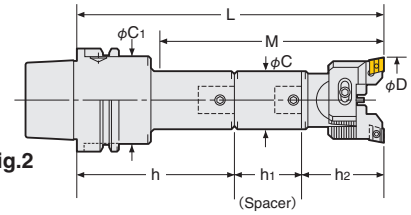

Fig.3

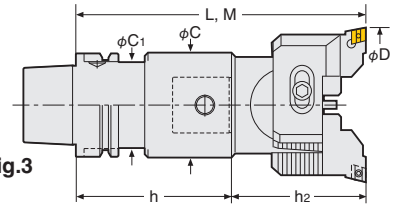

TAPER	Code No.	Boring Range D	Boring Depth M	C	C_1	Shank Code No.	Spacer Code No.	P.248 Head Code No.	P.248 Tip No.	Weight (kg)	Fig
HSK63A	HSK 63A-RAC25-135A	25～32	67	15	24	HSK 63A-Q12- 80	—	12-RAC 25- 55A	AEG12	1.7	1
	-165A		105			-Q12-110				1.8	
	-180A		112			-Q12- 80	SP12-12-45			1.8	2
	-RAC32-150A	32～45	77	19	30	-Q16- 95	—	16-RAC 32- 55A		2.1	1
	-180A		110			-Q16-125				2.3	
	-195A		122			-Q16- 95	SP16-16-45			2.3	2
	-RAC43-150A	43～55	97	40	50	-Q20- 80	—	20-RAC 43- 70A	AEG16	2.4	1
	-180A		130			-Q20-110				2.6	
	-210A		157			-Q20- 80	SP20-20-60			2.9	2
	-RAC53-165A	53～70	135	53		-Q26- 95	—	26-RAC 53- 70A		2.2	1
	-210A		180			-Q26-140				3.0	
	-225A		195			-Q26- 95	SP26-26-60			3.0	2
	-RAC70-180A	70～100	180	64	52.4	-Q34- 95	—	34-RAC 70- 85A		4.5	3
	-195A		195			-Q34-110				4.9	
	-240A		240			-Q34- 95	SP34-34-60			5.9	
	-RAC100-195A	100～130	195	83		-Q42- 95	—	42-RAC100-100A		6.5	

★**"F" grade** inserts are supplied as standard with the head. ☞**P.248** Please refer ☞**P.100** for cutting condition.
★Please refer ☞**P.261** for base holder, ☞**P.90** for spacer and ☞**P.67** for head.
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. HSK63A-RAC53-165A-C**
★For **HSK40A** or **50A**, modular connection system is applied. Please refer ☞ **P.261** for Base Holder.
★**When L length is required longer than standard, please specify the boring depth M.**
★Lubrication Pipe is optional. Please refer ☞**P.292**



Coolant Through Tool

HSK

HSK BALANCE-CUT BORING ARBOR (RAC-A)

NIKKEN

Balance cut boring bar executes boring in 2 cartridge inserts absorbing the vibration each other. The faster the feed rate, the better swarf ejection. This is Ideal for rough and medium boring.

Double Cutting Capability



Example of 2 Stepped Balance Cut



Approx. double removal of below cutting condition is possible by **-0.3 Cartridge.** ☞**P.68**

TAPER	Code No.	Boring Range D	Boring Depth M	C	C_1	Shank Code No.	Spacer Code No.	P.248 Head Code No.	P.248 Tip No.	Weight (kg)	Fig
HSK100A	HSK100A-RAC 25-150A	25～32	67	15	24	HSK100A-Q12- 95	—	12-RAC 25- 55A	AEG12	3.9	1
	-180A		105			-Q12-125				4.1	
	-195A		112			-Q12- 95	SP12-12-45			4.0	2
	-RAC 32-180A	32～45	77	31	50	-Q16-125N	—	16-RAC 32- 55A		4.6	1
	-210A		110			-Q16-155				4.8	
	-225A		122			-Q16-125N	SP16-16-45			4.8	2
	-RAC 43-180A	43～55	97	40	60	-Q20-110	—	20-RAC 43- 70A	AEG16	4.9	1
	-195A		130			-Q20-125				5.0	
	225A		142			-Q20-110	SP20-20-45			5.3	2
	-240A		157			-Q20-110	SP20-20-60			5.4	
	-RAC 53-210A	53～70	117	53	65	-Q26-140	—	26-RAC 53- 70A		6.1	1
	-240A		182			-Q26-170N				6.2	
	-270A		177			-Q26-140	SP26-26-60			6.8	2
	-RAC 70-255A	70～100	202	64	80	-Q34-170	—	34-RAC 70- 85A		8.7	1
	-285A		232			-Q34-200				9.1	
	-315A		262			-Q34-170	SP34-34-60			10.1	2
	-RAC100-225A	100～130	225	83	83	-Q42-125	—	42-RAC100-100A		11.7	1
	-290A		290			-Q42-190				11.7	
	-315A		315			-Q42-125	SP42-42-90			15.1	2

★**"F" grade** inserts are supplied as standard with the head. ☞**P.248** Please refer ☞**P.100** for cutting condition.
★Please refer ☞**P.261** for base holder, ☞**P.90** for spacer and ☞**P.67** for head.
★**For centre through coolant type, please add"-C"at the end of Code No. e.g. HSK100A-RAC53-210A-C**
★For **HSK40A** or **50A**, modular connection system is applied. Please refer ☞**P.261** for Base Holder.
★**HSK100A-RAC100-375A, 425A and 475A are also available.**
★Lubrication Pipe is optional. Please refer ☞**P.292**

Insert tip for RAC-A

Material		
	Steel	
	Stainless Steel	
	Cast Iron	
	Aluminium	●
		Coated Carbide K
	Grade	F
	Material	KW10

Applicable Arbor	Dimension	Code No.	Nose R	KW10
RAC25A, RAC32A		AEG12-○1	0.1	●
		AEG12-○2	0.2	●
		AEG12-○4	0.4	●
RAC43A-RAC530A		AEG16-○1	0.1	●
		AEG16-○2	0.2	●
		AEG16-○4	0.4	●

★Minimum order quantity : 10pcs.

Please add the grade indication into ○, and add the insert tip material indication at the end off the Code No. e.g. AEG16-F2(KW10)

HSK

HSK BALANCE-CUT BORING ARBOR (RAC-K)

NIKKEN

Rough Boring—For Through Hole and Multi Sheets

RAC-K

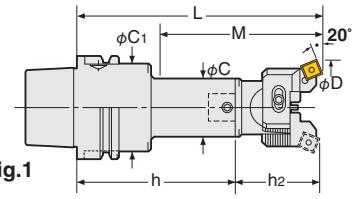

Fig.1

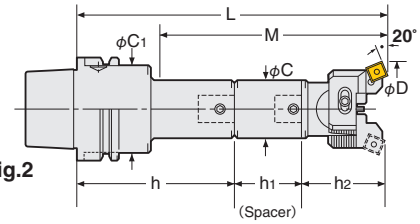

Fig.2

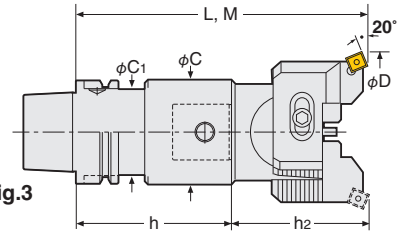

Fig.3

TAPER	Code No.	Boring Range D	Boring Depth M	C	C1	Shank Code No.	Spacer Code No.	P.250 Head Code No.	P.250 Tip No.	Weight (kg)	Fig
HSK63A	HSK 63A-RAC25-135K	25～32	67	15	24	HSK 63A-Q12- 80	—	12-RAC 25- 55K	SC09	1.7	1
	-165K		105			-Q12-110				1.8	
	-180K		112			-Q12- 80	SP12-12-45			1.8	2
	-RAC32-150K	32～45	77	19	30	-Q16- 95	—	16-RAC 32- 55K		2.1	1
	-180K		110			-Q16-125				2.3	
	-195K		122			-Q16- 95	SP16-16-45			2.3	2
	-RAC43-150K	43～55	97	40	50	-Q20- 80	—	20-RAC 43- 70K	SC12	2.4	1
	-180K		130			-Q20-110				2.6	
	-210K		157			-Q20- 80	SP20-20-60			2.9	2
	-RAC53-165K	53～70	135	53		-Q26- 95	—	26-RAC 53- 70K		2.2	1
	-210K		180			-Q26-140				3.0	
	-225K		195			-Q26- 95	SP26-26-60			3.0	2
	-RAC70-180K	70～100	180	64	52.4	-Q34- 95	—	34-RAC 70- 85K		4.5	3
	-195K		195			-Q34-110				4.9	
	-240K		240			-Q34- 95	SP34-34-60			5.9	
	-RAC100-195K	100～130	195	83		-Q42- 95	—	42-RAC100-100K		6.5	

★**"C" grade (Coated)** inserts are supplied as standard with the head. ☞**P.250** Please refer ☞**P.100** for cutting condition.
★Please refer ☞**P.261** for base holder, ☞**P.90** for spacer and ☞**P.67** for head.
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. HSK63A-RAC53-165K-C**
★For **HSK40A** or **50A**, modular connection system is applied. Please refer ☞ **P.261** for Base Holder.
★**When L length is required longer than standard, please specify the boring depth M.**
★Lubrication Pipe is optional. Please refer ☞**P.292**



Coolant Through Tool

HSK

HSK BALANCE-CUT BORING ARBOR (RAC-K)

NIKKEN

Balance cut boring bar executes boring in 2 cartridge inserts absorbing the vibration each other. The faster the feed rate, the better swarf ejection. This is Ideal for rough and medium boring.

Double Cutting Capability



TAPER	Code No.	Boring Range D	Boring Depth M	C	C_1	Shank Code No.	Spacer Code No.	P.250 Head Code No.	P.250 Tip No.	Weight (kg)	Fig
HSK100A	HSK100A-RAC 25-150K	25～32	67	15	24	HSK100A-Q12- 95	—	12-RAC 25- 55K	SC09	3.9	1
	-180K		105			-Q12-125				4.1	
	-195K		112			-Q12- 95	SP12-12-45			4.0	2
	-RAC 32-180K	32～45	77	31	50	-Q16-125N	—	16-RAC 32- 55K		4.6	1
	-210K		110			-Q16-155				4.8	
	-225K		122			-Q16-125N	SP16-16-45			4.8	2
	-RAC 43-180K	43～55	97	40	60	-Q20-110	—	20-RAC 43- 70K	SC12	4.9	1
	-195K		130			-Q20-125				5.0	
	225K		142			-Q20-110	SP20-20-45			5.3	2
	-240K		157			-Q20-110	SP20-20-60			5.4	
	-RAC 53-210K	53～70	117	53	65	-Q26-140	—	26-RAC 53- 70K		6.1	1
	-240K		182			-Q26-170N				6.2	
	-270K		177			-Q26-140	SP26-26-60			6.8	2
	-RAC 70-255K	70～100	202	64	80	-Q34-170	—	34-RAC 70- 85K		8.7	1
	-285K		232			-Q34-200				9.1	
	-315K		262			-Q34-170	SP34-34-60			10.1	2
	-RAC100-225K	100～130	225	83	83	-Q42-125	—	42-RAC100-100K		11.7	1
	-290K		290			-Q42-190				11.7	
	-315K		315			-Q42-125	SP42-42-90			15.1	2

★**"C" grade (Coated)** inserts are supplied as standard with the head. ☞**P.250** Please refer ☞**P.100** for cutting condition.
★Please refer ☞**P.261** for base holder, ☞**P.90** for spacer and ☞**P.67** for head.
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. HSK100A-RAC53-210K-C**
★For **HSK40A** or **50A**, modular connection system is applied. Please refer ☞**P.261** for Base Holder.
★**HSK100A-RAC100-375K, 425K and 475K are also available.**
★Lubrication Pipe is optional. Please refer ☞**P.292**

Insert tip for RAC-K

● : best ○ : good

Material			
	Steel	●	
	Stainless Steel	●	
	Cast Iron	○	●
	Aluminium		
		Coated Carbide M	Coated Carbide K
	Grade	C	
	Material / Nose R	AC630M	AC410K

Applicable Arbor	Dimension	Code No.	Nose R	AC630M	AC410K
RAC25K, RAC32K		SC09-○4	0.4	●	●
RAC43K-RAC100K		SC12-○8	0.8	●	●

★Minimum order quantity : 10pcs.

Please add the grade indication into ○, and add the insert tip material indication at the end off the Code No. e.g. SC12-C8 (AC630M)

HSK

HSK BALANCE-CUT RAC BORING ARBOR for LARGE DIA. NIKKEN

For Roughing

- With the screws for slight adjustment
- Boring Dia. : φ130～φ580mm

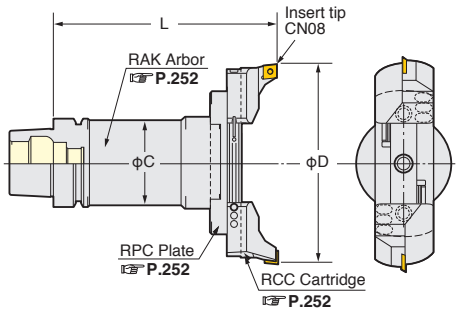

RAC

Boring Dia.:φ130～580mm

TAPE	Code.No	D MIN.～MAX.	L	C	RAK Arbor Code No.	RPC Plate No.	RCC Cartridge No.	Weight (kg)
HSK 63A	HSK 63A-RAC130-205	130～180	205	61	HSK 63A-RAK-130A	RPC-130	For Heavy Duty Boring of Iron and Cast Iron RCC-130 ×2 Insert Tip CN08	6.9
	-RAC180-205	180～230				-180		7.5
HSK100A	HSK100A-RAC130-185	130～180	185	90	HSK100A-RAK-110A	RPC-130		9.3
	-235		235		-160A			11.8
	-285		285		-210A			14.5
	-335		335		-260A			17.2
	-385		385		-310A			19.9
	-435		435		-360A			22.6
	-485		485		-410A			25.3
	-RAC180-185	180～230	185		-RAK-110A	RPC-180		9.9
	-235		235		-160A			12.4
	-285		285		-210A			15.1
	-335		335		-260A			17.8
	-385		385		-310A			20.5
	-435		435		-360A			23.2
	-485		485		-410A			25.9
	-RAC230-185	230～280	185		-RAK-110A	RPC-230		10.6
	-235		235		-160A			13.1
	-285		285		-210A			15.8
	-335		335		-260A			18.5
	-385		385		-310A			21.2
	-435		435		-360A			23.9
	-485		485		-410A			26.6
	-RAC280-185	280～330	185		-RAK-110A	RPC-280		11.2
	-235		235		-160A			13.7
	-285		285		-210A			16.4
	-335		335		-260A			19.1
	-385		385		-310A			21.8
	-435		435		-360A			24.5
	-485		485		-410A			27.2
	-RAC330-210	330～380	210	98	HSK100A-RAK330-125	RPC-330		17.8
	-RAC380-210	380～430				-380		18.6
	-RAC430-210	430～448				-430		19.5
	-RAC480-210	480～530				-480		20.4
	-RAC530-210	530～580				-530		21.2

★The Code No. on above table are the boring arbors with **RCC-130** cartridge (Insert tip: **CN08**) the Heavy Duty Boring of Iron and Cast Iron. Please refer ☞**P.100**.
★Boring arbor with cartridges & insert for Steel, Stainless Steel and Cast Iron (**E**) , for Aluminum (**A**) and for Through Hole & Multi Sheets (**K**) are available. Please refer☞**P.252** for cartridges. **e.g. HSK100A-RAC130-185E**
★Please refer☞**P.252** for **RAK** arbor and **RPC** plate.
★Arbor, plate and cartridges are delivered in separate packages.
★Please check the interference of the arbor with your M/C not to occur the interference in the tool magazine.
★The location of the cutting edge is same as the drive key for standard. The different location is available, please specify θ. **e.g. HSK100A-RAC180-235-90˚**
★**For centre through coolant type, please add"-C"at the end of Code No. e.g. HSK100A-RAC130-185-C**
★Lubrication Pipe is optional. Please refer ☞ **P.292**



View from Cutting Edge



Coolant Through Tool

HSK MODULAR TYPE ARBOR

NIKKEN

BALANCE CUT RAK BORING ARBOR for LARGE DIA.<RAK Arbor>

RAK

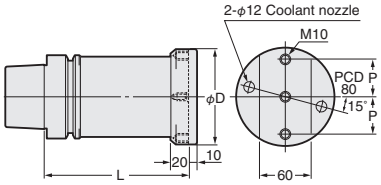

Fig.1

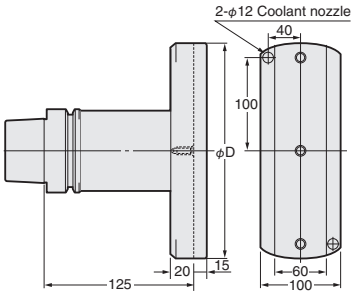

Fig.2

Code No.	Boring Range	L	D	P	Weight (kg)	Applicable RPC Plate	Hex. Socket bolt	Fig.
HSK 63A-RAK-130A	130～230	130	102	35	4.3	RPC-130, 180	M1035	1
HSK100A-RAK-110A	130～330	110			6.7	RPC-130, 180, 230, 280		
-RAK-160A		160			9.2			
-RAK-210A		210			11.9			
-RAK-260A		260			14.6			
-RAK-310A		310			17.3			
-RAK-360A		360			20.0			
-RAK-410A		410			22.7			
-RAK330-125	330～580	125	240	100	11.3	RPC-330, 380, 430, 480, 530	M1045	2

★The location of the cutting edge is same as the drive key for standard. The different location is available, please specify θ. **e.g. HSK100A-RAK-160A(90°)**
★For centre through coolant type, please add"-C"at the end of Code No. e.g. HSK100A-RAK-160A-C 2 set of coolant nozzles are standard accessory.

BALANCE CUT PLATE for LARGE DIA.<RPC Plate>

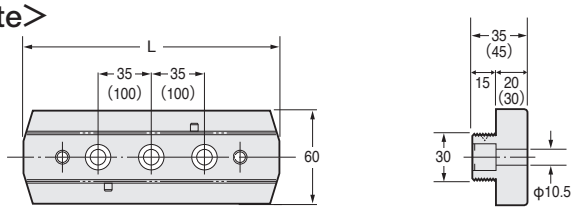

Dimensions in( )are for RPC-330, 380, 430, 480 and 530.

Code No.	Boring Range	L	Weight(kg)	Code No.	Boring Range	L	Weight(kg)	Code No.	Boring Range	L	Weight(kg)
RPC-130	130～180	118	1.4	RPC-330	330～380	316	5.3	RPC-530	530～580	516	8.7
-180	180～230	166	2.0	-380	380～430	366	6.1				
-230	230～280	216	2.7	-430	430～480	416	7.0				
-280	280～330	266	3.3	-480	480～530	466	7.9				

Accessories for Balance-Cut RAC

Steel, Stainless Steel and Cast Iron
RCC-130 (CN08)

Heavy Duty Boring of Iron and Cast Iron
RCC-130E (CC12)

For aluminum
RCC-130A (AEG16)

For Through Hole and Multi Sheets
RCC-130K (SC12)

Cartridge Lock Bolt
Please remove the bolt when using **RAC-130** type for φ130～157mm.

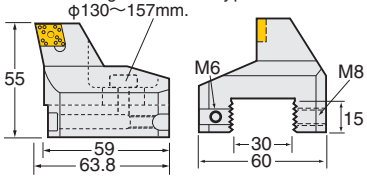

Weight：0.6kg

Accessories	Insert Tip	Clamp Bolt	Adjust Screw	Adjust Wrench	Wrench for Insert	Set Screw (M8)	Wrench for M815 Bolt	Hex Socket Bolt	Applicable RPC Plate
Code No.	*	CSM-70	M540	M3	20S	M815	M4	9GM6-20	RPC-130,180,230,280,330,380,430,480,530

★* : The insert tip is **RCC-130:CN08 (☞P.246)**, **RCC-130E:CC12 (☞P.244)**, **RCC-130A:AEG16 (☞P.248)**, **RCC-130K:SC12 (☞P.250)** Please refer☞**P.100** for cutting condition.
★There are two different types clamping system. One is eccentric system, the other is screw on system. Above parts are for screw on system.
★Code No. **RCC-130** indicates a single cartridge. When ordering a pair cartridge, please appoint to us Code No. **S.RCC-130**.
★The Code No. of the cartridges for 2 stepped balance cut is **SRCC-130(0.3)**

HSK ZMAC ADVANCED BORING ARBOR (ZMAC-V)

NIKKEN

Boring for Finishing

ZMAC-V

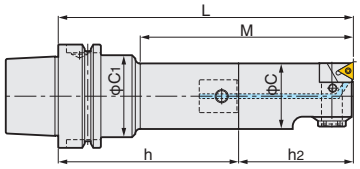

Fig.1

Only for ZMAC16-V



Fig.3

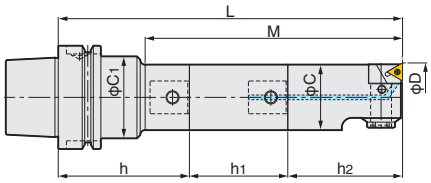

Fig.2

ZMAC100-V, 140-V

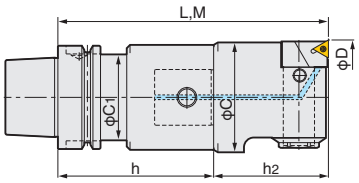

Fig.4

Code No. of the insert tip are shown.

JAPAN PAT.

TAPER	Code No.	Boring Range D	Boring Depth M	C	C_1	Shank Code No.	Extension Spacer Code No.	P.103 Head No.	P.103 Insert No.	Weight (kg)	Fig
HSK63A	HSK63A-ZMAC16-125V	15.8～20.2	38	15	24	HSK63A-Q12- 80	—	12-ZMAC16- 45V	3MP	1.6	3
	-135V		48					12-ZMAC16- 55V		1.6	
	-ZMAC20-120V	19.8～25.2	45	19	30	-Q 9- 80		9-ZMAC20- 40V		1.6	1
	-135V		67			-Q 9- 95N				1.6	
	-150V		75			-Q 9- 80	SP 9- 9-30			1.7	2
	-ZMAC25-120V	24.8～32.2	52	24	35	-Q12- 80	—	12-ZMAC25- 40V		1.7	1
	-150V		90			-Q12-110				1.8	
	-165V		97			-Q12- 80	SP12-12-45			1.8	2
	-ZMAC32-150V	31.8～42.2	77	31	42	-Q16- 95	—	16-ZMAC32- 55V	4MP	2.2	1
	-180V		110			-Q16-125				2.4	
	-195V		122			-Q16- 95	SP16-16-45			2.4	2
	-ZMAC42-150V	41.8～55.2	97	40	50	-Q20- 80	—	20-ZMAC42- 70V	6MP	2.7	1
	-180V		130			-Q20-110				2.9	
	-210V		157			-Q20- 80	SP20-20-60			3.1	2
	-ZMAC55-165V	54.8～70.2	135	53	50	-Q26- 95	—	26-ZMAC55- 70V		3.6	1
	-210V		180			-Q26-140				4.3	
	-225V		195			-Q26- 95	SP26-26-60			4.3	2
	-ZMAC70-165V	69.8～85.2	165	67	52.4	-Q34- 95	—	34-ZMAC70- 70V		5.1	4
	-180V		180			-Q34-110				5.5	
	-225V		225			-Q34- 95	SP34-34-60			6.5	
	-ZMAC85-195V	84.8～100.2	195	83	52.4	-Q42- 95	—	42-ZMAC85-100V		8.7	

★Minimum reading unit (diameter) **ZMAC16V**, **ZMAC20V** (main scale 0.02mm only) **ZMAC25V** (main scale 0.02mm / vernier scale 0.005mm) **ZMAC32V** to **ZMAC140V** (main scale 0.01mm / vernier scale 0.005mm).
★**"C" grade (Coated) insert for Steel, Stainless & Cast Iron is supplied as Standard with the head (Smooth boring & Long tool-life).** ☞ **P.103** Please refer ☞ **P.101** for cutting condition.
We would recommend **"B"** grade (**CBN**) insert for Hardened Steel & High Speed boring of Cast Iron.
★Please refer ☞ **P.261** for base holder, ☞ **P.90** for spacer and ☞ **P.75, P.76** for head.
★Centre Through Coolant function is available as standard.
★For **HSK40A** or **50A**, modular connection system is applied. Please refer ☞ **P.261** for Base Holder.
★**When L length is required longer than standard, please specify boring depth M.**
★Lubrication Pipe is optional. Please refer ☞ **P.292**



Coolant Through Tool

Boring Arbor with Extension Spacer

ZMAC-V for Multi-Stage Boring Bar ☞ P.95

Please contact us for the special boring bar.

HSK ZMAC ADVANCED BORING ARBOR (ZMAC-V)

NIKKEN

With ZMACα-V Boring Head

Please add "AA" at the end of Code No.
e.g. HSK63A-ZMAC42-150AAV

ZMACα-V

Diameter can be adjusted easily and quickly by new handle with wrench.

Unlock | Adjust diameter | Lock

Code No. of the insert tip ◎ ◎ are shown.

JAPAN PAT.

TAPER	Code No.	Boring Range D	Boring Depth M	C	C_1	Shank Code No.	Extension Spacer Code No.	P.103 Head No.	Insert No.	Weight (kg)	Fig
HSK100A	HSK100A-ZMAC 16-140V	15.8～20.2	38	15	24	HSK100A-Q12- 95	—	12-ZMAC 16- 45V	3MP	3.9	3
	-150V		48					12-ZMAC 16- 55V		3.9	
	-ZMAC 20-150V	19.8～25.2	45	19	40	-Q 9-110		9-ZMAC 20- 40V		4.0	1
	-165V		67			-Q 9-125N				4.0	
	-180V		75			-Q 9-110	SP 9- 9-30			4.1	2
	-ZMAC 25-135V	24.8～32.2	52	24	44	-Q12- 95	—	12-ZMAC 25- 40V		4.0	1
	-165V		90			-Q12-125				4.0	
	-180V		97			-Q12- 95	SP12-12-45			4.1	2
	-ZMAC 32-180V	31.8～42.2	77	31	50	-Q16-125N	—	16-ZMAC 32- 55V	4MP	4.7	1
	-210V		110			-Q16-155				4.8	
	-225V		122			-Q16-125N	SP16-16-45			4.9	2
	-ZMAC 42-180V	41.8～55.2	97	40	60	-Q20-110	—	20-ZMAC 42- 70V	6MP	5.2	1
	-195V		130			-Q20-125				5.2	
	-225V		142			-Q20-110	SP20-20-45			5.6	2
	-240V		157			-Q20-110	SP20-20-60			5.7	
	-ZMAC 55-210V	54.8～70.2	117	53	65	-Q26-140	—	26-ZMAC 55- 70V		6.7	1
	-240V		182			-Q26-170N				6.8	
	-270V		177			-Q26-140	SP26-26-60			8.3	2
	-ZMAC 70-240V	69.8～85.2	187	67	80	-Q34-170	—	34-ZMAC 70- 70V		9.2	1
	-270V		217			-Q34-200				9.8	
	-300V		247			-Q34-170	SP34-34-60			10.7	2
	-ZMAC 85-225V	84.8～100.2	187	83	—	-Q42-125	—	42-ZMAC 85-100V		11.7	1
	-290V		252			-Q42-190				14.2	
	-315V		277			-Q42-125	SP42-42-90			15.2	2
	-ZMAC100-225V	99.5～140.5	225	95	98	-Q42-125	—	42-ZMAC100-100V		11.6	4
	-290V		290			-Q42-190				14.3	
	-325V		325			-Q42-225A				17.0	
	-375V		375			-Q42-275A				19.7	
	-425V		425			-Q42-325A				22.4	
	-ZMAC140-225V	139.5～180.5	225	135	98	-Q42-125	—	42-ZMAC140-100V		13.0	
	-290V		290			-Q42-190				15.7	
	-325V		325			-Q42-225A				18.4	
	-375V		375			-Q42-275A				21.1	
	-425V		425			-Q42-325A				23.8	

★Minimum reading unit (diameter) **ZMAC16V**, **ZMAC20V** (main scale 0.02mm only) **ZMAC25V** (main scale 0.02mm / vernier scale 0.005mm) **ZMAC32V** to **ZMAC140V** (main scale 0.01mm / vernier scale 0.005mm).
★**When L length is required longer than standard, please specify boring depth M.** ★Centre Through Coolant function is available as standard.
★**"C" grade (Coated) insert for Steel, Stainless&Cast Iron is supplied as Standard with the head (Smooth boring & Long tool-life).** ☞**P.103**
We would recommend **"B"** grade (**CBN**) insert for Hardened Steel & High Speed boring of Cast Iron. Please refer ☞**P.101** for cutting condition.
★Please refer ☞ **P.261** for base holder, ☞ **P.90** for spacer and ☞ **P.75, P.76** for head.
★Lubrication Pipe is optional. Please refer ☞**P.292**

HSK ZMAC ADVANCED BORING ARBOR (ZMAC-VR)

NIKKEN

Boring for Semi-Finishing—ZMAC-VR

ZMAC-VR

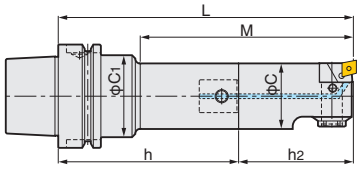

Fig.1

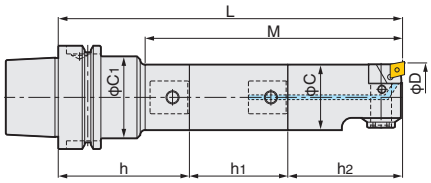

Fig.2

ZMAC100-VR, 140-VR

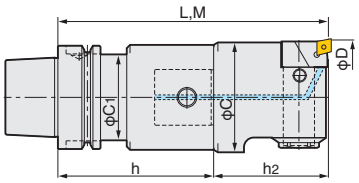

Fig.3

Code No. of the insert tip are shown.

JAPAN PAT.

TAPER	Code No.	Boring Range D	Boring Depth M	C	C_1	Shank Code No.	Extension Spacer Code No.	P.256 Head No.	P.256 Insert No.	Weight (kg)	Fig
HSK63A	HSK63A-ZMAC32R-150V	31.8～42.2	77	31	42	HSK63A-Q16- 95	—	16-ZMAC32R- 55V	CC06	2.2	1
	-180V		110			-Q16-125				2.4	
	-195V		122			-Q16- 95	SP16-16-45			2.4	2
	-ZMAC42R-150V	41.8～55.2	97	40	50	-Q20- 80	—	20-ZMAC42R- 70V		2.7	1
	-180V		130			-Q20-110				2.9	
	-210V		157			-Q20- 80	SP20-20-60			3.1	2
	-ZMAC55R-165V	54.8～70.2	135	53	50	-Q26- 95	—	26-ZMAC55R- 70V		3.6	1
	-210V		180			-Q26-140				4.3	
	-225V		195			-Q26- 95	SP26-26-60			4.3	2
	-ZMAC70R-165V	69.8～85.2	165	67	52.4	-Q34- 95	—	34-ZMAC70R- 70V	CC08	5.1	4
	-180V		180			-Q34-110				5.5	
	-225V		225			-Q34- 95	SP34-34-60			6.5	
	-ZMAC85R-195V	84.8～100.2	195	83	52.4	-Q42- 95	—	42-ZMAC85R-100V		8.7	

★Minimum reading unit (diameter) **ZMAC32VR** to **ZMAC85VR** (main scale 0.01mm / vernier scale 0.005mm).
★**"C" grade (Coated) insert for Steel, Stainless & Cast Iron is supplied as Standard with the head (Smooth boring & Long tool-life).** ☞**P.256** Please refer ☞**P.101** for cutting condition.
We would recommend "B" grade (CBN) insert for Hardened Steel & High Speed boring of Cast Iron.
★Please refer ☞**P.261** for base holder, ☞**P.90** for spacer and ☞**P.75, P.76** for head.
★Centre Through Coolant function is available as standard.
★For **HSK40A** or **50A**, modular connection system is applied. Please refer ☞**P.261** for Base Holder.
★**When L length is required longer than standard, please specify boring depth M.**
★Lubrication Pipe is optional. Please refer ☞**P.292**



Coolant Through Tool

Boring Arbor with Extension Spacer

ZMAC-V for Multi-Stage Boring Bar ☞P.95

Please contact us for the special boring bar.

Insert Tip for ZMAC-VR

●:best ○:good

Material	Steel	●	
	Stainless Steel	●	
	Cast Iron	○	●
	Aluminium		
	High Speed finish for Cast Iron		
	Hardened Steel		
	High Speed finish for Aluminium		

Please add the grade indication into ○, and add the insert tip material indication at the end off the Code No. e.g. CC12-C8(AC630M)

There is the CBN insert tip which both corners can be used. Please refer ☞**P.103** for ISO code of the insert tip.

Applicable Arbor	Dimension	Code No.	Grade	C	
				Coated Carbide M	Coated Carbide K
			Material / Nose R	AC630M	AC410K
ZMAC32-VR, ZMAC42-VR, ZMAC55-VR		CC06-○4	0.4	●	●
		CC06-○8	0.8	●	●
ZMAC70-VR, ZMAC85-VR		CC08-○4	0.4	●	●
		CC08-○8	0.8	●	●
ZMAC100-VR, ZMAC140-VR		CC12-○4	0.4	●	●
		CC12-○8	0.8	●	●

Code No. of the insert tip  are shown.

TAPER	Code No.	Boring Range D	Boring Depth M	C	C_1	Shank Code No.	Extension Spacer Code No.	P.256 Head No.	Insert No.	Weight (kg)	Fig
HSK100A	HSK100A-ZMAC 32R-180V	31.8～42.2	77	31	50	HSK100A-Q16-125N	—	16-ZMAC 32R- 55V	CC06	4.7	1
	-210V		110			-Q16-155				4.8	
	-225V		122			-Q16-125N	SP16-16-45			4.9	2
	-ZMAC 42R-180V	41.8～55.2	97	40	60	-Q20-110	—	20-ZMAC 42R- 70V		5.2	1
	-195V		130			-Q20-125				5.2	
	-225V		142			-Q20-110	SP20-20-45			5.6	2
	-240V		157			-Q20-110	SP20-20-60			5.7	
	-ZMAC 55R-210V	54.8～70.2	117	53	65	-Q26-140	—	26-ZMAC 55R- 70V		6.7	1
	-240V		182			-Q26-170N				6.8	
	-270V		177			-Q26-140	SP26-26-60			8.3	2
	-ZMAC 70R-240V	69.8～85.2	187	67	80	-Q34-170	—	34-ZMAC 70R- 70V	CC08	9.2	1
	-270V		217			-Q34-200				9.8	
	-300V		247			-Q34-170	SP34-34-60			10.7	2
	-ZMAC 85R-225V	84.8～100.2	187	83	—	-Q42-125	—	42-ZMAC 85R-100V		11.7	1
	-290V		252			-Q42-190				14.2	
	-315V		277			-Q42-125	SP42-42-90			15.2	2
	-ZMAC100R-225V	99.5～140.5	225	95	83	-Q42-125	—	42-ZMAC100R-100V	CC12	11.6	4
	-290V		290			-Q42-190				14.3	
	-325V		325			-Q42-225A				17.0	
	-375V		375			-Q42-275A				19.7	
	-425V		425			-Q42-325A				22.4	
	-ZMAC140R-225V	139.5～180.5	225	135	83	-Q42-125	—	42-ZMAC140R-100V		13.0	
	-290V		290			-Q42-190				15.7	
	-325V		325			-Q42-225A				18.4	
	-375V		375			-Q42-275A				21.1	
	-425V		425			-Q42-325A				23.8	

★Minimum reading unit (diameter) **ZMAC32VR** to **ZMAC85VR** (main scale 0.01mm / vernier scale 0.005mm).
★**When L length is required longer than standard, please specify boring depth M.** ★Centre Through Coolant function is available as standard.
★**"C" grade (Coated) insert for Steel, Stainless&Cast Iron is supplied as Standard with the head (Smooth boring & Long tool-life).☞P.256**
We would recommend **"B"** grade (**CBN**) insert for Hardened Steel & High Speed boring of Cast Iron. Please refer☞**P.101** for cutting condition.
★Please refer ☞ **P.261** for base holder, ☞ **P.90** for spacer and ☞ **P.75, P.76** for head.
★Lubrication Pipe is optional. Please refer☞**P.292**

HSK BALANCE-CUT BAC ADVANCED BORING ARBOR for LARGE DIA. NIKKEN

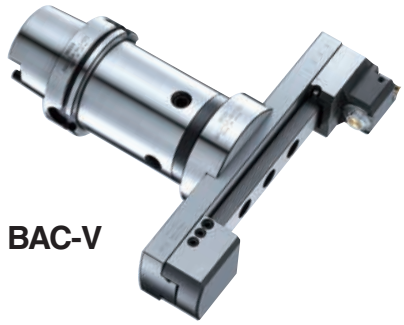

BAC-V

For Finishing

- MIN. dial readout on dia. : 0.01mm
- Boring Dia : ϕ130～ϕ595mm

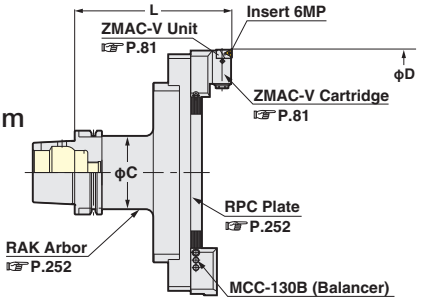

Boring Dia:ϕ130～595mm

JAPAN PAT. P.103

TAPER	Code.No	D MIN.～MAX.	L	C	RAK Arbor Code No.	PPC Plante No	Cartridge (Balancer)	Weight (kg)
HSK 63A	HSK 63A-BAC130-205V	130～195	205	61	HSK 63A-RAK-130A	RPC-130	MCCZ-130V (MCC-130B) Insert 6MP	6.5
	-BAC180-205V	180～245				-180		7.5
HSK100A	HSK100A-BAC130-185V	130～195	185	90	HSK100A-RAK-110A	RPC-130		9.5
	-235V		235		-160A			12.0
	-285V		285		-210A			14.7
	-335V		335		-260A			17.3
	-385V		385		-310A			20.1
	-435V		435		-360A			22.8
	-485V		485		-410A			25.5
	-BAC180-185V	180～245	185		-RAK-110A	RPC-180		10.1
	-235V		235		-160A			12.6
	-285V		285		-210A			15.3
	-335V		335		-260A			18.0
	-385V		385		-310A			20.7
	-435V		435		-360A			23.3
	-485V		485		-410A			26.1
	-BAC230-185V	230～295	185		-RAK-110A	RPC-230		10.8
	-235V		235		-160A			13.3
	-285V		285		-210A			16.0
	-335V		335		-260A			18.7
	-385V		385		-310A			21.3
	-435V		435		-360A			24.1
	-485V		485		-410A			26.8
	-BAC280-185V	280～345	185		-RAK-110A	RPC-280		11.4
	-235V		235		-160A			13.9
	-285V		285		-210A			16.6
	-335V		335		-260A			19.3
	-385V		385		-310A			22.0
	-435V		435		-360A			24.7
	-485V		485		-410A			27.4
	-BAC330-210V	330～395	210	98	HSK100A-RAK330-125	RPC-330		18.0
	-BAC380-210V	380～445				-380		18.8
	-BAC430-210V	430～495				-430		19.7
	-BAC480-210V	480～545				-480		20.6
	-BAC530-210V	530～595				-530		21.4

★**"C" grade (Coated)** Inserts are supplied as standard. ☞**P.103** Please refer ☞**P.101** for cutting condition.
★Unit **"M5HZ-55V"** is provided as standard, please refer ☞**P.252** for Arbor (**RAK**) and Plate (**RPC**).
★Arbor, Plate and Cartridge are delivered in separate packages.
★When ordering, please let us know machine maker and model no. to avoid the interfererce with tool magazine of **ATC**.
★The location of cutting edge is same as drive key in standard.
The different location is available, please specify **θ** in Code No. **e.g. HSK100A-BAC180-235V (90°)**
★**For centre through coolant type, please add "-C" at the end of Code No. e.g. HSK100A-BAC130-185V-C**
★Lubrication Pipe is optional. Please refer ☞**P.292**



View from Cutting edge.

Coolant Through Tool

HSK

BALANCE-CUT BCB BORING ARBOR for LARGE DIA. NIKKEN

For Semi-Finishing

BCB



Boring Dia:φ130～595mm

P.105

TAPER	Code.No	D MIN.～MAX.	L	C	RAK Arbor Code No.	RPC Plante No	Cartridge (Balancer)	Weight (kg)
HSK 63A	HSK 63A-BCB130-215	130～195	215	61	HSK 63A-RAK-130A	RPC-130	BCB-130 (MCC-130B) Insert 10MP	6.9
	-BCB180-215	180～245				-180		7.9
HSK100A	HSK100A-BCB130-195	130～195	195	90	HSK100A-RAK-110A	RPC-130		9.8
	-245		245		-160A			12.3
	-295		295		-210A			15.0
	-345		345		-260A			17.7
	-395		395		-310A			20.4
	-445		445		-360A			23.1
	-495		495		-410A			25.8
	-BCB180-195	180～245	195		HSK100A-RAK-110A	RPC-180		10.2
	-245		245		-160A			12.9
	-295		295		-210A			15.6
	-345		345		-260A			18.3
	-395		395		-310A			21.0
	-445		445		-360A			23.7
	-495		495		-410A			26.4
	-BCB230-195	230～295	195		HSK100A-RAK-110A	RPC-230		10.9
	-245		245		-160A			13.6
	-295		295		-210A			16.3
	-345		345		-260A			19.0
	-395		395		-310A			21.7
	-445		445		-360A			24.4
	-495		495		-410A			27.1
	-BCB280-195	280～345	195		HSK100A-RAK-110A	RPC-280		11.5
	-245		245		-160A			14.2
	-295		295		-210A			16.9
	-345		345		-260A			19.6
	-395		395		-310A			22.3
	-445		445		-360A			25.0
	-495		495		-410A			27.7
	-BCB330-220	330～395	220	98	HSK100A-RAK330-125	RPC-330		18.1
	-BCB380-220	380～445				-380		18.9
	-BCB430-220	430～495				-430		19.8
	-BCB480-220	480～545				-480		20.7
	-BCB530-220	530～595				-530		21.5

★Please refer ☞**P.101** for cutting condition.
★MIN. dial readout on dia.: 0.02mm, Sub scale: 0.002mm
★Lubrication Pipe is optional. Please refer ☞**P.292**
★For centre through coolant type, please add "-C" at the end of Code No. e.g. HSK100A-BCB130-195-C

Up to φ800 is also available. Please contact with us.

Double Cut Style BCB Boring Bar

BCB-W

★Double cut style can be done with both side of **BCB-130** cartridges. Please add **"W"** at the end of Code No. **e.g. BT50-BCB130W-195**

- **True balance cut** can be done to adjust the height by micro adjustment first and then to adjust the diameter by adjust screw.
- **Stepped cut** can be done to change the height of the cartridges.

Stepped Cut



HSK

BALANCE-CUT BORING ARBOR for LARGE DIA. ULTRA-LIGHT WEGHT NIKKEN

RACα BORING ARBOR

For Roughing

- With the screws for slight adjustment
- Boring Dia : φ130～φ580mm

RACα

High Pressure
Centre Through
(MAX. 7MPa)

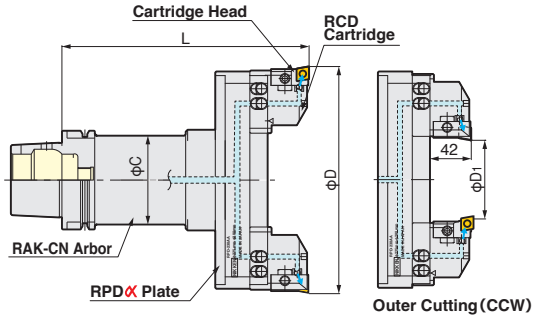

P.246

Boring Dia. : φ130～580mm / Outer Cutting Dia. : φ10～430mm

TAPE	Code.No	D MIN.～MAX.	L	D1 MIN.～MAX.	C	RAK-CN Arbor Code No.*1	RPDα Plate No.	RCD Cartridge No.	Weight (kg)
HSK63A	HSK 63A-RAC130-225AA	130～180	225	10～30	61	HSK 63A-RAK-130A	RPD-130AA	For Heavy Duty Boring of Iron and Cast Iron RCD-130 ×2 Insert CN08	6.6
	-RAC180-225AA	180～230		30～80			-180AA		7.1
HSK100A	HSK100A-RAC130-205AA	130～180	205	10～30	90	HSK100A-RAK-110A	RPD-130AA		9.0
	-255AA		255			-160A			11.5
	-305AA		305			-210A			14.2
	-355AA		355			-260A			16.9
	-405AA		405			-310A			19.6
	-455AA		455			-360A			22.3
	-505AA		505			-410A			25.0
	-RAC180-205AA	180～230	205	30～80		-RAK-110A	RPD-180AA		9.5
	-255AA		255			-160A			12.0
	-305AA		305			-210A			14.7
	-355AA		355			-260A			17.4
	-405AA		405			-310A			20.1
	-455AA		455			-360A			22.8
	-505AA		505			-410A			25.5
	-RAC230-205AA	230～280	205	80～130		-RAK-110A	RPD-230AA		10.1
	-255AA		255			-160A			12.6
	-305AA		305			-210A			15.3
	-355AA		355			-260A			18.0
	-405AA		405			-310A			20.7
	-455AA		455			-360A			23.4
	-505AA		505			-410A			26.1
	-RAC280-205AA	280～330	205	130～180		-RAK-110A	RPD-280AA		10.6
	-255AA		255			-160A			13.1
	-305AA		305			-210A			15.8
	-355AA		355			-260A			18.5
	-405AA		405			-310A			21.2
	-455AA		455			-360A			23.9
	-505AA		505			-410A			26.6
	-RAC330-220AA	330～380	220	180～230	98	HSK100A-RAK330-125	RPD-330AA		15.7
	-RAC380-220AA	380～430		230～280			-380AA		16.2
	-RAC430-220AA	430～480		280～330			-430AA		16.7
	-RAC480-220AA	480～530		330～380			-480AA		17.2
	-RAC530-220AA	530～580		380～430			-530AA		17.7

★The Code No. on above table are the boring arbors with **RCD-130** cartridge (Insert tip: **CN08**) the Heavy Duty Boring of Iron and Cast Iron. Please refer ☞**P.100** for cutting condition.
★Boring arbor with cartridges & insert for Steel, Stainless Steel and Cast Iron (**E**), for Aluminum (**A**) and for Through Hole & Multi Sheets (**K**) are available. Please refer ☞**P.84** for cartridges. **e.g. HSK100A-RAC130-205AA-E**
★Please refer ☞**P.84** for **RAK** arbor and **RPD** plate.
★Arbor, plate and cartridges are delivered in separate packages.
★Please check the interference of the arbor with your M/C not to occur the interference in the tool magazine.
★The location of the cutting edge is same as the drive key for standard. The different location is available, please specify θ. **e.g. HSK100A-RAC180-255AA (90˚)**
★Lubrication Pipe is optional. Please refer ☞ **P.292**
★When cutting the outer diameter, use the spindle in reverse rotation.



View from Cutting Edge

BALANCE-CUT BORING ARBOR for LARGE DIA. ULTRA-LIGHT WEGHT NIKKEN

BACα ADVANCED BORING ARBOR

For Finishing

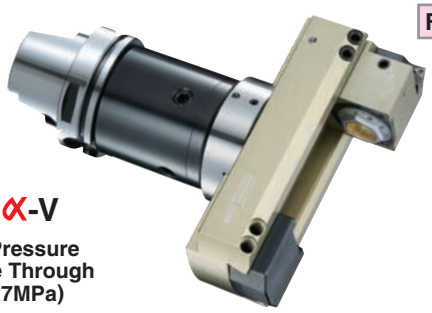

BACα-V

High Pressure Centre Through (MAX. 7MPa)

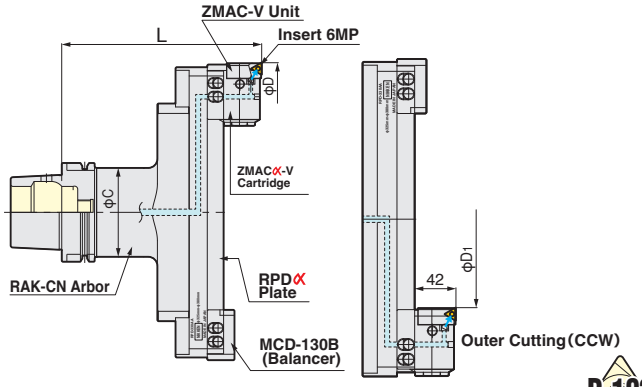

Boring Dia. : φ130～580mm / Outer Cutting Dia. : φ10～430mm

JAPAN PAT. P.103

TAPE	Code.No	D MIN.～MAX.	L	D1 MIN.～MAX.	C	RAK-CN Arbor Code No.*1	RPDα Plate No.	Cartridge (Balancer)	Weight (kg)
HSK63A	HSK 63A-BAC130-225AAV	130～180	225	10～30	61	HSK 63A-RAK-130A	RPD-130AA	MCDZ-130AAV (MCD-130B) Insert 6MP	6.9
	-BAC180-225AAV	180～230		30～80			-180AA		7.4
HSK100A	HSK100A-BAC130-205AAV	130～180	205	10～30	90	HSK100A-RAK-110A	RPD-130AA		9.3
	-255AAV		255			-160A			11.8
	-305AAV		305			-210A			14.5
	-355AAV		355			-260A			17.2
	-405AAV		405			-310A			19.9
	-455AAV		455			-360A			22.6
	-505AAV		505			-410A			25.3
	-BAC180-205AAV	180～230	205	30～80		-RAK-110A	RPD-180AA		9.8
	-255AAV		255			-160A			12.3
	-305AAV		305			-210A			15.0
	-355AAV		355			-260A			17.7
	-405AAV		405			-310A			20.4
	-455AAV		455			-360A			23.1
	-505AAV		505			-410A			25.8
	-BAC230-205AAV	230～280	205	80～130		-RAK-110A	RPD-230AA		10.4
	-255AAV		255			-160A			12.9
	-305AAV		305			-210A			15.6
	-355AAV		355			-260A			18.3
	-405AAV		405			-310A			21.0
	-455AAV		455			-360A			23.7
	-505AAV		505			-410A			26.5
	-BAC280-205AAV	280～330	205	130～180		-RAK-110A	RPD-280AA		10.9
	-255AAV		255			-160A			13.4
	-305AAV		305			-210A			16.1
	-355AAV		355			-260A			18.8
	-405AAV		405			-310A			21.5
	-455AAV		455			-360A			24.2
	-505AAV		505			-410A			26.9
	-BAC330-220AAV	330～380	220	180～230	98	HSK100A-RAK330-125	RPD-330AA		16.0
	-BAC380-220AAV	380～430		230～280			-380AA		16.5
	-BAC430-220AAV	430～480		280～330			-430AA		17.0
	-BAC480-220AAV	480～530		330～380			-480AA		17.5
	-BAC530-220AAV	530～580		380～430			-530AA		18.0

★**"C" grade (Coated)** Inserts are supplied as standard. ☞**P.103**
Please refer ☞**P.101** for cutting condition.
★Unit **"M10HZ-75V"** is provided as semi-standard,
please refer **"M10HZ-85V"** ☞**P.86** for Arbor (**RAK**) and Plate (**RPD**).
★Arbor, Plate and Cartridge are delivered in separate packages.
★When ordering, please let us know machine maker and model no.
to avoid the interfererce with tool magazine of **ATC**.
★The location of cutting edge is same as drive key in standard.
The different location is available, please specify **θ** in
Code No. **e.g. HSK100A-BAC180-255AAV (90°)**
★Lubrication Pipe is optional. Please refer ☞ **P.292**
★When using it for outer diameter cutting, the spindle will rotate in reverse.



View from Cutting Edge

HSK

HSK BASE HOLDER for MODULAR TYPE

NIKKEN

Q

Fig.1



Fig.2



Fig.3



TAPER	Code No.	Q	L	C	C1	H	H1	Coupling Bolt No.	Fig.	Weight(kg)
HSK 40A	HSK 40A-Q26- 75	26	75	50	33.6	55	40	B26N	3	0.8
HSK 50A	HSK 50A-Q26- 75	26	75	50	41.6	48	33	B26N	3	1.1
HSK 63A	HSK 63A-Q 9- 80	9	80	19	30	5	—	B19	2	0.7
	- 95N		95			27				0.7
	-Q12- 80	12	80	24	35	12		B12	2	0.8
	-110		110			50				0.8
	-Q16- 95	16	95	31	42	22		B16	2	1.0
	-125		125			55				1.1
	-Q20- 80	20	80	40	50	27		B20	2	1.4
	-110		110			60				1.3
	-Q26- 60	26	60	50	—	33		B26N	1	1.0
	- 95		95			68				1.5
	-140		140			113				2.3
	-Q34- 95	34	95	64	52.4	68	53	B34	3	2.0
	-110		110			83	68			2.4
	-Q42- 95	42	95	83	52.4	68	35	B42	3	2.5
HSK100A	HSK100A-Q 9-110	9	110	19	40	5	—	B19	2	2.3
	-125N		125			27				2.3
	-Q12- 95	12	95	24	44	12		B12	2	2.3
	-125		125			50				2.3
	-Q16-125N	16	125	31	50	22		B16	2	2.8
	-155		155			55				2.9
	-Q20-110	20	110	40	60	27		B20	2	2.9
	-125		125			60				3.0
	-Q26- 65	26	65	50	—	33		B26N	1	2.4
	-140		140		65	45			2	4.5
	-170N		170			110				4.6
	-Q34-140	34	140	64	—	106		B34	1	4.4
	-170		170		80	117			2	5.3
	-200		200			147				5.9
	-Q42-125	42	125	83	—	95		B42	1	5.3
	-190		190			160				7.9
	-Q42-225A	42	225	83		—				11.7
	-275A		275							14.4
	-325A		325							17.1
	-375A		375							19.8

★φC of **Q26** base holder has been increased from 45mm to 50mm due to improvement of its rigidity.
★All base holders have a centre through coolant hole.
★The Coupling screw & wrench are supplied as standard.
★**When L length is required longer than standard, please specify the boring depth M.**
★Lubrication Pipe is optional. Please refer ☞ **P.292**



HSK DJ BORING BAR

NIKKEN

DJ

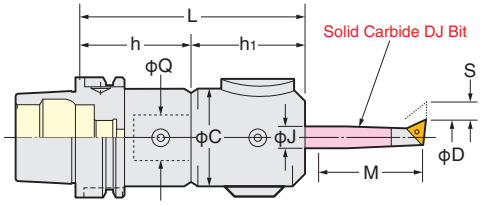

Coolant Through type is available. Please contact us.

P.103 P.104

TAPER	Code No.	Boring Range D	Boring Depth M	L	C	Bit Hole Size J	Shank Code No. HSK No.-Q-h	Head Code No. Q-MinD-h1	Bit Stroke S	DJ Bit Code No.
HSK 63A	HSK 63A -DJ3-100A	3~28	14~ 80	100	50	10	HSK 63A-Q26- 60	Q26-DJ3-40A	5.2	J10
	-135A			135			- 95			
	-DJ8-104AN	3~50	14~130	104	59	16	HSK 63A-Q26- 60	-DJ8-44AN	6.0	J16
	-139AN			139			- 95			
HSK100A	HSK100A -DJ3-105A	3~28	14~ 80	105	50	10	HSK100A-Q26- 65	Q26-DJ3-40A	5.2	J10
	-210A			210			-170N			
	-DJ8-109AN	3~50	14~130	109	59	16	HSK100A-Q26- 65	-DJ8-44AN	6.0	J16
	-214AN			214			-170N			

★**MIN. dial readout on dia.: 0.01mm, Sub scale: 0.005mm, 0.8mm/rev.**
★Each boxed set of **DJ3** and **DJ8** Boring Bars include 4 pcs of **DJ** Boring Bits as standard.
Bits included to **HSK63A-DJ8-104A : J16-8-40, J16-18-80C, J16-28-85, J16-38-85**
Bits included to **HSK63A-DJ8-104AN :**The standard set bites will be replaced by those with C(with oil hole) as soon as the stock of those without C(without oil hole) runs out.
★**DJ** Boring Bar without Boring Bits is also available. Please add**"-BD"**at the end of Code No. **e.g. HSK63A-DJ3-100A-BD**
★Shank and **DJ** Head(including Boring Bits)are delivered in separate packages.
★Please refer ☞ **P.88** for Boring Bits. Please refer ☞ **P.102** for cutting condition.
★Lubrication Pipe is optional. Please refer ☞ **P.292**

HSK

MAJOR DREAM HOLDER HSK BASE HOLDER for MODULAR TYPE

NIKKEN

MDQ
Photo shows with spacer and **ZMAC**α**-V** head.



TAPER	Code No.	Q	L	C	C1	H	Weight(kg)	ZMAC-V Boring Range
HSK 50A	HSK 50A-MDQ26- 95	26	95	50	50	95.0	1.2	16~70
HSK 63A	HSK 63A-MDQ26-100	26	100	50	52.4	30.0	1.5	16~70
HSK100A	HSK100A-MDQ26-135	26	135	50	80	18.0	5.2	16~70
	-MDQ34-140	34	140	64		27.5	5.3	16~85
	-MDQ42-150	42	150	83		121	6.1	16~180

★All base holders have a centre through coolant hole.
★The coupling bolt and wrench are supplied as standard.
★**When L length is required longer than standard, please specify the boring depth M and Q No.**
★Lubrication Pipe is optional. Please refer ☞ **P.292**



QUICK TYPE ANGULAR HEAD (Free Positioning in 360°)

NIKKEN

Quick type Off-Set Angular Head

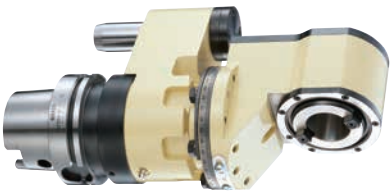

AFT

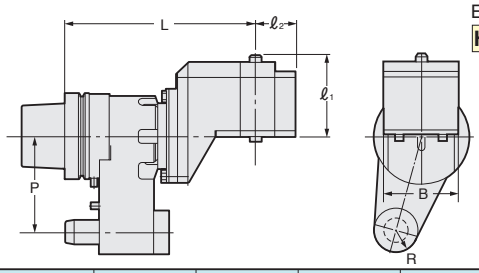

Explanation of the Code No.

HSK63A - AF T 30 - 210

- Length from Gauge Line
- Taper No. of Adapter
- Quick type
- Off-Set type Angular Head
- Shank

MAX2,000r/min

TAPER	Code No.	Shank	L	P	ℓ1	ℓ2	B	R	Adapter	Weight (kg)
HSK 63A	HSK 63A-AFT30-210	HSK 63A	210	65	85	35	70	17.5	AHK30	7.5
HSK100A	HSK100A-AFT35-237	HSK100A	237	110	85	45	84	25	AHK35	16.0

★Taper Connection System is applied to Stopper Block. (Different from the another FA Tooling) ★All types are available with Oil Hole System. ★Test bar is attached as standard.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.
★When M/C spindle rotates CW, the cutter rotates CW.

Quick type 90° Angular Head

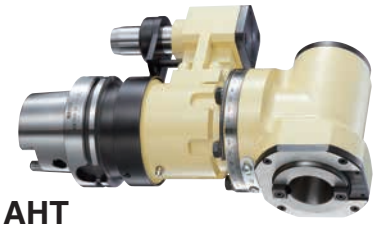

AHT

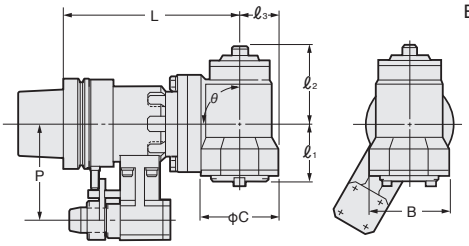

Explanation of the Code No.

HSK63A - AH T 30 - 165 - 90

- Angle
- Length from Gauge Line
- Taper No. of Adapter
- Quick type
- Symbol of Angular Head
- Shank

MAX2,000r/min

TAPER	Code No. L -θ	Shank	L	P	ℓ1	ℓ2	ℓ3	C	B	θ	Adapter	Weight (kg)
HSK 63A	HSK 63A-AHT30-165 -90	HSK 63A	165	65	58	61	37	86	80	90	AHK30	6.5
	-250*-90	HSK 63A	250									10.5
HSK100A	HSK100A-AHT35-217 -90	HSK100A	217	110	65	88	45	100	90	90	AHK35	17.0
	-300*-90	HSK100A	300									22.0

★Taper Connection System is applied to Stopper Block. (Different from the another FA tooling) ★All types are available with Oil Hole System. ★Test bar is attached as standard.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.
★Models with ✻ mark : Detailed discussion is needed. **★When M/C spindle rotates CCW, the cutter rotates CW.**

Quick type 30°, 45°, 60°Angular Head

AHT Photo shows 30° type.

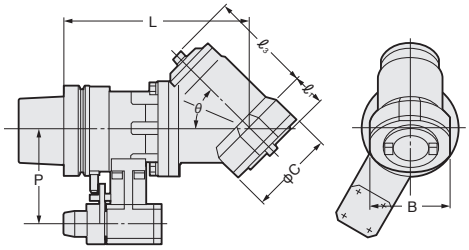

Explanation of the Code No.

HSK63A - AH T 30 - 220 - 30

- Angle
- Length from Gauge Line
- Taper No. of Adapter
- Quick type
- Symbol of Angular Head
- Shank

MAX2,000r/min

TAPER	Code No. L -θ	Shank	L	P	ℓ1	ℓ2	C	B	θ	Adapter	Weight (kg)
HSK 63A	HSK 63A-AHT30-220 -30	HSK 63A	220	65	1.5	122	86	80	30	AHK30	6.5
	-185 -45		185		35	88			45		6.5
	-175 -60		175		35	88			60		6.5
	-250*-30	HSK 63A	250	65	1.5	122	86	80	30	AHK30	10.5
	-45				35	88			45		10.5
	-60				35	88			60		10.5
HSK 100A	HSK100A-AHT35-265 -30	HSK100A	265	110	0	140	100	90	30	AHK35	17.0
	-232 -45		232		26	110			45		17.0
	-217 -60		217		40	105			60		17.0
	-300*-30	HSK100A	300	110	0	140	100	90	30	AHK35	22.0
	-45				26	110			45		22.0
	-60				40	105			60		22.0

★Taper Connection System is applied to Stopper Block. (Different from the another FA tooling) ★All types are available with Oil Hole System. ★Test bar is attached as standard.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.
★Models with ✻ mark : Detailed discussion is needed. **★When M/C spindle rotates CCW, the cutter rotates CW.**

MODULAR TYPE ANGULAR HEAD

NIKKEN

Modular type Angular Head AHM

AHM

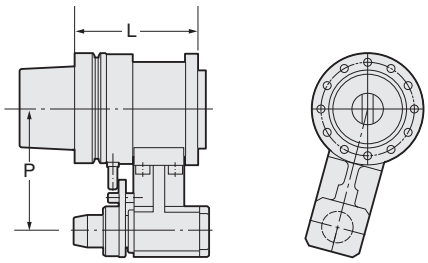

MAX**6,000**r/min

TAPER	Code No. -L	L	P	Weight (kg)	Suitable Modular Head
HSK 63A	**HSK 63A-AHM-115**	100	65	4.5	
HSK100A	**HSK100A-AHM-127**	120	110	11.5	

★Taper Connection System is applied to Stopper Block. (Different from the another FA Tooling) ★All types are available with Oil Hole System.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.

90°type Modular Head AHM90

AHM

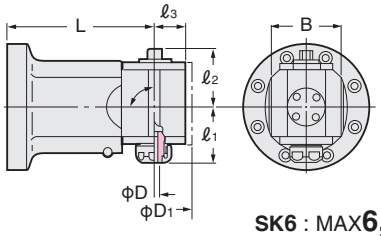

Explanation of the Code No.

AHM90 - **SK6** - **80**

- Length from Gauge Line
- Symbol of Slim Chuck
- Symbol of Modular Head 90°type

SK6 : MAX**6,000**r/min **SK10,16** : MAX**4,000**r/min

Code No. -L	D	ℓ_1	ℓ_2	ℓ_3	D_1	B		Weight (kg)	SK Collet
AHM90-SK 6-80, 120, 150*	0.7～6	42	35	22	50	48	90	3.0, 4.0, 4.5	**SK 6**
-SK10-80, 120, 150*	1.75～10	63	57	32	64	60		3.5, 4.5, 5.0	**SK 10**
-SK16-80, 120, 150*	2.75～16	66	58	35	74	70		4.2, 5.2, 5.7	**SK 16**

★*Mark is for light machining. ★For **SK** Collet, please refer ☞**P.277**. **★When M/C spindle rotates CCW, the cutter rotates CW.** ★Test bar is attached as standard.

AHM

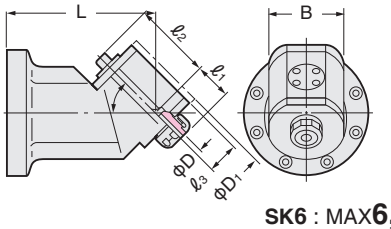

Explanation of the Code No.

AHM45 - **SK6** - **120**

- Length from Gauge Line
- Symbol of Slim Chuck
- Symbol of Modular Head 45°type

SK6 : MAX**6,000**r/min **SK10,16** : MAX**4,000**r/min

Code No. -L	D	ℓ_1	ℓ_2	ℓ_3	D_1	B		Weight (kg)	SK Collet
AHM45-SK 6-120, 150*	0.7～6	27	67	22	50	52	45	3.0, 4.0, 4.5	**SK 6**
-SK10-120, 150*	1.75～10	39	80	30	64	60		3.5, 4.5, 5.0	**SK 10**
-SK16-120, 150*	2.75～16	38	90	35	74	70		4.2, 5.2, 5.7	**SK 16**

★*Mark is for light machining. ★For **SK** Collet, please refer ☞**P.277**. ★Angle 30°, 60° are also available as an option. **★When M/C spindle rotates CCW, the cutter rotates CW.**
★Test bar is attached as standard.

Angular head for deep hole

AHPL

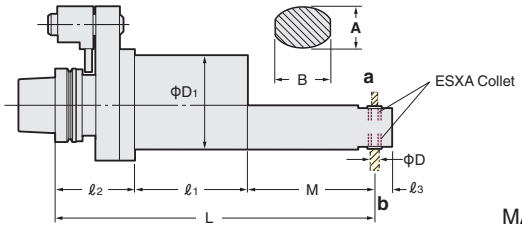

MAX**3,500**r/min

TAPER	Code No. -L	D	D_1	A	B	L	M	ℓ_1	ℓ_2	ℓ_3	r/min	Weight (kg)	Applicable Collet
HSK 63A	**HSK 63A-AHPL4-194**	1.0～4.0	80	25	31	194	32	67.5	94.5	14.5	6,450	5.0	**ESXA4**
	-218					218	56					5.5	
	-242					242	80					6.0	
	-266					266	104					7.5	
	-AHPL6-203	1.0～6.0	80	36	45	202.5	46.5	61.5	94.5	15	8,000	5.0	**ESXA6**
	-231					230.5	74.5					6.0	
	-259					258.5	102.5					8.0	
HSK 100A	**HSK100A-AHPL6-206**	1.0～6.0	80	36	45	205.5	46.5	61.5	97.5	15	8,000	7.0	**ESXA6**
	-234					233.5	74.5					8.0	
	-262					261.5	102.5					10.0	
	-AHPL8-255	1.0～8.0	110	43	47.5	254.5	73	78	103.5	20	6,000	9.0	**ESXA8**
	-287					286.5	105					10.0	
	-307					306.5	125					11.0	

★**ESXA** Collet is supplied as an option. **★Different shape is possible, please contact with us for more detail.**
★When M/C spindle rotates CW, the cutter at a rotates CW and the cutter at b rotates CCW.

HSK SOLID TYPE ANGULAR HEAD (Free Positioning in 360°) NIKKEN

Solid OFF SET type Angular head

AFK·AFC

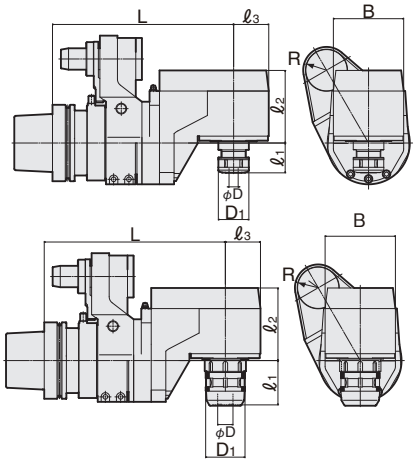

Explanation of the Code No.

HSK63A - AF K 16 - 210

- Length from Gauge Line
- MAX. Chucking Dia.
- Kind of chuck
  K : Slim Chuck
  C : Milling Chuck
- OFF SET type
  Symbol of Angular Head
- Shank

TAPER	Code No. -L	D	D_1	ℓ_1	ℓ_2	ℓ_3	B	R	r/min	Weight (kg)	Collet
HSK 63A	HSK 63A-AFK16-210	2.75～16	40	50	85	35	70	17.5	2,000	8.5	SK 16
	-AFC20-210	2～20	52	56						8.7	KM 20
HSK100A	HSK100A-AFC20-237-NCC	2～20	52	58	85	45	84	25	2,000	17.0	KM 20
	-AFC32-237-NCC	3～32	69	65						17.2	KM 32

★Taper Connection System is applied to Stopper Block. (Different from the another FA Tooling) ★Test bar is attached as standard.
★All types are available with Oil Hole System.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.
★For SK16, please refer ☞ P.277. For KM20 and KM32, please refer ☞ P.274.
★Please advise name of M/C builder and model No. etc. **★When M/C spindle rotates CW, the cutter rotates CW.**
★Those ending in NCC are centre-through compatible as standard.

Solid - 90°, 45°type Angular head



AHK·AHC

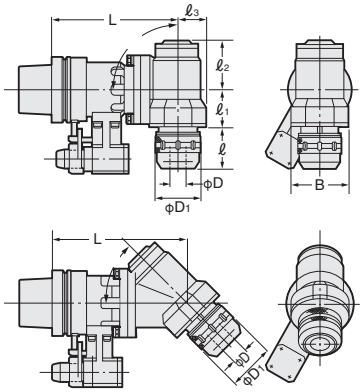

Explanation of the Code No.

HSK63A - AH K 10 - 195 - 90

- angle 30°, 45°, 60°, 90°
- Length from Gauge Line
- MAX chucking Dia
- Kind of chuck
  K : Slim Chuck
  C : Milling Chuck
- Symbol of Angular Head
- Shank

TAPER	Code No. -L -	D	D_1	ℓ	ℓ_1	ℓ_2	ℓ_3	B	r/min	Weight (kg)	Collet
HSK 63A	HSK 63A-AHK10-195 -90	1.75～10	27.5	18	45	57	32	60	4,000	8.0	SK 10
	-235*-90									9.0	
	-AHK16-195 -90	2.75～16	40	25	41	58	35	70		8.7	SK 16
	-235*-90									9.7	
	-AHC20-165 -90	2～20	52	57	58	61	37	80	2,000	7.1	KM 20
	-250*-90									11.1	
HSK100A	HSK100A-AHK10-207 -90	1.75～10	27.5	18	45	57	32	60	4,000	15.0	SK 10
	-247*-90									16.0	
	-AHK16-207 -90	2.75～16	40	25	41	58	35	70		15.7	SK 16
	-247*-90									16.7	
	-AHK25-217 -90	7.5～25.4	55	57	60	82	45	90	2,000	17.2	SK 25
	-300*-90									22.2	
	-AHC32-217 -90	3～32	69							17.5	KM 32
	-300*-90									22.5	

★Taper Connection System is applied to Stopper Block. (Different from the another FA Tooling) ★Test bar is attached as standard.
★All types are available with Oil Hole System.
★Stopper block is available as an option. When ordering, please inform your M/C maker and Model as well as your M/C spindle flange dimension.
★For SK10 SK16 SK25, please refer ☞ P.277. For KM20 KM25 and KM32, please refer ☞ P.274.
★Angle 30°, 45°, 60° are also available as an option. ★ ✻Mark is for light cutting.
★When M/C spindle rotates CCW, the cutter rotates CW.
★Please contact with us for the dimension of 30°, 45°, 60° type.
★Lubrication Pipe is optional. Please refer ☞ P.292

HSK HIGH SPEED SPINDLE SPEEDER

NIKKEN

HSK-PX

Explanation of the Code No.

HSK40 - PX 5 160

- Length
- Ratio
- NX : 4times, 5 times / PX : 6times, 10 times
- Shank

10,000～40,000r/min

- **NIKKEN NX** increases the spindle speed by 4 to 10 times, so economically convert your standard M/C to high speed M/C.
- Even small endmills can cut smoothly without chatter.
- **Run-out accuracy is more stable due to TiN Bearing Nut (standard accessory).**





TAPER	Code No.	D	L	C	C_1	ℓ	H	Ratio	MAX. r/min	Weight(kg)	Collet
HSK63A	HSK 63A-PX 6-150GX	0.5～8.0	151	22	76	14.5	60	6	30,000	4.1	ETS14
	-PX10-160GX		160.5		98			10	40,000	4.5	
HSK100A	HSK100A-PX 6-150GX		147		76		82	6	30,000	6.8	
	-PX10-160GX		171.5		98			10	40,000	7.2	

PX type

★Grease lubrication is standard.

★Please add **"MX"** instead of **"GX"** at the end of Code No. for the oil mist lubrication.
e.g. BT40-PX6-130MX

★**ETS** collet is supplies as an option.

Air Cylinder for Cooling with ON/OFF Magnet NXE-COOL

The best cooling is to cool the speeder body directly.

ETS Collet



Explanation of the Code No.

ETS 14 - 0.5

- MAX. Chucking Dia.
- Style No.
- Symbol of ETS Collet

★φd=0.5～1.0: Each 0.1mm (Gripping range : 0.1mm)
e.g. ETS14-0.5 : 0.4～0.5mm
★φd=1.25～2.5: Each 0.25mm (Gripping range : 0.25mm)
★φd=3.0 ～8.0: Each 0.5mm (Gripping range : 0.5mm)

HSK

X-Treme Shank HSK X-Treme Chuck

NIKKEN

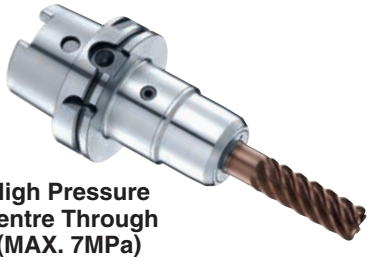

High Pressure Centre Through (MAX. 7MPa)



Explanation of the Code No.

HSK100A – C32EX – 121 – J

- J: J-Type (Jet Groove)
- Nominal Gauge Length
- X-Treme Chuck
- Chucking Capacity
- Symbol of Milling Chuck
- Shank No.

JAPAN, USA, EU, CHINA PAT.

TAPER	Code No. (φD - L)	C_1	L	$ℓ_2$	End mill with oil hole: Stopper*	End mill with oil hole: Face cap*	Handle (Option)	Weight (kg)
HSK63A	HSK 63A-C12EX- 96	40	96	58	9MC12HEX- 6L	9C12SL-FS-EX-A1	GH16	1.3
	-C16EX-101	48	101	68	9MC16HEX-6.5L	9C16SL-FS-EX-A1	GH20	1.5
	-C20EX-106	55	106	71	9MC20HEX- 7L	9C20 -FS-EX-A1	GH25	1.7
HSK100A	HSK100A-C12EX- 96	40	96	58	9MC12HEX- 6L	9C12SL-FS-EX-A1	GH16	2.7
	-C16EX-106	48	106	68	9MC16HEX-6.5L	9C16SL-FS-EX-A1	GH20	3.0
	-C20EX-116	55	116	71	9MC20HEX- 12L	9C20 -FS-EX-A1	GH25	3.6
	-C25EX-116	55	116.3	76.3	9MC25HEX-6.2L	9C25SL-FS-EX-A1	GH25	3.5
	-C32EX-121	68	121.3	83.3	9MC32HEX- 7L	9C32SL-FS-EX-A1	GH32	4.0
	-C42EX-136	86	136	86	9MC42HEX- 9L	9C42SL-FS-EX-A1	9HC42	5.7
HSK125A	HSK125A-C20EX-121S	55	121	71	9MC20HEX- 12L	9C20 -FS-EX-A1	GH25	5.4
	-C25EX-121S	55	121.3	77.3	9MC25HEX-6.2L	9C25SL-FS-EX-A1	GH25	5.3
	-C32EX-136S	68	136.3	83.3	9MC32HEX- 7L	9C32SL-FS-EX-A1	GH32	6.3
	-C42EX-136S	86	136	86	9MC42HEX- 9L	9C42SL-FS-EX-A1	9HC42	7.1

Please use direct chucking without KM collet.

★ MAX. 7MPa of center through coolant is available with the stopper.

★ Please use **J**-type **X-Treme** chuck, when end mill without oil hole is used. **eg) HSK125A-C32EX-136S-J**
In case of **J**-type **X-Treme** chuck, **J**-type stopper and **J**-type face cap (with Jet grooves) are attached. **9MC32HEX-7L-J, 9C32L-FS-EX-J1**
J-type **X-Treme** chuck is used for the pocket milling and side milling.

GH Handle ☞P.293

HSK HIGH SPEED MILLING CHUCK (INCH)

NIKKEN

C-G
High Pressure Centre Through (MAX. 7MPa)
Photo shows High Speed Milling Chuck

ANNIVERSARY Type
—Powerful gripping torque—
- High rigidity
- High precision
- Compact design



Fig. 1



Fig. 2

Dimensions are displayed in inches.

TAPER	Code No.	C	D	ℓ	L	MAX. r/min	Weight (kg)	Fig.	Collet	Chucking Range	Handle (Option)
HSK 63A	HSK 63A-C3/4 - 95G	1.890	0.750	2.244	3.740	25,000	1.6	1	KM3/4	0.125～0.750	GH20
	-110G				4.331		1.8				
	-C1 -100G	2.165	1.000	2.362	3.937	20,000	1.9	2	KM1	0.125～1.000	GH25
	-130G				5.118		2.3				
	-C1 1/4 -110G	2.677	1.250	2.559	4.331		2.2		KM1 1/4	0.187～1.250	GH32
	-130G			2.756	5.118		2.6				
HSK100A	HSK100A-C 3/4 -115G	1.890	0.750	2.244	4.528	20,000	3.0	1	KM3/4	0.125～0.750	GH20
	-135G				5.315		3.6				
	-C1 -115G	2.165	1.000	2.362	4.528	15,000	3.3		KM1	0.125～1.000	GH25
	-135G				5.315		3.6				
	-C1 1/4 -115G	2.677	1.250	2.559	4.528	12,000	3.2		KM1 1/4	0.187～1.250	GH32
	-165G			2.756	6.496		4.8				

★Please note the acceptable shank tolerance is h6.
★Please refer ☞P.274 for **KM** collet.(inch)
★Lubrication Pipe is optional. Please refer ☞P.292

GH Handle ☞P.293

HSK MILLING CHUCK (INCH)

NIKKEN

C
High Pressure Centre Through (MAX. 7MPa)

ANNIVERSARY Type
—Powerful gripping torque—
- High rigidity
- High precision
- Compact design



Fig. 1



Fig. 2

Dimensions are displayed in inches.

TAPER	Code No.	C	D	ℓ	L	Weight (kg)	Fig.	Collet	Chucking Range	Spanner (Option)
HSK 63A	HSK 63A-C3/4 - 95	2.047	0.750	2.244	3.740	1.6	1	KM3/4	0.125～0.750	9HC22
	-110				4.331	1.8				
	-C1 -100	2.362	1.000	2.362	3.937	1.9	2	KM1	0.125～1.000	9HC25
	-130				5.118	2.3				
	-C1 1/4 -110	2.717	1.250	2.559	4.331	2.2		KM1 1/4	0.187～1.250	9HC32
	-130			2.756	5.118	2.6				
HSK100A	HSK100A-C 3/4 -115	2.047	0.750	2.244	4.528	3.0	1	KM3/4	0.125～0.750	9HC22
	-135				5.315	3.6				
	-C1 -115	2.362	1.000	2.362	4.528	3.3		KM1	0.125～1.000	9HC25
	-135				5.315	3.6				
	-C1 1/4 -115	2.717	1.250	2.559	4.528	3.2		KM1 1/4	0.187～1.250	9HC32
	-165			2.756	6.496	4.8				

★Please refer ☞P.274 for **KM** collet.(inch)
★Please note the acceptable shank tolerance is h6～7.
★Lubrication Pipe is optional. Please refer ☞P.292

Spanner ☞P.293



BT MILLING CHUCK (INCH)

NIKKEN

BT

Centre Through

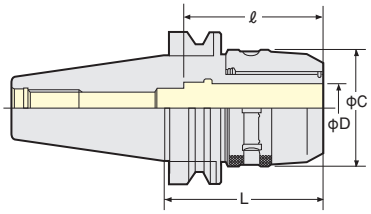

Dimensions are displayed in inches.

TAPER	Code No.	C	D	ℓ	L	Weight (kg)	Collet	Chucking Range	Spanner (Option)
BT40	BT40 -C3/4 - 70	2.047	0.750	3.150	2.756	1.6	KM3/4	0.125～0.750	9HC22
	-105				4.134	2.0			
	-C1 - 70	2.362	1.000	3.150	2.756	1.8	KM1	0.125～1.000	9HC25
	- 90				3.543	2.1			
	-C1 1/4 - 85	2.717	1.250	3.031	3.346	2.1	KM1 1/4	0.187～1.250	9HC32
	-120			4.134	4.724	2.8			
BT50	BT50 -C 3/4 -105	2.047	0.750	3.150	4.134	4.5	KM3/4	0.125～0.750	9HC22
	-135				5.315	4.8			
	-C1 -105	2.362	1.000	3.150	4.134	4.8	KM1	0.125～1.000	9HC25
	-135				5.315	5.2			
	-C1 1/4 - 90	2.717	1.250	4.134	3.543	4.3	KM1 1/4	0.187～1.250	9HC32
	-135				5.315	5.6			

★Please refer ☞P.274 for **KM** collet.(inch)
★Please note the acceptable shank tolerance is h6～7.

Spanner ☞P.293

CAT MILLING CHUCK (INCH)

NIKKEN

CAT

Centre Through



Fig. 1

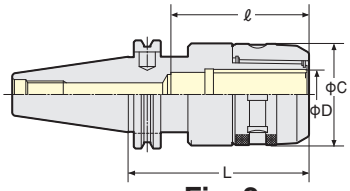

Fig. 2

Dimensions are displayed in inches.

TAPER	Code No.	C	D	ℓ	L	Weight (kg)	Fig.	Collet	Chucking Range	Spanner (Option)
CAT40	CAT40-C3/4 - 70U-IDU	2.047	0.750	3.150	2.75	1.6	2	KM3/4	0.125～0.750	9HC22
	- 85U-IDU				3.346	1.8				
	-105U-IDU				4.134	2.0				
	-120U-IDU				4.724	2.2				
	-C1 - 85U-IDU	2.362	1.000	3.150	3.346	2.1		KM1	0.125～1.000	9HC25
	-105U-IDU				4.134	2.3				
	-C1 1/4SL- 85U-IDU	2.717	1.250	3.031	3.346	2.1		KM1 1/4	0.187～1.250	9HC32
	-105U-IDU			3.543	4.134	2.5				
	-120U-IDU			4.134	4.724	2.8				
CAT50	CAT50-C 3/4 -105U-IDU	2.047	0.750	3.150	4.134	4.5	1	KM3/4	0.125～0.750	9HC22
	-135U-IDU				5.315	4.8				
	-160U-IDU				6.496	5.1				
	-C1 -105U-IDU	2.362	1.000	3.150	4.134	4.8		KM1	0.125～1.000	9HC25
	-135U-IDU				5.315	5.2				
	-C1 1/4 - 90U-IDU	2.717	1.250	4.134	3.543	4.3		KM1 1/4	0.187～1.250	9HC32
	-105U-IDU				4.134	4.6				
	-135U-IDU				5.315	5.6				
	-165U-IDU				6.496	6.4				

★Please refer ☞P.274 for **KM** collet.(inch)
★Please note the acceptable shank tolerance is h6～7.
★ID chip pocket is put as standard.

Spanner ☞P.293

CAT HIGH SPEED MILLING CHUCK (INCH)

NIKKEN

CAT
High Pressure Centre Through (MAX. 7MPa)



Fig. 1

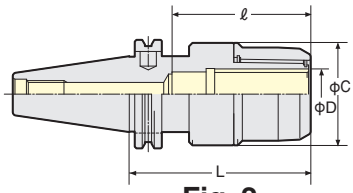

Fig. 2

Dimensions are displayed in inches.

TAPER	Code No.	C	D	ℓ	L	MAX. (r/min)	Weight (kg)	Fig.	Collet	Chucking	Handle (Option)
CAT40	CAT40-C3/4 - 85UG-IDU	1.890	0.750	3.150	3.346	25,000	1.8	2	KM3/4	0.125～0.750	GH20
	-105UG-IDU				4.134		2.0				
	-C1 - 85UG-IDU	2.165	1.000	3.150	3.346	20,000	2.1		KM1	0.125～1.000	GH25
	-105UG-IDU				4.134		2.3				
	-C1 1/4SL-105UG-IDU	2.677	1.250	2.500	4.134		2.5		KM1 1/4	0.187～1.250	GH32
	-120UG-IDU			3.150	4.724		2.8				
CAT50	CAT50-C 3/4 -105UG-IDU	1.890	0.750	3.150	4.134	20,000	4.5	1	KM3/4	0.125～0.750	GH20
	-135UG-IDU				5.315		4.8				
	-C1 -105UG-IDU	2.165	1.000	3.150	4.134	15,000	4.8		KM1	0.125～1.000	GH25
	-135UG-IDU				5.315		5.2				
	-C1 1/4 -105UG-IDU	2.677	1.250	4.134	4.134		4.6		KM1 1/4	0.187～1.250	GH32
	-135UG-IDU				5.315		5.6				

★Please note the acceptable shank tolerance is h6
★Please refer ☞P.274 for **KM** collet.(inch)
★ID chip pocket is put as standard.

GH Handle ☞P.293

DIMENSION of CAT TOOL SHANK

NIKKEN

CAT40

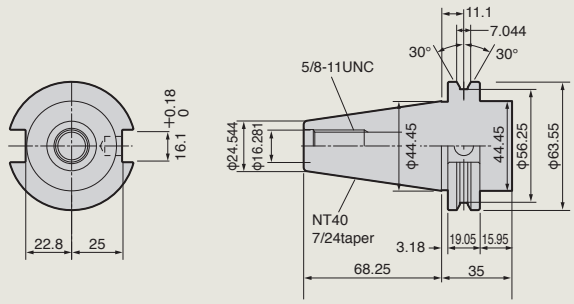

CAT50

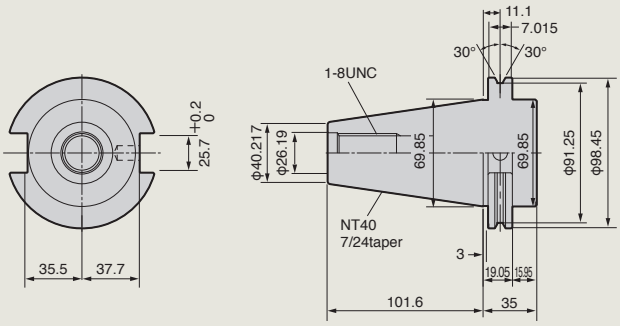

CAT standard is based on **ASME B5-50-1985 (CATERPILLAR 1975).**

CAT

Straight Shank MILLING CHUCK

NIKKEN

S-C for Multi-Lock Milling Chuck

Centre Through

Photo. shows **S32-C12-200**

■ For Extension



Style	Code No.	φd	φD	φd1	L	MAX. L1	Collet	Weight(kg)
32	S32-C12-120, 160, 200	32	12	33	120, 160, 200	60, 100, 140	KM12	0.6, 0.9, 1.1
	-C16-130		16	44	130	70	KM16	0.7
	-C20-150		20	52	150	90	KM20	1.1
42	S42-C16-180	42	16	44	180	120	KM16	1.6
	-C20-185		20	52	185	125	KM20	1.7

★**S32-C22-150, S42-C22-185, S42-C25-150** are also available as semi-standard.
★**The MC and NC straight shank Milling Chuck is unified to the above Code No.** ★Please refer ☞**P.274** for **KM** Collet.
★Spanner is available as an option. **C20 : 9HC22, C25 : 9HC25 C32 : 9HC32, C42 : 9HC42 C12 (di=φ30) : 9HC12, C12 (di=φ33) : 9HC12A, C16 : 9HC16, C20 : 9HC22**

Straight Shank MINI-MINI CHUCK

NIKKEN

K-MMC



Style	Code No.	Chucking Range D	L	φD1	L1	L2	Collet	Weight(kg)
16	K16-MMP 4- 70, 150	1～ 4	70, 150	15	50, 130	20	MPK 4	0.1, 0.2
20	K20-MMC 8-100	2～ 8	100	20	80	20	PMK 8 VMK 8	0.2
32	K32-MMC 8-122, 160	2～ 8	122, 160	20	67	40	PMK 8 VMK 8	0.5, 0.7
	K32-MMC12-170S	4～12	170	30	120	50	PMK12 VMK12	1.0

★Wrench is supplied as standard. Collet is available as an option.

Straight Shank TAPPER CHUCK

NIKKEN

■ For Slim body and Ultra Smooth Tapping Operations with Float Mechanism.

NZ

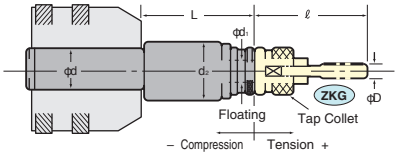

Style	Code. No.	Tapping Capability M	Tapping Capability P	L	d1	d	d2	Float Compression	Float Tension	Weight (kg)	Tap Collet
32	NZ32-12-105	M 2～12	P1/16 ～1/4	105～125	19	32	45	5	15	1.3	ZKG12
	-16-125	M 3～16	P1/8 ～3/8	125～145	25		55	8	20	2.2	ZKG16
	-24-140	M 8～24	P1/4 ～5/8	140～160	30		63			2.8	ZKG24
42	NZ42-12- 90	M 2～12	P1/16 ～1/4	90～125	19	42	45	5	15	2.0	ZKG12
	-16-125	M 3～16	P1/8 ～3/8	125～160	25		55	8	20	3.0	ZKG16
	-24-140	M 8～24	P1/4 ～5/8	140～175	30		63			3.6	ZKG24

STRAIGHT SHANK MASAMUNE SHRINK FIT HOLDER

NIKKEN

MS-A

Centre Through

Fig.1



Fig.2



Fig.3



Style d	Code No.	L	φD	L1	L2	L3	D1	D2	Fig
10	MS10-A 3- 90	90	3	27	10	—	6	8.7	1
	-A 4- 90		4		13		7	9.7	
16	MS16-A 4-120	120	4	42	13	—	7	11.2	1
	-A 6-120		6		19		10	14.2	
	-A 8-120		8	38	25		12	16.0	2
20	MS20-A 6-150	150	6	72	19	—	10	17.4	1
	-A 8-150		8		25		12	19.4	
	-A10-150		10	57	31	63	14	20.0	3
	-A12-150		12	38	37	78	16	20.0	

★Please note the acceptable shank tolerance is h6.
★Carbide tool can be used and **HSS** tool can not be used.
★Minimum insertion length is L2.
★Maximum insertion length is L3. If cutting tool is inserted longer than L3, the cutting tool bottom will be contacted to holder. Then, the run-out accuracy will be worse.
★The tool will become very hot during heat shrinking. Please use glove for safety.
★ID=φ16, φ20 and φ25mm are available.
★The capacity of the drier is approx. 3kW.
★Inductive style of the heat shrinking unit is recommended.

Straight Shank SLIM CHUCK

NIKKEN

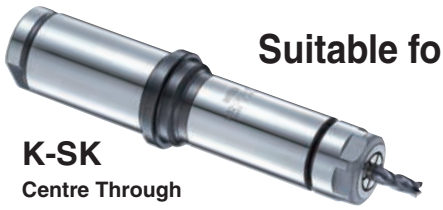

Suitable for Multi-Lock Milling Chuck

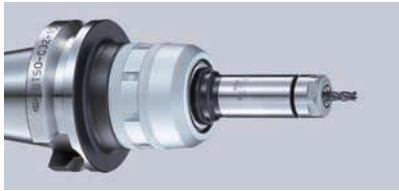

K-SK

Centre Through

Explanation of the Code No.

K 20 - SK 6 - 100

- Length
- MAX Chucking Dia.
- Symbol of Slim Chuck
- OD of shank
- Symbol of straight shank

Fig. 1

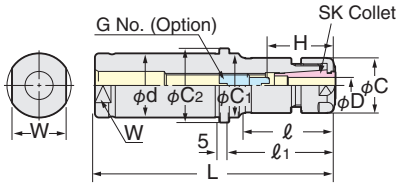

Fig. 2

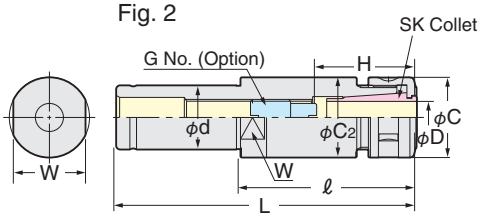

Code No.	D	ℓ	ℓ1	C	C1	C2	W	H	G No. (Option)	Weight (kg)	Fig	SK Collet
K20-SK 6-100, 120	0.7~6.0	37, 57	-	19.5	-	27	18	21~35	SKG-8	0.2, 0.2	1	SK 6
-SK10-100, 120	1.75~10.0	40, 60		27.5		27.5		30~50	SKG-12L	0.3, 0.3	2	SK10
K22-SK 6-100, 120	0.7~6.0	37, 57		19.5		27	19	21~35	SKG-8	0.2, 0.2	1	SK 6
-SK10-100, 120	1.75~10.0	40, 60		27.5		27.5		30~50	SKG-12L	0.3, 0.3	2	SK10
K25-SK 6-100, 130	0.7~6.0	32, 62		19.5		30	22	21~35	SKG-8	0.3, 0.3	1	SK 6
-SK10-120, 150	1.75~10.0	50, 80		27.5				30~50	SKG-12L	0.4, 0.5		SK10
K32-SK 6-120, 140, 170	0.7~6.0	45, 65, 63	53, 73, 100	19.5	32, 32, 24	37	27	21~35	SKG-8	0.5, 0.5, 0.5		SK 6
-SK10-120, 150, 180, 210	1.75~10.0	45, 75, 75, 75	53, 83, 111, 141	27.5	32, 32, 31.5, 33.5			30~50	SKG-12L	0.6, 0.7, 0.8, 1.0		SK10
-SK13-120, 150, 180, 210	2.75~13.0	52, 82, 112, 142	-	33	-			31~65	SKG-15	0.7, 0.8, 1.0, 1.2		SK13
-SK16-120, 150, 180, 210	2.75~16.0	58, 88, 118, 148		40		40	36	45~70	SKG-18L	0.7, 0.9, 1.2, 1.4	2	SK16
-SK20-120, 150, 180	3.5~20.0	58, 88, 118		48.5		40	41	47~80	SKG-22	0.9, 1.3, 1.7		SK20
-SK25-150	7.5~25.4	88		55		42	46	55~65	SKG-18L	1.3		SK25
K42-SK 6-150, 170	0.7~6.0	52, 62	61, 78	19.5	32	47	36	21~35	SKG-8	1.0, 1.1	1	SK 6
-SK10-150, 180	1.75~10.0	56, 78	-	27.5	-			30~50	SKG-12L	1.1, 1.3		SK10
-SK13-150, 180	2.75~13.0	56, 86		33				31~65	SKG-15	1.2, 1.4		SK13
-SK16-150, 180	2.75~16.0	58, 88		40				45~70	SKG-18L			SK16
-SK20-150, 180	3.5~20.0	68, 98		48.5		48.5		47~80	SKG-22	1.5, 1.9		SK20
-SK25-170	7.5~25.4	88		55		44.5	46	55~65	SKG-18L	1.8	2	SK25

★Collet, adjust screw (G No.) and spanner are available as an option.
The Code No. of the spanner is **SK6 (C=φ18) : SKL-6, SK6 (C=φ19.5) : SKL-6W, SK10: SKL-10, SK13: 9HC12A, SK16: 9HC16, SK20: 9HC22, SK25: 9HC25**

★Please refer ☞ **P.277** for **SK** Collet. ★All Slim Chucks are Centre Through Coolant type.
★Please refer ☞ **P.282** for adjust screw (G No.).

Straight Shank SLIM CHUCK ULTRA LONG TYPE

NIKKEN

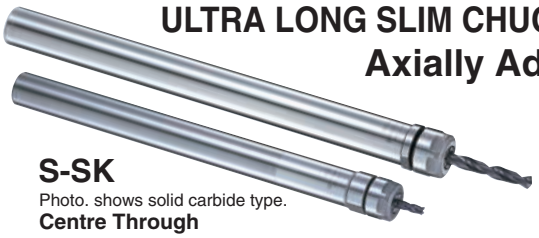

ULTRA LONG SLIM CHUCK
Axially Adjustable

S-SK

Photo. shows solid carbide type.

Centre Through

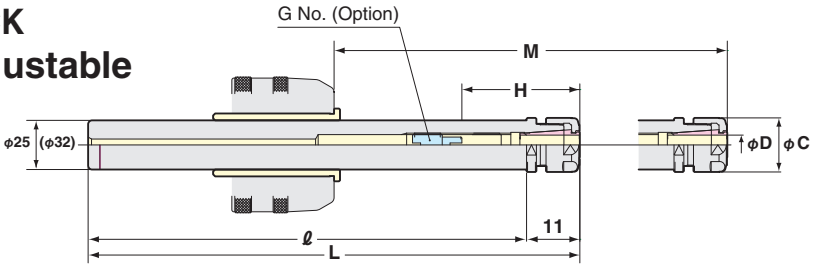

Solid Carbide type is also available.
Please add "**X**" to the Code No. **e.g. S25-SK10X-250, S25-SK10X-300**

Code.No.	D	L	ℓ1	ℓ2	C	Over Hang Length M	H	G No. (Option)	Weight (kg)	Collet
S25-SK10-250	1.75~10.0	250	223	27	27.5	145~200	30~60	SKG-12L	0.9	SK10
-300		300	273			195~250			1.1	
S32-SK13-250	2.75~13.0	250	224	26	33	145~185	31~65	SKG-15	1.4	SK13
-300		300	274			195~235			1.7	
S32-SK16-250	2.75~16.0	250	192	58	40	145~185	40~70	SKG-18	1.5	SK16
-300		300	242			195~235			1.8	

★Nut, Adjust Screw (G No.) and Collet Extractor are supplied as standard. ★Spanner **"SKL-10"** is available as an option.
★Please refer ☞ **P.277** for **SK** collet. ★Please add **"C"** at the Code No. for Centre Through Coolant type. **e.g. S25-SK10C-250**
★**S18-SK6-200** is also available ★Please refer ☞ **P.282** for adjust screw (G No.).

S18-SK6-200



Straight Shank NPU DRILL CHUCK

NIKKEN

Suitable For MULTI-LOCK Milling Chuck

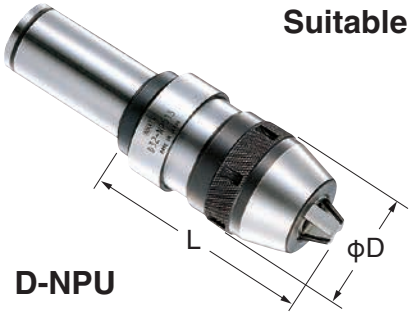

D-NPU

Style	Code No.	Chucking Dia	L MIN.	L MAX.	Weight (kg)
32	D32-NPU 8	0.3～8	65.5	72.5	0.9
	-NPU13	1～13	84.5	96.5	1.4
42	D42-NPU 8	0.3～8	55.5	62.5	1.2
	-NPU13	1～13	79.5	91.5	1.7

★φD : **NPU 8** : 36.5mm **NPU13** : 48mm Chucking Length : **NPU 8** : 18.8mm **NPU13** : 26.5mm ★Wrench is available as an option. **NPU8: NPUL-8, NPU13: NPUL-13**.

Straight Shank CENTER DRILL HOLDER

NIKKEN

Suitable For MULTI-LOCK Milling Chuck

■Effective for centering in narrow places

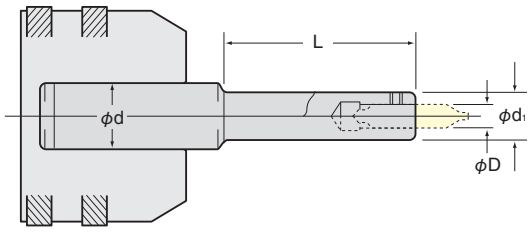

NCD

Style	Code No.	D	L	d1	d
32	NCD32- 5-100,150	5	85, 135	16	32
	- 6-100,150	6	85, 135		
	- 8-100,150	8	85, 135		
	-10-100,150	10	85, 135	20	
	-12-100,150	12	85, 135		

Style	Code No.	D	L	d1	d
42	NCD42- 5-100,150	5	82, 132	16	42
	- 6-100,150	6	82, 132		
	- 8-100,150	8	82, 132		
	-10-100,150	10	82, 132	20	
	-12-100,150	12	82, 132		

CENTERING TOOL CENTERING END MILL

NIKKEN

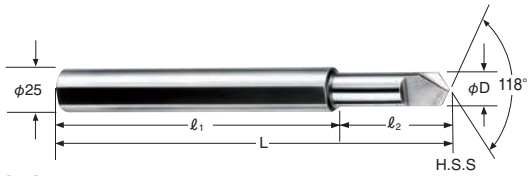

CCT

Code No.	φD	L	ℓ1	ℓ2
CCT25-12-165	12	165	100	65
-15-220	15	220	155	
-15-330		330	265	
-19-165	19	165	100	
-19-220		220	155	
-19-330		330	265	

CC

Nikken Chamfering combined centering end mill 90 ° Twist type

Code No.	φD	φd	L	ℓ1	ℓ2
CC10-16	10	16	130	95	35
CC12-16	12	16	145	100	45
CC16-20	16	20	150	100	50
CC20-25	20	25	155	100	55

■Three kinds of machining can be done with one cutting tool.

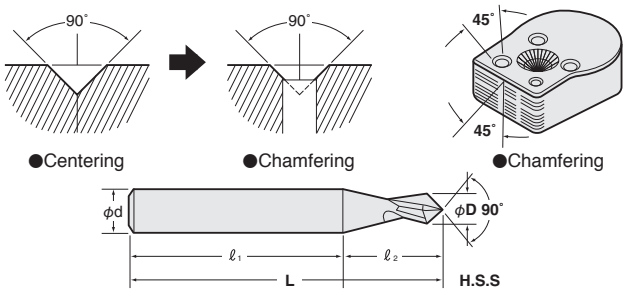

BT

STRAIGHT

MILLING CHUCK COOLANT SOLUTION

NIKKEN

	CUTTING TOOL WITH OIL HOLE 		JETCOOLANT SYSTEM 	
	Direct Chucking	**with Collet**	**Direct Chucking**	**with Collet**
Standard Milling Chuck ex.) BT○○-C○○	Front Nut with O-ring for direct chucking  CKFN-DC 	Front Nut with O-ring  CCNK Collet / CCK Collet  CKFN-C 	Front Nut for Direct Chucking for JETCOOLANT  CKFN-D (with JETCOOLANT Groove) 	Front Nut for JETCOOLANT  CCNK Collet / CCK Collet  CKFN-MN (with Coolant Nozzle) / CKFN (with V Groove)  ①In case cutter dia is larger than its shank dia. ②Front Nut for JETCOOLANT
Milling chuck for high pressure center through ex.) BT○○-C○○C MBT○○-C○○ NBT○○-C○○ NC5○○-C○○ HSK○○-C○○	①In case of cutting tool shank is shorter than ℓ1. Please use stopper.☞P.34 ②Inserting depth is longer than ℓ1. 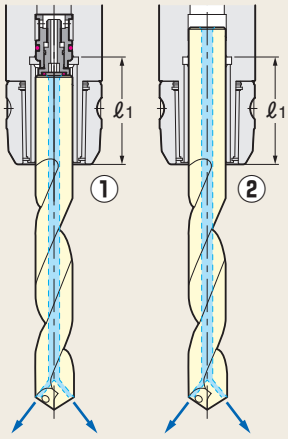		Front Nut for Direct Chucking for JETCOOLANT *Inserting depth should be less than ℓ1.  CKFN-D (with JETCOOLANT Groove) 	

*Direct chucking means, for example, to use shank dia.32 cutting tool to Milling Chuck with inner dia.32.
*Milling Chuck for high pressure center through can be used for high pressure due to inside perfect seal.

■CENTRE COOLANT STRAIGHT COLLET + FRONT NUT

The Jet Coolant Pressure creates a tornado effect, ensuring efficient swarf dispersal.



For groove cutting
+
CKFN



For cutters with cutting diameter which is larger than the shank diameter.
+
CKFN-MN



A front nut with an O-ring seal, for use with oil hole cutter, is also available as option.
+
CKFN-C



Prevention of the swarf contamination.

STRAIGHT COLLET (KM COLLET)

NIKKEN



KM

Photo shows **ANNIVERSARY type KM Collet**.



◯means with internal grooves for gripping strongly to eliminate the oil.

Explanation of the Code No.

KM 32 – 10

- 10: ID of Collet
- 32: OD of Collet
- KM: Symbol of Collet

KM :Standard
NK :Adjustable
CCK :Centre Coolant
CCNK:Centre Coolant, Adjustable

Style	L	KM Collet Code No. (OD-ID)
KM12	40	**KM12-**2, 3, 4, 5, 6, **7**, **8**, **9**,**10**
KM16	47.5	**KM16-**2, 3, 4, 5, 6, 7, **8**, **9**,**10**,**11**,**12**
KM20	53	**KM20-**2, 3, 4, 5, 6, 7, 8, 9,**10**,**11**,12,13,14,15,**16**
KM22	57	**KM22-**3, 4, 5, 6, 7, 8, 9,10,**11**,12,13,14,15,16,17,**18**,**19**, **20**
KM25	59	**KM25-**3, 4, 5, 6, 7, 8, 9,**10**,**11**,12,13,14,15,16,17,18,19, 20, **21**, **22**
KM32	64.5	**KM32-**3, 4, 5, 6, 7, 8, 9,10,11,12,13,14,15,16,17,18,19, 20, 21, 22, 23, 24, 25, 26, **30**
KM42	73(78)	**KM42-**3, 4, 5, 6, 7, 8, 9,10,11,12,13,14,15,16,17,18,19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, **40**

★For Synchronous Tapping Program : Special ID Collets for Tap Shank are also available.
★Other metric sizes and imperial sizes, 1/8, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8, 3/4, 13/16, 7/8, 1, 1·1/8, 1·1/4, 1·1/2"are also available.
★The collets with bold character are the **"ANNIVERSARY" type KM Collet**.
Ordinary **KM** Collet can be used with **"ANNIVERSARY" type Milling Chuck**, but better performance can be found with the **"ANNIVERSARY" type KM Collet**.
★Please note the acceptable shank tolerance is h6~h7.
★( ): L dimension for **KM42-12** or larger ID.
★Collet removal (**9CKR**) is an optional accessory for NC milling chuck.

STRAIGHT COLLET (NK COLLET)

NIKKEN



NK

Cutter length adjustment on the collet is possible from front and back.

◯means with internal grooves for gripping strongly to eliminate the oil.

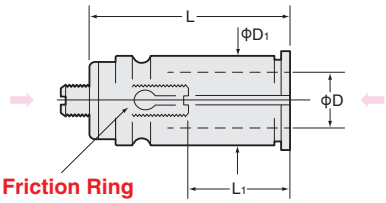

Style	L	L1	NK Collet Code No. (OD-ID)
NK20	63	20~40	**NK20-**3, 4, 5, **6**, 7, **8**, 9,**10**,11,12,13,14,15,**16**
NK22	70	30~50	**NK22-**3, 4, 5, **6**, 7, **8**, 9,**10**,11,12,13,14,15,16,17,18
NK25	68	30~55	**NK25-**3, 4, 5, **6**, 7, **8**, 9,**10**,11,12,13,14,15,16,17,18,19, 20, 21, 22
NK32	75	30~60	**NK32-**3, 4, 5, **6**, 7, **8**, 9,**10**,11,12,13,14,15,16,17,18,19, 20, 21, 22, 23, 24, 25, 26
NK42	85(92)	30~65	**NK42-**3, 4, 5, **6**, 7, **8**, 9,**10**,11,12,13,14,15,16,17,18,19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32

★For Synchronous Tapping Program : Special ID Collets for Tap Shank are also available.
★Other metric sizes and imperial sizes, 1/8, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8, 3/4, 13/16, 7/8, 1, 1·1/8, 1·1/4, 1·1/2"are also available.
★The collets with bold character are standard.
★Please note the acceptable shank tolerance is h6~h7.
★( ): L dimension for **NK42-12** or larger ID.
★Collet removal (**9CKR**) is an optional accessory for NC milling chuck.

STRAIGHT COLLET (KM COLLET) (I.D.inch)

NIKKEN

KM

Photo shows **ANNIVERSARY type KM Collet**.

Style	L	KM Collet Code No. (inside diameter)
KM20	53	**KM20 -**1/8, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8
KM25	59	**KM25 -**1/8, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8, 3/4, 7/8
KM32	64.5	**KM32 -**1/8, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8, 3/4, 7/8, 1

STRAIGHT COLLET (KM COLLET) (inch)

NIKKEN

KM

Style	KM Collet Code No. (outer, inside diameter)
KM3/4	**KM3/4 -**1/8, 3/16, 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8
KM1	**KM1 -**1/8, 3/16, 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 3/4, 7/8
KM1 1/4	**KM1 1/4 -**1/8, 3/16, 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 3/4, 7/8,1

★Please note the acceptable shank tolerance is h6~h7.
★**KM** collet with outer diameter in inches and inner diameter in millimeters are made to order.
★Collet removal (**9CKR**) is an optional accessory for NC milling chuck.

CENTRE COOLANT STRAIGHT COLLET

NIKKEN

Suitable for all models of the NIKKEN MILLING CHUCK

CCK Collet

Front Nut



Jet Coolant
⊕
Prevention of Swarf entering the collet through the slots

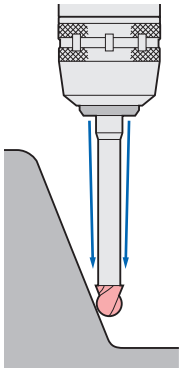

Explanation of the Code No.

CCK 32 – 10

- 10: ID of Collet
- 32: OD of Collet
- CCK: Symbol of CCK Collet

CCK :Centre Coolant
CCNK :Centre Coolant, Adjustable
KM :Standard
NK :Adjustable
ONK :Oil Hole Drill
OJK-A:Jet Coolant
OJK-S:Multiple Nozzles



For grooving.



For cutters with cutting diameter which is larger than the shank diameter.



Prevention of the swarf contamination.



A front nut with an O-ring seal, for use with oil hole cutter, is also available as option.

CKFN-MN

CKFN-C

CCK Collet

○means with internal grooves for gripping strongly to eliminate the oil.



CCK

Explanation of the Code No.

CCK 32 – 10

- 10: ID of Collet
- 32: OD of Collet
- CCK: Symbol of Centre Coolant Collet

It can be used for the standard collet.

Style	φD1	φD2	L1	L2	CCK Collet Code No. (OD-ID)	Front Nut Code No.
CCK12	12	19.5	38	7	**CCK12**-3, 4, 5, 6, 8,10	**CKFN12**
CCK16	16	28.5	45	8	**CCK16**-3, 4, 5, 6, 8, 10, 12	**CKFN16**
CCK20	20	33	50.5	8	**CCK20**-6, 8,10, 12, 16	**CKFN20**
CCK25	25	39	56	8.5	**CCK25**-6, 8,10, 12, 16, 20	**CKFN25**
CCK32	32	46.5,43	61.5	9	**CCK32**-6, 8,10, 12, 15, 16, 19, 20, 24, 25, 30	**CKFN32, CKFN32T**
CCK42	42	59.5	70(75)	9	**CCK42**-6, 8,10, 12, 16, 20, 25, 32	**CKFN42**

★Above bold figures indicate **"ANNIVERSARY" type CCK Collet**.
★Please note the acceptable shank tolerance is h6~h7.
★Other metric sizes and imperial sizes, 1/8, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8, 3/4, 13/16, 7/8, 1, 1·1/8, 1·1/4, 1·1/2"are also available.
★**CKFN** front nut and **CCKL** spanner are optional accessories.
★Collet removal (**9CKR**) is an optional accessory for NC milling chuck.

CCNK Collet

○means with internal grooves for gripping strongly to eliminate the oil.

Cutter length adjustment on the collet is possible from front and back.

Photo shows with front nut.

CCNK+CKFN

Explanation of the Code No.

CCNK 32 – 10

- 10: ID of Collet
- 32: OD of Collet
- CCNK: Symbol of Centre Coolant Collet for NC

It can be used for the standard collet.

Style	CCNK Collet Code No. (OD-ID)	Front Nut Code No.
CCNK20	**CCNK20**-6, 8, 10, 12, 16	**CKFN20**
CCNK25	**CCNK25**-6, 8, 10, 12, 16, 20	**CKFN25**
CCNK32	**CCNK32**-6, 8, 10, 12, 16, 20, 25	**CKFN32, CKFN32T**
CCNK42	**CCNK42**-6, 8, 10, 12, 16, 20, 25, 32	**CKFN42**

★Please note the acceptable shank tolerance is h6~h7.
★Other metric sizes and imperial sizes, 1/8, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8, 3/4, 13/16, 7/8, 1, 1·1/8, 1·1/4, 1·1/2"are also available.
★**CKFN** front nut and **CCKL** spanner are optional accessories.
★Collet removal (**9CKR**) is an optional accessory for NC milling chuck.

FRONT NUT For CENTRE COOLANT STRAIGHT COLLET

NIKKEN

BT

Front Nut



CKFN

Explanation of the Code No.

CKFN 32 – 10 [ ]

- [ ] : JET COOLANT SYSTEM
  C : For with OH
- 10: ID of Collet
- 32: OD of Collet
- CKFN: Symbol of Front Nut

Style	φD2	L2	Front Nut Code No.	Spanner(option)
CKFN12	19.5	7	**CKFN12** -3, 4, 5, 6, 8,10	**CCKL12**
CKFN16	28.5	8	**CKFN16** -3, 4, 5, 6, 8,10,12	**CCKL16**
CKFN20	33	8	**CKFN20** -6, 8,10,12,16	**CCKL20**
CKFN25	39	8.5	**CKFN25** -6, 8,10,12,16, 20	**CCKL25**
CKFN32	46.5	9	**CKFN32** -6, 8,10,12,15,16,19,20,24,25,30	**CCKL32**
CKFN32T	43	9	**CKFN32T**-6, 8,10,12,16, 20, 25	**CCKL25**
CKFN42	59.5	9	**CKFN42** -6, 8,10,12,16, 20, 25, 32	**CCKL42**

★**For C32 there are 2sizes, CKFN32 = for nosering diameter of φ 69mm, CKFN32T = for nosering diameter of φ 64mm**
★Front Nut fitted with an **O-ring** is available. e.g. The Code No. is **CKFN25-12C**
★Other metric sizes and imperial sizes, 1/8, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8, 3/4, 13/16, 7/8, 1, 1·1/8, 1·1/4, 1·1/2 are also available.

Front Nut : MN

CKFN-MN

Explanation of the Code No.

CKFN 32 – 20 MN

- MN: Jetting multi-nozzle type for cutters with cutting diameter which is larger than the shank diameter.
- 20: ID of Collet
- 32: OD of Collet
- CKFN: Symbol of Front Nut

Style	Front Nut Code No.	Spanner(option)
CKFN16	**CKFN16** -6*, 8***MN**	**CCKL16**
CKFN20	**CKFN20** -6, 8,10,12,16**MN**	**CCKL20**
CKFN25	**CKFN25** -6, 8,10,12,16, 18, 20**MN**	**CCKL25**
CKFN32	**CKFN32** -6, 8,10,12,16, 20, 25**MN**	**CCKL32**
CKFN32T	**CKFN32T**-6, 8,10,12,16, 20, 25**MN**	**CCKL25**
CKFN42	**CKFN42** -6, 8,10,12,16, 20, 25, 32**MN**	**CCKL42**

★*marks are special order items, others are standard items.
Other metric sizes and imperial sizes, 1/8, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8, 3/4, 13/16, 7/8, 1, 1·1/8, 1·1/4, 1·1/2 are also available.
★**For C32 there are 2sizes, CKFN32 = for nosering diameter of φ 69mm, CKFN32T = for nosering diameter of φ 64mm**

Front NUT for Direct chucking : D,DC

CKFN-D,DC

Explanation of the Code No.

CKFN 32 – 32 D

- D: D : With Jet coolant groove
  DC : For with OH
- 32: OD of Cutter
- 32: ID of Chuck
- CKFN: Symbol of Front Nut

Direct chucking means:
e.g. To use shank dia. 32 cutting tool to Milling Chuck with inner dia.32.

Style	Front NUT for direct chucking Code No.	Spanner(option)
CKFN12	**CKFN12** -12**D**, 12**DC**	**CCKL12**
CKFN16	**CKFN16** -16**D**, 16**DC**	**CCKL16**
CKFN20	**CKFN20** -20**D**, 20**DC**	**CCKL20**
CKFN25	**CKFN25** -25**D**, 25**DC**	**CCKL25**
CKFN32	**CKFN32** -32**D**, 32**DC**	**CCKL32**
CKFN32T	**CKFN32T**-32**D**, 32**DC**	**CCKL25**
CKFN42	**CKFN42** -42**D**, 42**DC**	**CCKL42**

★All are semi-standard.
★**For C32 there are 2sizes, CKFN32 = for nosering diameter of φ 69mm, CKFN32T = for nosering diameter of φ 64mm**

Straight Shank MORSE TAPER SOCKET

NIKKEN

ACCESSORY

Suitable for MULTI-LOCK Milling Chuck

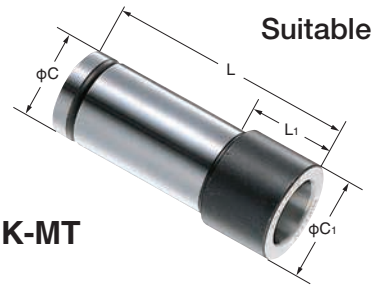

K-MT

Style	Code No.	L	L1	C	C1
20	**K20-MT1, MT2**	59, 70.5	5, 20	20	25
25	**K25-MT1, MT2**	59, 70.5	3, 10.5	25	29
32	**K32-MT1, MT2, MT3**	59, 70.5, 88	3, 8.5, 26	32	37
42	**K42-MT1, MT2, MT3, MT4**	59, 70.5, 89, 113.5	5, 5, 5, 18	42	48

SLIM CHUCK COLLET (SKCOLLET)

NIKKEN





Explanation of the Code No.

SK 10 - 6 P

- P: Non: Standard; P:P class (Run-out Accuracy=3μm); A:A type (for End Mill Shank)
- 6: MAX. Chucking Dia.
- 10: Style No.
- SK: Symbol of SK Collet

SK **"A" type SK collet (for End Mill Shank) are marked ●. The acceptable shank tolerance is h8.Code No. is e.g. SK10-10A**
"P" class SK collet (for drill) are available for all series. e.g. SK10-10P

Code No.	Chucking D
SK 6- 0.8	0.7 ~ 0.8
- 1	0.9 ~ 1.0
- 1.25	1.15~ 1.25
- 1.5	1.3 ~ 1.5
- 1.75	1.55~ 1.75
- 2	1.8 ~ 2.0
- 2.25	2.05~ 2.25
- 2.5	2.3 ~ 2.5
- 2.75	2.55~ 2.75
- 3	2.8 ~ 3.0
- 3.5	3.0 ~ 3.5
- 4	3.5 ~ 4.0
- 4.5	4.0 ~ 4.5
- 5	4.5 ~ 5.0
- 5.5	5.0 ~ 5.5
- 6	5.5 ~ 6.0
SK10- 1	0.9 ~ 1.0
- 1.25	1.15~ 1.25
- 1.5	1.3 ~ 1.5
- 1.75	1.55~ 1.75
- 2	1.75~ 2.0
- 2.25	2.0 ~ 2.25
- 2.5	2.25~ 2.5
- 2.75	2.5 ~ 2.75
- 3	2.75~ 3.0
- 3.5	3.0 ~ 3.5
- 4	3.5 ~ 4.0
- 4.5	4.0 ~ 4.5
- 5	4.5 ~ 5.0
- 5.5	5.0 ~ 5.5
- 6	5.5 ~ 6.0
- 6.5	6.0 ~ 6.5
- 7	6.5 ~ 7.0
- 7.5	7.0 ~ 7.5
- 8	7.5 ~ 8.0
- 8.5	8.0 ~ 8.5
- 9	8.5 ~ 9.0
- 9.5	9.0 ~ 9.5
-10	9.5 ~10.0

Code No.	Chucking D
SK13- 3	2.75~ 3.0
- 3.5	3.0 ~ 3.5
- 4	3.5 ~ 4.0
- 4.5	4.0 ~ 4.5
- 5	4.5 ~ 5.0
- 5.5	5.0 ~ 5.5
- 6	5.5 ~ 6.0
- 6.5	6.0 ~ 6.5
- 7	6.5 ~ 7.0
- 7.5	7.0 ~ 7.5
- 8	7.5 ~ 8.0
- 8.5	8.0 ~ 8.5
- 9	8.5 ~ 9.0
- 9.5	9.0 ~ 9.5
- 10	9.5 ~10.0
- 10.5	10.0~10.5
- 11	10.5~11.0
- 11.5	11.0~11.5
- 12	11.5~12.0
- 12.5	12.0~12.5
- 13	12.5~13.0

Code No.	Chucking D
SK16- 3	2.75~ 3.0
- 3.5	3.0 ~ 3.5
- 4	3.5 ~ 4.0
- 4.5	4.0 ~ 4.5
- 5	4.5 ~ 5.0
- 5.5	5.0 ~ 5.5
- 6	5.5 ~ 6.0
- 6.5	6.0 ~ 6.5
- 7	6.5 ~ 7.0
- 7.5	7.0 ~ 7.5
- 8	7.5 ~ 8.0
- 8.5	8.0 ~ 8.5
- 9	8.5 ~ 9.0
- 9.5	9.0 ~ 9.5
- 10	9.5 ~10.0
- 10.5	10.0~10.5
- 11	10.5~11.0
- 11.5	11.0~11.5
- 12	11.5~12.0
- 12.5	12.0~12.5
- 13	12.5~13.0
- 13.5	13.0~13.5
- 14	13.5~14.0
- 14.5	14.0~14.5
- 15	14.5~15.0
- 15.5	15.0~15.5
- 16	15.5~16.0

Code No.	Chucking D
SK20- 4	3.5 ~ 4.0
- 4.5	4.0 ~ 4.5
- 5	4.5 ~ 5.0
- 5.5	5.0 ~ 5.5
- 6	5.5 ~ 6.0
- 6.5	6.0 ~ 6.5
- 7	6.5 ~ 7.0
- 7.5	7.0 ~ 7.5
- 8	7.5 ~ 8.0
- 8.5	8.0 ~ 8.5
- 9	8.5 ~ 9.0
- 9.5	9.0 ~ 9.5
- 10	9.5 ~ 10.0
- 10.5	10.0~ 10.5
- 11	10.5~ 11.0
- 11.5	11.0~ 11.5
- 12	11.5~ 12.0
- 12.5	12.0~ 12.5
- 13	12.5~ 13.0
- 13.5	13.0~ 13.5
- 14	13.5~ 14.0
- 14.5	14.0~ 14.5
- 15	14.5~ 15.0
- 15.5	15.0~ 15.5
- 16	15.5~ 16.0
- 16.5	16.0~ 16.5
- 17	16.5~ 17.0
- 17.5	17.0~ 17.5
- 18	17.5~ 18.0
- 18.5	18.0~ 18.5
- 19	18.5~ 19.0
- 19.5	19.0~ 19.5
- 20	19.5~ 20.0

Code No.	Chucking D
SK25- 8	7.5~8.0
- 10	9.5~10.0
- 12	11.5~12.0
- 16	15.5~16.0
- 16.5	16.0~16.5
- 17	16.5~17.0
- 17.5	17.0~17.5
- 18	17.5~18.0
- 18.5	18.0~18.5
- 19	18.5~19.0
- 19.5	19.0~19.5
- 20	19.5~20.0
- 20.5	20.0~20.5
- 21	20.5~21.0
- 21.5	21.0~21.5
- 22	21.5~22.0
- 22.5	22.0~22.5
- 23	22.5~23.0
- 23.5	23.0~23.5
- 24	23.5~24.0
- 24.5	24.0~24.5
- 25	24.5~25.0
- 25.4	25.0~25.4

★**SK6** collet with the special internal dia. is also available.

Collet removal **(SKR-6)** is supplied as standard only for **SK6**. **SKR-10**, **SKR-16** and **SKR-25** are available as an option. Collet removal is not necessary for **the new types of collet (SK10 to SK25 collet including SK13 and SK20)**.

★Collets with special inner diameters can also be manufactured.
★**Please refer to ☞ P.278 as for SK coolant collet (AC collet).**
★**Please refer to ☞ P.279 as for the jet coolant system and the system for oil hole drill.**
★**When gripping a cutting tool of less than nominal size with the SK collet, please be careful that the tool protrusion will be shortened.**

"P" class SK collet for drill

It guarantees the Run-out accuracy within 3 micron at the nose (4D) from the chuck.
Additionally Collet Set is also available.

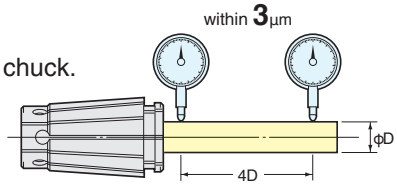

"A" type SK collet for endmill

The acceptable shank tolerance ids h8.
★**A type SK-AC COLLET ☞ P.278**
★**When using A type SK COLLET ☞ P.277 and AC collet, the total length will be shorter by about 3mm.Please be careful when you check the interference.**

SK Collet A Type
SK 6-3A, 4A, 5A, 6A
SK10-3A, 4A, 5A, 6A, 8A, 10A
SK13-3A, 4A, 5A, 6A, 8A, 10A, 12A, 13A
SK16-3A, 4A, 5A, 6A, 8A, 10A, 12A, 16A
SK20-4A, 5A, 6A, 8A, 10A, 12A, 16A, 20A
SK25-8A, 10A, 12A, 16A, 20A, 25A

SK Collet A Type (Inch)
SK 6 -1/8A, 3/16A
SK10 -1/8A, 3/16A, 1/4A, 5/16A, 3/8A
SK13 -1/8A, 3/16A, 1/4A, 5/16A, 3/8A, 7/16A, 1/2A
SK16 -1/8A, 3/16A, 1/4A, 5/16A, 3/8A, 7/16A, 1/2A, 9/16A, 5/8A
SK20 -1/8A, 3/16A, 1/4A, 5/16A, 3/8A, 7/16A, 1/2A, 9/16A, 5/8A, 3/4A
SK25 -3/16A, 1/4A, 5/16A, 3/8A, 7/16A, 1/2A, 5/8A, 3/4A, 25.4A

CENTRE-THRU COOLANT COLLET (SK-AC) for NIKKEN SLIM CHUCK

NIKKEN





Code number reference

SK 10 - 6 AC

- Center-thru coolant
- MAX. Chucking Dia.
- Style No.
- Symbol of SK Collet

The acceptable shank tolerance is h8.

SK-AC

High Pressure Centre Through (MAX. 7MPa)

Style	Code No.	Chucking D	Min. Gripping Length L
SK 6	SK 6- 3AC	3.0	16.0
	- 4AC	4.0	18.0
	- 5AC	5.0	19.0
	- 6AC	6.0	25.0
SK10	SK10- 3AC	3.0	18.0
	- 4AC	4.0	20.0
	- 5AC	5.0	22.0
	- 6AC	6.0	23.0
	- 7AC	7.0	24.0
	- 8AC	8.0	24.0
	- 9AC	9.0	25.0
	-10AC	10.0	31.0
SK13	SK13- 4AC	4.0	24.0
	- 5AC	5.0	25.0
	- 6AC	6.0	29.0
	- 7AC	7.0	30.0
	- 8AC	8.0	30.0
	- 9AC	9.0	30.0
	-10AC	10.0	30.0
	-11AC	11.0	30.0
	-12AC	12.0	31.0

Style	Code No.	Chucking D	Min. Gripping Length L
SK16	SK16- 6AC	6.0	25.0
	- 7AC	7.0	27.0
	- 8AC	8.0	30.0
	- 9AC	9.0	32.0
	-10AC	10.0	34.0
	-11AC	11.0	35.0
	-12AC	12.0	36.0
	-13AC	13.0	36.0
	-14AC	14.0	36.0
	-15AC	15.0	36.0
	-16AC	16.0	45.0
SK20	SK20-12AC	12.0	41.0
	-13AC	13.0	40.8
	-14AC	14.0	41.1
	-15AC	15.0	41.3
	-16AC	16.0	46.0
	-17AC	17.0	45.5
	-18AC	18.0	45.8
	-19AC	19.0	46.0
	-20AC	20.0	55.0
SK25	SK25-16AC	16.0	46.0
	-20AC	20.0	47.0
	-25AC	25.0	57.0

★Clamping range: h8

★**When using A type SK COLLET** ☞ P.277 **and AC collet, the total length will be shorter by about 3mm. Please be careful when you check the interference.**

When using A collets or AC collets, the length to the nut end face is 3 mm shorter than when using standard collets.

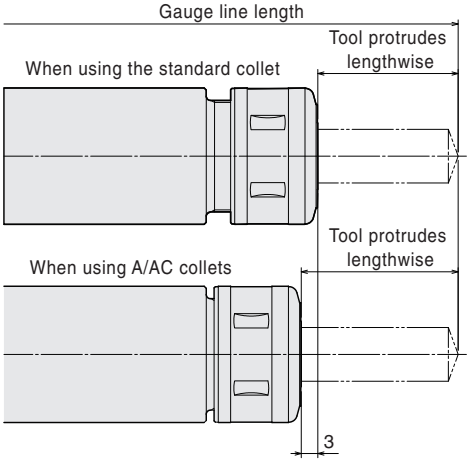

Quick & Easy to block coolant diffusion

Slim Chuck
Major Dream Holder

SK standard nut
SKT/MDSK standard nut

New SK coolant collet

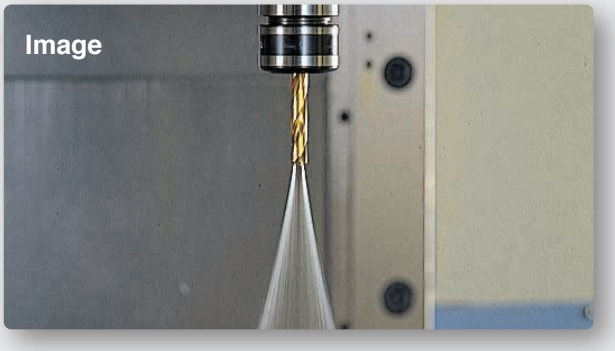

Coolant may leak when the cutting tool has a flat area on the shank.

SK COLLET CASE

NIKKEN

This case allows for compact storage of SK Collet.

This SK collet case reduces set-up time by keeping things organized.

Code No.	Collet	Maximum storage capacity	Dimension
SKBX- 10	SK10	60	W300×H100 ×D200mm
- 16	SK16	24	
- 610	SK 6	26	
	SK10	40	
-1316	SK13	24	
	SK16	14	

SLIM CHUCK COOLANT SOLUTION

NIKKEN

WITH OIL HOLE DRILL		JET COOLANT SYSTEM
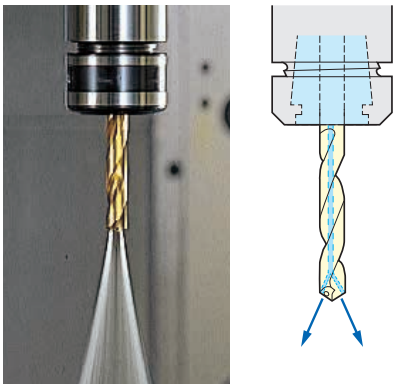	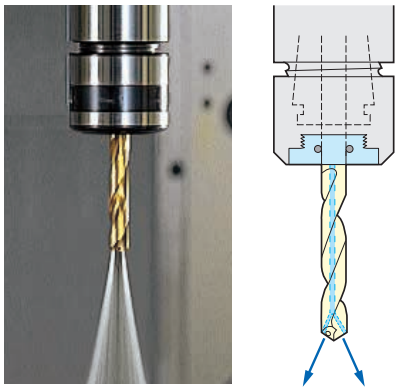	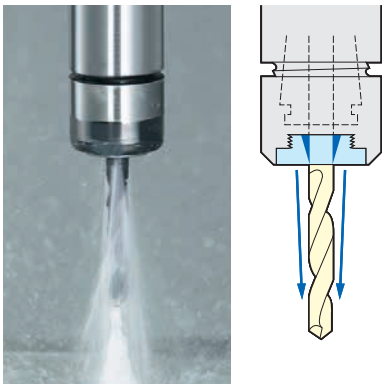
1 Standard Nut + SK-AC Coolant Collet	**2** J-TYPE Nut with Standard Collet and J CAP(C) ☞P.280	**3** J-TYPE Nut with Standard Collet and J CAP ☞P.281

1 WITH OIL HOLE DRILL
SK standard Nut + AC Collet (for using of oil hole drill)

SK standard Nut

SKT MDSK standard Nut (for GH Handle)



SK-AC Collet

+



OH DRILL

Style	Nut for standard Spanner		Nut for GH Handle		AC Collet (OPTION)	ADJUST SCREW (OPTION)
	Nut Code No.	Spanner (OPTION)	Nut Code No.	GH Handle (OPTION)		
SK 6 SK 6(P)	SKN-6WK	SKL-6W 	SKN-6WK (GH)	GH6 	SK 6-3AC, 4AC, 5AC, 6AC	Please refer ☞P.282 Fig3, Fig4, Fig5
SKT 6 MDSK 6	SKTN-6K		MDSKN-6K			
SK10 SK10(P)	SKN-10K	SKL-10 	SKN-10K (GH)	GH10 	SK10-3AC, 4AC, 5AC,6AC, 7AC, 8AC, 9AC, 10AC	
SKT 10 MDSK10	SKTN-10K		MDSKN-10K			
SK13 SK13(P)	SKN-13B	9HC12A 	SKN-13B (GH)	GH12 	SK13-4AC, 5AC, 6AC, 7AC, 8AC, 9AC, 10AC, 11AC, 12AC	
SKT 13 MDSK13	SKTN-13B		MDSKN-13B			
SK16 SK16(P)	SKN-16B	9HC16 	SKN-16B (GH)	GH16 	SK16-6AC, 7AC, 8AC, 9AC10AC, 11AC, 12AC, 13AC, 14AC, 15AC, 16AC	
SKT 16 MDSK16	SKTN-16B		MDSKN-16B			
SK20 SK20(P)	SKN-20B	9HC22 	SKN-20B (GH)	GH20 	SK20-12AC, 16AC, 20AC, 25AC	
SKT 20 MDSK20	SKTN-20B		MDSKN-20B			
SK25 SK25(P)	SKN-25B		SKN-25B (GH)	GH25 	SK25-16AC, 20AC, 25AC	
SKT 25 MDSK25	SKTN-25B		MDSKN-25B			

★Please refer to ☞ P.278 for SK Coolant Collet (AC Collet)

★The nut Code No. for **SK6** and **SK10** are changed. The old Code No. are
SKN-6WK : SKN-6WB, SKTN-6K : SKTN-6B, SKN-10K : SKN-10B, SKTN-10K : SKN-10B, SKN-6WK(GH) : SKN-6WB(GH),
MDSKN-6K : SKN-6B(GH), MDSKN-10K : SKN-10B(GH), SKN-10K(GH) : SKN-10B(GH)
We are replaced by a new model product as soon as the product stock of the old model No. disappears.

SLIM CHUCK COOLANT SOLUTION

NIKKEN

2 WITH OIL HOLE DRILL
J-TYPE Nut with standard Collet and J-CAP(C)

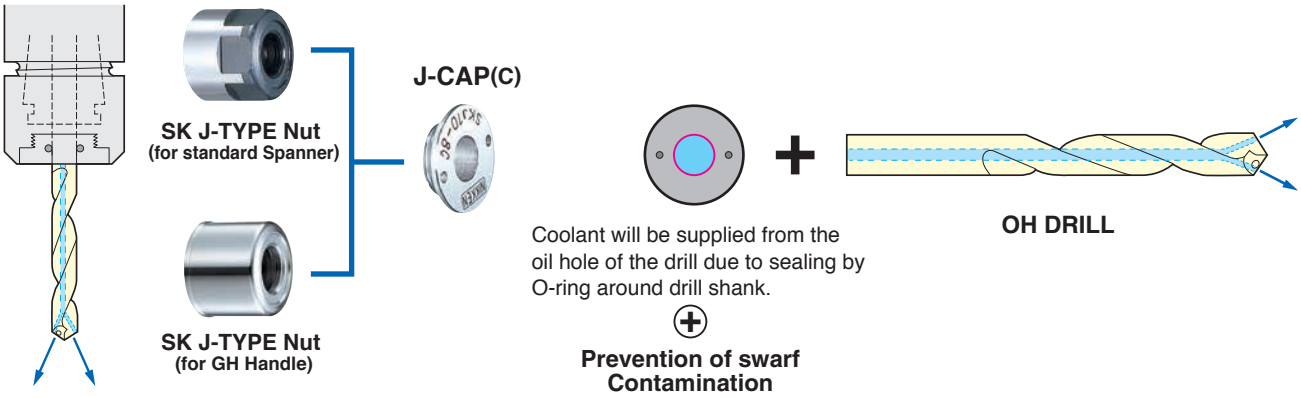

•In the case of with J-Nut, please add "-J" to the end Code No. As Nut full length becomes longer 6mm than a standard nut, in the case of J-Nut, please be careful.

•When using SK-A collets or AC collets, or when gripping a cutting tool smaller than the normal diameter on SK collets, the total length will be shortened by about 3mm. Please be careful when you check the interference.

Style	Collet Selection	OPTION					
		J-TYPE Nut		Spanner	J-CAP(C) Code No. for OIL HOLL DRILL	Wrench for J-cap Code No.	ADJUST SCREW
		SK, SK-P	SKT, MDSK				
SK 6 SK 6(P) (High Speed) MDSK 6 SKT 6	SK 6-○.○ SK 6-○.○A	(for standard Spanner) SKN-6WKJ	(for standard Spanner) SKTN-6KJ	(standard Spanner) SKL-6W	SKJ 6-3C, 3.3C, 4C, 4.2C, 5C, 6C	SKJL-6	Please refer ☞P.56 Fig3, Fig4, Fig5
		(for GH Handle) SKN-6WKJ (GH)	(for GH Handle) MDSKN-6KJ	(GH Handle) GH6			
SK10 SK10(P) (High Speed) MDSK10 SKT10	SK10-○.○ SK10-○.○A	(for standard Spanner) SKN-10KJ	(for standard Spanner) SKTN-10KJ	(standard Spanner) SKL-10	SKJ10-3C, 4C, 5C, 5.5C, 6C, 6.2C, 6.8C, 7C, 8C, 8.5C, 10C	SKJL-10	
		(for GH Handle) SKN-10KJ (GH)	(for GH Handle) MDSKN-10KJ	(GH Handle) GH10			
SK13 SK13(P) (High Speed) MDSK13 SKT13	SK13-○.○ SK13-○.○A	(C-Spanner) SKN-13BJ	(C-Spanner) SKTN-13BJ	(C-Spanner) 9HC12A	SKJ16-7C, 8C, 8.5C, 10C, 10.3C, 12C, 12.5C	SKJL-16	
		(for GH Handle) SKN-13BJ (GH)	(for GH Handle) MDSKN-13BJ	(GH Handle) GH12			
SK16 SK16(P) (High Speed) MDSK16 SKT16	SK16-○.○ SK16-○.○A	(C-Spanner) SKN-16BJ	(C-Spanner) SKTN-16BJ	(C-Spanner) 9HC16	SKJ16-7C, 8C, 8.5C, 10C, 10.3C, 12C, 12.5C, 14C, 15C, 16C		
		(for GH Handle) SKN-16BJ (GH)	(for GH Handle) MDSKN-16BJ	(GH Handle) GH16			
SK20 SK20(P) (High Speed) MDSK20 SKT20	SK20-○.○ SK20-○.○A	(C-Spanner) SKN-20BJ	(C-Spanner) SKTN-20BJ	(C-Spanner) 9HC22	SKJ25-8C, 10C, 12C, 16C 17.5C, 20C	SKJL-25	
		(for GH Handle) SKN-20BJ (GH)	(for GH Handle) MDSKN-20BJ	(GH Handle) GH20			
SK25 SK25(P) (High Speed) MDSK25 SKT25	SK25-○.○ SK25-○.○A	(C-Spanner) SKN-25BJ	(C-Spanner) SKTN-25BJ	(C-Spanner) 9HC22	SKJ25-8C, 10C, 12C, 16C 17.5C, 20C, 25C		
		(for GH Handle) SKN-25BJ (GH)	(for GH Handle) MDSKN-25BJ	(GH Handle) GH25			

∗We recommend A type Collet in MDSK.

★The nut Code No. for **SK6** and **SK10** are changed. The old Code No. are
SKN-6WKJ : SKN-6WBJ, SKN-6WKJ(GH) : SKN-6WBJ(GH), SKN-10KJ : SKN-10BJ, SKN-10KJ(GH) : SKN-10BJ(GH),
SKTN-6KJ : SKTN-6BJ, MDSKN-6KJ : MDSKN-6BJ, SKTN-10KJ : SKN-10BJ, MDSKN-10KJ : SKN-10BJ(GH)
We are replaced by a new model product as soon as the product stock of the old model No. disappears.

SLIM CHUCK COOLANT SOLUTION

NIKKEN

3 WITHOUT OH DRILL (JET Coolant SYSTEM)
J-type Nut with standard Collet and J-CAP

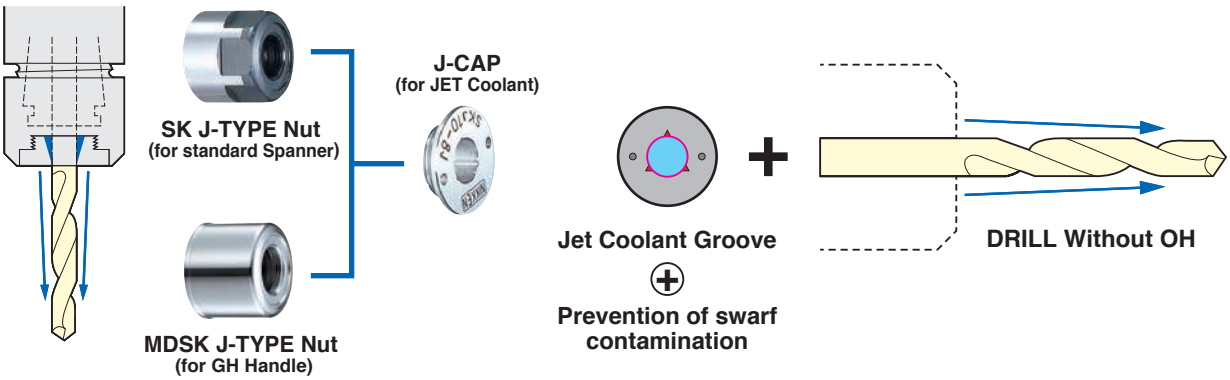

・In the case of with J-Nut, please add "-J" to the end Code No. As Nut full length becomes longer 6mm than a standard nut, in the case of J-Nut, please be careful.
・When using SK-A collets or SK-AC collets, or when gripping a cutting tool smaller than the nominal diameter on SK collets, the total length will be shortened by about 3 mm. Please be careful when you check the interference.

Style	Collet Selection	OPTION					
		J-TYPE Nut		Spanner	J-CAP Code No. (for JET Coolant)	Wrench for J-cap Code No.	ADJUST SCREW
		SK, SK-P	SKT, MDSK				
SK 6 SK 6(P) (High Speed) MDSK 6 SKT 6	SK 6-○.○ SK 6-○.○A	(for standard Spanner) SKN-6WKJ	(for standard Spanner) SKTN-6KJ	(standard Spanner) SKL-6W	SKJ 6-3, 3.3, 4, 4.2, 5, 6	SKJL-6	Please refer ☞P.282 Fig5
		(for GH Handle) SKN-6WKJ (GH)	(for GH Handle) MDSKN-6KJ	(GH Handle) GH6			
SK10 SK10(P) (High Speed) MDSK10 SKT10	SK10-○.○ SK10-○.○A	(for standard Spanner) SKN-10KJ	(for standard Spanner) SKTN-10KJ	(standard Spanner) SKL-10	SKJ10-3, 4, 5, 5.5, 6, 6.2, 6.8, 7, 8, 8.5, 10	SKJL-10	
		(for GH Handle) SKN-10KJ (GH)	(for GH Handle) MDSKN-10KJ	(GH Handle) GH10			
SK13 SK13(P) (High Speed) MDSK13 SKT13	SK13-○.○ SK13-○.○A	(C-Spanner) SKN-13BJ	(C-Spanner) SKTN-13BJ	(C-Spanner) 9HC12A	SKJ16-7, 8, 8.5, 10, 10.3, 12, 12.5	SKJL-16	
		(for GH Handle) SKN-13BJ (GH)	(for GH Handle) MDSKN-13BJ	(GH Handle) GH12			
SK16 SK16(P) (High Speed) MDSK16 SKT16	SK16-○.○ SK16-○.○A	(C-Spanner) SKN-16BJ	(C-Spanner) SKTN-16BJ	(C-Spanner) 9HC16	SKJ16-7, 8, 8.5, 10, 10.3, 12, 12.5, 14, 15, 16		
		(for GH Handle) SKN-16BJ (GH)	(for GH Handle) MDSKN-16BJ	(GH Handle) GH16			
SK20 SK20(P) (High Speed) MDSK20 SKT20	SK20-○.○ SK20-○.○A	(C-Spanner) SKN-20BJ	(C-Spanner) SKTN-20BJ	(C-Spanner) 9HC22	SKJ25-8, 10, 12, 16, 17.5, 20	SKJL-25	
		(for GH Handle) SKN-20BJ (GH)	(for GH Handle) MDSKN-20BJ	(GH Handle) GH20			
SK25 SK25(P) (High Speed) MDSK25 SKT25	SK25-○.○ SK25-○.○A	(C-Spanner) SKN-25BJ	(C-Spanner) SKTN-25BJ	(C-Spanner) 9HC22	SKJ25-8, 10, 12, 16, 17.5, 20, 25		
		(for GH Handle) SKN-25BJ (GH)	(for GH Handle) MDSKN-25BJ	(GH Handle) GH25			

＊We recommend A type Collet in MDSK.
★The nut Code No. for **SK6** and **SK10** are changed. The old Code No. are
SKN-6WKJ : SKN-6WBJ, SKN-6WKJ(GH) : SKN-6WBJ(GH), SKN-10KJ : SKN-10BJ, SKN-10KJ(GH) : SKN-10BJ(GH)
SKTN-6KJ : SKTN-6BJ, MDSKN-6KJ : MDSKN-6BJ, SKTN-10KJ : SKN-10BJ, MDSK-10KJ : SKN-10BJ(GH)
We are replaced by a new model product as soon as the product stock of the old model No. disappears.

ADJUST SCREW FOR SLIM CHUCK

NIKKEN

The adjust Screw for the High Speed Slim Chuck **"GSK-P type"** is identical to the Standard Slim Chuck as below.
e.g. The adjust Screw for BT30-GSK10-45P is SKG-12S, is the same as the screw for BT30-SK10-45.



Fig.1



Fig.2



Fig.3



Fig.4



Fig.5

Please remove standard Adjust Screw or use the Adjust Screw specially designed to J type Nut for the stopper.

SK

Explanation of the Code No. of the Adjust screw for Standard Slim Chuck

e.g. SKG - 12 L - J
- None, -J : Symbol of adjust screw used with J type nut (Fig.5)
- None, S, L : Length indication
- 8, 12, 18, 28 : Screw size
- Symbol of adjust screw

Style	Adjust Screw Code No.	Fig.	Slim Chuck Code No.
SK 6	SKG- 8	1	All **SK6** Slim Chucks
SK10	SKG-12L	1	All **SK10** Slim Chucks except below
	SKG-12S	2	BT30-SK10-45, HSK50A-SK10-90, HSK63F-SK10-90
SK13	SKG-15	1	All **SK13** Slim Chucks
SK16	SKG-18L	1	All **SK16** Slim Chucks except below
	SKG-12	2	BT30-SK16-90
	SKG-12L	1	BT30-SK16-60
	SKG-18S	2	BT40-SK16-60
SK20	SKG-22	1	All **SK20** Slim Chucks except below
	SKG-12	2	BT30-SK20-90
	SKG-12L	1	BT30-SK20-75
	SKG-12S	2	BT30-SK20-60
SK25	SKG-28	1	All **SK25** Slim Chucks except below
	SKG-12	2	BT30-SK25-90, BT40-SK25-75
	SKG-12MF	2	NC5-46-SK25-90

★W=2mm is standard. W=2.4, 3, 4, 5, 6, 8, 12mm are also available. e.g.**SKG-12L-W2.4**
Please choose suitable one for the tang width of your drill.

Explanation of the Code No. of the Adjust screw with centre hole for Standard Slim Chuck

e.g. SKG - 12 H A
- None, A : Centre hole indication
- H : With centre hole
- 12, 18, 28 : Screw size
- Symbol of adjust screw

Style	Screw Size	Adjust Screw Code No.	Fig.	Hole Dia.	Cutter Shank Dia.	Wrench width
SK10	M12	SKG-12H	3	φ4	φ6～	3
		SKG-12HA		φ2.5	φ4～	2
SK13	M15 P1.0	SKG-15H		φ4	φ6～	3
		SKG-15HA		φ2.5	φ4～	2
SK16	M12	SKG-12H		φ4	φ6～	3
		SKG-12HA		φ2.5	φ4～	2
	M18 P1.5	SKG-18H		φ7.2	φ10～	6
		SKG-18HA		φ3.5	φ5～	3
SK20	M12	SKG-12H		φ4	φ6～	3
		SKG-12HA		φ2.5	φ4～	2
	M22 P1.5	SKG-22H		φ8	φ10～	5
SK25	M12	SKG-12H		φ4	φ6～	3
		SKG-12HA		φ2.5	φ4～	2
	M28 P2.0	SKG-28H		φ12	φ16～	8

★The adjust screw for oil hole tap is also available. Please contact with us.
★These adjust screws are for the coolant pressure up to 1MPa.

SK-C

There is no leakage of coolant from screw, because OD of the straight portion of the adjust screw is sealed.

Explanation of the Code No. of the Adjust screw for High Pressure Coolant Slim Chuck

e.g. SKG 10 - 10 HG B - J
- None, -J : Symbol of adjust screw used with J type nut (Fig.5)
- None, A, B,··· : Specification (Length, for small drill, for Tap...)
- Suymbol of high pressure coolant
- 6, 10, 12, 18, 24 : Screw size
- 6, 10, 13, 16, 20, 25 : Slim chuck style
- Symbol of adjust screw

3LOCK tool (MBT, MIT and MCAT) , 2LOCK tool (NBT, NIT and NCAT) , NC5 tool and HSK tool can be used at high pressure centre through tool coolant application (MAX.7MPa) .

Please change the shank No. from **BT** to **MBT** or **NBT** for **3LOCK tool or 2LOCK tool**.

The adjust screw for **BT40-SK16F-90** is same as the adjust screw for **MBT40-SK16F-90** and **NBT40-SK16F-90**.

Please refer adjust screw for oil hole holder.
SKO ☞P.115, MOK ☞P.113

Adjustment tool for adjust screw Scale wrench with scale useful for presetting tool length

Code No. ex.) SKWR-DR-120L
(Minus driver type: Standard type)
It is compatible with each type of SK. Please let us know the model number of the slim chuck you will be using.

Style	Adjust Screw Code No.	Fig.	Hole Dia.	Cutter Shank Dia.	Slim Chuck Code No.	Wrench width
SK 6	SKG 6- 6HG	4	φ2.5	φ4～	All **SK6C/SK6F** Slim Chucks	2
SK10	SKG10-10HG		φ4	φ6～	All **SK10C/SK10F** Slim Chucks	4
	SKG10-10HGA		φ2.5	φ4～		2
SK13	SKG13-10HG		φ4	φ6～	All **SK13C/SK13F** Slim Chucks	4
	SKG13-10HGA		φ2.5	φ4～		2
SK16	SKG16-12HG		φ7.2	φ10～	All **SK16C/SK16F** Slim Chucks except below	6
	SKG16-12HGB				BT40-SK16F-90	
	SKG16-10HG				HSK40A-SK16C-120, HSK50A-SK16C-120 HSK63A-SK16C-120, 150, HSK100A-SK16C-120 NC5-46-SK16C-90, -120, NBT40-SK16C-60, NBT30-SK16C-75	
	SKG16-12HGE				NBT30-SK16C-60	
	SKG16-12HGA		φ3.5	φ5～	All **SK16C/SK16F** Slim Chucks except below	3
	SKG16-12HGBA				BT40-SK16F-90	
	SKG16-10HGA				HSK40A-SK16C-120, HSK50A-SK16C-120 HSK63A-SK16C-120, 150, HSK100A-SK16C-120 NC5-46-SK16C-90, -120, NBT40-SK16C-60, NBT30-SK16C-75	
SK20	SKG20-18HG		φ6.8	φ10～	All **SK20C/SK20F** Slim Chucks except below	5
	SKG20-12MFHG				NC5-46-SK20C-90, NC5-53-SK20C-90, HSK63A-SK20C-120,-135	
	SKG20-12HG				NC5-46-SK20C-120, NC5-53-SK20C-120, NBT30-SK20C-90 HSK100A-SK20C-150, -200	
	SKG20-12HGE				NBT30-SK20C-75	
	SKG20-16HG				NBT40-SK20C-60	
	SKG20-18HGB				BT40-SK20F-90	
SK25	SKG25-24HG		φ12	φ16～	All **SK25C/SK25F** Slim Chucks except below	8
	SKG25-24HGA				BT40-SK25F-120, BT50-SK25F-105	
	SKG25-18HGC				BT40-SK25F-90	
	SKG25-18HGD				BT40-SK25C-90, NC5-63-SK25C-135 NC5-85-SK25C-135, NBT40-SK25C-90	
	SKG25-18HGE				HSK63A-SK25C-135, HSK100A-SK25C-145, NBT40-SK25C-75	

★The adjust screw for oil hole tap is different from standard. The front end of the adjust screw is flat, not taper.
Please add **"S"** at the end of Code No. **e.g. SKG10-10HGAS, SKG16-12HGAS, SKG16-12HGBAS**
★The adjust screw for extra small cutter shank dia. (φ3) is available. Please contact with us.
★The steel made adjust screw for **SK10** or **SK16** is available.
Please add **"-FE"** at the end of Code No. **e.g. SKG10-10HG-FE**

For Drill

For Tap

MPK, PMK, VMK COOLANT SOLUTION

NIKKEN

FOR OILHOLE DRILL

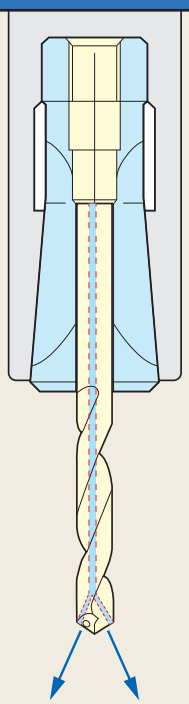

1 By using VMK collet, supply coolant through the coolant hole of the cutting tool with OH.

VMK COLLET

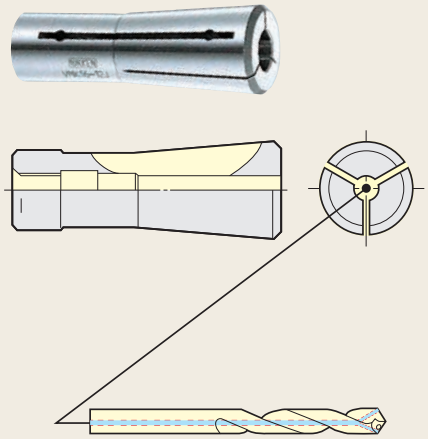

FOR STANDARD OILHOLE DRILL, ENDMILL

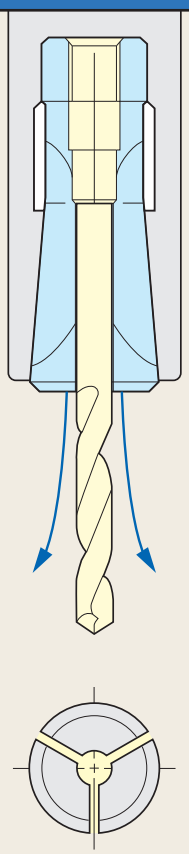

2 By using MPK or PMK collet, supply coolant through the collet gap.

MPK COLLET (MMC4)
PMK COLLET (MMC8, 12)

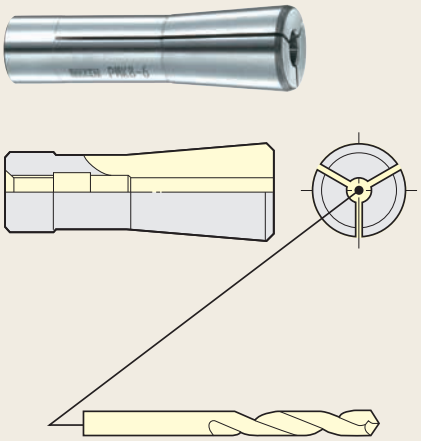

★If the rotation speed is high, the coolant will spread, so use **3** VMK-J Collet.

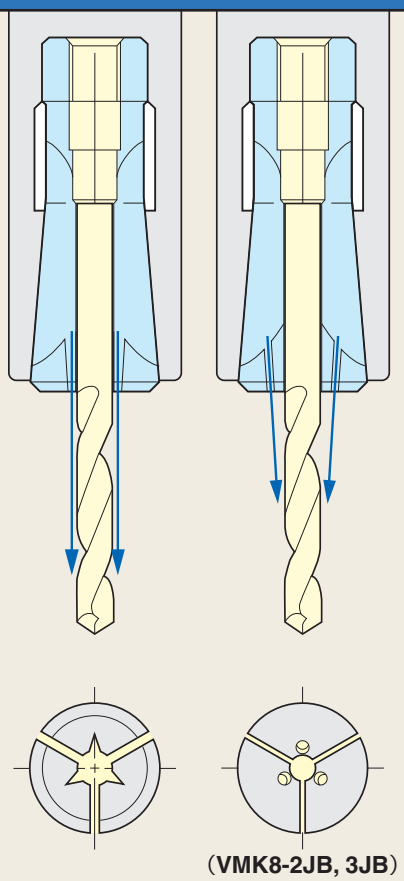

3 By using VMK-J collet, jet coolant is supplied through the J-groove.

*VMK8-2JB and 3JB MPK4-2JB,3JB,4JB are of the jet hole type.

VMK-J COLLET

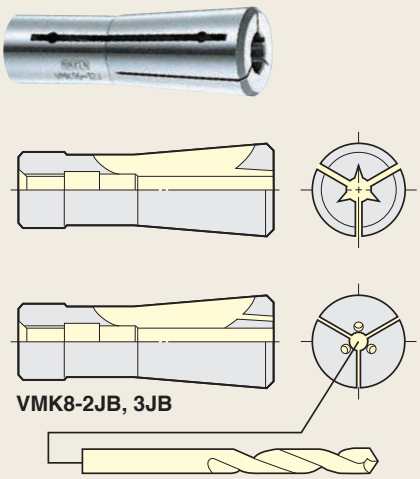

MINI-MINI COLLET (MPK/PMK/VMK COLLET)

NIKKEN

■STANDARD COLEET : MPK Collet / PMK Collet

Explanation of the Code No.

PMK 8 - 2

- 2: ID of Collet
- 8: Style No.
- PMK: Symbol of PMK collet



■FOR CENTRE THROUGH TOOL COOLANT : VMK Collet / VMK-J Collet

Explanation of the Code No.

VMK 12 - 6 J

- J: Non: Without Jet Spread Groove / J : With Jet Spread Groove
- 6: ID of Collet
- 12: Style No.
- VMK: Symbol of VMK collet



Jet Spread Groove (J Type)

Jet spread Hole Type
VMK8-2J、VMK8-3J

Code No.	Min. Gripping Length
MPK 4 - 1	6
- 1.5	8
- 2	10
- 2.5	12
- 3	16
- 3.5	16
- 4	16
-1/16	8
-3/32	10
- 1/8	16

Code No.	Min. Gripping Length
PMK 8 - 2	10
- 2.2	10
- 2.4	12
- 2.6	12
- 2.8	12
- 3	16
- 3.2	16
- 3.4	16
- 3.6	16
- 3.8	16
- 4	20
- 4.2	20
- 4.4	20
- 4.6	22
- 4.8	22
- 5	22
- 5.2	22
- 5.4	22
- 5.6	22
- 5.8	22
- 6	22
- 6.2	22
- 6.4	22
- 6.6	22

Code No.	Min. Gripping Length
PMK 8-6.8	22
- 7	22
-7.2	22
-7.4	22
-7.6	22
-7.8	22
- 8	22
-1/8	16
-3/16	22
PMK12- 4	19
- 5	22
- 6	30
- 8	31
- 10	31
- 12	31

Code No.	Min. Gripping Length
VMK8 - 2	10
- 3	16
- 4	20
- 5	22
- 6	22
- 7	22
- 8	22
- 2JB	10
- 3JB	16
- 4J	20
- 5J	22
- 6J	22
- 7J	22
- 8J	22
- 1/8	15
-3/16	22
- 1/4	22
-5/16	22
- 3/8	22
- 1/8JB	16
-3/16J	22
- 1/4J	22
-5/16J	22
- 3/8J	22

Code No.	Min. Gripping Length
VMK12- 4	19
- 5	22
- 6	30
- 8	31
- 10	31
- 12	31
- 4J	19
- 5J	22
- 6J	30
- 8J	31
- 10J	31
- 12J	31
-3/16	22
- 1/4	30
-5/16	31
- 3/8	31
-7/16	31
- 1/2	31
-3/16J	22
- 1/4J	30
-5/16J	31
- 3/8J	31
-7/16J	31
- 1/2J	31

★**For Centre through tool Coolnant type MINI-MINI Chuck :**
★Standard **VMK** Collet is for the cutting tool with coolant hole.
★**VMK-J** Collet is for the cutting tool without Coolant hole.
★Please note the acceptable shank tolerance h6.
★**VMK8-2J** is Jet Spread Hole type.
★**VMK-2J** and **VMK-3J** will be replaced with **VMK-2JB** and **VMK-3JB** as soon as the stock is runs out.

■For Centre Through Tool Coolant: MPK-C

Code No.	Min. Gripping Length
MPK 4 - 3C	16
- 4C	16

■Jet Spread Hole Type: MPK-JB

Code No.	Min. Gripping Length
MPK 4 -2JB	10
-3JB	16
-4JB	16

★Please note the acceptable shank tolerance of **MPK** Collet is h6.
★Even the gripping range of **PMK** Collet is 0.2mm / dia. **(e.g. PMK8-2 : 1.8~2.0)** but the shank tolerance of **h6 highly** recommended for precision machining.

■For VEGA CHUCK

VMK Collet Code No.
VMK16-4J, 5J, 6J, 8J, 10J, 12J, 16J
VMK20-6J, 8J, 10J, 12J, 16J, 20J
VMK25-8J, 10J, 12J, 16J, 20J, 25J
VMK32-12J, 16J, 20J, 25J, 32J

★Please note the acceptable shank tolerance h6.
★For details of collets for **MINI-MINI CHUCK**, Please refer to the upper row.

■For VC HOLDER

VCK Collet Code No.
VCK 6-2, 3,(3.175), 4, 5, 6
VCK13-3,(3.175), 4, 5, 6, 7, 8, 9, 10, 11, 12

★Please note the acceptable shank tolerance h8.
★Also available in inch sizes. **VCK 6-1/8, 3/16, 1/4 VCK13-1/8, 3/16, 1/4, 5/16, 3/8, 7/16, 1/2**
★Innerdiameter (**3.175**) is the same as **1/8**. Code No. is **-1/8**. **e.g.VCK6-1/8**

■VCK Collet



■Jet coolant splash with J type Nut.

Cap with triangular grooves
The jet coolant pressure creates a tornado effect.

Cap with O-ring
For oil hole cutting tool

BT

ACCESSORY

ONE TOUCH TAP COLLET (JIS)

NIKKEN

ZKG Tap Collet

Rotary Bearing Cam Mechanism

The **ZKG** tap collet can response very smoothly for the change of the tapping torque.

- The torque of CCW is 1.4 times of the torque of CW to prevent the problem of the swarf.
- The tap can be clamped with one touch operation.
- The adjustment mechanism of the setting torque is not installed on the **ZKG** tap collet. The high torque setting type is available for the tapping on the stainless as an option. e.g **ZKG12-4-HT**



Please note that H dimensions are not interchangeable with conventional **ZKN** collets.

D3 Dimenion
ZKG12:32mm
ZKG16:39mm
ZKG24:46mm

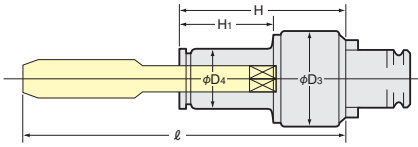

Fig.1

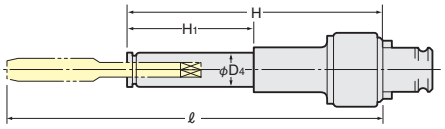

Fig.2

Tapperchuck using this collet
ZL☞P.51, Z☞P.52, NZ☞P.270

	ZKG12						ZKG16						ZKG24					
	Code.No	D4	H	H1	ℓ	Fig	Code.No	D4	H	H1	ℓ	Fig	Code.No	D4	H	H1	ℓ	Fig
Metric (M)	ZKG12- 2				72	1	ZKG16- 3	13	64.5	37.5	85.5	1	ZKG24- 8	19	73	45	111	1
	- 3	13	54.5	30.5	75		- 4				90.5		-10				116	
	- 4				80		- 5				98.5		-12				122	
	- 5				88		- 6	19	65	38	100.5		-14	26	74	48	123	
	- 6	19	55	31	90		- 8				104		-16				128	
	- 8				94		-10				109		-18				128	
	-10				99		-12				115		-20				136	
	-12				105		-14	26	66	42	116		-22	32			141	
							-16				121		-24				144	
Unified (U) or British Standard Whitworth (W)	ZKG12-1/8	13	54.5	30.5	75	1	ZKG16-1/8	13	64.5	37.5	85.5	1	ZKG24-1/2	19	73	45	124	1
	-3/16				88		-3/16				98.5		-9/16	26	74	48	125	
	-1/4	19	55	31	90		-1/4	19	65	38	100.5		-5/8				129	
	-5/16				93.5		-5/16				104		-3/4				137	
	-3/8				99		-3/8				109		-7/8	32			141	
	-7/16				103		-7/16				113		-1				149	
	-1/2				107		-1/2				117							
							-9/16	26	66	42	118							
							-5/8				122							
Pipe (PT) (PS)	ZKG12-1/8P	19	56	32	83	1	ZKG16-1/8P	19	66.5	39	93	1	ZKG24-1/4P	26	75	49	104	1
	-1/4P	26	60	36	89		-1/4P	26	68.5	44	97		-3/8P				105	
	-1/16P	19	56	32	81.5		-3/8P				98		-1/2P	32			114	
	-1/16P-Y	19	56	32	81.5								-5/8P				115	

★Tap for pipe thread is clamped with the side lock screw.
★High torque setting type example for stainless steel is available. Please add **"-HT"** at the end of Code No. **e.g. ZKG12-4-HT**
★Low torque setting is **"-LT"**. **e.g. ZKG12-4-LT**
★The shank dimension of the 1/16P tap varies depending on the tap maker.
★The internal mechanism of the tap collet for the left handed tap is different from the standard one. Please use the special tap collet for the left handed tap.
★ISO standards are indicated by an **"S" in the code**. **e.g. ZKG12-3S-50L**

	ZKG12L						ZKG16L						ZKG24L					
	Code.No	D4	H	H1	ℓ	Fig	Code.No	D4	H	H1	ℓ	Fig	Code.No	D4	H	H1	ℓ	Fig
Metric (M) 50mm Long	ZKG12- 3- 50L	13	104.5	38.5	125	2	ZKG16- 3- 50L	13	114.5	38.5	135.5	2	ZKG24- 8- 50L	19	123	95	161	1
	- 4- 50L				130		- 4- 50L				140.5		-10- 50L				166	
	- 5- 50L				138		- 5- 50L				148.5		-12- 50L				172	
	- 6- 50L	19	105	81	140	1	- 6- 50L	19	115	88	150.5	1	-14- 50L	26	124	98	173	
	- 8- 50L				144		- 8- 50L				154		-16- 50L				178	
	-10- 50L				149		-10- 50L				159		-18- 50L				178	
	-12- 50L				155		-12- 50L				165		-20- 50L				186	
							-14- 50L	26	116	92	166		-22- 50L	32			191	
							-16- 50L				171		-24- 50L				194	
Metric (M) 100mm Long	ZKG12- 3-100L	13	154.5	88.5	175	2	ZKG16- 3-100L	13	164.5	88.5	185.5	2	ZKG24- 8-100L	19	173	145	211	
	- 4-100L				180		- 4-100L				190.5		-10-100L				216	
	- 5-100L				188		- 5-100L				198.5		-12-100L				222	
	- 6-100L	19	155	131	190	1	- 6-100L	19	165	138	200.5	1	-14-100L	26	174	148	223	
	- 8-100L				194		- 8-100L				204		-16-100L				228	
	-10-100L				199		-10-100L				209		-18-100L				228	
	-12-100L				205		-12-100L				215		-20-100L				236	
							-14-100L	26	166	142	216		-22-100L	32			241	
							-16-100L				221		-24-100L				244	

ZKN TAP COLLET (JIS)

NIKKEN

ZKN Tap Collet

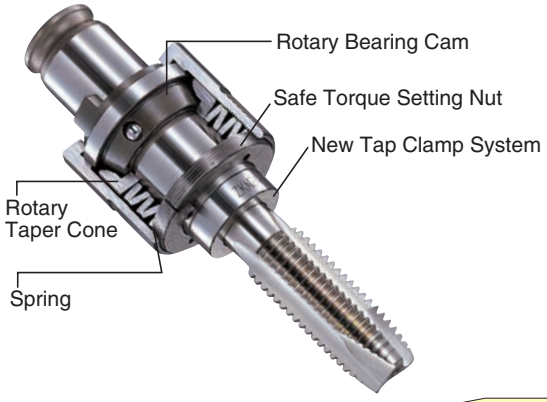

- **High Accuracy, Quick Response and Long Tap Life.**
- **Rotary Bearing Cam Mechanism**
  NIKKEN **ZKG** Tap Collet can be used with the all NIKKEN flaoting Tapper Chucks.
- **The torque of CCW is 1.4 times of the torque of CW to prevent the problem of the swarf.**
- **The setting torque can be adjusted.**

Smaller equal to **ZKG38-24**

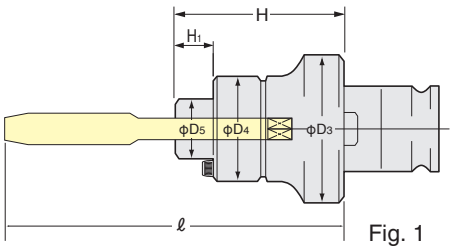

Fig. 1

All size for **ZKN8**
Larger equal to **ZKN38-27**
All size of **ZKN65**

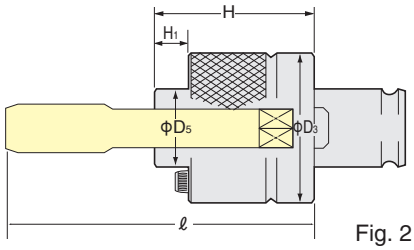

Fig. 2

ZKN65 : The tap collet fot the unified thread is also available. (U,W)
$1^{3}/_{8}$, $1^{1}/_{2}$, $1^{5}/_{8}$, $1^{3}/_{4}$, $1^{7}/_{8}$, 2, $2^{1}/_{4}$, $2^{1}/_{2}$, $2^{3}/_{4}$, 3, $3^{1}/_{4}$, $3^{1}/_{2}$, $3^{3}/_{4}$

	ZKN8	ZKN38		ZKN65	
		M18~24	M27~36	M36~65	M68~100
D_3	23	78		110	125
D_4	—	56	—	—	—

Tapperchuck using this collet
ZL ☞P.51, Z ☞P.52, NZ ☞P.270

ZKN8 is semi-standard.

	ZKN 8					ZKN38					ZKN65				
	Code.No	D_5	H	H_1	ℓ	Code.No	D_5	H	H_1	ℓ	Code.No	D_5	H	H_1	ℓ
Metric (M)	ZKN 8-2	13	29.5	6.5	50	ZKN38-18	32	61	17	117	ZKN65- 36	68	89	20	179
	-3				55	-20				121	- 39				187
	-4				56	-22				130	- 42				189
	-5				64	-24				133	- 45				194
	-6				66	-27	45	64	12	142	- 48				198
	-8				73	-30				145	- 52				205
						-33				153	- 56				212
						-36				161	- 60				222
						-38				121	- 64				229
											- 65				229
											- 68	84	94	25	254
Unified (U) or British Standard Whitworth (W)	ZKN 8-1/8	13	29.5	6.5	55	ZKN38-3/4	32	61	17	122	- 72				254
	-3/16				64	-7/8				130	- 80				264
	-1/4				66	-1				138	-100*				274
						-11/8	45	64	12	145	ZKN65-1P	68	89	20	127
						-11/4				153	-11/8P				135
						-13/8				161	-11/4P				139
											-13/8P				144
											-11/2P				144
											-15/8P				144
Pipe (PT) (PS) (PF)						ZKN38 -3/8P	26	61	24	91	-13/4P				144
						-1/2P	32		17	100	-2P				149
						-5/8P				104	-21/4P				159
						-3/4P	45	64	12	103	-21/2P	84	94	25	174
						-7/8P				106	-23/4P				174
						-1P				109	-3P				174

★*mark: The Code No. of tap collet for **M85** to **M90** is **ZKN65-100**.
The Code No. of tap collet for **M95** to **M100** is **ZKN65-100N**.
★The internal mechanism of the tap collet for the left handed tap is different from the standard one. Please use the special tap collet for the left handed tap.

ONE TOUCH TAP COLLET (ISO, IMPERIAL, DIN)

NIKKEN

BT

- Can be used with all NIKKEN Floating Tapper Chucks.
- Setting and Removal of Tap can be done in ONE TOUCH.
- Torque Limitter Mechanism built-in.
  Reversing Torque is 1.4 times of Normal Rotation in order to prevent the troubles caused by swarf.

ZKG

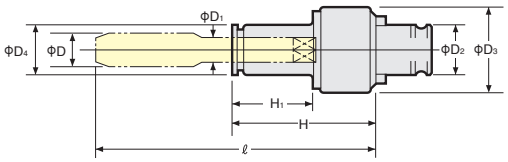

Tapping Capacity	ZKG12		ZKG16			ZKG24		
	M2～5	M6～12	M3～5	M6～12	M14～20	M8～12	M14～20	M22～24
D_2	19		25			30		
D_3	32		39			46		
D_4	13	19	13	19	26	19	26	32
H	54.5	55	64.5	65	66	73	74	
H_1	30.5	31	37.5	38	42	45	48	

Tapperchuck using this collet
ZL☞P.51, Z☞P.52, NZ☞P.270

TAP SPEC.	ZKG12					ZKG16					ZKG24				
	Code No.	D	D_1	W	ℓ	Code No.	D	D_1	W	ℓ	Code No.	D	D_1	W	ℓ
ISO Metric	ZKG12-2S	2	2.5	2	74	ZKG16-4S	4	4	3.15	93	ZKG24-12S	12	9	7.1	129
	-3S	3	3.15	2.5	79	-5S	5	5	4	97	-14S	14	11.2	9	130
	-4S	4	4	3.15	83	-6S	6	6.3	5	102	-16S	16	12.5	10	136
	-5S	5	5	4	87	-8S	8	8	6.3	106	-18S	18	14	11.2	145
	-6S	6	6.3	5	92	-10S	10	10	8	113	-20S	20	14	11.2	145
	-8S	8	8	6.3	96	-12S	12	9	7.1	121	-22S	22	16	12.5	145
	-10S	10	10	8	103	-14S	14	11.2	9	122	-24S	24	18	14	155
	-12S	12	9	7.1	111	-16S	16	12.5	10	128					
ISO Pipe	ZKG12-1/8PS	9.728	8	6.3	87	ZKG16-1/8PS	9.728	8	6.3	97.5	ZKG24-1/4PS	13.157	10	8	110
						-1/4PS	13.157	10	8	103.5	3/8PS	16.662	12.5	10	116
						-3/8PS	16.662	12.5	10	109.5	-1/2PS	20.955	16	12.5	122
											-5/8PS	22.911	18	14	124
IMPERIAL BSW BSF	ZKG12-1/8S(No.5S)	3.175	3.15	2.5	78	ZKG16-1/8S(No.5S)	3.175	3.15	2.5	88	ZKG24-1/2S	12.7	9	7.1	129
	-No.6S	3.505	3.55	2.8	80	-No.6S	3.505	3.55	2.8	90	-9/16S	14.288	11.2	9	130
	-No.8S	4.166	4.5	3.55	82	-No.8S	4.166	4.5	3.55	92	-5/8S	15.875	12.5	10	136
	-3/16S(No.10S)	4.762	5	4	86	-3/16S(No.10S)	4.762	5	4	96	-3/4S	19.05	14	11.2	145
	-No.12S	5.48	5.6	4.5	90	-No.12S	5.48	5.6	4.5	100	-7/8S	22.225	16	12.5	145
	-1/4S	6.35	6.3	5	90	-1/4S	6.35	6.3	5	100	-1S	25.4	18	14	155
	-5/16S	7.937	8	6.3	95	-5/16S	7.937	8	6.3	105					
	-3/8S	9.525	10	8	101	-3/8S	9.525	10	8	111					
	-7/16S	11.112	8	6.3	108	-7/16S	11.112	8	6.3	118					
	-1/2S	12.7	9	7.1	111	-1/2S	12.7	9	7.1	121					
						-9/16S	14.288	11.2	9	122					
						-5/8S	15.875	12.5	10	128					
IMPERIAL Pipe	ZKG12-1/8PB	9.728	8.08	6	83.037	ZKG16-1/8PB	9.728	8.08	6	93.537	ZKG24-1/4PB	13.157	10.9	8.18	104.8
						-1/4PB	13.157	10.9	8.18	98.3	-3/8PB	16.662	13.77	10.31	106.388
						-3/8PB	16.662	13.77	10.31	99.888	-1/2PB	20.955	17.45	13.08	114.5
											-5/8PB	22.911	20.32	15.3	114.5
DIN Metric	ZKG12-2D(DIN352)	2	2.8	2.1	72	ZKG16-4D(DIN371)	4	4.5	3.4	102	ZKG24-12D(DIN376)	12	9	7	150
	-3D(DIN371)	3	3.5	2.7	85	-5D(DIN371)	5	6	4.9	107	-14D(DIN376)	14	11	9	145
	-4D(DIN371)	4	4.5	3.4	92	-6D(DIN371)	6	6	4.9	117	-16D(DIN376)	16	12	9	145
	-5D(DIN371)	5	6	4.9	97	-8D(DIN376)	8	6	4.9	127	-18D(DIN376)	18	14	11	158
	-6D(DIN371)	6	6	4.9	107	-8D7(DIN371)	8	8	6.2	123	-20D(DIN376)	20	16	12	168
	-8D(DIN376)	8	6	4.9	117	-10D(DIN376)	10	7	5.5	134	-22D(DIN376)	22	18	14.5	166
	-8D7(DIN371)	8	8	6.2	113	-10D7(DIN371)	10	10	8	131	-24D(DIN376)	24	18	14.5	186
	-10D(DIN376)	10	7	5.5	124	-12D(DIN376)	12	9	7	142					
	-10D7(DIN371)	10	10	8	121	-14D(DIN376)	14	11	9	137					
	-12D(DIN376)	12	9	7	132	-16D(DIN376)	16	12	9	137					
DIN Pipe	ZKG12-1/8R(DIN353)	9.728	7	5.5	92	ZKG16-1/8R(DIN353)	9.728	7	5.5	102.5	ZKG24-1/4R(DIN353)	13.157	11	9	105
						-1/4R(DIN353)	13.157	11	9	98.5	-3/8R(DIN353)	16.662	12	9	112
						-3/8R(DIN353)	16.662	12	9	105.5	-1/2R(DIN353)	20.955	16	12	116

★Long size TAP Collet is available. ☞P.285 e.g. ZKG12-4S-50L
★TAP Clamp Mechanism for PIPE TAP is Side Lock System.
★High torque setting type example for stainless steel is available. Please add "-HT" at the end of Code No. e.g. ZKG12-3S-HT

ACCESSORY

ZK TAP COLLET (ISO, IMPERIAL, DIN)

NIKKEN

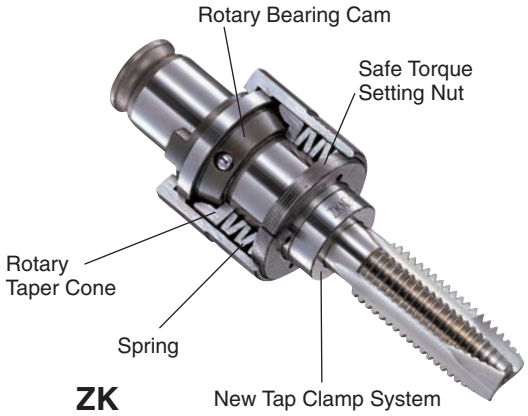

ZK

- Can be used with all NIKKEN Floating Tapper Chucks.
- Torque Limitter Mechanism built-in.

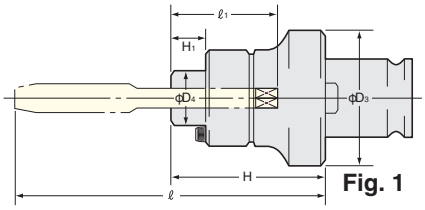

Fig. 1

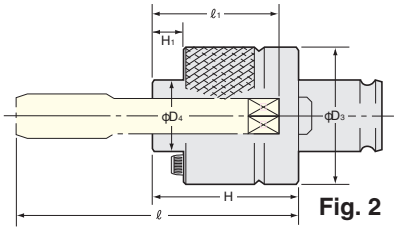

Fig. 2

Total length "ℓ" is calculated as ;
ℓ= Tap length - ℓ1 + H

	ZK8	ZK38	ZK65
D_4	13	45	68
D_3	23	78	110
H_1	6.5	12	13
H	29.5	64	89

Tapperchuck using this collet
ZL ☞P.51, Z ☞P.52, NZ ☞P.270

ZK8 type is semi-standard.

TAP SPEC.	ZK 8 Code No.	D	D1	W	ℓ1	Fig
ISO Metric	ZK8-2S	2	2.5	2.0	22.5	2
	-3S	3	3.15	2.5	23.5	
	-4S	4	4.0	3.15	24.5	
	-5S	5	5.0	4.0	25.5	
	-6S	6	6.3	5.0	26.5	
ISO Pipe						
IMPERIAL BSW BSF	ZK8-No.2S	2.18	2.8	2.24	23.5	2
	-No.3S	2.515				
	-No.4S	2.845	3.15	2.5	23.5	
	-No.5S(1/8S)	3.175				
	-No.6S	3.505	3.55	2.8		
	-No.8S	4.166	4.5	3.55	24.5	
	-No.10S(3/16S)	4.826	5.0	4.0	25.5	
	-No.12S	5.480	5.6	4.5		
	-1/4S	6.350	6.3	5.0	26.5	
IMPERIAL Pipe						
DIN Metric	ZK8-2D	2(Din 371)	2.8	2.1	23.5	2
	-3D	3(Din 371)	3.5	2.7	24.5	
	-4D	4(Din 371)	4.5	3.4		
	-5D	5(Din 371)	6.0	4.9	26.5	
	-6D	6(Din 371)				
	-8D	8(Din 376)				
DIN Pipe						

ZK38 Code No.	D	D1	W	ℓ1	Fig
ZK38-18S	18	14	11.2	44	1
-20S	20				
-22S	22	16	12.5	46	
-24S	24	18	14	48	
-27S	27	20	16	54	2
-30S	30				
-33S	33	22.4	18	56	
-36S	36	25	20	58	
ZK38-3/8PS	16.662	12.5	10	34	1
-1/2PS	20.955	16	12.5	38	
-5/8PS	22.911	18	14	40	
-3/4PS	26.441	20	16	46	2
-7/8PS	30.201	22.4	18	48	
- 1 PS	33.249	25	20	50	
ZK38- 3/4S	19.050	14	11.2	44	1
- 7/8S	22.225	16	12.5	46	
- 1 S	25.400	18	14	48	
-11/8S	28.575	20	16	54	2
-11/4S	31.750	22.4	18	56	
-13/8S	34.925	25	20	58	
ZK38- 3/8PB	16.662	13.77	10.31	33.7	1
- 1/2PB	20.955	17.45	13.08	39.9	
- 5/8PB	22.911	20.32	15.3	39.5	
- 3/4PB	26.441	23.01	17.3	43.5	2
- 7/8PB	30.201	27.76	20.6	45.1	
- 1 PB	33.249	28.57	21.4	46.6	
ZK38-18D	18(Din 376)	14	11	44	1
-20D	20(Din 376)	16	12	45	
-22D	22(Din 376)	18	14.5	47	
-24D	24(Din 376)				
-27D	27(Din 376)	20	16	53	2
-30D	30(Din 376)	22	18	55	
-33D	33(Din 376)	25	20	57	
-36D	36(Din 376)	28	22	59	
ZK38-3/8R	16.662	12	9	33	1
-1/2R	20.955	16	12	37	
-5/8R	22.911	18	14.5	39	
-3/4R	26.441	20	16	45	2
-7/8R	30.201	22	18	47	
- 1 R	33.249	25	20	49	

ZK65 Code No.	D	D1	W	ℓ1	Fig
ZK65-36S	36	25.0	20.0	58	2
-39S	39	28.0	22.4	60	
-42S	42				
-45S	45	31.5	25.0	65	
-48S	48				
-52S	52	35.5	28.0	68	
-56S	56				
-60S	60	40.0	31.5	71	
-64S	64				
ZK65-11/4PS	41.910	31.5	25	51	2
-11/2PS	47.803	35.5	28	55	
-13/4PS	53.746				
- 2 PS	59.614	40	31.5	62	
ZK65-11/2S	38.100	28	22.4	60	2
-13/4S	44.450	31.5	25.0	65	
- 2 S	50.800	35.5	28.0	68	
-21/4S	57.150	40.0	31.5	71	
-21/2S	63.500				
ZK65-11/4PB	41.910	33.32	25.0	51	2
-11/2PB	47.803	38.10	28.57	50	
-13/4PB	53.746	41.28	30.94	62	
- 2 PB	59.614	47.63	35.71	56	
ZK65-36D	36(Din 376)	28.0	22.0	59	2
-39D	39(Din 376)	32.0	24.0	61	
-42D	42(Din 376)				
-45D	45(Din 376)	36.0	29.0	69	
-48D	48(Din 376)				
-52D	52(Din 376)	40.0	32.0	72	
-56D	56(Din 376)	45.0	35.0	75	
-60D	60(Din 376)				
-64D	64(Din 376)	50.0	39.0	78	
ZK65-11/8R	37.898 (Din 353)	28.0	22.0	51	2
-11/4R	41.910 (Din 353)	32.0	24.0	53	
-13/8R	44.325 (Din 353)	36.0	29.0	55	
-11/2R	47.803 (Din 353)				
-13/4R	53.746 (Din 353)				
- 2 R	59.614 (Din 353)				

★Tap collet Code No. "**ZK**" is for **ISO**, **IMPERAL** and **DIN** Taps.
★Tap collet Code No. "**ZKN**" is for **JIS** Taps. Please refer ☞ **P.286** for **ZK** New tap collet.

TAP COLLET without TORQUE CONTROL (JIS)

NIKKEN

■Tap Collet for CNC Lathe

ZMK

For Synchronized Tapping on M/C, use ZMK tap collet with ZT Tapper Chuck.

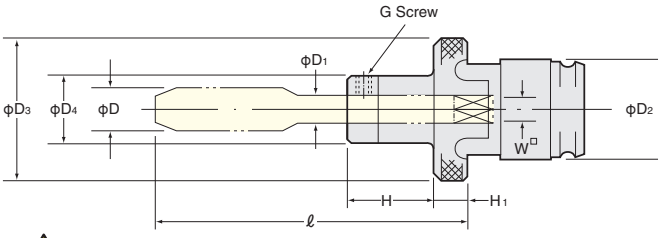

⚠ Torque Control is not built-in. Careful attention must be paid to diameter of drilled hole, program and so on.

Dimension List of ZMK Tap Collet

	ZMK8		ZMK12		ZMK16			ZMK24		
D	M3～6	M8	M3～6	M8～12	M4～6	M8～12	M14～16	M12	M14～16	M18～24
D_2	13		19		25			30		
D_3	20		28		36			42		
D_4	13	19	13	19	13	19	26	19	26	32
H	14	24	16	20	21			25		29
H_1	4		6		6			8		
G	M4-0.5	M6-0.75	M4-0.5	M6-0.75	M4-0.5	M6-0.75		M6-0.75	M8-1.0	

	ZMK 8				ZMK12				ZMK16				ZMK24			
	Code No.	D_1	W	ℓ	Code No.	D_1	W	ℓ	Code No.	D_1	W	ℓ	Code No.	D_1	W	ℓ
Metric (M)	ZMK8-3	4	3.2	43.5	ZMK12- 3	4	3.2	47.5	ZMK16- 4	5	4.0	53.5	ZMK24-12	8.5	6.5	83
	-4	5	4.0	44.5	- 4	5	4.0	48.5	- 5	5.5	4.5	61.5	-14	10.5	8.0	84
	-5	5.5	4.5	52.5	- 5	5.5	4.5	56.5	- 6	6	4.5	63.5	-16	12.5	10.0	89
	-6	6	4.5	54.5	- 6	6	4.5	58.5	- 8	6.2	5.0	66	-18	14	11.0	93
	-8	6.2	5.0	67	- 8	6.2	5.0	65	-10	7	5.5	71	-20	15	12.0	97
					-10	7	5.5	70	-12	8.5	6.5	77	-22	17	13.0	106
					-12	8.5	6.5	76	-14	10.5	8.0	78	-24	19	15.0	109
									-16	12.5	10.0	83				
Unified (U) or British Standard Whitworth (W)	ZMK8-1/8	4	3.2	43.5	ZMK12-1/8	4	3.2	47.5	ZMK16-1/8	4	3.2	52.5	ZMK24-1/2	9	7.0	85
	-3/16	5	4.5	52.5	-3/16	5.5	4.5	56.5	-3/16	5	4.5	61.5	-9/16	10.5	8.0	86
	-1/4	6	4.5	54.5	-1/4	6	4.5	58.5	-1/4	6	4.5	63.5	-5/8	12	9.0	90
					-5/16	6.1	5.0	65	-5/16	6.1	5.0	66	-3/4	14	11.0	98
					-3/8	7	5.5	70	-3/8	7	5.5	71	-7/8	17	13.0	106
					-7/16	8	6.0	74	-7/16	8	6.0	75	- 1	20	15.0	114
					-1/2	9	7.0	78	-1/2	9	7.0	79				
									-9/16	10.5	8.0	80				
									-5/8	12	9.0	84				
Pipe (PT) (PF)					ZMK12-1/8P	8	6.0	51	ZMK16-1/8P	8	6.0	54	ZMK24-3/8P	14	11.0	63
									-1/4P	11	9.0	56	ZMK24-1/2P	18	14.0	76
									-3/8P	14	11.0	57	ZMK24-5/8P	19	15.0	80

★For long size Tap Collets are also available. 50mm (**-50L**), 100mm (**-100L**) longer than standard type. **e.g. ZMK12-4-50L**

NIKKEN TAPPER CHUCK for NC lathes

NIKKEN

ST-ZT

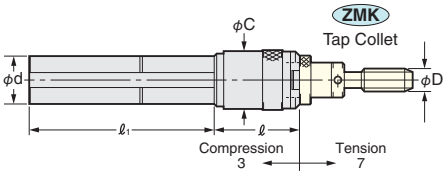

●Float mechanism suitable for NC lathes makes it easy to follow, ideal for precision tapping work.

Code No. L	Tapping Capability D	d	C	ℓ	ℓ₁	Tap Collet
ST25-ZT12	M3～M12	25	32	48	70	ZMK 12
ST32-ZT12	M3～M12	32	32	48	70	
-ZT16	M4～M16		42	55	70	ZMK 16

Tap Dimensions by Standard

NIKKEN

Taps have different shank diameters and square dimensions depending on the standard and size. For example, JIS standard Metric M10, Unified U3/8, and DIN376 standard M10 have the same shank shape, so the tap collet can be used for both.
However, the torque limiter setting must be adjusted for each tap.

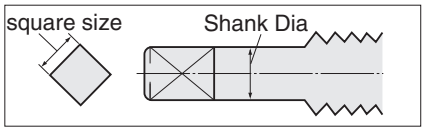

Tap shank No.	JIS			ISO			DIN		Shank	square
	Metric(M)	Unified(U)	Pipe(P),(R)	Metric(M)	Unified(U)	Pipe(P),(R)	Metric(M)	Pipe(P),(R)	Dia	size
1	-	-	-	M2	-	-	-	-	2.5	2.0
2	-	-	-	-	-	-	M2(DIN371)	-	2.8	2.1
3	M2	-	-	-	-	-	-	-	3.0	2.5
4	-	-	-	M3	U1/8(UNo.5)	-	-	-	3.15	2.5
5	-	-	-	-	-	-	M3(DIN371)	-	3.5	2.7
6	-	-	-	-	UNo.6	-	-	-	3.55	2.8
7	-	-	-	M4	-	-	-	-	4.0	3.15
8	M3	U1/8	-	-	-	-	-	-	4.0	3.2
9	-	-	-	-	-	-	M4(DIN371)	-	4.5	3.4
10	-	-	-	-	UNo.8	-	-	-	4.5	3.55
11	M4	-	-	M5	U3/16(UNo.10)	-	-	-	5.0	4.0
12	M5	U3/16	-	-	-	-	-	-	5.5	4.5
13	-	-	-	-	UNo.12	-	-	-	5.6	4.5
14	M6	U1/4	-	-	-	-	-	-	6.0	4.5
15	-	-	-	-	-	-	M5,M6(DIN371)	M8(DIN376)	6.0	4.9
16	-	U5/16	-	-	-	-	-	-	6.1	5.0
17	M8	-	-	-	-	-	-	-	6.2	5.0
18	-	-	-	M6	U1/4	-	-	-	6.3	5.0
19	M10	U3/8	-	-	-	-	M10(DIN376)	-	7.0	5.5
20	-	-	-	-	-	-	-	R1/8(DIN353)	7.0	5.5
21	-	U7/16	-	-	-	-	-	-	8.0	6.0
22	-	-	P1/16,P1/8	-	-	-	-	-	8.0	6.0
23	-	-	-	-	-	-	M8(DIN371)	-	8.0	6.2
24	-	-	-	M8	U5/16,U7/16	-	-	-	8.0	6.3
25	-	-	-	-	-	R1/8	-	-	8.0	6.3
26	M12	-	-	-	-	-	-	-	8.5	6.5
27	-	U1/2	-	-	-	-	M12(DIN376)	-	9.0	7.0
28	-	-	-	M12	U1/2	-	-	-	9.0	7.1
29	-	-	-	M10	U3/8	-	M10(DIN371)	-	10.0	8.0
30	-	-	-	-	-	R1/4	-	-	10.0	8.0
31	M14	U9/16	-	-	-	-	-	-	10.5	8.0
32	-	-	-	-	-	-	M14(DIN376)	-	11.0	9.0
33	-	-	P1/4	-	-	-	-	R1/4(DIN373)	11.0	9.0
34	-	-	-	M14	U9/16	-	-	-	11.2	9.0
35	-	U5/8	-	-	-	-	M16(DIN376)	-	12.0	9.0
36	-	-	-	-	-	-	-	R3/8(DIN353)	12.0	9.0
37	M16	-	-	M16	U5/8	-	-	-	12.5	10.0
38	-	-	-	-	-	R3/8	-	-	12.5	10.0
39	M18	U3/4	-	-	-	-	M18(DIN376)	-	14.0	11.0
40	-	-	P3/8	-	-	-	-	-	14.0	11.0
41	-	-	-	M18,M20	U3/4	-	-	-	14.0	11.2
42	M20	-	-	-	-	-	-	-	15.0	12.0
43	-	-	-	-	-	-	M20(DIN376)	-	16.0	12.0
44	-	-	-	-	-	-	-	R1/2(DIN353)	16.0	12.0
45	-	-	-	M22	U7/8	-	-	-	16.0	12.5
46	-	-	-	-	-	R1/2	-	-	16.0	12.5
47	M22	U7/8	-	-	-	-	-	-	17.0	13.0
48	-	-	-	M24	U1	-	-	-	18.0	14.0
49	-	-	P1/2	-	-	R5/8	-	-	18.0	14.0
50	-	-	-	-	-	-	M22,M24(DIN376)	-	18.0	14.5
51	M24	-	-	-	-	-	-	-	19.0	15.0
52	-	-	P5/8	-	-	-	-	-	19.0	15.0
53	-	U1	-	-	-	-	-	-	20.0	15.0

★If the tap shank No. in the table above is the same, the tap collets can be shared.
★Tap collets for pipe are exclusively for pipe taps.
★The shank diameter of 1/16P varies depending on the tap manufacturer.
★The symbol U is used to refer to UNC and UNF collectively as U.
★The symbol P is used to refer to PT(Rc),PS(Rp),PF(G) and NPTF collectively as P.
★The symbol R is used to refer to Rc,Rp and G collectively as R.

Tool Wagon

NIKKEN

TW

TAPER	Code No.	Wagon Storage
BT30	**TW30**	60piece
BT40	**TW40**	48piece
BT50	**TW50**	40piece
NC5-46,HSK40A	**TW-NC5- 46**	60piece
NC5-63,HSK63A	**TW-NC5- 63**	48piece
NC5-85	**TW-NC5- 85**	40piece
NC5-100,HSK100A	**TW-NC5-100**	40piece

TAPER CLEANER

★For the Code No. of Taper Cleaner, please add **"-Taper No."** at the end of **"NTP-CLE"**.
e.g. NTP-CLE50

TOOL CLAMPER

NIKKEN

NCL





Code No.	ΦD	W	ΦD1	H	T	P	Pitch	Remark
NCL-BT30	46	15.9	102	110	80	ϕ10.3 (M10)	50 × 60	
-BT40	63	15.9	102	115	80		50 × 60	NC5− 63 can be used
-BT45*	85	19.2	115	124	90		60 × 70	NC5− 85 can be used
-BT50	100	25.6	130	133	100		70 × 80	NC5−100 can be used
NCL-NC5-46	46	12	102	110	80		50 × 60	
-IT50	97.5	25.6	130	133	100		70 × 80	
-ICAT40	63.55	15.9	102	115	80		50 × 60	IT40, CAT40
-CAT50	98.45	25.6	130	133	100		70 × 80	

★**Please refer ☞ P.298 for the TCL-GH Tool Clamper.**
★*Sales for **BT45** will be discontinued as soun as stock runsout.

HSK LUBRICATION PIPE

NIKKEN

TAPER	Lubrication Pipe Code No.		Wrench Code No. for Movable type*1
	Movable	Stationary	
HSK 40A	HSK 40-LP	HSK 40-LPS	HSK 40-LPL
HSK 50A	HSK 50-LP	HSK 50-LPS	HSK 50-LPL
HSK 63A	HSK 63-LP	HSK 63-LPS	HSK 63-LPL
HSK100A	HSK100-LP	HSK100-LPS	HSK100-LPL

★Wrench for movable type marked ✻1 is as an option.
★Standard wrench can be used for stationary type.
HSK40-LPS:W=5, HSK50-LPS:W=5, HSK63-LPS:W=6, HSK100-LPS:W=8
★Stationary type is popular but, movable type is used for the M/C of JTEKT, TSUGAMI, KOMATSU NTC or TAKIZAWA. Please check your M/C specification.

⚠ Caution

- **For the HSK M/C with centre through coolant delivered via the tool clamping system, please make sure that the lubrication pipe is fitted in the rear of the HSK tool. This will prevent coolant from flooding the hollow chamber of the HSK Tool.**
- **For the HSK M/C without centre through coolant facility, but only external coolant source, care must be taken to prevent coolant from entering the front nose of chuck or collet slots and so contaminating the hollow area of the chuck. Please fit recommended plug. Please add -"LPGP" at the end of HSK No. e.g. HSK63-LPGP**

GH Handle Type TOOL CLAMPER

NIKKEN

TCL-GH



Head mounting dimensions



Clamper base mounting dimensions

Clamper head **TCL-HD**

Clamper base **TCL-BD**

Please use the TCL-GH clamper as a clamper for tools that do not have drive grooves or U grooves, such as the HSK E / F type.
Different shanks can be clamped as long as the V-flange diameter is the same.
EX.)TCL-63GH(HSK63A, 63E, 63F, BT40, NC5-63)
The clamper base is common, and various shanks can be supported by exchanging the clamper head.

CLAMPER Code No.	BASE Code No.	HEAD Code No.	SHANK
TCL- 25GH	TCL-BD	TCL- 25HD	HSK 25E
TCL- 32GH		TCL- 32HD	HSK 32E
TCL- 40GH		TCL- 40HD	HSK 40A, 40E
TCL- 46GH		TCL- 46HD	BT30, NC5-46
TCL- 50GH		TCL- 50HD	HSK 50A, 50E
TCL- 63GH		TCL- 63HD	HSK 63A, 63E, 63F, BT40, NC5-63
TCL-100GH		TCL-100HD	HSK100A, BT50, NC5-100

HANDLE / SPANNER / WRENCH

NIKKEN

■Handle for Milling Chuck

Style	Code No.
C12(C1=φ30mm)	9HC12*
C12(C1=φ33mm)	9HC12A
C16	9HC16
C20	9HC22
C25(C1=φ55mm)	9HC22
C25(C1=φ60mm)	9HC25
C32(C1=φ64mm)	9HC25
C32(C1=φ69mm)	9HC32
C42	9HC42

*9HC12 will be discontinued as soon as the product stock disappears.

■Spanner for Slim Chuck

Style	Code No.
SK6(C=φ18mm)	SKL-6
SK6(C=φ19.5mm)	SKL-6W
SK10	SKL-10
SK13	9HC12A
SK16	9HC16
SK20	9HC22
SK25	9HC22

~SK10 SK13~

■Torque adjustable Spanner for Slim Chuck

Spanner Code No.	Spannerhead Code No.	Torque wrench Code No.
SKL-6-TLS	SKL-6-TLS-HD	N50LCK (L1=85)
SKL-6W-TLS	SKL-6W-TLS-HD	
SKL-10-TLS	SKL-10-TLS-HD	
SKL-13-TLS	SKL-13-TLS-HD	N100LCK (L1=113)
SKL-16-TLS	SKL-16-TLS-HD	
SKL-20-TLS	SKL-20-TLS-HD	
SKL-25-TLS	SKL-25-TLS-HD	

★Torque adjustable spanner can be purchased separately from wrench heads and torque wrenches.



■Wrench for NPU Drill Chuck

Style	Code No.
NPU 8	NPUL- 8
NPU13	NPUL-13

GH HANDLE for HIGH SPEED TOOLING

NIKKEN

GH Handle has a two-way tightening/loosening ratchet on the handle that has been developed to provide quick and convenient loading of the tool. The **GH Handle** also dispenses with the need for notches on the nose ring.

JAPAN PAT.



GH

Tightening

Loosening

■GH Handle

Code No.	Milling Chuck	Slim Chuck	MAJOR DREAM	VC Holder
GH 6*	—	SK 6-P / SKT 6	MDSK 6	—
GH10*	—	SK10-P / SKT10	MDSK10	VC6
GH12*	C12-G	SK13-P / SKT13	MDSK13	—
GH16*	C16-G	SK16-P / SKT16	MDSK16	VC13
GH20*	C20-G	SK20-P / SKT20	MDSK20	—
GH25*	C25-G	SK25-P / SKT25	MDSK25	—
GH32S	C32-G(Nose Ring:φ62mm)	—	—	—
GH32	C32-G(Nose Ring:φ68mm)	—	—	—

★Torque adjustable **GH Handle** is available for * marked handle.
The Code No. is **GH6-TLS, GH10-TLS, GH16-TLS, GH25-TLS.**

■Torque adjustable GH Handle

Spanner Code No.	Spannerhead Code No.	Torque wrench Code No.
GH 6-TLS	GH 6-TLS-HD	N50LCK (L1=85)
GH10-TLS	GH10-TLS-HD	
GH12-TLS	GH12-TLS-HD	N100LCK (L1=113)
GH16-TLS	GH16-TLS-HD	
GH20-TLS	GH20-TLS-HD	
GH25-TLS	GH25-TLS-HD	

★Torque adjustable GH Handle can be purchased separately from wrench heads and torque wrenches.

CLAMPING HANDLE "BENKEI"

NIKKEN

JAPAN PAT.

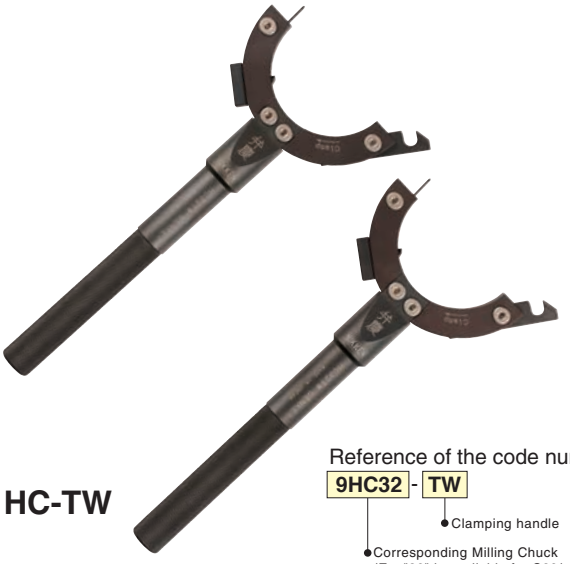

HC-TW

Clamp Nose Ring (Milling Chuck) by pair of clamping handles.
New designed clamping handle "BENKEI"

3 easy steps make it possible to clamp, unclamp milling chuck very safely and easily.

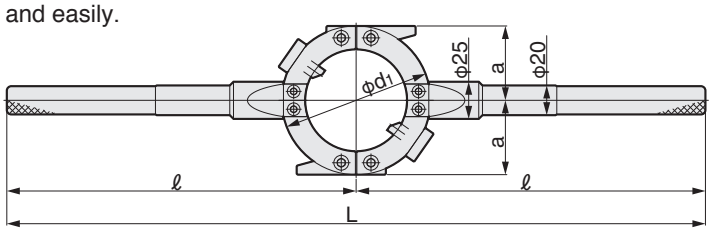

Reference of the code number

9HC32 - TW

- TW: Clamping handle
- 9HC32: Corresponding Milling Chuck (Ex. "32" is available for C32(φC1=69mm) milling chuck)

Code No.	Dimensions(mm)				Corresponding Milling Chuck
	a	ℓ	L	φd1	
9HC32TW	50	235	470	100	C32(φC1=69mm)
9HC42TW	59	285	570	117	C42(φC1=86mm)
9HC50TW	69	285	570	138	C50EX(φC1=105mm)

Milling Chuck

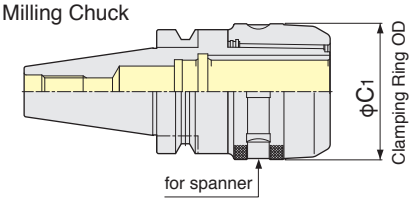

SILICONE TAPER SCRAPER

NIKKEN

The Cleaning Instrument Capable of Surely and Quickly Removing Oil and Particles Stuck to the Machine Spindle.

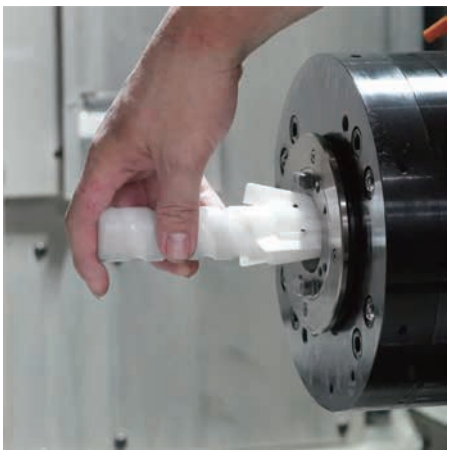

〈Material〉
Base :Polyacetal
Scraper :Silicon rubber

Silicone Taper Scraper to maintain perfectry "Taper Contact"

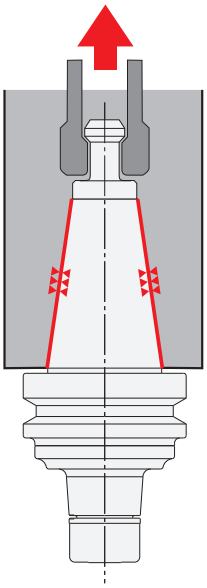

Product Lineup

※Please note that you can't choose the color of scraper.

	Code No.
for BT30	CLEH-NT30-R
for BT40	CLEH-NT40-R
for BT50	CLEH-NT50-R
for HSK 63A	CLEH-HSK 63-R
for HSK100A	CLEH-HSK100-R

For ZMAC ADVANCED THUMB WHEEL SOCKET

For Quick and Fast Adjustment of Dial Ring

NIKKEN

Improve Setting Times!!

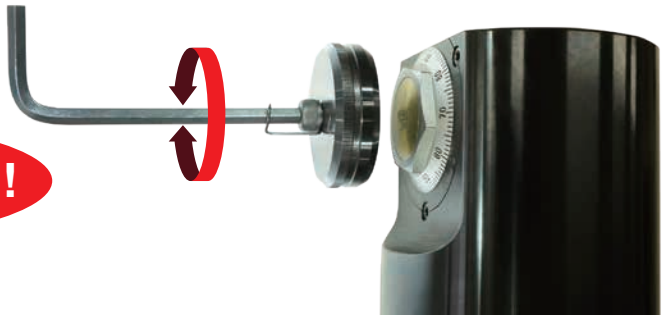

※L-share hexagon wrench is available.

Code No.	Head No.
M 2HZL-SCT	ZMAC 16
	ZMAC 20
M 3HZL-SCT	ZMAC 25
M 4HZL-SCT	ZMAC 32
M 5HZL-SCT	ZMAC 42
	ZMAC 55
M 7HZL-SCT	ZMAC 70
M10HZL-SCT	ZMAC 85
	ZMAC100
	ZMAC140

SCALE WRENCH

NIKKEN

Quick & Easy Set-up Tool for NIKKEN SLIM CHUCK

■Hexagon

Code No.	Corresponding Slim Chuck	Hexagon Size
SKWR-2- 95L	Available for standard centre through, high pressure centre through	2
-3-101L		3
-4-110L		4
-5-120L		5
-6-133L		6
-8-154L		8

■Flathead screwdriver

Code No.	Corresponding Slim Chuck	Style
SKWR-DR-120L	Standard Slim Chuck	Flathead Screwdriver Type

■Adjusting Screw and Scale Wrench Compatibility Chart

Style	SK Scale Wrench for standard adjust screw		SK Scale Wrench for Center-thru adjust screw		SK Scale Wrench for high pressure coolant thru Slim Chuck adjust screw	
	Adjust screw Code No.	Code No.	Adjust screw Code No.	Code No.	Adjust screw Code No.	Code No.
SK 6	SKG- 8	SKWR-DR-120L	—	—	SKG 6- 6HG	SKWR-2- 95L
SK10	SKG-12L		SKG-12H	SKWR-3-101L	SKG10-10HG	SKWR-4-110L
	-12S		-12HA	-2- 95L	-10HGA	-2- 95L
SK13	SKG-15		SKG-15H	SKWR-3-101L	SKG13-10HG	SKWR-4-110L
			-15HA	-2- 95L	-10HGA	-2- 95L
SK16	SKG-18L -12 -12L -18S		SKG-12H -12HA -18H -18HA	SKWR-3-101L -2- 95L -6-133L -3-101L	SKG16-12HG -12HGB -10HG -12HGE	SKWR-6-133L
					SKG16-12HGA -10HGA	SKWR-3-101L
SK20	SKG-22 -12 -12L -12S		SKG-12H -12HA -22H	SKWR-3-101L -2- 95L -5-120L	SKG20-18HG -12MFHG -12HG -12HGE -16HG -18HGB	SKWR-5-120L
SK25	SKG-28 -12 -12MF		SKG-12H -12HA -28H	SKWR-3-101L -2- 95L -8-154L	SKG25-24HG -24HGA -18HGC -18HGD -18HGE	SKWR-8-154L

★Please refer ☞ P.282 for the Code No. of the adjust screw corresponding to the Slim Chuck.

NIKKEN DIAMOND SURFACE

NIKKEN

All cutting edges of diamonds electrodeposited by a special manufacturing method are aligned, and it provides a smooth feel and uniform polishing.

- The use of high quality diamonds provides excellent sharpness and durability.
- Uniformly arranged diamond abrasive grains in a dotted pattern.
- Can be used freely from all directions for workpiece.
- The special stand made of urethane foam with excellent workability.

Special stand made of urethane foam with excellent workability

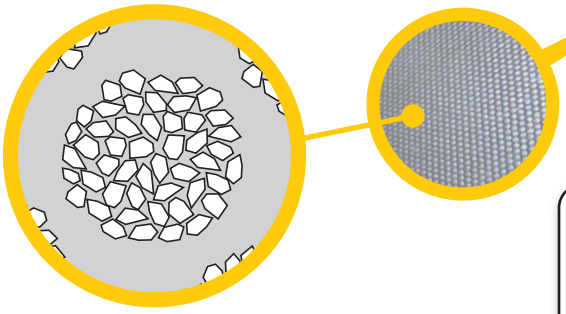

The Secret of DIAMOND SURFACE

Dots made of diamond abrasive grains are evenly arranged. The aggregation becomes a sharp cutting edge.

Best of Whetstone Restoration

Surface restoration of the whetstone is completed in **60** seconds.



Dimensions

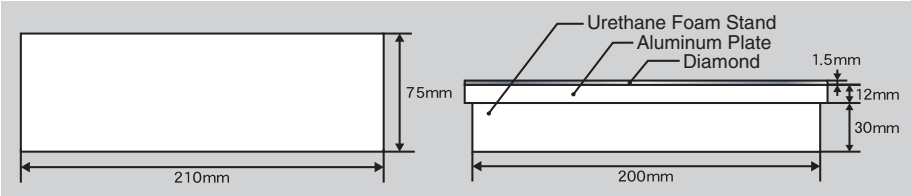

Specifications

Grain Size	Surface Roughness	Code No.
#160	Coarse	NKDS-160
#400	Second-cut	NKDS-400
#600	Smooth	NKDS-600

ECO BLACK TOOLING

NIKKEN

Rust Proof Treatment (Option)

The RP treatment creates a fine film of the contents (Fe_3O_4) and penetrates into the tool holder material 1～2 micron deep. This fine film inhibits the rust and corrosion of your tool holder taper and stops it from being transmitted to your machine spindle. The RP treatment will not effect the accuracy and the hardness of your NIKKEN tool holders.

⚠ Caution

- **If the detection of tool existing at tool magazine by optical method on your M/C, the tool with RP treatment may be judged "no tool existing". Please check your M/C specification.**
- **RP treatment to the measurement tool is not available due to de-energisation.**
- **The taper connection of the tool shank with RP treatment is more stuck than the taper connection of the tool shank without RP treatment. Then, the unclamping force for the tool with RP is required 20% stronger than the unclamping force for the tool without RP. Please be careful to check the unclamping force of your M/C, when the tool with RP treatment is chosen.**
- **Therefore, the taper cone of 3LOCK tool and NC5 tool is changed to without RP treatment as standard. And the special anti-rust treatment is applied to the taper cone of the 3LOCK tool and NC5 tool.**

★Products with '-RP'at the end of the code number are "ECO BLACK TOOLING"

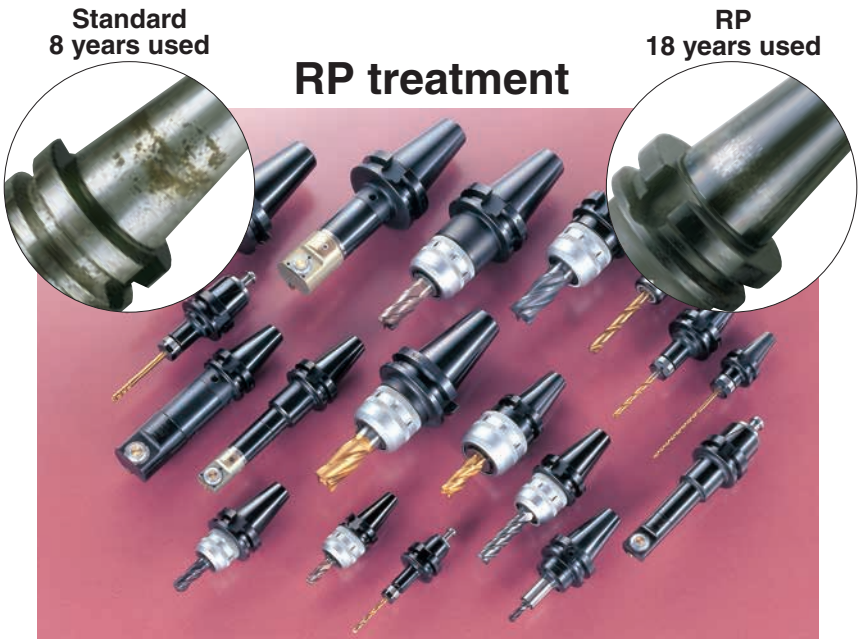

ACCESSORY

Pulling Force Measuring Tool for Portable

NIKKEN

Photo shows with Aluminum case. **S.BT40-CLP-P**

■By measuring the pull force in M/C spindles regularly, abrormalities can be detected early.

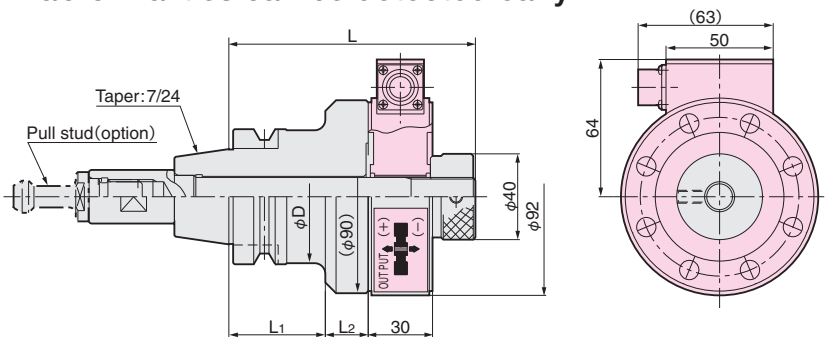

Load Cell(SH-50KN) and Digital Indicator are shared with all taper sizes.

TAPER	Code. No.	φD	L1	L2	L	Load Cell		Use Range	Weight (kg)
						Code	MAX. Lord		
BT30	**BT30-CLP-N-P**	45	35	15	100	SH-50KN	50KN	0～15KN	2.5
BT40	**BT40-CLP-P**	62	45	20	115			0～24KN	3.5
BT50	**BT50-CLP-P**	90	70	–	121			0～40KN	5.0

★**NC5** taper is also available. Please specify pull stud code. ☞**P.226** **e.g. NC5-63-CLP-D40-P**
★Please add **"-BD"** at the end of the code No. When you require just taper shank. **e.g. BT50-CLP-BD**
★Set code with Aluminum case **e.g. S.BT40-CLP-P**
1pc of taper shank can be stored.
★**HSK**, **Polygonal taper** is also available. **e.g. HSK63A-CLP-P**

THREE ANGLE CLAMPER

NIKKEN

Exchangeable Adapter

Please sellect suitable one by the table below.

*Check the direction of rotation of clamp ring to make sure that there will be no interference between the position of the clamper and the cutter or pull stud.

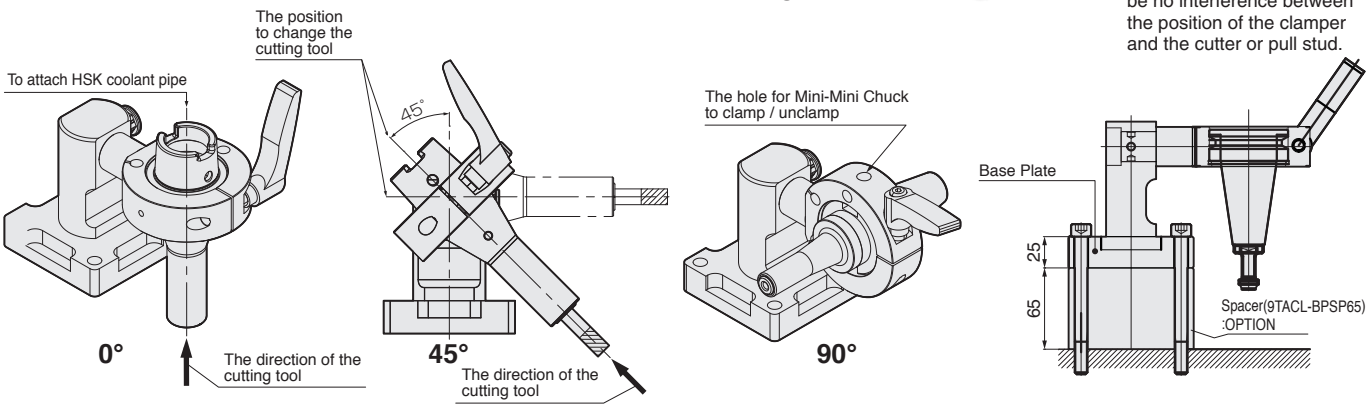

Clamper Code No.	BT40	BT50	IT40	CAT40	NC5-63	NC5-100	HSK63	HSK100	C6
TACL-B40H63A	○	–	–	–	○	–	○	–	–
TACL-B50H100A	–	○	–	–	–	○	–	○	–
TACL-ICAT40A	–	–	○	○	–	–	–	–	–
TACL-C6A	–	–	–	–	–	–	–	–	○

Exchangeable adapter

TACL-B40H63A Suitabele Clamper	Adaptation shank
9TACL63D-B30N46	BT30, NC5-46
9TACL63D-HSK50	HSK50, C5*1
9TACL63D-HSK40	HSK40, C4
9TACL63D-HSK32	HSK32
9TACL63D-HSK25	HSK25

*1 Length at ϕ50 must be over 25.4mm.

TACL-B50H100A Suitabele Clamper	Adaptation shank
9TACL100D-B40H63	BT40, NC5-63, HSK63
9TACL100D-CAT50	CAT50
9TACL100D-IT50	IT50
9TACL100D-HSK80	HSK80, C8
9TACL100D-C6	C6
9TACL100-B85N85	BT45,NC5-85

Replacement adapter for Straight Shank

TACL-B40H63A Suitabele Clamper	Adaptation shank
9TACL63D-S5/8	15.875mm (5/8")
9TACL63D-S3/4	19.05mm (3/4")
9TACL63D-S20	20mm
9TACL63D-S25	25mm
9TACL63D-S1	25.4mm (1")

NIKKEN REAMER SERIES CATALOGUE

NIKKEN

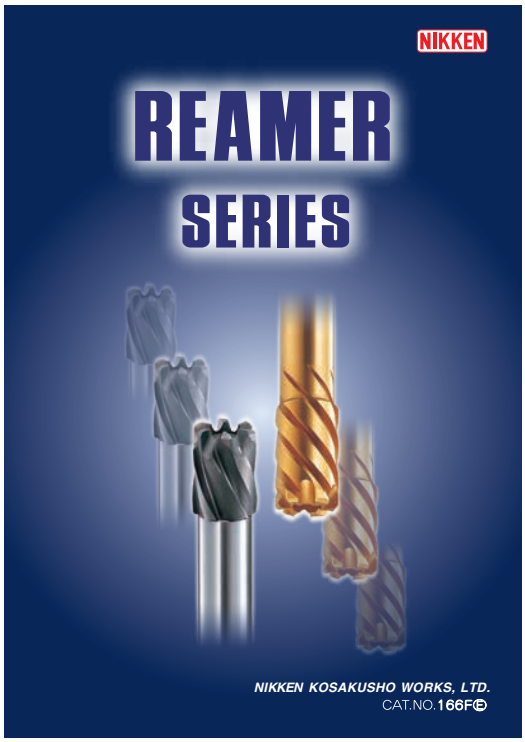

☞ Please refer to **REAMER SERIES** Catalogue.

■**CARBIDE, HSS / With / Without MILLING BLADE / from SMALL DIA. to LARGE DIA.**

■**REAMER SERIES CATALOGUE CAT No.166F to cover all kinds of Reamers (Carbide / HSS, Without / With End Tooth, Diameter from ϕ2mm to ϕ100mm)**

■**CARBIDE PF RADICAL MILL REAMER EVO**

Specially designed for the tough material such as Inconel, Hastelly, Waspaloy and Titanium Smooth cutting capability and special coating to protect the base material from cutting heat and deposition.

■**CARBIDE PF SPECTRUM REAMER SPX**

The newest reamer for Aluminium and Nonferrous Metals
Due to the high hardness level (**6000HV**) has been achived using Hydrogen-Free **DLC** coating, the hardness of the **SPX** reamer is close to the hardness of the diamond.

■**Two types of OH reamer, through hole and blind hole, are line-up.**

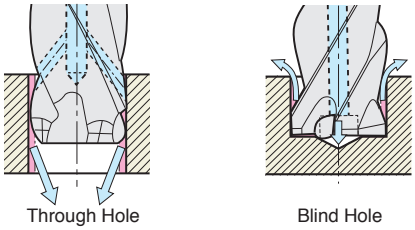

OH shape of reamer with OH

NIKKEN REAMER SERIES / WITH MILLING BLADE

NIKKEN

■**CHARACTERISTICS of REAMER With MILLING BLADE**

●**Hole accuracy is not required for inspection** (finished hole tolerance within H7)

●**Outstanding surface roughness and durability** (surface roughness within 3S)

REAMER·DRILL

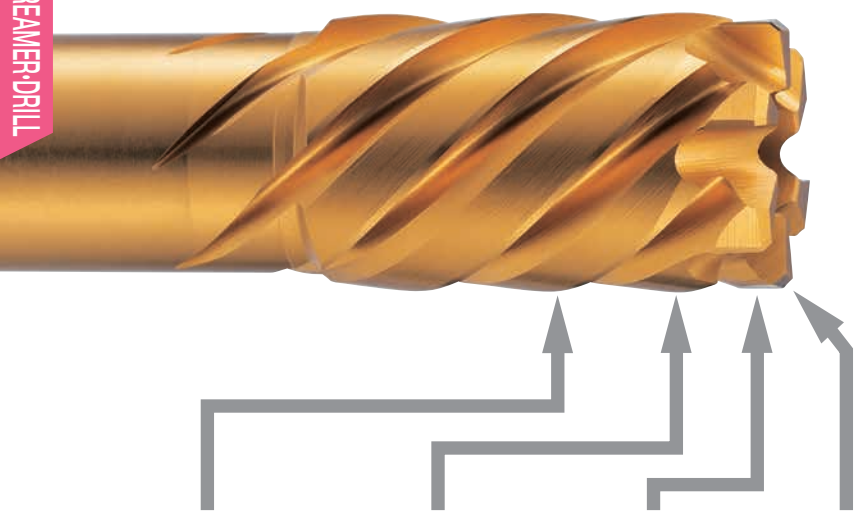

■**Plane roughness data of NCS-16.0**

P-curve
L=1.6mm

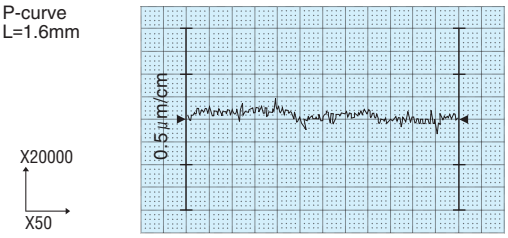

Material : S45C
Cutting speed : 14.5m/min
Feed rate : 0.35mm/rev.
Drilled hole : ϕ15.5（ϕ0.5 stock removal）

Burnishing
This is a polishing section without a cutting edge to clean up the roughness of the finished surface.

Reamer blade (finishing)
Smooth finish is achieved by reamer blade for the optimal finishing removal from milling blade.

Pilot part
NC sensor reamer moves forward guiding the pilot hole machined by milling blade.

Milling blade (Semi-Finish)
Semi-finish (Optimal finishing removal) is achived by milling blade from dnilled hole variation.



Swarf by milling blade



Swarf by reaming blade

NIKKEN CARBIDE PF RADICAL REAMER EVO

NIKKEN

Specially designed for the material difficult-to-cut.


Photo shows Radical Mill Reamer PF-RMSS-EVO

■Especially for nickel-based alloys and titanium alloys such as Inconel®, Hastelloy® and Waspaloy®.

■Smooth cutting capability and special coating to protect the base material from cutting heat and deposition.

Radical Mill Reamer EVO is a reamer dedicated to the materials difficult-to-cut.

■Machining Result

Hastelloy® C276 equivalent (HB180) **φ10mm**
V=18m/min, f=0.2mm/rev → φ10mm within H7 and Ra0.3

Inconel® 718 equivalent (HB250～280) **φ10mm**
V=5m/min, f=0.2mm/rev → φ10mm within H7 and Rz6.3

Inconel® 65 equivalent (HB210) **φ4mm**
V=10m/min, f=0.1mm/rev, Hole depth12mm
1000 holes could be done.

■The latest advanced coating technology has been incorporated into the Radical Mill Reamer EVO.

- ●The angle of the cutting edge is optimized for the materials difficult-to-cut.
- ●Highly deposition-resistant coating was used with a heat resistance of 1100°C and a film hardness of 3200 HV.
- ●Even though the arc evaporation, the droplets and pin holes are extremly reduced and smooth cutting surface can be done.

NIKKEN CARBIDE PF SPECTRUM REAMER SPX

NIKKEN

The newest reamer for aluminum and nonferrous metals with SPX coating


Photo shows Radical Mill Reamer PF-RMSS-SPX

Features of SPX coating (Hydrogen-Free DLC)

■High level of hardness

High hardness level **(6000 HV)** has been achieved using a **Hydrogen-Free DLC coating**, which contains no hydrogen at the time of deposition.
The hardness is extremely close to that of a diamond. (The hardness of conventional diamond-like carbon (DLC) coatings is approximately 3000 HV.)

■Heat resistance

Coating for physical vapor deposition (PVD) adopting special filtering technology allows for a highly heat-resistant coating with few impurities and with heat resistance of 550°C. (The heat resistance of conventional diamond-like carbon (DLC) coatings the heat resistance is approximately 300°C.)

■High efficiency performance

The film thickness is 1μm or less, therefore it does not effect to cutting performance.
The coating with superior slilding performance and adhered strongly on the base material suppress heat generation when reaming and long tool life can be realized.

■The "Spectrum Reamer" is …

- ●This is a special new reamer for aluminum, cast aluminum, nonferrous metals and resin, with a new type of **Hydrogen-Free SPX** (new coating), which has thin film with a high level of hardness, and totally different from conventional DLC contained hydrogen.
- ●The angle of the cutting edge has been optimized for the work materials and SPX coating.

NIKKEN REAMER SERIES

NIKKEN

Wide Product Range to meet Any Material Requirements
Long Life•High Finishing Accuracy on Tough Materials



Cutting Speed on Each Material for Oil Base Coolant Use

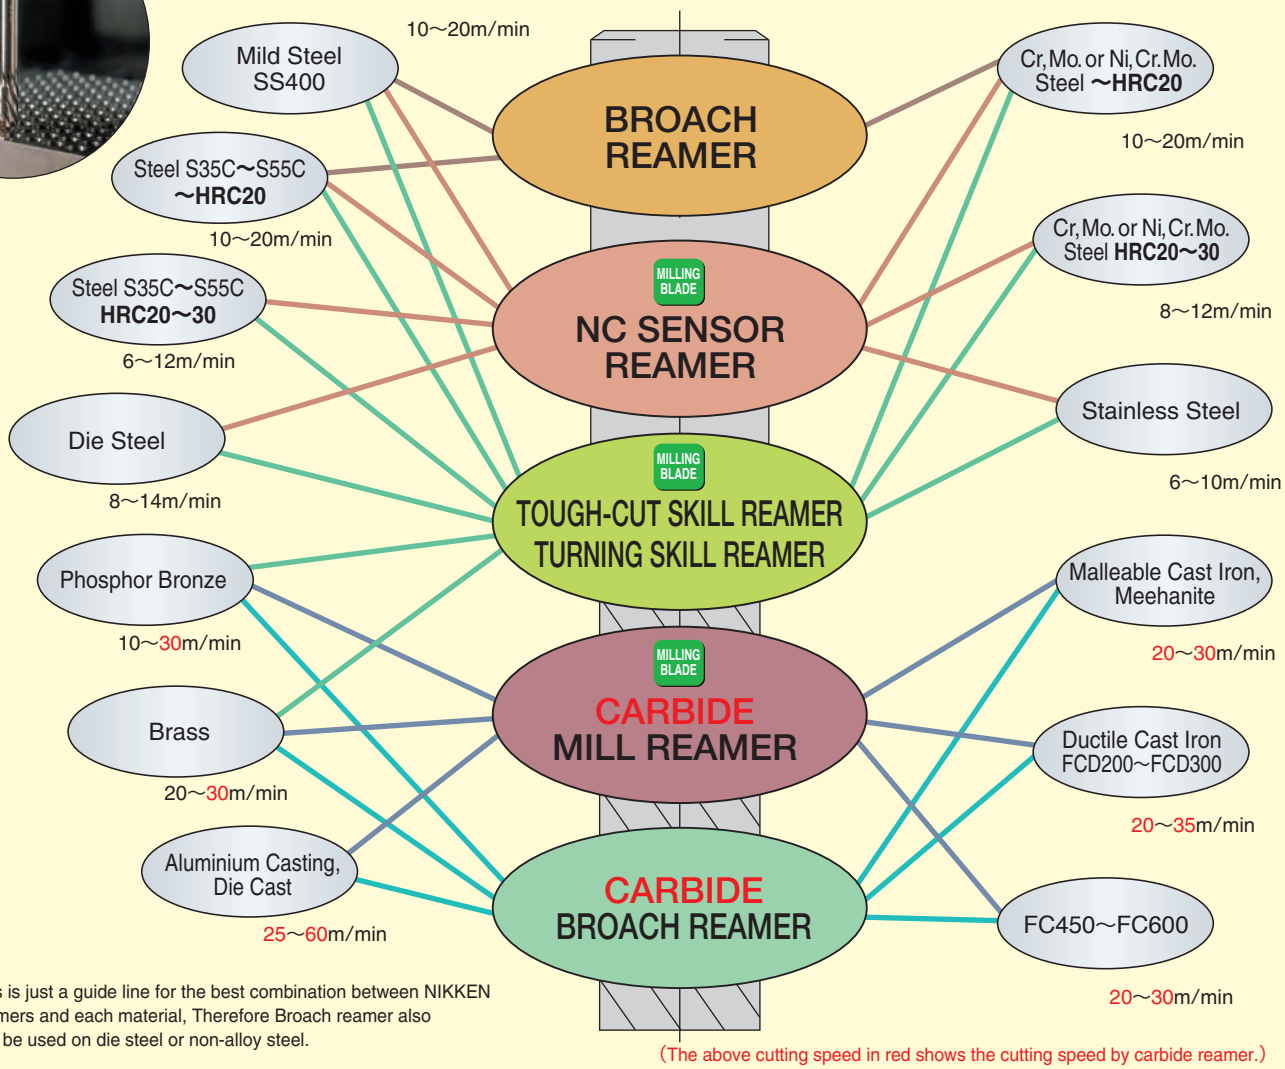

This is just a guide line for the best combination between NIKKEN reamers and each material, Therefore Broach reamer also can be used on die steel or non-alloy steel.

(The above cutting speed in red shows the cutting speed by carbide reamer.)

■REAMERS FOR THROUGH HOLE / STEPPED HOLE / BLIND HOLE

CAN BE SELECTED BY SHAPE OF THE HOLE



EXCELLENT STRAIGHTNESS AND CIRCULARTY.

FOR THROUGH HOLE



EXCELLENT STRAIGHTNESS AND CIRCULARTY.

FOR STEPPED HOLE



EXCELLENT STRAIGHTNESS AND CIRCULARTY.

FOR BLIND HOLE



WHEN YOU CANNOT GET GOOD RESULT FOR BLIND HOLE BY USING ENDMILL, BORING ARBOR AND SO ON, PLEASE TRY “REAMERS FOR BLIND HOLE

PARTICULAR CASE

＊Coated reamer is normally not suitable for the cast iron, however(PF)RADICAL REAMER / NC SENSOR REAMER may be suitable for FCD400-600.
＊Under normal conditions, coated reamer is not suitable for the aluminium, however (PF)RADICAL REAMER may be suitable for ADC as well.
＊For the cast iron with soluable coolant, CARBIDE MILL REAMER (K01 GRADE) may be used.

NIKKEN REAMER SERIES

NIKKEN

Wide Product Range to meet All Material Requirements
Long Tool Life•High Finishing Accuracy on Tough Materials



Cutting Speed on Each Material for Soluble Coolant Use

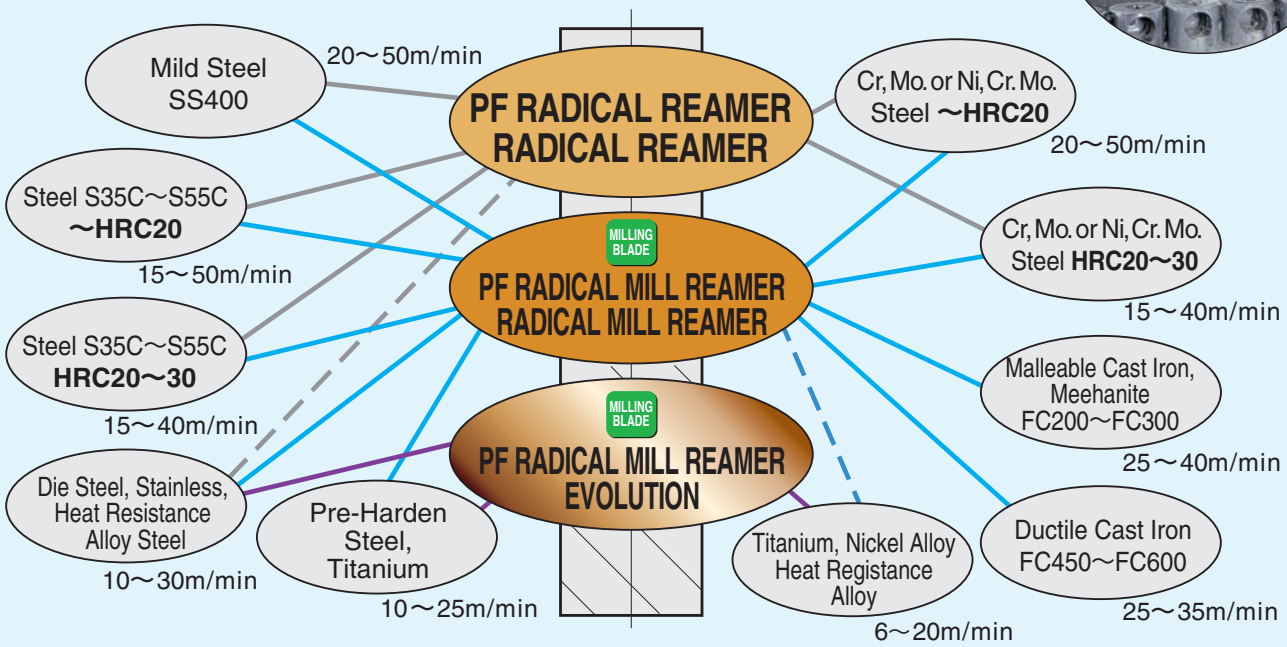

●Please select the other reamers as PF radical reamer(below) for alminium / copper / no-ferrous alloy.
●When using oil base coolant, you could get better accuracy and longer tool life.

Cutting Speed on Each Material for Soluble Coolant Use

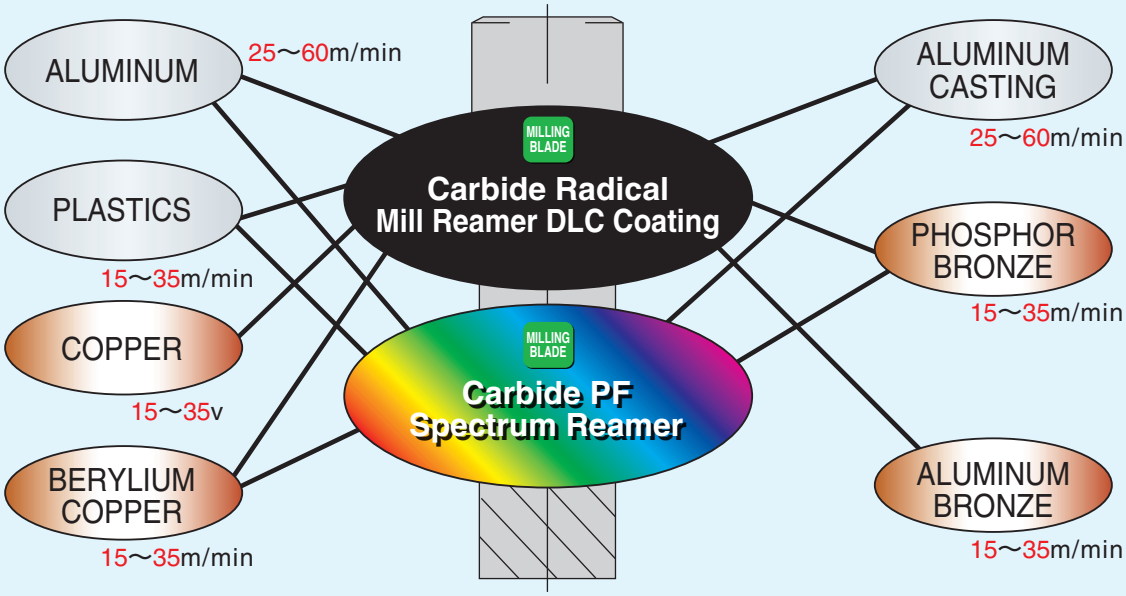

●Please select the other reamers for the other materials.
●With using oil base coolant, you could get better accuracy and longer tool life.

REAMER•DRILL

COMBAT Z DRILL

Cost down can be achieved by improvement of drilling operation.

NIKKEN

Dimensions of ϕ16～42 mm COMBAT Z DRILL

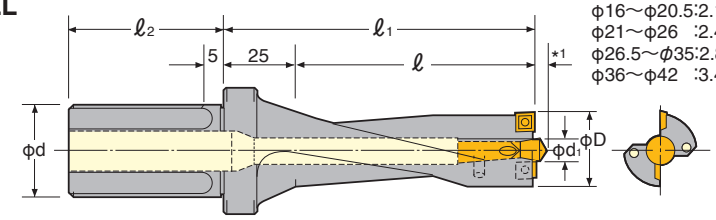

*1 Dimension
ϕ16～ϕ20.5:2.1mm
ϕ21～ϕ26 :2.4mm
ϕ26.5～ϕ35:2.8mm
ϕ36～ϕ42 :3.4mm

ϕ16～ϕ38
L／D=3 or 4

ϕ16～ϕ35mm by every 0.5mm increment, ϕ36～ϕ60mm by every 1mm increment,ϕ60～ϕ80mm by every 5mm increment are standard. WiTH Oil Hole.

Each 0.1mm increment drill is available as an option.

Drill Dia.	3D Series Code No. ϕd -ϕD -ℓ	3D Series ℓ	3D Series ℓ1	4D Series Code No. ϕd -ϕD -ℓ	4D Series ℓ	4D Series ℓ1	3D, 4D ϕd	3D, 4D ℓ2	Pilot Drill	Insert Tip	Clamp Screw	Tip Clamp Handle
16	ST20-COMZ16 - 50	50	75	ST20-COMZ16 - 65	65	90	20	43	9CMD5 d1=ϕ5	9CMT4 2 pcs	M1840	T-6
16.5	-COMZ16.5- 50			-COMZ16.5- 65								
17	-COMZ17 - 50			-COMZ17 - 65								
17.5	-COMZ17.5- 50			-COMZ17.5- 65								
18	-COMZ18 - 55	55	80	-COMZ18 - 75	75	100					M1845	
18.5	-COMZ18.5- 55			-COMZ18.5- 75								
19	-COMZ19 - 55			-COMZ19 - 75								
19.5	-COMZ19.5- 60	60	85	-COMZ19.5- 80	80	105						
20	-COMZ20 - 60			-COMZ20 - 80								
20.5	-COMZ20.5- 60			-COMZ20.5- 80								
21	ST25-COMZ21 - 60	60	85	ST25-COMZ21 - 80	80	105	25	53	9CMD6 d1=ϕ6	9CMT6 2 pcs	M2560	T-8
21.5	-COMZ21.5- 60			-COMZ21.5- 80								
22	-COMZ22 - 65	65	90	-COMZ22 - 85	85	110						
22.5	-COMZ22.5- 65			-COMZ22.5- 85								
23	-COMZ23 - 70	70	95	-COMZ23 - 90	90	115						
23.5	-COMZ23.5- 70			-COMZ23.5- 90								
24	-COMZ24 - 70			-COMZ24 - 90								
24.5	-COMZ24.5- 70			-COMZ24.5- 90								
25	-COMZ25 - 75	75	100	-COMZ25 -100	100	125						
25.5	-COMZ25.5- 75			-COMZ25.5-100								
26	-COMZ26 - 75			-COMZ26 -100								
26.5	ST32-COMZ26.5-80N	80	105	ST32-COMZ26.5-110N	110	135	32	58				
27	-COMZ27 - 80			-COMZ27 -110					9CMD8 d1=ϕ8	9CMT7 2 pcs	M3070	T-10
27.5	-COMZ27.5- 80			-COMZ27.5-110								
28	-COMZ28 - 80			-COMZ28 -110								
28.5	-COMZ28.5- 90	90	115	-COMZ28.5-120	120	145						
29	-COMZ29 - 90			-COMZ29 -120								
29.5	-COMZ29.5- 90			-COMZ29.5-120								
30	-COMZ30 - 90			-COMZ30 -120								
30.5	-COMZ30.5- 90			-COMZ30.5-120								
31	-COMZ31 - 90			-COMZ31 -120								
31.5	-COMZ31.5- 90			-COMZ31.5-120								
32	-COMZ32 - 90			-COMZ32 -120								
32.5	-COMZ32.5- 90			-COMZ32.5-120								
33	-COMZ33 - 90			-COMZ33 -120								
33.5	-COMZ33.5- 90			-COMZ33.5-120								
34	-COMZ34 - 90			-COMZ34 -120								
34.5	-COMZ34.5- 90			-COMZ34.5-120								
35	-COMZ35 - 90			-COMZ35 -120								
36	-COMZ36 -100	100	125	-COMZ36 -140	125	125			9CMD10 d1=ϕ10	9CMT9 2 pcs	M4090	T-15
37	-COMZ37 -100			-COMZ37 -140								
38	-COMZ38 -100			-COMZ38 -140								

★**Two Pilot Drills, a pair of insert tips and Insert Clamp Handle are supplied as standard.**
★Please refer ☞**P.48** for Centre Through Side Lock Holder,☞**P.48** for Flange Through Side Lock Holder and ☞**P.115** for Oil Hole Holder for **COMBAT Z Drill** at M/C use.

COMBAT Z DRILL

Cost down can be achieved by improvement of drilling operation.

NIKKEN

φ39～φ49　L／D=2, 3 or 4

Drill Dia.	2D Series Code No. φd -φD -ℓ	ℓ	ℓ1	3D Series Code No. φd -φD -ℓ	ℓ	ℓ1	4D Series Code No. φd -φD -ℓ	ℓ	ℓ1	2D,3D,4D φd	ℓ2	Pilot Drill	Insert Tip	Clamp Screw	Tip Clamp Handle
39	ST32-COMZ39- 80	80	105	ST32-COMZ39-120	120	145	ST32-COMZ39-160	160	185	32	58	9CMD10 d1=φ10	9CMT9 (2 pcs)	M4090	T-15
40	-COMZ40- 80			-COMZ40-120			-COMZ40-160								
41	-COMZ41- 80			-COMZ41-120			-COMZ41-160								
42	-COMZ42- 80			-COMZ42-120			-COMZ42-160								
43	-COMZ43- 80			-COMZ43-120			-COMZ43-160						9CMT6 (4 pcs)	M2560	T-8
44	-COMZ44- 80			-COMZ44-120			-COMZ44-160								
45	-COMZ45- 80			-COMZ45-120			-COMZ45-160								
46	-COMZ46- 80			-COMZ46-120			-COMZ46-160								
47	-COMZ47- 80			-COMZ47-120			-COMZ47-160								
48	-COMZ48- 80			-COMZ48-120			-COMZ48-160								
49	-COMZ49- 80			-COMZ49-120			-COMZ49-160								

Dimensions ofφ43mm or larger COMBAT Z DRILL

4 insert tips are installed on the drill larger thanφ43mm for less cutting resistance.

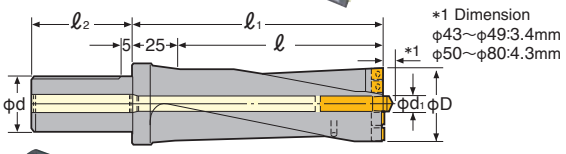

Photo. shows ST25-COMZ21-130

The extended drill longer than L/D=5 or with chamfering tool are available as an option.
Minimum. order quantity of special drill is 2 off.

φ50～φ80　L／D=2

Drill Dia.	2D Series Code No. φd -φD -ℓ	ℓ	ℓ1	φd	ℓ2	Pilot Drill	Insert Tip	Clamp Screw	Tip Clamp Handle
50	ST32-COMZ50-100	100	125	32	58	9CMD12 d1=φ12	9CMT6 (4 pcs)	M2560	T-8
51	-COMZ51-100								
52	-COMZ52-100								
53	-COMZ53-100								
54	-COMZ54-100								
55	-COMZ55-100								
56	-COMZ56-110	110	135				9CMT7 (4 pcs)	M3070	T-10
57	-COMZ57-110								
58	-COMZ58-110								
59	-COMZ59-110								
60	ST40-COMZ60-120	120	145	40	68	9CMD12 d1=φ12	9CMT7 (4 pcs)	M3070	T-10
65	-COMZ65-120								
70	-COMZ70-130	130	155				9CMT9 (4 pcs)	M4090	T-15
75	-COMZ75-130								
80	-COMZ80-150	150	175						

★**Two Pilot Drills, a pair of insert tips and Insert Clamp Handle are supplied as standard.**
★Please refer ☞**P.48** for Centre Through Side Lock Holder,☞**P.48** for Flange Through Side Lock Holder and ☞**P.121** for Oil Hole Holder for **COMBAT Z Drill** on M/C.

Insert Tip for COMBAT Z DRILL

Code No.	Insert Tip Dimensions	φD	T	φd	Nose Radius	ISO Code No.	Grade	Material	Applicable Drill
9CMT4		4.76	1.98	1.9	0.4	MPMT04T104	Coated (PR1725)	Steel Cast Iron	COMZ16～20.5
9CMT6		6.35	2.38	2.8		MPMT060204			COMZ21～26 COMZ43～55
9CMT7		7.94	3.18	3.4	0.8	MPMT070308			COMZ26.5～35 COMZ56～65
9CMT9		9.525		4.4		MPMT090308			COMZ36～42 COMZ66～80

★**The Rhomboid insert tips are installed on the drill. Total 4 corners at 2 external and 2 internal diameters can be used. Please pay attention to install the insert into the pockets correctly.**
★The spare Insert Tips are available per a box(10 off).

COMBAT Z DRILL Economical Cutting Condition

- For Steel/Cast Iron
  "40,000" is the basic figure for cutting speed, and the rotation speed could be obtained by dividing above figure by the drill diameter.
  e.g. forφ32mm diameter drill:40,000÷32=1,250(r/min)
- For Stainless Steel/Steel Plate SS41
  "25,000" is the basic figure for cutting speed, and the rotation speed could be obtained by dividing above figure by the drill diameter.
  e.g. forφ32mm diameter drill:25,000÷32= 780(r/min)
- Feed Rate

Drill Dia	φ16～φ26	φ26.5～φ42	φ43～φ85
Mild Steel　Feed per rev.	0.1～0.15	0.1～0.2	0.15～0.2
Cast Iron　Feed per rev.	0.15～0.2	0.2～0.3	0.2～0.35

⚠

★How to install Insert Tips



★**Coolant pressure more than 0.5MPa must be supplied.**
★For Stainless Steel/Steel Plate, even the cutting speed is reduced to meet with the materials, please do not reduce the feed rate and keep it as for steel.
★For tough materials, e.g. steel plate, please use stepped feed (G73) for breaking the swarf.
★This drill is suitable for offset hole, or inter-merged twin bore, but not suitable for stacked plate drilling.

ZERO-ZERO HOLDER FOR TURNING MACHINE

JAPAN PAT. NIKKEN

LCH40-SZF16S-55

Centre Through

Required for ultra-high precision drilling and ultra precision reaming



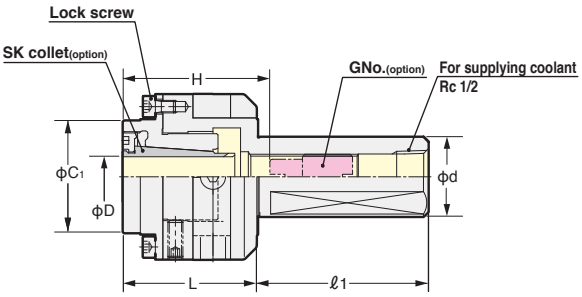

Code No.	D	d	L	ℓ1	H	C	c1	G No. (Option)	Nut (Standard)	SK Collet	Spanner (Option)
LCH32-SZF10S-52	1.75～10	32	52.1	68	50	66	35	SKG-18-SZF10S	SKN-10SB	SK10	SKL-10S-P
LCH40-SZF10S-52		40								SK10-P	
LCH32-SZF10S-52-A		32							SKN-10SB-11L	SK10-A	
LCH40-SZF10S-52-A		40								SK10-AC	
LCH32-SZF16S-55	2.75～16	32	54.3		70		45	SKG-18L	SKN-16SB	SK16	SKL-16S-P
LCH40-SZF16S-55		40								SK16-P	
LCH32-SZF16S-55-A		32							SKN-16SB-9L	SK16-A	
LCH40-SZF16S-55-A		40								SK16-AC	

★Nut is supplied as standard.
★Collet is available as an option. Please refer ☞**P.283, P284**.
★A Type and SK Coolant Collet : Chucking range : h8
★Tightening Spanner **SKL-10S-P, SKL-16S-P** is available as an option.
★Adjustment Wrench **9ZFL** is available as an option.
★Dial Gauge **LCD-Z** is available as an option.
★Test bar is available as an option.
Code.No. is **SZF-TB10-140**、**SZF-TB16-200**

★There is also a **ZERO-ZERO holder** Pro set in which a collet, a tightening spanner and a wrench for swing ajustment are setin the **ZERO-ZERO holder**.

■Pro set with standard collet : **S.LCH32-SZF16S**、**S.LCH40-SZF16S**
■Pro set with coolant collet : **S.LCH32-SZF16SC**、**S.LCH40-SZF16SC**
■Full set with standard collet : **S.LCH32-SZF16S-FZ**、**S.LCH40-SZF16S-FZ**
■Full set with coolant collet : **S.LCH32-SZF16SC-FZ**、**S.LCH40-SZF16SC-FZ**

Run-out adjustment

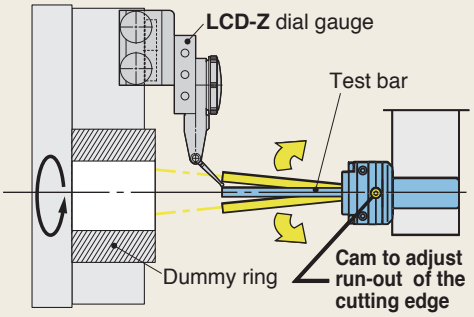

Run-out adjustment range at the tip of 100mm test bar : 0.05mm
(Cam ring indication : Φ 0.1mm)

Misalignment adjustment

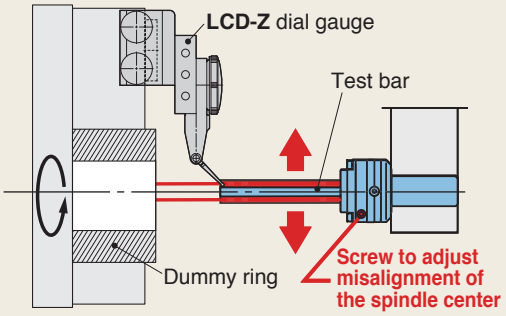

Misalignment adjustment range : 0.5mm/diameter

■ **Better Hole Diameter**
■ **Better Surface Roughness**
■ **Extend Tool Life**

COLLETS FOR ZERO-ZERO HOLDER

SK Collet

Perfect seal, ideal for coolant-thru tools

SK Coolant Collet

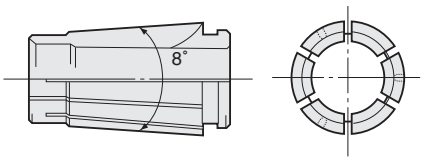

☞**P.283, P284**

Explanation of the Code No.

SK 16 - 6 P

- Non Standard Type
  - P P-class
  - A A-type
  - AC Coolant-thru
- MAX. Chucking Dia.
- Style No.
- SK Collet

HOW TO ADJUST

Required Tools

Adjustment Wrench
9ZFL (Optional)

Tightening Spanner
SKL-10S-P (Optional)
SKL-16S-P (Optional)

Dial Gauge
LCD-Z (Optional)

SK SLEEVE (SLIM CHUCK)

High accuracy Slim Chuck makes it possible to achieve precise hole-making operation.

Centre Through



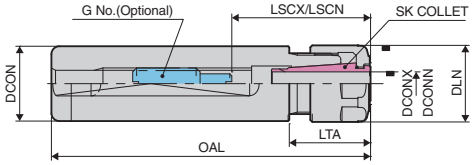

Code.No.	DCON	t	DCONN～DCONX	OAL	LTA	DLN	LSCN～LSCX	G No. (Option)	Weight (kg)	SK Collet	Spanner (Option)
ST 3/4 - SK 6 - 81	19.05	9	0.7～6.0	80.5	20.5	19.5	21～35	SKG-8	0.14	SK6	SKL-6W (SKL-6WS)
ST 3/4 - SK 6 -141				140.5					0.26		
ST 3/4 CM - SK 6 - 97				96.5		19.0			0.17		
ST 20 - SK 6 - 81	20			80.5		19.5			0.14		
ST 20 - SK 6 -141				140.5					0.26		
ST 22 SC - SK 6 - 97	22	10.5 (1 side)		96.5					0.18		
ST 1 - SK10 - 82	25.4	11	1.75～10.0	82.1	22.1	27.5	30～57	SKG-12L	0.23	SK10	SKL-10
ST 1 - SK10 -142				142.1					0.40		
ST 1 CM - SK10 - 97				97.1			30～60		0.30		
ST 25 - SK10 - 82	25			82.1			30～57		0.23		
ST 25 - SK10 -142				142.1					0.40		

★Nut is included.
Collet is not included.

★Please confirm the machine specification. The modification is sometimes required. ＊**CM** is designed exclusively for CITIZEN MACHINERY.
★Tool shank Dia 22mm and 15.875mm are available. (Optional) (Ex.) **S22-SK6-141**
★The above Slim Chuck will be replaced with RC1/8 tapped hole for coolant supply as soon as the stock runs out. ex.): ST3/4CM-SK6-97-RC1/8

FOR SK SLEEVE
SK COLLET

Code No.	Chucking Dia.
SK6 - 0.8	0.7 ～ 0.8
- 1	0.9 ～ 1.0
- 1.25	1.15 ～ 1.25
- 1.5	1.3 ～ 1.5
- 1.75	1.55 ～ 1.75
- 2	1.8 ～ 2.0
- 2.25	2.05 ～ 2.25
- 2.5	2.3 ～ 2.5
- 2.75	2.55 ～ 2.75
- 3	2.8 ～ 3.0
- 3.5	3.0 ～ 3.5
- 4	3.5 ～ 4.0
- 4.5	4.0 ～ 4.5
- 5	4.5 ～ 5.0
- 5.5	5.0 ～ 5.5
- 6	5.5 ～ 6.0

Code No.	Chucking Dia.
SK10- 2	1.75 ～ 2.0
- 2.25	2.0 ～ 2.25
- 2.5	2.25 ～ 2.5
- 2.75	2.5 ～ 2.75
- 3	2.75 ～ 3.0
- 3.5	3.0 ～ 3.5
- 4	3.5 ～ 4.0
- 4.5	4.0 ～ 4.5
- 5	4.5 ～ 5.0
- 5.5	5.0 ～ 5.5
- 6	5.5 ～ 6.0
- 6.5	6.0 ～ 6.5
- 7	6.5 ～ 7.0
- 7.5	7.0 ～ 7.5
- 8	7.5 ～ 8.0
- 8.5	8.0 ～ 8.5
- 9	8.5 ～ 9.0
- 9.5	9.0 ～ 9.5
-10	9.5 ～10.0

Wrench (Optional)
SKL-6W,SKL-10

Small size wrench **"SKL-6WS"** is available when there is some interferences.

MMC SLEEVE (MINI-MINI CHUCK)



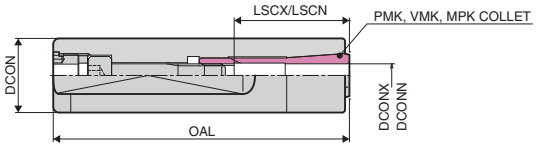

Code.No.	DCON	t	DCONN～DCONX	OAL	LSCN～LSCX	Collet	Spanner (Option)
K 5/8 CM*- MMC4 - 50	15.875	7	1.0～4.0	52.0	16～24	MPK4	Allen Key 4mm
K 3/4 CM*- MMC8 - 80	19.05	9	1.8～8.0	81.5	22～41	PMK8	Allen Key 6mm or EA573KL-6
K 1 CM*- MMC8 -100	25.4	11		101.5			
K 20 CM*- MMC8 -100	20.0	9					
K 22 SC - MMC8 -100	22.0	10.5 (1 side)					
K 25 TG - MMC8C-100	25.0	11.5 (1 side)	2.0～8.0 (1.8～8.0)			VMK8 (PMK8)	

★Collet and Wrench are not included. ＊**CM** is designed exclusively for CITIZEN MACHINERY.

FOR MMC4
MPK COLLET

Code No.
MPK4-1, 1.5, 2, 2.5, 3, 3.5, 4

MPK Collet clamping range: h6

FOR MMC8
PMK VMK COLLET

Code No.
PMK 8-2, 2.2, 2.4,...3,...4,...5,...6,...7,...8 (each 0.2mm)
VMK 8-2, 3, 4, 5, 6, 8, 10

Choosing exactly the same size with tool shank (tolerance h6) is highly recommended.
PMK Collet Clamping Range: 0.2mm
VMK Collet Clamping Range: h6~h8

Clamp / Unclamp from the back side of the tool
EA573KL-6

OIL JETTER SYSTEM for NC LATHE

NIKKEN

The problem of NC lathe process is said to be inner diameter machining.

Solution

Drilling
Boring
Variation in inner diameter dimension

Coolant is not enough for external supply

Trouble frequent due to insufficient supply of coolant



Coolant is not supplied to required area.

NIKKEN OIL JETTER SYSTEM developed for internal rationalization solves this problem.

Boring





Drilling

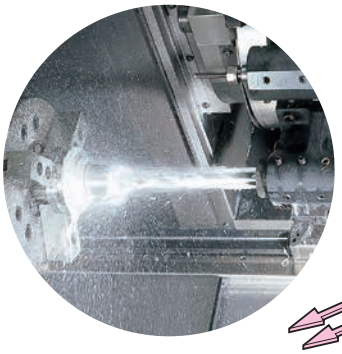

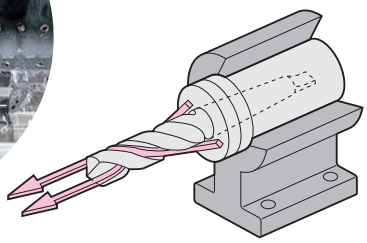

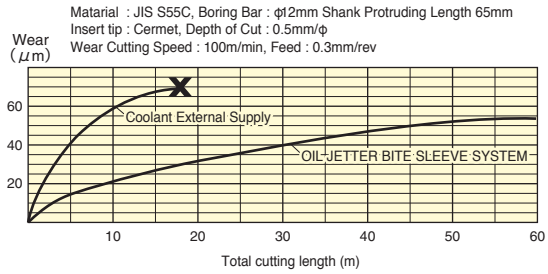

With reliable jetting
▼
Edge Cooling
Chip Discharge
▼
Long Service Life of Cutting Tool Reduction of Setup Time and Setup Times Unattended Operation at Night

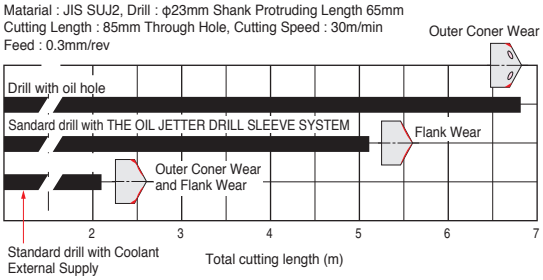

- With external supply, the total cutting length is 17m and wears by 70μm, and the service life is reached.
- In THE OIL JETTER BITE SLEEVE SYSTEM it is possible to continue with wear of 50μm even after cutting 60m.

Oil hole drill is good for life expectancy,
- The outer corner wear and there are many regrinding steps.
- Not suitable for through holes.
- There is a limit to the discharge amount.
- It is expensive.

In contrast, THE OIL JETTER SLEEVE SYSTEM
- Mainly flank are wear, easy to regrinding.
- Suitable for through holes.
- It is proportional to the tank discharge amount and the discharge amount is large.
- It is also possible to use a standard drill.

OIL JETTER SYSTEM for NC LATHE

NIKKEN

Oil Jetter Bite Sleeve (for Commercially Available Boring Bar)

LEA

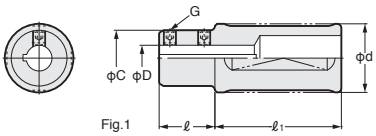

Fig.1

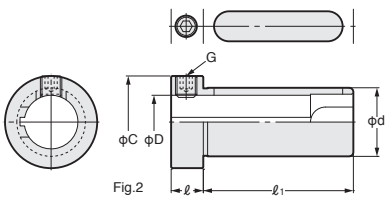

Fig.2

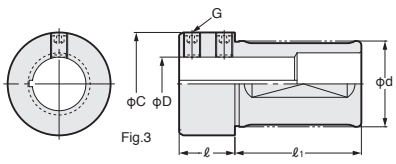

Fig.3

- With powerful coolant discharge groove.
- Excellent coolant effect for boring.
- Always remove chips with strong pressure to protect the cutting edge.

Code No. d- D	C	ℓ	ℓ1	G	Fig
LEA16- 6	15.5	26	70	9SLG5P0.5-5	1
- 8	16			9SLG6P0.75-5	
LEA20- 6	18	26	70	9SLG5P0.5-5	1
- 8	19.5			9SLG6P0.75-6	
-10	19.5			9SLG6P0.75-5	
-12	30	10		9SLG6-8	2
LEA25- 6	20	26	70	9SLG5P0.5-5	1
- 8	22			9SLG6P0.75-6	
-10	22				
-12	24				
-16	24.5			9SLG6P0.75-5	
LEA32- 8	22	26	70	9SLG6P0.75-6	1
-10	24				
-12	26				

Code No. d- D	C	ℓ	ℓ1	G	Fig
LEA32-16	30	26	70	9SLG8P1.0-8	1
-20	31.5				
-25	43	15		9SLG10-10	2
LEA40-10	24	26	70	9SLG6P0.75-6	1
-12	26				
-16	30			9SLG8P1.0-8	
-20	34				
-25	48			9SLG8P1.0-12	3
-32	53	20		9SLG12-12	2
LEA50-12	26	26	75	9SLG6P0.75-6	1
-16	30	30		9SLG8P1.0-8	
-20	34	34			
-25	48	48		9SLG8P1.0-12	
-32	58	58		9SLG10P1.25-10	3

OIL JETTER SLIM CHUCK for NC LATHE

NIKKEN

Oil Jetter SLIM CHUCK

STH-SK

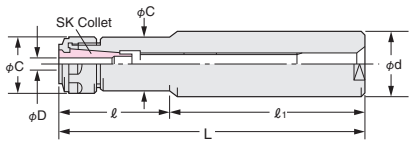

Code No.	D	d	C	ℓ	ℓ1	G(Option)	SK Collet
STH16-SK10-120	1.75~10	16	27.5	50	70	–	SK 10
STH20-SK16-130	2.75~16	20	40	60		SKG-18A	SK 16
STH25-SK16-130		25					
STH32-SK16-120		32		50			
STH40-SK16-120		40		30	90		
STH50-SK16-120		50		45	75		

★Please refer ☞**P.277** for **SK** Collet.

Adjust type Centring Holder & Centering Dial Gauge

LCH-SK

The angle of the flat surface of the shank and the adjusting screw is 45 ° as standard.
For different angles, please contact us separately.





- Adjust any radial direction 0.5mm.
- Adjust misalignment within ±0.01mm between a chuck and a turret head.
- Stable drilling and perfect finishing.
- Improve tool life and promote high precision and unmanned operation.
- Especially, it is essential for carbide and small diameter center drill.

Code No.	D	d	L	C	SK Collet
LCH16-SK10	1.75~10	16	46	27.5	SK 10
LCH20-SK16	2.75~16	20	58	40	SK 16
LCH25-SK16		25			
LCH32-SK16		32			
LCH40-SK16		40			
LCH50-SK16		50			

★Please refer ☞**P.277** for **SK** Collet.

- 6" to 12" chuck is available.
- It is possible to put on lathe chuck jaws and measure directly runout turret head.
- Double Sided Dial Gauge with excellent visibility is attached.

(Magnet mounted)
Easy centering

LCD

★A more robust **LCD-Z** is also available ☞**P.305**

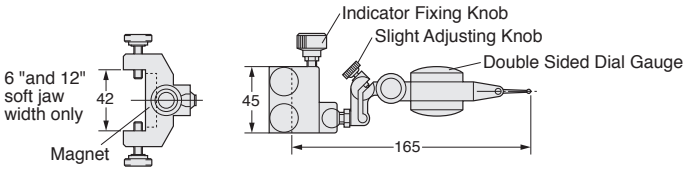

OIL JETTER DRILL SLEEVE for NC LATHE

NIKKEN

- With 4 coolant discharge nozzles along the drill groove.
- Since the nozzle position is variable, it exhibits the coolant effect.
- An expensive oil hole drill is unnecessary and continuous operation is possible.

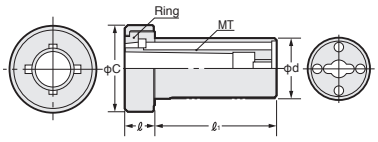

LE-MT

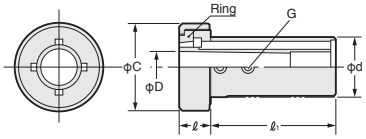

LS

〈For MT Shank Drill〉

Code No.	C	ℓ	ℓ1
LE25-MT1	47	15	44.5
-MT2			57
LE32-MT1	47	15	44.5
-MT2			59
-MT3	56	25	65
LE40-MT1	56	18	41.5
-MT2			56
-MT3		25	65
-MT4	83	48	
LE50-MT1	66	18	75
-MT2			
-MT3		20	70
-MT4	83	38	75

〈For Straight Shank Drill〉

Code No.	C	ℓ	ℓ1	G
LS16-10	47	25	60	M8
LS20-10	47	25	60	M8
-12				
LS25-10	47	15	60	M6
-12				
-16		25		M8
LS32-10	47	15	70	M6
-12				
-16				M8
-20	56	30		M10
LS40-10	56	18	70	M6
-12				M8
-16				
-20				M10
-25		30		
-32	66	35		M12
LS50-10	66	18	75	M6
-12				M8
-16				
-20				M10
-25		20		
-32		35		M12

MT No.	Drill diameter
MT1	φ8.1~φ14
MT2	φ14.1~φ23
MT3	φ23.1~φ32
MT4	φ32.1~φ44

φD	Drill diameter
10	φ8.1~φ10
12	φ10.1~φ13
16	φ13.1~φ14.5
20	φ14.6~φ18.5
25	φ18.6~φ23.5
32	φ23.6~φ32

CNC ROTARY TABLE with AR21 CONTROLLER

NIKKEN

CNC105AR21-04

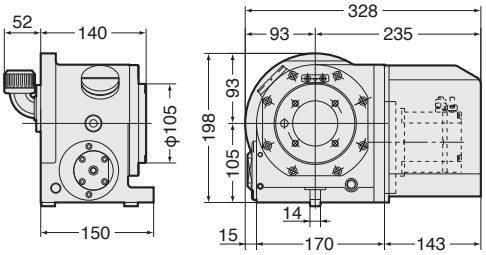

Powerful Clamping Torque : 205Nm



Air purge function is provided.

CNC180AR21-04

CNC180AR21-04 (400W) is standard. **CNC180AR21-08 (750W)** and **CNC180AR21-06 (High Torque)** are available.

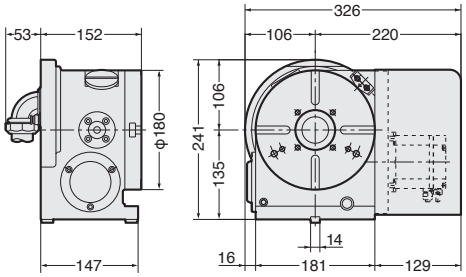

Powerful Clamping Torque : 303Nm



Air purge function is provided.

CNC202AR21-08

CNC202AR21-08 (750W) is standard. **CNC202AR21-06 (High Torque)** is available.

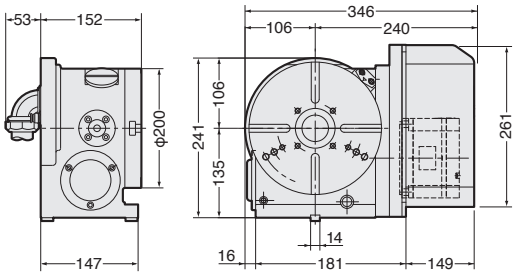

Powerful Clamping Torque : 303Nm



Air purge function is provided.

CNC205AR21-05

NC202AR21-05 (450W) is standard. ★Built-in type rotary joint 6+1 can be mounted.

Rotary joint shown in photo is optional.

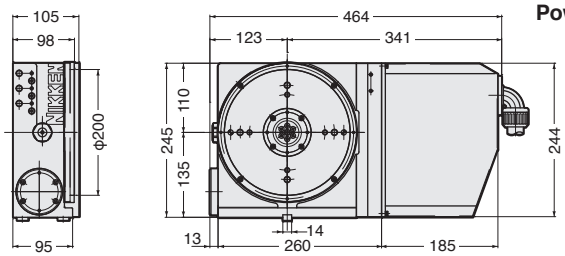

Powerful Clamping Torque : 380Nm



Air purge function is provided.

NCT200AR21-08

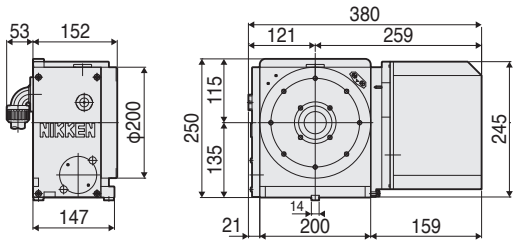

Powerful Clamping Torque : 900Nm



Air purge function is provided.

CNC260AR21-08, 302AR21-08

CNC260, 302AR21-08 (750W) is standard. **CNC260, 302AR21-06 (High Torque)** is available.



CNC260

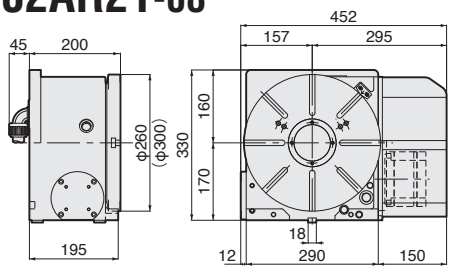

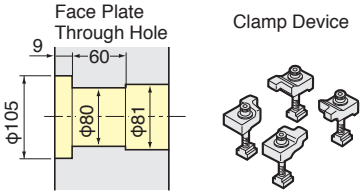

For the rotary table with pneumatic brake, air purge function is provided inside the motor cover as standard.

High seed rotation Z series is available for all models of CNC rotary table. **e.g. CNCZ260AR21**

CNC ROTARY TABLE with AR21 CONTROLLER

NIKKEN

CNC321, 401AR21-18

★Built-in type rotary joint can be mounted.



Rotary joint shown in photo is optional.

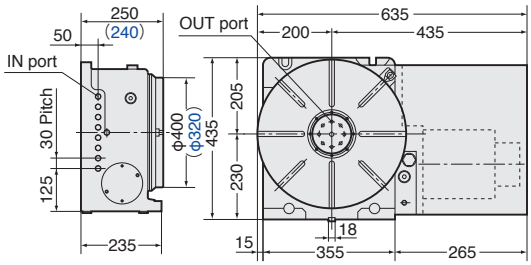





★ Please contact us for the dimension of **CNC321AR21-18**.

CNC501, 601AR21-18

★Built-in type rotary joint can be mounted.



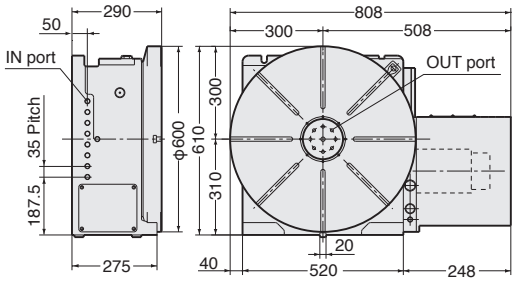





★ Please contact us for the dimension of **CNC501, AR21-18**.

CNC1000, 1200AR21

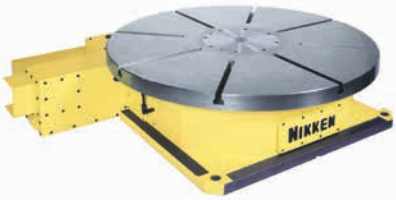

Center socket shown in photo is optional.

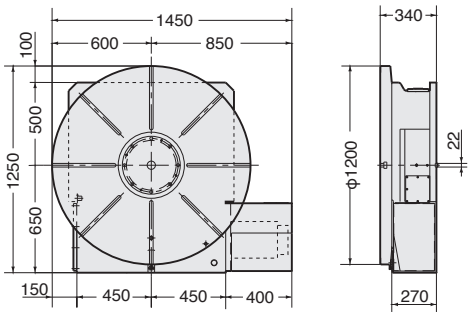

★ Ultra precision of ±3sec. is available as an option. There is no through hole on the rotary table due to the rotary encoder for ultra precision option.

★ Please contact us for the dimension of **CNC1000AR21**.

★ **Code No. will be varied according to the servo motor capacity. e.g CNC1000AR21-44 (4.4KW Motor)**

CNC1201AR21



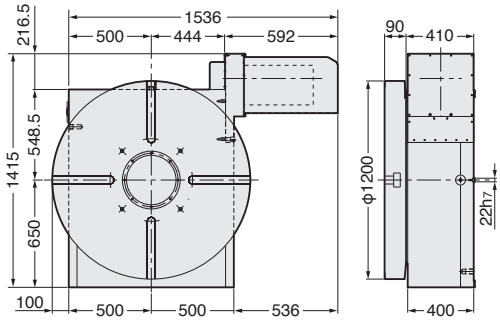

★ Ultra precision of ±3sec. is available as an option. There is no through hole on the rotary table due to the rotary encoder for ultra precision option.

★ Please contact us for the dimension of **CNC1000AR21**.

★ **Code No. will be varied according to the servo motor capacity. e.g CNC1201AR21-44 (4.4KW Motor)**

CNC1600AR21



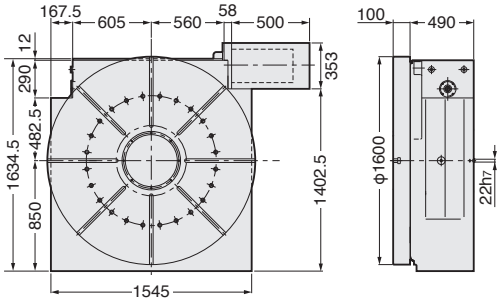

★ Ultra precision of ±3sec. is available as an option. There is no through hole on the rotary table due to the rotary encoder for ultra precision option.

★ Please contact us for the dimension of **CNC2000AR21**.

★ **Code No. will be varied according to the servo motor capacity. e.g CNC1600AR21-44 (4.4KW Motor)**

The specification of the large rotary table will be varied according to your application.

1. With/without T slot, Width of T slot
2. Spindle hole dimension···Center socket for centering is normally installed.
3. Layout of the rotary table···Vertical use, horizontal use, vertical and horizontal use
4. Total reduction ratio···Suitable capacity of the servo motor can be selected.

☞ Please refer to **CNC ROTARY TABLE** Catalogue.

Tilting Rotary Table with AR21 Controller

NIKKEN

5AX-100WAR21







Motor capacity of rotary axis and tilting axis are added at the end of Code No. e.g 5AX-100WAR21-0404

5AX-130WAR21



Photo with φ130mm plate.
Rotary axis cable stays.







Motor capacity of rotary axis and tilting axis are added at the end of Code No. e.g 5AX-130WAR21-0404

5AX-201WAR21

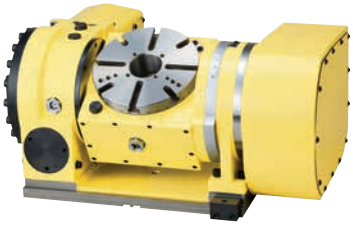







Motor capacity of rotary axis and tilting axis are added at the end of Code No. e.g 5AX-201WAR21-0408

5AX-250WAR21







Motor capacity of rotary axis and tilting axis are added at the end of Code No. e.g 5AX-250WAR21-1313

5AX-350WAR21







Motor capacity of rotary axis and tilting axis are added at the end of Code No. e.g 5AX-350WAR21-1318

☞ Please refer to **CNC ROTARY TABLE** Catalogue.

CNC ROTARY TABLE with AR21 CONTROLLER

NIKKEN

Minimum Command Increment: 0.001° or 1sec.

AR21 controller can drive all models of NIKKEN CNC rotary table.

Single M signal provides Various Automatic Operation.

Any unequal dividing, equal dividing, arc cutting, lead cutting etc. can be done very easily.

USB interface as standard equipment

By connecting to a PC, program data and parameters can be input and output. (However, communication software is required on the PC side.)

Upgrade of Water Proof Characteristic EMC Assessment

The direct out type connection is applied for all models of CNC rotary table, and the EMC assessment is satisfied as the total system.

Digital Servo System & Absolute Encoder

Very excellent acceleration/deceleration characteristics, the powered up torque and the best suited servo parameter realize the high quality and long life.

M ZRN after Power ON or after releasing the emergency stop condition is not necessary.*

Plenty of Optional Functions

True Closed Loop, Manual Pulse Generator, M Function (Input: 5/ Output: 5), External N Number Search, External Position Display, External Power ON/OFF, Pitch Error Compensation

More than 30,000 sets working in the field.

This fact ensures the highest reliability.

Product compatible with ROHS2-10 commands

The AR21 controller is now ROHS2-10 compliant and has the product code AR21, which can be shipped to EU member countries.

* : The operation to establish the coordinate system is required at once, when turning the POWER ON at first time just after connecting the cable.

AR21 controller
- Standard (400W, 750W)
  300×280×285 10kg
- **Single Phase AC200/220V**

AR21 PW controller
- Power up (1.3KW, 1.8KW)
  540×360×400 28kg
- **3 phase AC200/220V**

AR21 controller for larger capacity
- (4.4KW) is available.
- **3 phase AC200/220V**

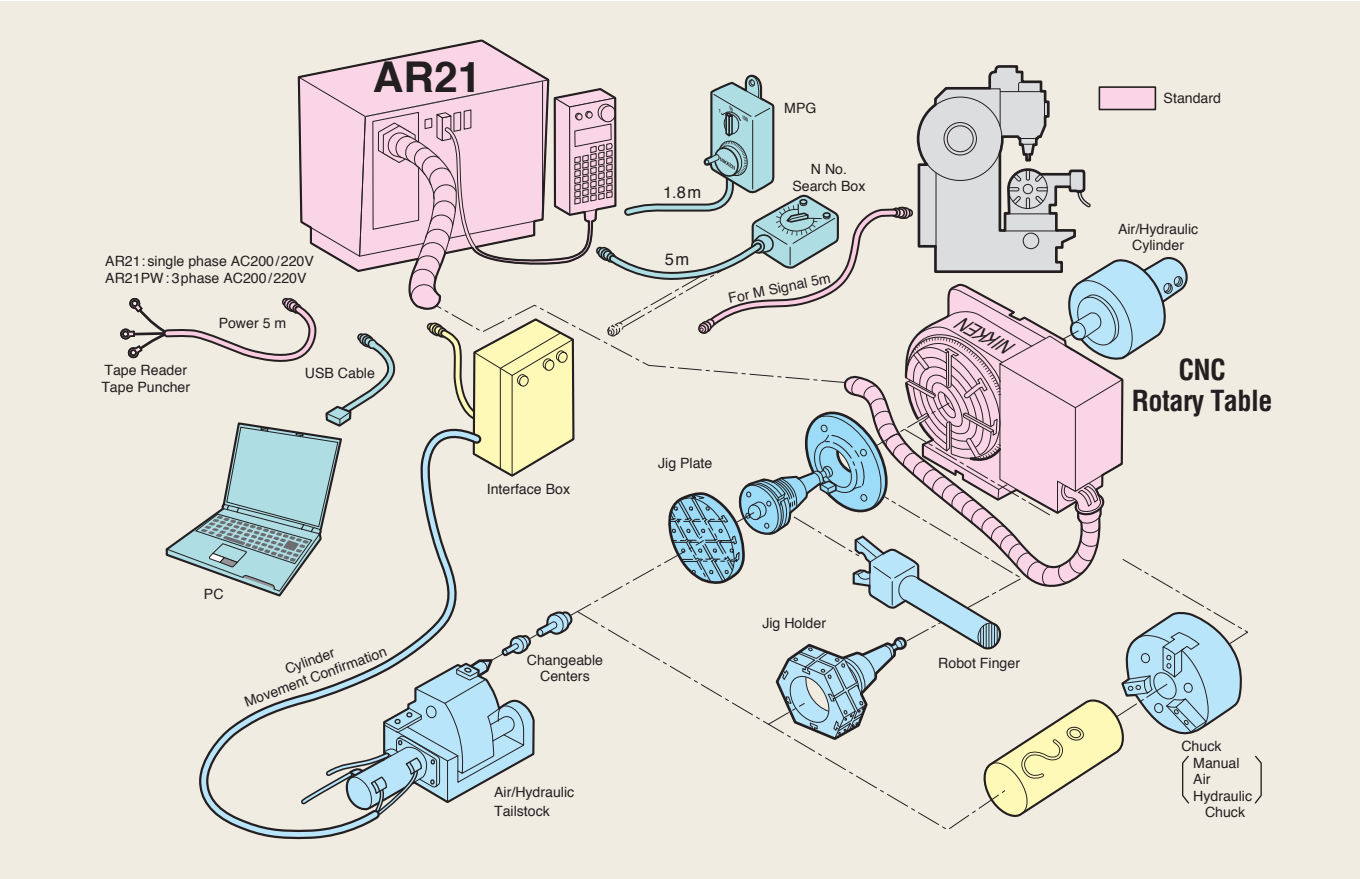

PULL STUD

NIKKEN

PS

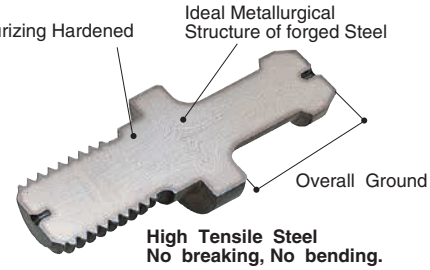

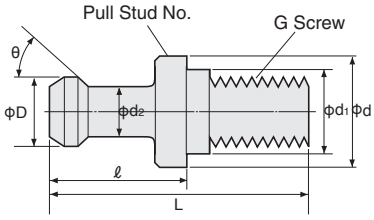

●PULL STUDS of new standard are also available.

Pulling Force Measuring Tool

Transducer size
W X H X D = 100 X 140 X 200

We would strongly recommend that a regular check on the pulling force of your M/C should be carried out to identify any problems at early stage. **The NIKKEN Pulling Force Measuring Tool - CLP** comes complete with 5m cable and the pulling force of your machine can be measured with the **CLP** using either a manual tool change or A.T.C.

Pull Stud No.	D	d	d_1	d_2	L	ℓ	G	θ°	Type		Remarks
PS- 1	15	23	17	10	60	35	M16	45°	BT40 MAS-1 Standard Type		MAS P40T-1
- 2								60°	BT40 MAS-2 Standard Type		MAS P40T-2
- 3	19	31	21	14	70	40	M20	45°	BT45 MAS-1 Standard Type		MAS P45T-1
- 4								60°	BT45 MAS-2 Standard Type		MAS P45T-2
- 5	23	38	25	17	85	45	M24	45°	BT50 MAS-1 Standard Type		MAS P50T-1
- 6								60°	BT50 MAS-2 Standard Type		MAS P50T-2
-16	11	16.5	12.5	7	43	23	M12	45°	BT30 MAS-1 Standard Type		MAS P30T-1
-17								60°	BT30 MAS-2 Standard Type		MAS P30T-2
-18	13	20		8.5	48	28		45°	BT35 MAS-1 Standard Type		MAS P35T-1
-19								60°	BT35 MAS-2 Standard Type		MAS P35T-2
-5F	23	38	25	17	85	45	M24	45°	BT50 MAS-1		PS-5 Top face ground
-6F								60°	BT50 MAS-2		PS-6 Top face ground
-50					110	70		45°	BT50		
-53			26.187		85.2	45.2	1-8UNC		CAT50U		
-63			26		82.5	45	1-8UNC	60°	CAT50U		
-70	19	23	17	14	60	35	M16	45°	BT40		
-72	15		16.281	10	57.15	32.15	5/8-11UNC		CAT40U		
-O	23	38	25	17	85	45	M24	90°	BT50-90° Type		
-O8-1	15	23	17	10	60	35	M16		BT40-90° Type		
-P	24	36	25	18	71	31	M24		BT50	MITSUI SEIKI	
-P5-1	15	23	17	10	50	25	M16		BT40	MITSUI SEIKI	
-P10	11	16	12.5	7	40	20	M12		BT30	MITSUI SEIKI	
-U2	13.7	20	13	8.9	53	28		60°	BT35	MATSUURA	
-G4	23	38	25	17	85	45	M24	90°	BT50	MAZAK	
-G5	15	23	17	10	54.6	29.6	M16		BT40	MAZAK	
-G45	28.956	37	25	20.828	65.2	25.2	M24	45°	BT50	MAZAK Top face ground	PS-G41 W/o hole
-G58	18.796	22	17	12.446	44.1	19.106	M16		BT40	MAZAK Top face ground	PS-G51 W/o hole
-G60	18.796	21.8	16.281	12.446	41.256	16.256	5/8-11UNC		CAT40U	OKUMA	
-O19	23	38	—	17	85	45.2	1-8UNC	90°	CAT50U		
-O47-2			25	17	85	45.2	M24		IT50	DMG MORI	
-P13	24	36	—	18	71	31	1-8UNC		CAT50U	MITSUI SEIKI	
-H30	15	23	16.281	10	57.2	32.2	5/8-11UNC	45°	CAT40U	DMG MORI	
-B1	22	38	25	16	112	72	M24	60°	BT50	OKUMA	
-809	28			21	74	34		75°	BT50	Top face ground	JIS-B6339-89
-805	19	23	17	14	54	29	M16		BT40	Top face ground	JIS-B6339-89
-801	12	16.5	12.5	8	43	23.4	M12		BT30	Top face ground	JIS-B6339-89
-J	14	20	13		45	23		90°	BT35	KITAMURA	
-M10	14	16	12.5	10	40	22		45°	CAT30S	MAKINO SEIKI	
-R3	10	18	13	7	43	25			BT35	ROKU-ROKU	
-C	21	39	25	15	105.1	63.1	M24		BT50	HITACHI SEIKO	
-301	15	23	17	11	60	35	M16	60°	BT40	TSUGAMI	
-Q3	16	16.5	12.5	12.5	31.8	11.8	M12	45°	BT30	OKADA	
-BR*1	7	10	6.5	4	28	17	M 6	45°	BT15	BROTHER	
-81	12	16.5	12.5	8	44	24	M12	R4	BT30	CKD	
-581	28	36	25	21	74	34	M24	75°	IT50		DIN69872-B-1988
-302	19	23	17	14	54	26	M16		IT40		DIN69872-A-1988
-366						29			BT40	DMG MORI	
-122	13	17	13	9	44	24	M12		IT30		DIN69872-A-1988
-S27	18.95	22.5	17	12.95	44.25	19.25	M16	45°	BT40	SNK	

★When Pull Stud w/o hole is used on Centre Through Coolant M/C, please use the Pull Stud which Top Face is ground.
★*1 The monoblock style of BT15 Slim Chuck with PS-BR is recommended.

PULL STUD with RPT

e.g. PS-16-RP

PULL STUD with ID

Please add the abbrevation of ID maker on to the PULL STUD No.
e.g. PS-6-IDB

OMRON	V600-D23P53	(φ8×6)	: **—IDM**
	V600-D23P54	(φ12×5)	: **—IDN**
BALLUFF	BIS-C122-04/L	(φ10×4.5)	: **—IDU**
	BIS-C105-05	(φ12×6)	: **—IDB**
JAPAN ID SYSTEM	WDD12B	(φ12×6)	: **—IDQ**

PULL STUD (CENTRE THROUGH COOLANT)

NIKKEN

PS
(Centre Through Coolant)

The specification of the pull stud may be different depending on the machine specification and the machine serial number. Please confirm the specification of your machine and order the proper pull stud.

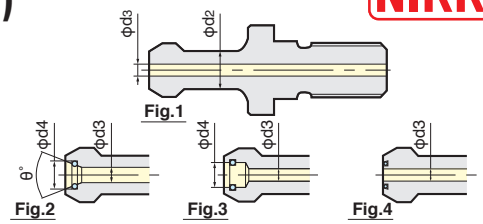

Pull Stud	Specification	Machine Maker	φd3	FIG	Remarks
PS-130E	BT30 MAS-Ⅱ Special **PS-17**	BROTHER, TOYOSK	2.5	1	φd2=7.5
-132	BT30 MAS-Ⅰ Special **PS-16**	FANUC	4	1	φd2=8
-114		DMG MORI	2.5	2	φd4=6.5 θ=30°
-802	BT30 JIS **PS-801**		4	1	PS-801 with hole
-876		MAZAK	2.5	2	φd4=5.5 θ=30°
PS-73*1	BT40 MAS-I **PS-1**		4	1	PS-1 with hole
-371		OKUMA HOWA	3	2	φd4=7 θ=30°
-392		JTEKT	3	3	φd4=7.3
-H28		DMG MORI	3	3	φd4=5
-75*1	BT40 MAS-II **PS-2**		4	1	PS-2 with hole*4
-806-1	BT40 JIS **PS-805**		6	1	PS-805 with φ6 hole*4
-813-1		MAKINO	6	1	AS568-015 with O-ring
-854		YASDA	6	1	φ3 with air hole
-874			6	2	φd4=10 θ=30°
-877		JTEKT	3	3	φd4=7.3
-881		KITAMURA	3	2	φd4=7 θ=30°
-B62-1		OKUMA	4	1	With O-ring S15
-366-D7	BT40 Centre Through	DMG MORI	7	1	
-366E-1			7	2	φd4=10 θ=30° **N29104*3**
-G51	BT40 ANSI **PS-G58**	MAZAK	7	1	PS-G58 with hole **34931900680*2**
-G510			7	3	PS-G51 High pressure **34261910160*2**
-309	IT40 DIN **PS-302**		7	1	DIN 69872-A-1988
-380E	IT40 DIN Centre Through	DMG MORI	7	2	φd4=10 θ=30° **N29106*3**
-A1	IT40 ISO A		7	1	ISO-7388/2-1984A
-A4	IT40 ISO B		7.35	1	ISO-7388/2-1984B
-G52	IT40 ANSI	MAZAK	7	1	**34931900660*2**
-G53	CAT40U ANSI	MAZAK	7	1	**34931900670*2**
-B64-1		OKUMA	4	1	With O-ring S15
-D72			7	1	ANSI/ASME B5,50-1985
-381E	CAT40U Centre Through	DMG MORI	7	2	φd4=10 θ=30° **N29105*3**
PS-5E	BT50 MAS-Ⅰ **PS-5**		6	1	PS-5 with hole
-552		JTEKT	6	3	φd4=10.4
-563		YASDA, KOMATSU NTC	5.5	2	φd4=11.2 θ=60°
-595		DMG MORI	8	2	φd4=11 θ=30° **N29120*3**
-5024		OKUMA HOWA	6	2	φd4=9.5 θ=30°
-B66		OKUMA	6	1	With O-ring P21
-5027		NIDEC OKK	6	4	With O-ring S9 at Face
-5030G		TOSHIBA	4.5	1	With O-ring P21
-M16		MAKINO	6	1	With O-ring P21
-H38-B		DMG MORI	3	4	With O-ring S5 at Face
PS-6E	BT50 MAS-Ⅱ **PS-6**		6	1	PS-6 with hole
-578		JTEKT	6	3	φd4=10.4
-579		YASDA	5.5	2	φd4=11.2 θ=60°
-596		DMG MORI	8	2	φd4=11 θ=30° **N29121*3**
-5016		OKUMA HOWA	6	2	φd4=9.5 θ=30°
-5022G		TOSHIBA	4.5	1	With O-ring P21
-5031		OKK	6	4	With O-ring S9 at Face
-B60		OKUMA	6	1	With O-ring P21
-H39-B		DMG MORI	3	4	With O-ring S5 at Face
-M23		MAKINO	6	1	With O-ring P21
PS-O31	BT50 90° **PS-O**		6	1	PS-O with hole
-O54		OKUMA	6	1	With O-ring P21
-O56		DMG MORI	8	2	φd4=11 θ=30° **N29119*3**
-O67		OKK	6	4	With O-ring S9 at Face
-O72		OKUMA HOWA	6	2	φd4=9.5 θ=30°
-O48-B		DMG MORI	3	4	With O-ring S5 at Face
PS-810	BT50 JIS **PS-809**		10	1	PS-809 with hole
-816-1		MAKINO	6	1	With O-ring P21
-819		JTEKT	6	3	φd4=10.4
-833		YASDA	5.5	2	φd4=11.2 θ=60°
-850		OKUMA	6	1	With O-ring P21
PS-P16	BT50 MITSUI	MITSUI	8	1	PS-P with hole, Top surface ground
PS-G41	BT50 ANSI **PS-G45**	MAZAK	10	4	With O-ring P12 at Face **44831901160*2**
-G63			10	1	PS-G45 with hole, Top surface ground **32551901720*2**
-G410			10	3	PS-G41 High pressure **34341901620*2**
-D92	CAT50U ANSI		11.7	1	ANSI/ASME B5,50-1985
PS-A3	IT50 ISO A		11.5	1	ISO-7388/2-1984A
-A6	IT50 ISO B		11.55	1	ISO-7388/2-1984B
-512	IT50 DIN		11.5	1	DIN 69872-A-1988

★When pull stud without hole is used on the M/C with the centre through coolant, please use the pull stud which fop surface is ground.
★JIS40 type pull stud (φd2=14) is recommended for the machine with the centre through coolant instead of MAS40 type pull stud marked *1(φd2=10).
★ *2 shows the pull stud Code No. of MAZAK. ★The top surface of the pull stud of **Fig.2** is not ground. **★ *3 shows the pull stud Code No. of MORI SEIKI.** ★ *4 φd3=φ7 is also available.

PULL STUDS CODE NO.

NIKKEN

:NC5 Spindle Available

Machine Maker	Machine Model	TAPER	Holder	Code No.
IKEGAI	TV4, 4F, 4L	No.40	BT40	PS-1
	TV-U4, 4LII H4 TH500 THU500	40	40	-805
	TV5, U5 MXseries BX110Pseries BX130Pseries TH600 THU600 AH6, 8	50	50	-5
IWASHITA INDUSTRIAL	IAMseries	No.40	BT40	PS-2
	IAMseries	50	50	-6
EGURO	E-32V E-32VLC	No.30	BT30	PS-16
	REVOLVER-32	30	NC5-46 Special	-837
	E-43V	40	BT40	-805
	APORO4	40	NC5-63	-834-1
ENSHU	S300 SS300 DT CENTERseries JE30S ES400	No.30	BT30	PS-16
	E-130 JE130 JE30S JE30G ES400 EV360, 360T	30	30	-17
	Super400, 450FV VMCseries HMCseries	40	40	-1
	JEseries ES450, 450T EV450, 530S GE460H, 480H	40	40	-2
	JE50	40	NC5-63	-N63AE
	EV650, 600MV VMCseries HMCseries VE65E	50	BT50	-5
	JE80, 80G EV530 GE580, 590H	50	50	-6
OKUMA	MA, MB, MC, MD, MF, MX-Aseries VH-40 VR-40 MP-46V GENOSseries	No.40	BT40	PS-2
	Centre Through(JIS)	40	40	-B62-1
	MX-55VA	40	NC5-63	-N63AE
	MA, MB, MC, MD, MX-B, MCV-A, B, MCR,MU,MFseries MCM-B	50	BT50	-6
	Centre Through	50	50	-B60
OKUMA HOWA	MILLAC Vseries, Hseries MAC TURNseries MM-300 ML-300	No.40	BT40	PS-1
	Centre Through	40	40	-371
	MILLAC VIIseries	40	40	-2
	Centre Through	40	40	-B62-1
	MILLAC Vseries, Hseries VTMseries VMP-10, 16	50	50	-6
	Centre Through	50	50	-5016
	MILLAC VIIseries	50	50	-6
	Centre Through	50	50	-B60
	VTM-65, 100	50	NC5-100	-N100VE
NIDEC OKK	PM300, 350	No.30	BT30	PS-801
	PCV, TRC, VM, AMC, DGM, VP, GC, HM, HP, VCseries PG8 PM400III DV5, V1 VB53 GR400	40	40	-1
	MCV-350, 410/40 PCH-400, 500 HPV400 MPH-400	40	40	-08-1
	VM4, 5 PCV-40II PCV-55 VC8-Jr4, 5 HM 40 HC8-40 PM 400 PG 8	40	NC5-63	-N63VE
	KCV600/800 MCVseries VC8series HM 50, 63 MCH600 HC8-50, 63, 600	45	NC5-85	-N85VE
	MCV, MCH, MHA, KCV, ACM, DCM, VM, HMseries PCV-510, 620 VG5000 GC600 DV5	50	BT50	-0
	PCV50, 55, 60	50	50	-5
	PM500II	50	NC5-100	-N100VE
OHTORI	OSH-54 OSVseries OSU-545 BMVII-85	No.40	BT40	PS-1
	FTV-500, 500HV	40	40	-805
	BMV-40NC(OP), 400NC(OP), 500LNC, 500ANC OSV-139 FTV-1200	50	50	-5
OM	OMC-40HS	No.40	BT40	PS-1
	OMC-50V, 50HS	50	50	-5
	TDC, Omega-M, VTLex-M, Neoαseries	50	50	-6
	Centre Through	50	50	-579
KITAMURA	HX-250G	No.30	BT30	PS-801
	Centre Through	30	30	-802
	Mycenter-3XG, 4XiF, 7X, HX400G, Supercell-400 Mytrunnion-5 JIGcenter-5	No.40	BT40	PS-805
	Centre Through	40	40	-806-1
	Mycenter-4XiF, 7X, HX500i, 630i, 800iL, 1000i, 1250i, BridgeCenter-8F, 10	No.50	BT50	PS-809
	Centre Through	50	50	-810
KIRA	VMC, HMC, Arik, KN, VTCseries PC-30E, 30F, 30H, 30W KPC30a, 30b HPC-30Vb PCV-30, 150	No.30	BT30	PS-16
	Centre Through	30	30	-802
	VTC-30a	30	NC5-46	-N46AE
	KV, Arik, VTC, KNseries PC40G	40	BT40	-1
	Centre Through	40	40	-806-1
KIWA	KCW-5VR	No.30	BT30	PS-16
	Triple-V21i, V41 KNH-426 KH-41, 45 KCW-10V	40	40	-805
	Centre Through	40	40	-806-1
	KH-55	No.50	BT50	PS-809
	Centre Through	50	50	-810
KURASHIKI	KV-500, 500H, 700	No.40	BT40	PS-1
	KVseries KMVseries KBTseries KHseries CMNseries KHM-125 KBM11X	50	50	-5
KOMATSU NTC	N, Zseries	No.30	BT30	PS-16
	TMC, NH, NV, H, N, Z, ZV, ZHseries	40	40	-1
	ZV5400 ZH4000, 5000(Centre Through)	40	40	-371
	TMC, CNC, N, ZVseries	50	50	-5
	ZV5500(Centre Through)	50	50	-563
SHIZUOKA	CM-210G, 350B CM300-A, 300-5A	No.30	BT30	PS-16
	Bseries CM-350 SSR-550 HSR-7, 10	40	40	-08-1
	Bseries SMVseries SG-600	50	50	-0
SHIN NIPPON KOKI (SNK)	SUPER HIGH SPEED MACHINE CMV	No.30	NC5-46	PS-N46
	CMV-50, 70T	40	BT40	-2
	CMV, DC, ESP FSP, HF, HPS, PS, RB, BFRseries PC-55V EXI-70K	50	50	-6
	REBO FLAME MACHINE, RAIL MACHINE	50	NC5-100	-N100VE
JTEKT	PV640J	No.30	BT30	PS-16
	FA, FV, FVN, FXN, JV, PVseries e500H4, UX570	40	40	-1
	FH-40II	40	NC5-63	-N63AE
	FV, FVN, FHN, FXN, PV, BN, FH, FA, RB, SBseries SV-65 e500H5	50	BT50	-5
	DN-1V, 2V, 1H(Centre Through)	50	50	-52
SUGINO MACHINE	Self Centre V15, NSV15, VC15, H15, H15B	No.30	BT30	PS-17
TAKIZAWA	MAC-V1E, 430VP VP10	No.40	BT40	-1
	MAC-V40, 40B Y520	40	40	-805
	MAC-V40, 40B Y520(Centre Through)	40	40	-806-1
	MAC-V40	40	NC5-63	-N63VE
TAKEDA KIKAI	MV, TK-VSseries	No.40	BT40	PS-1
	VSseries	50	50	-6
TSUGAMI	VMA3-III VMC3-III VML3-III VA31H, 32H VA3	No.30	BT30	PS-16
	FMA3-III FMA5-III	40	40	-2
	VMA4-III	40	40	-1
	VMT4-III	40	40	-805

★This table shows the standard Pull Stud Code No. for the newest M/C. Please refer old NIKKEN catalogue for the Pull Stud of the old M/C.
★The Pull Stud Code No. depends on your M/C specification, therefore please check your M/C specification to select the proper Pull Stud.

PULL STUDS CODE NO.

NIKKEN

:NC5 Spindle Available

Machine Maker	Machine Model	TAPER	Holder	Code No.
SHIBAURA	**JRV**400, 450 **NX**76B	No.40	BT40	PS-1
	BMC, BTD, BP, MPC, MPE, MPF, MPH, VMC, BF, BTU, NX, BTH, BSF, BTFseries	50	50	PS-5
	MF-2020 **MP**-2635(5A)	45	NC5-85	PS-N85VE
	NX-76 **MGF**-21130	50	NC5-100	PS-N100VE
	BTD-110R13U	50	NC5-100	PS-831
TOYO SEIKI	**TVT, TVMC, THMC, TTC, DTR**series	No.30	BT30	PS-17
	Centre Through	30	30	-130E
	VT 30SR **TVMC** 301 **THMC** 310 **TVT**310S **TVT**313M1.S, SL **TVT**302M1.S, L	30	NC5-46	-N46AE
	TVT 30SR Special **TVMC** 301 **THMC** 310 **TVT**310S **TVT**302M1.S, L	30	NC5-46	-N46E
	H-44, 45 **THMC**410 **H**-46	40	BT40	-1
NIIGATA	**PN**40, 40A **SPN**40 **EF**40H **EN**series **VN**series **PN**series	No.40	BT40	PS-2
	HNseries **BHN**series **SPN**50, 63 **ULTY**501, 701, 901 **MPN**-80	50	50	-6
	BFN-50, 63	40	NC5-63	-820-1
	SBS-2	40	-63	-358
NISHIDA KIKAI	**HFA**-3 **VFR**-3 **HAS**-3 **HLA**-3 **HLB**-3	No.30	BT30	PS-16
	HDB-3	30	NC5-46	-827
	HKD-3 **HDB**-3	30	-46	-N46E
	VS-4, **HS**-4C, 4M **HT**-4 **HD**-4 **HW**-4 **HLE**-4 **HFA**-4 **HLB**-4	40	BT40	-1
	HDC-4	40	NC5-63	-849
	HFB-4 **HFC**-4 **HDC**-4	40	-63	-N63AE
	HS-5C, 5M, 5D **HP**-5A, 5B **HFA**-5 **HLB**-3	50	BT50	-6
HASEGAWA	**V**3, **V**3-5AX	No.30	NC5-46	PS-N46AE
HAMAI	**FZ**-16, 16L, 16E, 26, 26L **DZ**-16, 16L, 16LA	No.30	BT30	PS-16
	MC-3VA, 3VS, 4VS **EN**-3, 4, 6 **EN**-40 **HN**-40	40	40	-1
	MC-50V, 70V, 80V, 6V, 5VA, 6VA, 8VA **T**-80MH, 180MH	50	50	-5
FANUC	**ROBO DRILL/DRILL/DRILL MATE**series α-T14iA α-T21iD α-T21iE α-T21iF α-D14iA α-D21iA	No.30	BT30	PS-16
	Centre Through	30	30	-132
	α-T14iB α-T14iC α-T21iD α-T21iE α-T21iF	30	NC5-46	-123-AIR
	Centre Through	30	NC5-46	-123E
FUJI SEIKI	**FMC**-3V, 30V5, 35V5	No.40	BT40	PS-2
	Centre Through	40	40	-806-1
	FMC-6V, 6VR, VG, VP, 50HF, 300QT	50	50	-5
	Centre Through	50	50	-526
BROTHER	**TC**-201, 203, 203C, 20A	No.15	No.15	PS-BR
	TC-221, 225, 227, 229, 229N, 22A, 311, 312N, 31A, 321, 323, 324, 324N, 325, 32A, 32B, S2A, S2B, S2C, R2A, 22B, S2D, 32BN, 31B, R2B, S500X1, S700X1	30	30	-17
	Centre Through	30	30	-130E
	TC-22A, 32A, 32B	30	NC5-46	-N46AE
	TC-731, 731S	40	BT40	-1
HEIAN CORPORATION	**REX, ER, NC**series	No.30	BT30	PS-16
	ER, NCseries	35	MAS BT35	PS-19
	NCseries	40	BT40	PS-2
HORKOS	**HFN, HTNC, ES**series **NJ**50 **RS**50H **PM**70H **RM**70 **ES**50H **ES**50V-I	No.30	BT30	PS-16
	HFN, HTNC, RM, DM, HFNseries **NS**70 **MOH**630 **THMC**410 **TM**70H **TG**70H **MBE**	40	40	-1
	HFN-SAM40 **HFN**-SM30H **RS**50H	30	NC5-46	-N46E
	Centre Through	40	BT40	-73
	HFN, HTNCseries **G**50H **C**50H **DM**100H **RM**100H **NM**100 **DM**100H **NM**100	50	50	-5
	Centre Through	50	50	-5E
HOWA	**MMN, MDT, MBN, MSN, MEN, MJN, MZN, MKN**series	No.30	BT30	PS-16
	Centre Through	30	30	-132
	MXN-600-VCJ	30	NC5-46	-N46AE
	MBN, MCN, MHNseries **MCV**-800	40	BT40	-1
	Centre Through	40	40	-73
	MBN-800 **HS**-500	50	50	-5
	Centre Through	50	50	-5E
HONDA ENGINEERING	SPOOL HOLE MACHINE	No.30	NC5-46 Special	PS-N46AE
	H-VS5000	30	NC5-46	-N46AE
	H-VT6000 SHAFT END MACHINE	40	NC5-63	-N63AE
	H-CR462	40	NC5-63 Special	Special
	NN-S **HB**-LB461	50	NC5-100	PS-N100VE
HOMMA	**FM, TAC, STAC, HM, HTM, HGM**series	No.50	BT50	PS-5
MAKINO	a1, **A, V**series **J**55, 88 **D**300, 500, 800Z **BH**50	No.40	BT40	PS-805
	Centre Through	40	40	-813-1
	BNC, FNC, MCseries **SF**64 **A**55, 66, 88 **FB**127series	40	40	-1
	a1, **A, V, GF**series	50	50	-809
	Centre Through	50	50	-816-1
	FDNC, FNC, GF, MC, MCC, MCD, MCFseries **GN**1712-A **a**71, 81 **A**77, 88, 99, 100 **V**77	50	50	-5
MAKINO SEIKI	**MSA**30, 40, 50 **MS**5A, 5B **MSX**30 **PS**1-W **MSJ**25 **MSJX**25 **MSB**58, 512, 516	No.30	BT30	PS-16
	MSA30, 40, 50 **MS**5A, 5B **MSX**30 **MSB**58, 512, 516, S5B	40	40	-1
	MSA30, 40, 50 **MSB**58	40	NC5-63	-N63VE
	Centre Through	40	BT40	-73
MATSUURA	**μMASTER**, 400V-24, **FX**-1	No.30	BT-30	PS-17
	VX-0, -1 **FX**-0, 1G, 2 **LX**-0, 160 **LF**-160 **LV**-500	30	30	-801
	MC, RA, MAM, FXM, FX, H.Max, V.Max, H.Plus, R.Plus, V.Plusseries **Mold Plus**800 **MX**-520 **VX**-1000	40	40	-805
	MC-600VG, 600VDC **RA**-4G **MAM**-500HF	40	NC5-63	-N63AE
	MCseries **RA**series **MAM**series	40	NC5-63	-N63VE
	Centre Through	40	BT40	-806-1
	MC-1000V, 1250 V, 1500V, 2000V **MC**900H, 900HG **H.Plus**series	50	50	-6
	RA-4G(#50) **MC**-1500VG(#50) **MC**-900HG **LX**-1500	50	50	-809
MITSUI SEIKI	**VS, HR, HT, HU**series **VT**3A **VU**50A	No.40	BT40	PS-P5-1
	Vertexseries	40	40	-805
	Centre Through	40	40	-813-E5
	VU, VJ, VS, H, HU, HS, HR, HPTseries	50	50	-P
	Centre Through	50	50	-P16
MITSUBISHI	**V**-360 **M**-V4C, V5C **M**-H4B, H5B **MPA**series **M**-Vseries **M**-Hseries	No.40	BT40	PS-1
	V, M-V, **M**-H, **M**-VS, **MPA, MAF, MVR, MHT, MKH, DH**series	50	50	-6
	Centre Through	50	50	-6E
	MAF	50	NC5-100	-N100VE
MECTRON (MIYANO)	**MSV, MTV**-C, , **MTV**-T, **MTS, TSV**series **MCH**-80	No.30	BT30	PS-17
	MSV, MTV-C, **MTV**-T, **TSV**series	40	40	-2

★This table shows the standard Pull Stud Code No. for the newest M/C. Please refer old NIKKEN catalogue for the Pull Stud of the old M/C.
★The Pull Stud Code No. depends on your M/C specification, therefore please check your M/C specification to select the proper Pull Stud.

PULL STUDS CODE NO.

NIKKEN

:NC5 Spindle Available

Machine Maker	Machine Model	TAPER	Holder	Code No.
DMG MORI SEIKI	**TV**-300, 400 **ACCUMILL**4000 **ULTIMILL** H3000, V3000 **MILLTAP**700 **MAX**3000	No.30	BT30	PS-16
	Centre Through	30	30	-114
	SV, SH, SLV, MV, MH, NV, NMV, NVD, NH, AFM, Dura Vertical, NVX, NHX, VS, NTseries **Super TILT**500 **SVL**5000, 5250	40	40	-O8-1
	Centre Through	40	40	-366E-1
	SV400	40	NC5-63	-N63AE
	SV500 **SH**50 **SH**500	40	NC5-63	-N63VE
	SV, SH, MV, MH, MB, NV, NH, NVX, NHX, VS, NMH, NMV, NTseries	50	BT50	-0
	MV1003	50	NC5-100	-N100VE
	MV65B/50	50	-100	-835
	duo BLOCKseries	No.40	BT40	PS-366
		40	I T40	-302
	duo BLOCKseries Centre Through	40	BT40	-366-D7
		40	I T40	-309
	VKseries **VM**-40, 50 **VS**-40, 50, 60 **VKC**series **VA**series **HG**-400 **HS**series **HK**-630 **HA**series	No.40	BT40	PS-1
	VS-50, 60	40	NC5-63	-N63AE
	Centre Through	40	BT40	-H28
	VS-40, 50, 60, **HG**- 800	45	NC5-85	-N85VE
	VK-45, 55, 65, 85 **VA**series **VG**series **VF**series **VS**-50, 60 **HS**series **HK**-630 **HG**series **HC**series	50	BT50	-0
	HS-630 **HG**-630 **VF**-23 **VK**-85	50	NC5-100	-N100
	Centre Through	50	BT50	-048B
YAMAZAKI MAZAK	**IMPULSE**30 TypeA , B , C **UN**-600V, 600H	No.30	BT30	PS-17
	VTC, V, VQC, AJV, FJV, FH, FF, VARIAXIS, NEXUS, INTEGREX, VCN, HCN, PFH, μseries **ANGULAX**900	40	40	-G58*1
	FF-510, 660	40	NC5-63	-N63AE
	VTC, V, VQC, AJV, FJV, SV, H, FH, MTV, HV, INTEGREX, VORIEX, VARIAXIS, VCN, HCN, VERSATECH, μseries	50	BT50	-G45*1
	H-12, 12N, 15, 20, 25 **V**12, 15, 20 **VQC**-10/15, 20/50	50	50	-G4
YASDA	**YBM, YPC, VPC**series **H**30i **H**40	No.40	BT40	PS-1
	VBMVi40	40	40	-805
	Centre Through	40	40	-854
	YBM, YMCseries	50	50	-5
	Centre Through	50	50	-563
	YBM-700N, **YBM**-120N	50	NC5-100	-N100VE
ROKU-ROKU	**LIBERO RX**series	No.30	BT30	PS-16
	LIBERO RXseries	30	NC5-46	-110
	GIGA LIBERO RXseries	30	NC5-46	-N46E
	KX, MX, LX, GR-655N **VERTIMAC**series **RM**series **GIGA**	40	BT40	-1

★This table shows the standard Pull Stud Code No. for the newest M/C. Please refer old NIKKEN catalogue for the Pull Stud of the old M/C.
★The Pull Stud Code No. depends on your M/C specification, therefore please check your M/C specification to select the proper Pull Stud.
★*1 Please order the pull stud Code No. of MAZAK ☞ P.314

TECHNICAL INFORMATION for STOPPER PIN

NIKKEN

This is typical information (guide line) of the stopper pin only for the Spindle Speeder and Oil Hole Holder.
Be careful that the dimension of the stopper pin for Angular Head is different from this.
Please refer your M/C specification very carefully for more detail.



Fig.1



Fig.2



Machine Maker	Shank	H	E	H2	Fig.
ENSHU	BT30	50	12	4	1
	40	60	12	14	1
	50	82	18	22	1
OKUMA	BT40	65	18	0	2
	50	80	18	0	2
OKUMA HOWA	BT40	65	18	0	2
	50	80	18	11	2
NIDEC OKK	BT40	65	12	16	1
	50	82	18	22	1
KITAMURA	BT40	65	18	0	2
	50	82	18	22	1
KURASHIKI	BT40	60	12	14	1
	50	145	18	0	2
SHIN NIPPON KOKI(SNK)	BT50	82	18	22	1
TOSHIBA	BT40	65	18	0	2
	50	145	24	24	2
JTEKT	BT40	65	18	0	2
	50	80	18	4	2
NIIGATA	BT40	65	18	0	2
	50	80	18	11	2

Machine Maker	Shank	H	E	H2	Fig.
DMG MORI (HITACHI SEIKI)	BT40	60	12	14	1
	50	82	18	22	1
BROTHER	BT30	40	12	12	1
	40	60	12	14	1
KIRA	BT30	55	12	-1	1
FANUC	BT30	55	12	29	1
MAKINO	BT40	65	18	2	2
	50	80	18	5	2
MATSUURA	BT40	60	12	28	1
	50	82	18	22	1
MITSUI SEIKI	BT40	60	12	14	1
	50	82	18	22	1
MITSUBISHI	BT40	65	18	0	2
	50	80	18	27.7	2
DMG MORI	BT40	65	18	4	2
	50	80	18	0	2
YAMAZAKI MAZAK	BT40	65	18	2	2
	50	80	18	0	2
ROKU-ROKU	BT40	65	18	9	2
YASDA	BT40	60	12	14	1
	50	82	18	22	1

TECHNICAL INFORMATION for STOPPER BLOCK

This is the information for the stopper block when **NIKKEN Standard Spindle Speeder, Oil Hole Holder and Angular Head** are used. Please be careful that the pitch between the spindle centre and the centre of the hole of the stopper block varies depending on your M/C specification. When the stopper block has been already installed on your M/C, **please specify the drawing of the spindle flange on your M/C**, when ordering of the Spindle Speeder, Oil Hole Holder and Angular Head etc.

For SPINDLE SPEEDER

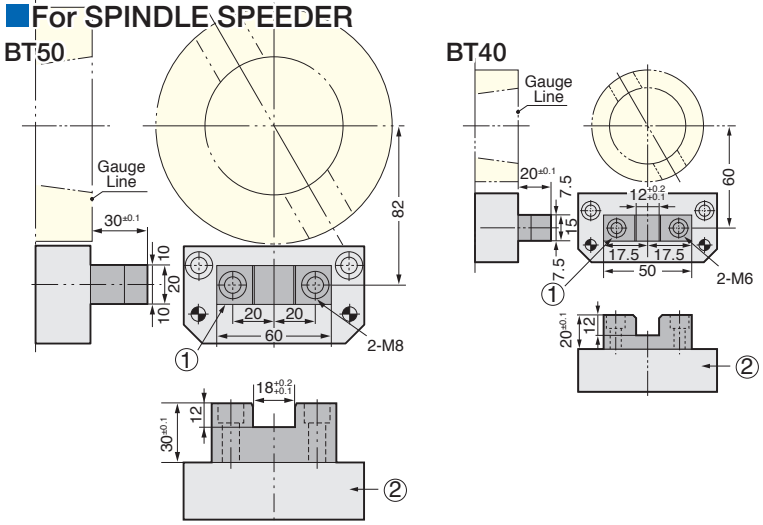

1. Please use **NIKKEN Original Stopper Block for Spindle Speeder** ① and make the **Stopper Block Base** ② by yourself.

   Code No. of Stopper Block
   #40:NX40-STB
   #50:NX50-STB

2. How to make the Stopper Block Base
   - Make the suitable shape to meet with the tapped holes and the dowel pin holes on your M/C.
   - It's not necessary to be heat-treated.

3. The pitch between the spindle centre and the centre of stopper block has to be physically adjusted when the spindle speeder is clamped on the spindle.

For OIL HOLE HOLDER

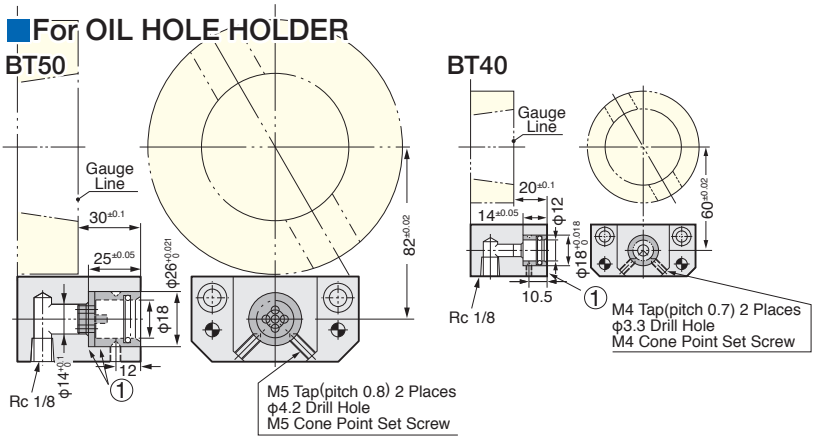

1. Please use **NIKKEN Bushing & Push Pin for the Oil Hole Holder** ① and make the Stopper Block by yourself.

   Code No. of Bushing & Push Pin
   #40:BK40BS-A with O-ring P12
   #50:BK50BS-A & BK50PP-A with O-ring P18

2. How to make the Stopper Block.
   - Make the suitable shape to meet with the tapped holes and the dowel pin holes on your M/C.
   - It's not necessary to be heat-treated.

3. The pitch between the spindle centre and the centre of the hole of stopper block has to be physically adjusted when the oil hole holder is clamped on the spindle.

For ANGULAR HEAD

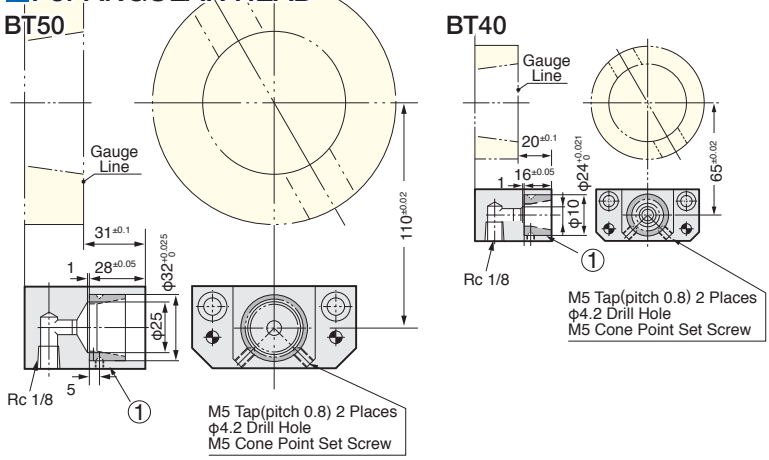

1. Please use **NIKKEN Bushing for the Angular Head** ① and make the Stopper Block by yourself.

   Code No. of Bushing
   #40:AHA-03000-01
   #50:AHA-01000-02

2. How to make the Stopper Block
   - Make the suitable shape to meet with the tapped holes and the dowel pin holes on your M/C.
   - It's not necessary to be heat-treated.

3. The pitch between the spindle centre and the centre of the hole of stopper block has to be physically adjusted when the angular head is clamped on the spindle.

The combination stopper block is also available. Please specify the dimension when ordering.

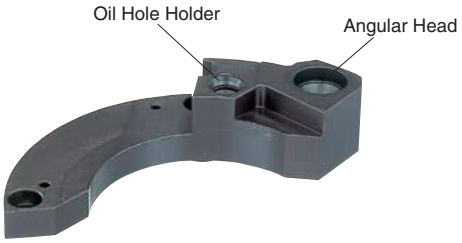



DIMENSIONS of ISO, DIN & MAS BT SHANK

NIKKEN

BT50

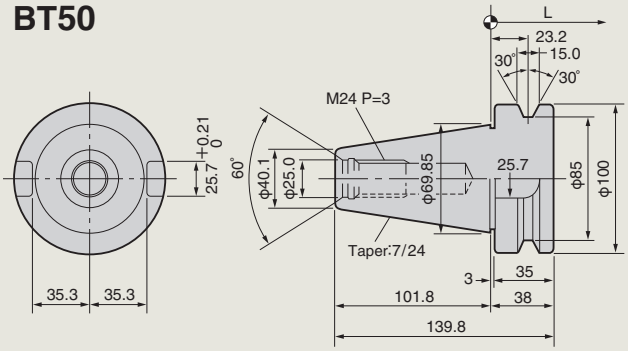

Pull Stud Code No. : PS-5, 6, 0, P, G41, G45, 50, 52

BT45

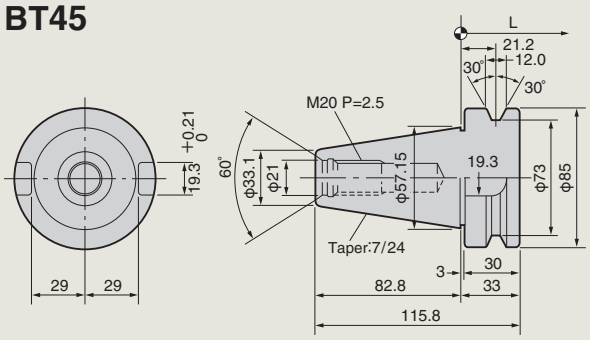

Pull Stud Code No. : PS-3, 4, 02, G1

BT40

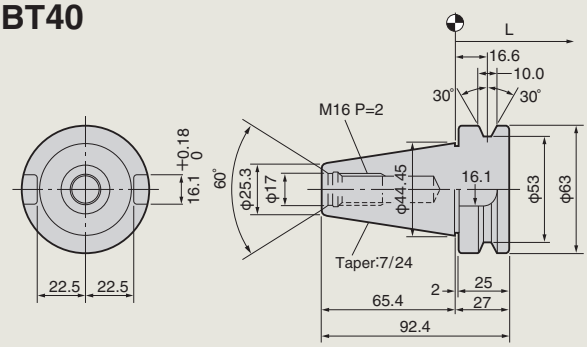

Pull Stud Code No. : PS-1, 2, 08, P5, G51, G58, G5, 301, 302

MAS BT35

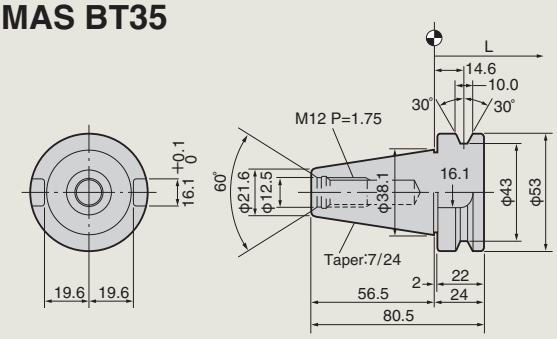

Pull Stud Code No. : PS-18, 19

BT30

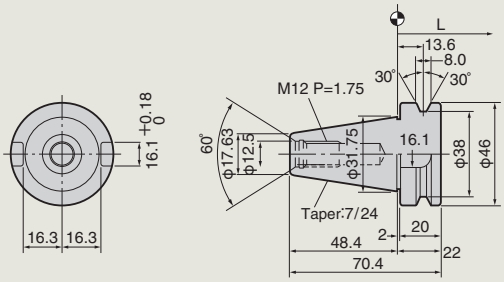

Pull Stud Code No. : PS-16, 17, 81, P10

BT35

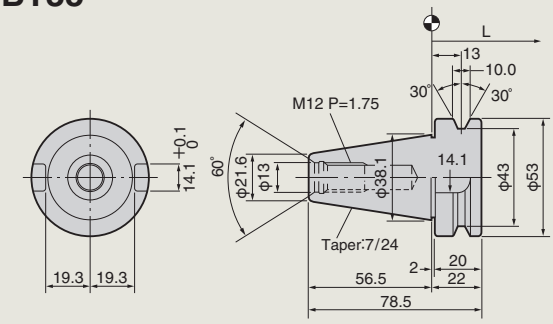

Pull Stud Code No. : PS-U2, J

IT50

ISO7388
DIN69871-'85

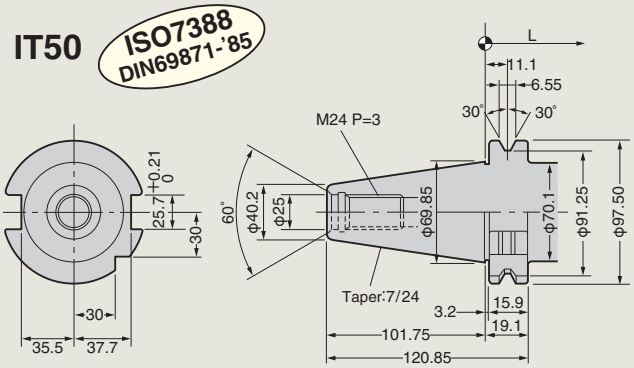

Pull Stud Code No. : PS-A3, A6, 512

IT40

ISO7388
DIN69871-'85

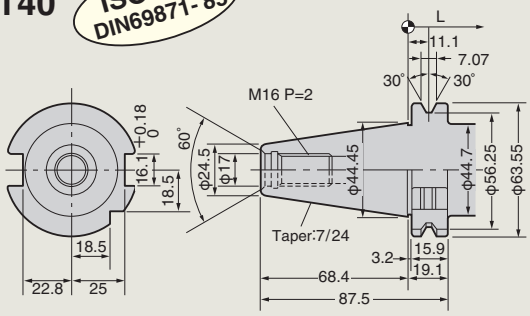

Pull Stud Code No. : PS-A1, A4, 319

☞ For CAT Tooling, please refer to P275

DIMENSION of ISO, DIN & HSK SHANK

NIKKEN

HSK100A

ISO 12164-1

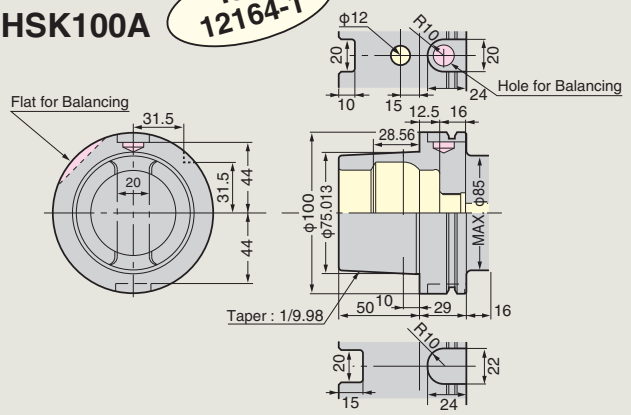

HSK63A

ISO 12164-1

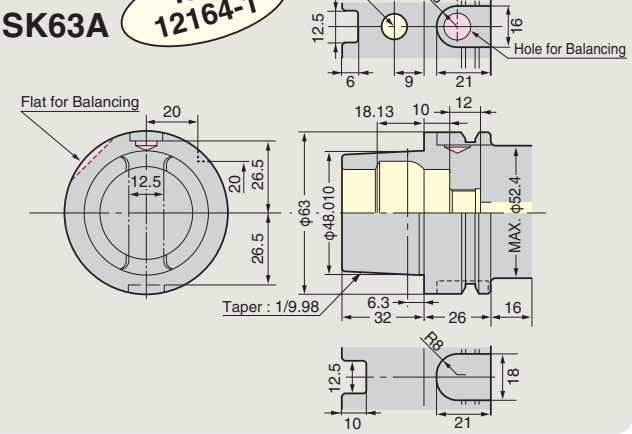

HSK50A

ISO 12164-1

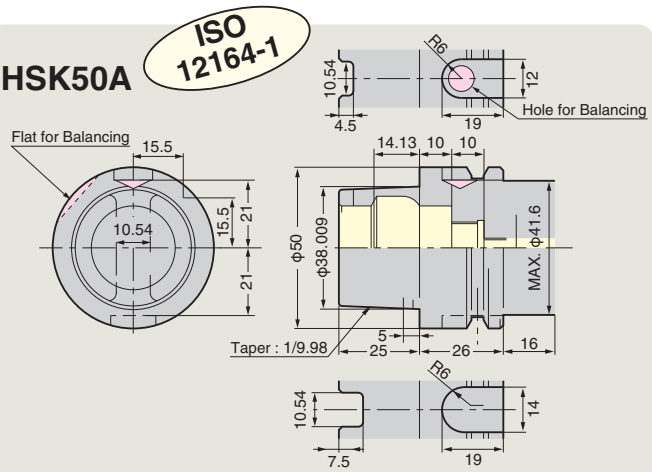

HSK40A

ISO 12164-1

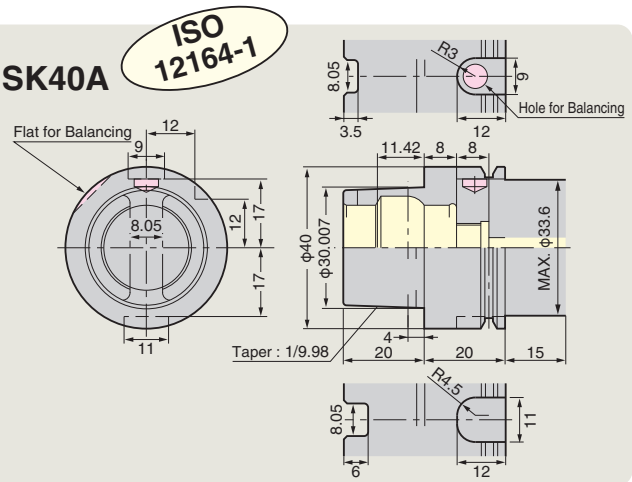

HSK63E

DIN69893-5



HSK50E

DIN69893-5

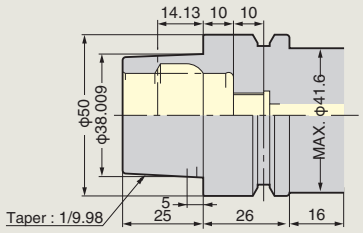

HSK40E

DIN69893-5

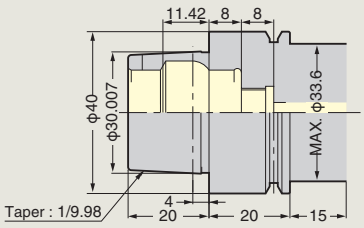

HSK32E

DIN69893-5

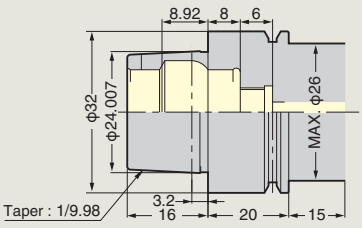

HSK25E

DIN69893-5

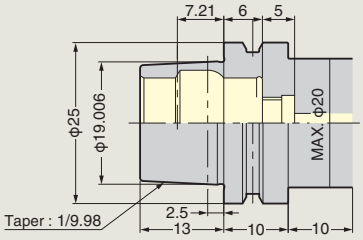

HSK63F

DIN69893-6



NIKKEN HSK Tooling has a hole and a flat for mass balancing as standard. Hole for manual clamp and hole for ID are not standardized.
Special HSK A type which U grooves and drive key slots are synmetric design without V notch is also available. Please contact with us.

HSK ISO Standard “ISO12164”

NIKKEN

■ The **HSK** ISO Standard “ISO12164-1, 2, 3, 4, 5, 6: 2023” was revised in 2023, adding **B**, **D**, **E**, **F** types specified in DIN69893:2003, as well as the **AB** type, etc. The new standard is as follows;
ISO12164-1: The shank side of **HSK-A**, **C**, **AB**, **CB**, and **EB** types.
ISO12164-2: The receiver side of **HSK-A**, **C**, **AB**, **CB**, and **EB** types.
ISO12164-3: The shank side of **HSK-T**, **TA**, and **U** types.
ISO12164-4: The receiver side of **HSK-T**, **TA**, and **U** types.
ISO12164-5: The shank side of **HSK-AS**, **CS**, and **ES** types.
ISO12164-6: The receiver side of **HSK-AS**, **CS**, and **ES** types.

■ The receiver side is unchanged. The main features of the shank side are as follows;

HSK Type	ISO12164 Part	DIN69893 2003	HSK Shank					
			NC/Conventional	Dynamic Balance	Tolerance of Drive Key Width	Taper Size		Restriction under V flange
						Standard	Small	
								
A	1	A	NC	-	Standard	○		Standard
AB	1		NC	YES	Standard	○		Standard
AS	5	B	NC	YES	Standard		○	Standard
C	1	C	Conventional	-	Standard	○		None
CB	1		Conventional	YES	Standard	○		None
CS	5	D	Conventional	YES	Standard		○	None
EB	1	E	NC	YES	None	○		Standard
ES	5	F	NC	YES	None		○	Standard
T	3		NC	-	Precision	○		Special
TA	3		NC	-	Precision	○		Standard
U	3		Conventional	-	Precision	○		None

■ Rotary tool shanks

- The **A/C** type remains unchanged.
- The **AB** type has been added as balance type for the **A** type. This is available as a option.
- The balance type for the conventional **B** type (DIN) has been added as the **AS** type.
- The **E** type (DIN) has been added as the **EB** type.
  The NIKKEN Code No. remains “**E**” (e.g. **HSK63E**).
- The **F** type (DIN) has been added as the **ES** type.
  The Nikken Code No. remains “**F**” (e.g. **HSK50F**).

Example: **HSK63AB**
The shape of the cutout and balance hole will vary depending on the type and size.

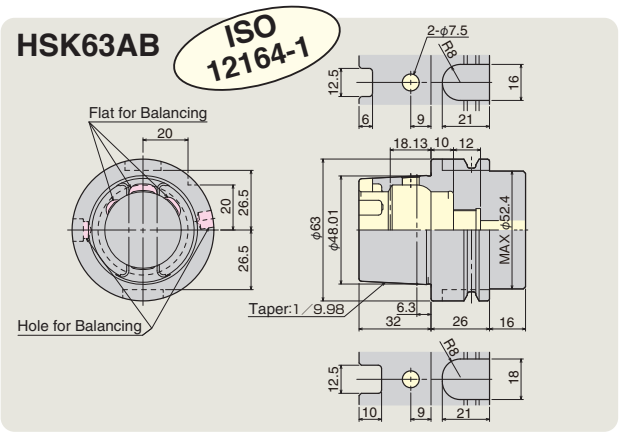

■ Stationary tool shank

The **TA** type has been added as a stationary tool shank with the same restricted dimensions under the flange as the **A** type. The **TA** type differs from the **T** type only in the restricted dimensions under the flange. The NIKKEN Code No. is “**TA**” (e.g. **HSK63TA**).



HSK-TA
Same Limitingdimensions as **HSK-A**



HSK-T
The restricted dimensions under the flange are special (short and thick).

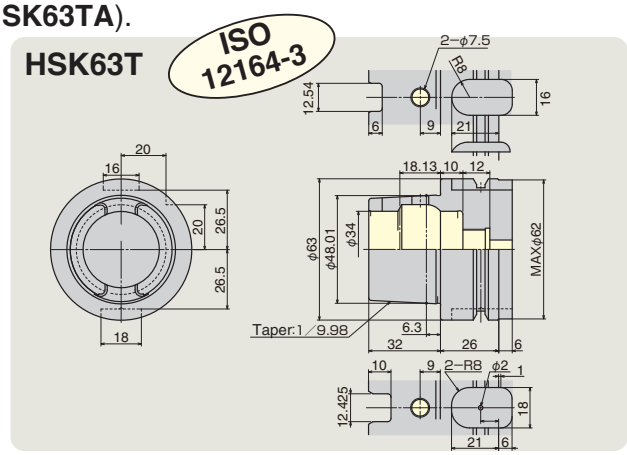

ISO13399 Data Package & Tool Data

NIKKEN

ISO13399

ISO13399 is defined as;
Cutting Item : ISO13399-2
Tool Item : ISO13399-3
Adaptive Item: ISO13399-4

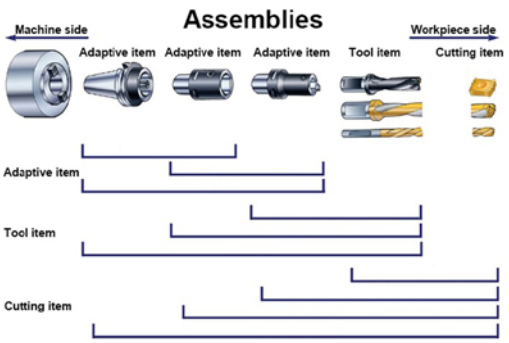

ISO13399 Coordinate System

PCS: Primary Coordinate System
Primary coordinate system - the standard coordinate system for the Item itself

MCS: Mounting Coordinate System
Mounting coordinate system - the standard coordinate system on
the product used for attaching to the **CSW** of the Item on the machine side

CSW: Coordinate System Workpiece side
Coordinate system on the workpiece side - the standard coordinate system on the Adaptive Item or Tool Item used for attaching the Item on the workpiece side

CRP: Cutting Reference Point
Cutting reference point: A reference point that exists on the Tool Item and serves as the starting point for the cutting position

CIP: Coordinate System in Process
Coordinate system in process

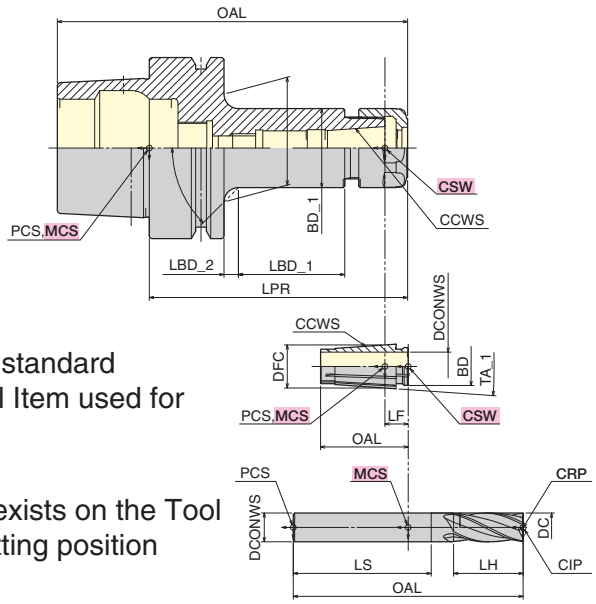

Tool Data

There are GTC packages and ISO13399-90 container files that can be used to supply tool data to CAM, and the data structure is as follows, starting with the P21 file. Nikken tooling data can be viewed and downloaded from the "**ToolsUnited**" database operated by CIMSOURCE.
URL:https://www.toolsunited.com/JP/TuMenu/Index

P21 file: This is a file that contains all the data for the products specified in ISO10303-21, as shown below.

2D drawings: DXF format

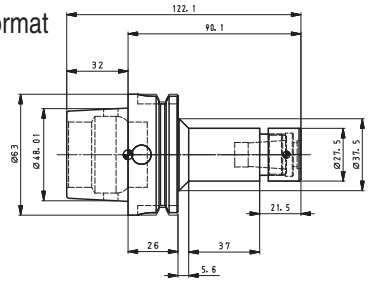

3D drawings: STEP format (BASIC and DETAIL)

BASIC for collision check



DETAIL for tool layout

Illustrations from catalogs, etc.
Photographs

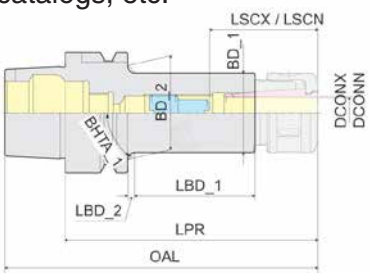

ALPHABETICAL INDEX OF THE PRODUCTS

Explanation of Code No.

e.g. BT40 – C32 – 85

- 85 ● Nominal Gauge Length
- C32 ● Chucking Capacity Depending on Type
- C32 ● Symbol of Chuck
- BT40 ● Shank No.



BT/IT/CAT **BT/IT** standard ☞ **P.319**, **CAT** ☞ **P.269**

Code No. "**MBT□□**" is **3LOCK Toolig** for **BT**. ☞ **P.147**
Code No. "**NBT□□**" is **2LOCK Toolig** for **BT**. ☞ **P.167**
Code No. "**NC5-□□**" is **NC5 Toolig**. ☞ **P.207**

Code No. "**IT□□**" is **IT Toolig**. ☞ **P.129**
Code No. "**MIT□□**" is **3LOCK Toolig** for **IT**. ☞ **P.162**
Code No. "**NIT□□**" is **2LOCK Toolig** for **IT**. ☞ **P.203**
Code No. "**HSK□□**" is **HSK Toolig**. ☞ **P.221**
Code No. "**CAT□□**" is **CAT Toolig**. ☞ **P.268**

When shank No. is **BT□□-**, please search by the symbol of chuck.
e.g. If Codo No. is **BT40-C32-85**, please refer **P.31** searched by **BT-C**.

When shank No. is started except **BT□□-**, please search by the shank No.
e.g. If Codo No. is **HSK63A-C32-115G**, please refer **P.223** searched by **HSK□□-C□□-G**.

FIGURES

A

B

C

D

E

★CNC:Please refer CNC Rotary Table catalogue. ★□□–:Coupling Dia. of Modular Boring Head 9, 12, 16, 20, 26, 34, 42 ★REAMER:Please refer REAMER SERIES catalogue.

★CNC:Please refer CNC Rotary Table catalogue. ★□□-:Coupling Dia. of Modular Boring Head 9, 12, 16, 20, 26, 34, 42 ★REAMER:Please refer REAMER SERIES catalogue.

★CNC:Please refer CNC Rotary Table catalogue. ★□□-:Coupling Dia. of Modular Boring Head 9, 12, 16, 20, 26, 34, 42 ★REAMER:Please refer REAMER SERIES catalogue.

NBT

NIT

MBT

MIT

HSK

NC5

CAT

IT

Code No. of End of Production / Sales

A	
ANQ	ON NON STOP TOOL
AL-M1202	AIR LINE KIT (MANUAL)
AL-M1203BS2	AIR LINE KIT
B	
BT/IT- BCB	MICRO CUT BORING BAR (SOLID type)
BT/IT- BRB	RING type BORING BAR
BS50-□□	MAS Straight Shank TOOL
BT50T-□□	TOOL for TOSHIBA TURNNING CENTRE
BTP50-□□	TOOL for SNK BOTTLE GRIP SHANK
BT/IT- BL□□	BALANCE CUT BORING BAR
BT/IT- LB□□	LB ARBAR for LARGE DIA.
C	
CAT30S-□□	TOOL for MAKINO SEIKI
CBT□□-□□	COMBINATION TOOL
CG	GERMAN COOLANT NOZZLE
BT/IT- CV	CV CHUCK
D	
DAC	DOUBLE CUT BORING ARBOR for LARGE DIA.
DCD-□□	TOOL for HITACHI DRILLING CENTRE
DK□□-□□	DRILL MATRE COLLET
DS□-□□	DS type BORING HEAD
BT/IT- DW□□	DOUBLE ANGLE CHUCK (DRILL MATE CHUCK)
E	
EBA-□□-□□	NATIONAL TAPER BCB BORING BAR
EBK-□□-□□	Straight SHANK BCB BORING BAR
EBM-□□-□□	MORSE TAPER BCB BORING BAR
EBR-□□-□□	CENTURY TAPER BCB BORING BAR
EBT-□□-□□	QUICK CHANGE type BCB BORING BAR
eMAC	DIGITAL BORING HEAD
G	
BT/IT- GSK□□	Old type HIGH SPEED SLIM CHUCK
H	
HA-□□-T□□	FLANGE type QUICK CHANGE HOLDER
BT/IT- HC□□	HYDRAULIC CHUCK
HNA-□□	TOOL for HITACHI (1-8UNC) BOYTTLE GRIP SHANK
HNB-□□	TOOL for HITACHI (1-8UNC) BOYTTLE GRIP SHANK
HNC-□□	TOOL for HITACHI (M24) BOYTTLE GRIP SHANK
HSK□□-GSK□□	HIGH SPEED SLIM CHUCK
HSK□□-NC5-	DREAM CUT HOLDER
HTS-□□-□□	AIR TURBINE SPINDLE TOOL
H□□U(M)-□□	FLANGE type QUICK CHANGE TOOL
I	
BT/IT- IC300-□□	AIR DRIVE ANGULAR HEAD
HSK- IC300-□□	AIR DRIVE ANGULAR HEAD
J	
BT/IT- JB	JIG BORING HEAD
BT/IT- JBD	JIG BORING HEAD
L	
LB	LB ARBOR for LARGE DIA.
L□□-NPU□□	DRILL CHUCK for NC LATHE
M	
MBT□□-GSK□□	HIGH SPEED SLIM CHUCK
MHP□-□□	MASTER BORING HEAD
MC□□-□□	Straight SHANK MILLING CHUCK (OLD Code No.)
MPA-□□	TOOL for MITSUBISHI BOTTLE GRIP SHANK
MTO	MOT SLEEVE for OIL HOLE HOLDER
MM	MULTI TAPPER CHUCK
N	
NC□□-□□	Adjustable Straight SHANK MILLING CHUCK
NC5-□□-GSK□□	HIGH SPEED SLIM CHUCK
ND□□-JTA	Adjustable DRILL CHUCK ARBOR
NEB□□-□□	Adjustable Straight SHANK BCB BORING BAR
NG-□	GERMAN STAND
NBT- NR□□	AIR MOTOR SPINDLE TOOL
NK□□-MT□□	Adjustable MORSE TAPERCOLLET
O	
ON□□	ON NON STOP TOOL
P	
PC□□	Straight SHANK PRO-CUT ENDMILL
BT/IT- PC□□	Straight SHANK PRO-CUT ENDMILL
R	
RH□□-BRB□□	MICRO CUT BORING BAR for LARGE DIA.
RH□□-BRS□□	SQUARE BYTE BORING BAR for LARGE DIA.
S	
BT/IT- SC□□	SC SLIM CHUCK
SC□□-□□	SC SLIM CHUCK COLLET
SKN□	NUT for SLIM CHUCK
SKN-□J	J type NUT for SLIM CHUCK
BT/IT- SKZ□□	SLIM CHUCK for TAP with SQUARE HOLE
SKZ□□-□□	SLIM CHUCK COLLET for TAP with SQUARE HOLE
SQ□□×□□	SQUARE BYTE with MICRO CUT CARTRIDGE
ST□□-SK□□	SLIM CHUCK for SIDE LOCK type A
T	
BT/IT- TA□□	SEMI-AUTOMATIC BORING HEAD
TCL□□	TOOL CLAMPER
TCP	TOOL CLAMPING PRESETTER
TDC-□□	TOOL for FANUC DRILL MATE
BT/IT- T□□	BT SHANK QUICK CHANGE HOLDER
U	
BT/IT- UAR	AUTO REVERSE BFACING HEAD
UCA□□-□□	NATIONAL TAPER ULTRA MILL MILLING CHUCK
UCR□□-□□	CENTYURY TAPER ULTRA MILL MILLING CHUCK
UCT□□-□□	QUICK CHANGE type ULTRA MILL MILLING CHUCK
BT/IT- UC□□	ULTRA MILL MILLING CHUCK
UK□□-□□	ULTRA MILL COLLET
BT/IT- UMS	UNIVERSAL MICRO SENSOR
BT/IT- UP□□	HIGH SPEED BASE CHUCK
UPA	UNIVERSAL BORING HEAD
UPK□□-□□	UPK COLLET for UP BASE CHUCK
W	
BT/IT- WE□□	SIDE LOCK HOLDER (USA)
WASP	ECONOMY type PRESETTER

Ending of the Maintenance Duties of Nikken Controller for CNC Rotary Table

The maintenance duties of Nikken controller had been continued as long as the electric parts/boards could be supplied. But, the electric parts / boards for the controllers described below became impossible. Therefore, the maintenance duties is ended. Please exchange to new CNC rotary table with α 21 controller.

- **Controllers for CNC rotary table** — **ND5000, 8000DC, 8800DC, 9000DC** ····· **Ended at 2005. APR**
- **Controllers for NSV Index table** — **NSV controller (M function/B function)** ····· **Ended at 2005. APR**
- **Controllers for CNC rotary table** — **8800DX, 8800AX** ····· **Ended at 2013. APR**

CAUTION

NIKKEN

Caution for Tooling

- **Please use a NIKKEN collet for the NIKKEN chucks.**
- **Please use a NIKKEN chuck for the NIKKEN collets. may not be performed 100% using on the other makers chucks.**
- Please be careful not to inflict personal injury at your handling of cutting tools.
- Please clean the contact surface on a holder & cutting tool shank.
- Please pay attention to prevent from the rust at the storage. We will recommend to use **NIKKEN TOOLINGS with RP process for rust prevention. Due to the optical system to detect the tool existing on the tool magazine of certain machines, NIKKEN's RP treated tooling may not be detected. Please check your machine's specifications very carefully to avoid this problem before you purchase our RP treated tooling.The taper connection of the tool shank with RP treatment is**



more stuck than the taper connection of the tool shank without RP treatment. Then, the unclamping force for the tool with RP treatment is required 20% stronger than the unclamping force for the tool without RP treatment. Please be careful to check the unclamping force of your M/C, when the tool with RP treatment is chosen.
- Please do not use the tooling that has scratches, damaged or rusted on its taper. This may cause false accuracy readings and reduce cutting performance.
- Please pay attention not to inflict personal injury with the broken tools or swarfs.
- Please do not modify the holders by yourselves.
- Please do not touch the tool at its rotating.
- Please do not touch the tool just after machining, it might be very hot.
- Please check if the cutting tool is held with the holder properly before the machining.
- For high speed application, please use NIKKEN **HIGH SPEED TOOLINGS** or the pre-balanced toolings.

MTA
- Please insert the tool shank into the bore of the holder with adjusting the tang location, and hold them with facing tool front end upwards, and hit the bottom end of the holder(pull stud end) by copper hammer hardly.
- For removal of the tool, insert a bar into tang hole and hit the bar by hammer with special care to prevent the tool from popping out.
- Please clamp side lock screw in case of coolant through application. **For high pressure coolant through application, please use milling chuck, slim chuck or side lock holder instead of MT adapter.**

MTB
- Please insert the tool shank into the bore of the holder and tighten the draw bolt for the setting.
- For removal of the tool, loosen the bolt at couple rotation and hit the bolt head by a hammer in order to remove the taper fitness,then remove the bolt.

SCA, SCC
- When setting of side cutter or metal saw onto the arbor, please adjust the location of the drive key.

JTA
- When setting drill chuck onto the arbor please put the chuck onto the arbor with adjusting the locations of male & female tapers and hit the bottom end of the holder(pull stud end) by copper hammer.
- Please use **NIKKEN SLIM CHUCK** for high precision and high speed operation.

NPU
- Please insert the drill shank into the bottom, and chuck the shank with the total chucking length of **NPU**.
- Please check the run-out accuracy before machining especially for the small diameter drill.
- When setting the drill onto the chuck, set the drill into the chuck and tighten the chuck ring by hand then tighten the ring by attached spanner to complete.



SL, SLA, SLB, SLS, DM
- When setting the tool onto the holder, adjust the locations between notches or flat face of the tool shank and side lock screws, and tighten the screws completly.
- The dimension of the flat portion of the cutter shank varies, therefore please select a proper holder according to the cutter shank dimension.
- Code No. of the side lock holder for oil hole drill is **SL○C. OK25～OK40** collet can be used for **SL○C.**

Type	Cutter	Axitial Adjustment
SL	φ 6～φ16 Drill,Endmill	—
SLA	φ20～φ42 Endmill	○
SLS*	φ 6～φ50 Endmill	—
WE	Inch Size Endmill	—
SLB	Drill Used with **DSA** socket	○

*SLS is the holder for JIS B 4005 endmill or weldon type endmill.

FMA, FMB, FMC, SMA, SMB, SMS
- Please use the bolt specified by the cutter maker.
- When setting the face milling cutter onto the arbor, insert the spigot of the arbor into the cutter bore and minimize the backlash between the drive key and the slot against the direction of rotation, then tighten the end bolt.
- For the cutter with coolant through the body, please check the coolant pass in the arbor and the cutter before machining.
- For high speed application, please perform the balancing operation with the cutter and insert tips fitted.

PS
- The pull stud is considered to consumption item and should be replaced pediodically. The guide line of replace ment is ;
  Without hole : 3 years or 150,000 times of ATC.
  With coolant hole : 2 years or 100,000 times of ATC.



Caution for 3LOCK・2LOCK

- Always ensure that M/C has the mechanism to confirm the perfect flange contact.
- Always ensure that M/C has the mechanism to clean the spindle flange surface.
- Please ensure that the suitable spacer is fitted on the machine spindle flange when the 3LOCK tooling is used on the standard BT/IT/CAT spindle machine. Please do not use the 3LOCK tooling on the standard spindle machine without the suitable thickness of the spacer.

Caution at Use

- Always ensure that swarf should not attach at the spindle flange surface of the double contact system. Generally the inside of the machining envelope is always covered with swarf. This means that there is a possibility that the flange of the tooling may collect swarf easily at the ATC. It is therefore important that the machine envelope is regularly cleaned(Clean the ATC arm, the route through which the tooling passes, the tool pot and the spindle surfaces etc.)at least every 3 months.
- The rust or fine swarf may be fitted on vacant pot inside. So, if ATC mechanism of your M/C is random pot change mechanism(the tool on the spindle is returned to the pot in which the next tool is stored), please insert the dummy tool into all vacant pots to protect this.
- Caution for centre through coolant application

There are 2 types of the sealing method of the coolant at pull stud, sealing of face contact and sealing of taper contact. please choose the proper pull stud for your M/C.
- If your center through coolant M/C does not have the sealing mechanism at pull stud, the coolant stays inside the spindle and is sealed at BT/IT taper connection. tool can not seal the coolant at taper connection, because the taper cone of tool has the slit.Please select tooling instead.

Pulling Force of the M/C

- If the pulling force of machine spindle decreases substantially, the NIKKEN 3LOCK tooling cannot perform 100% at its capability. We would recommend that regular inspection of the pulling force is carried out to prevent any reduction in the pulling force at an early stage. Please refer ☞P.319 for pulling force measurement tool.
- When the pulling force of the M/C became too low, 3LOCK tool can not perform its capability. Please ensure the MIN. pulling force as follows:
  MBT40: 5KN
  MBT50: 15KN

The periodical inspection of the pulling force is required.

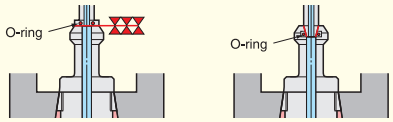

Sealing of Face Contact **Sealing at Taper Contact**

Rust Proof Treatment

- The taper connection of the tool shank with RP treatment is more stuck than the taper connection of the tool shank without RP treatment. Then, the unclamping force for the tool with RP treatment is required 20% stronger than the unclamping force for the tool without RP treatment. Please be careful to check the unclamping force of your M/C, when the tool with RP treatment is chosen.
- Therefore, the taper cone of 3LOCK tool and **NC5** tool is changed to without RPT treatment as standard. And the special anti-rust treatment is applied to the taper cone of the 3LOCK tool and **NC5** tool.

M/C with Flange Trough Tool Coolant

- When the stroke of the coolant nozzle at spindle flange is not sufficient on BT/IT standard M/C, 2LOCK tooling may not be used due to the collision. Please check the specification of your M/C.



Coolant can not be sealed at taper connection for 3LOCK tooling. Please 2LOCK tooling instead.

MULTI LOCK MILLING CHUCK INSTRUCTION MANUAL

NIKKEN

One Point Advice

To tighten the nose ring lightly until to contact with the flange surface of the chuck body is ready to use. If the nose ring is contacted too strongly, it may cause the internal stress higher, and the run-out accuracy may not be accurate.

Solution

Return the nose ring just a little (About 1 to 2 mm at the outer diameter of the nose ring) to tap slightly as illustration at right hand side. This operation releases the internal stress, and the run-out accuracy will be recovered. After that,please tighten the nose ring lightly again until to contact with the flange surface of the chuck body.





① **Wipe all dust and oil from internal bore of chuck, inside and outside of collet, and shank of cutter.Clean minute dust inside slot grooves of collet by air blow. When cleaning please use gloves and safety glasses.**

When the Milling Chuck is cleaned for maintenance reasons the grease inside the nose ring might also be washed off and this may cause burning out of the bearing mechanism.

② After setting End Mill into collet insert them into the chuck.

- Please use End Mill of h7 tolerance shank.
- **Please use End Mill with h6 shank tolerance for high speed machining.**
- **Please make sure that the cutter is held with the chuck at Min. gripping length shown in the list at the right hand side.**
- Protection must be used to grip End Mill teeth.
- Clamp as much of the shank of End Mill as possible.
- Insert Collet into Chuck until the flange of collet touches the surface of the front end, otherwise it can cause a broken End Mill or Collet, even damage to the Chuck itself, if the clamping length of shank is too short.
- Please do not clamp without End Mill.
- **When attaching dettaching the cutting tool, fix the milling chuck to the tool clamper.**

TYPE	SPANNER	TIGHTENING TORQUE (Nm)	TYPE	SPANNER	TIGHTENING TORQUE (Nm)
C12A※1	9HC12A※1	30～35	C32(#30,40)※3	9HC32※3	95～120
C16	9HC16	40～50	C32(#50)	9HC32	110～140
C20	9HC22	60～75	C42	9HC42	120～150
C22	9HC22	65～80	C50	9HC50	130～160
C25※2	9HC25※2	75～90			

*1 **C12A** is new model.
9HC12 has to be used fpr old model **C12**.
*2 **9HC22** has to be used for C25 which nose ring dia=ϕ55mm.
*3 **9HC25** has to be used for C32 which nose ring dia=ϕ64mm.

TYPE	GH HANDLE	TYPE	GH HANDLE
C12G	GH12	C25G	GH25
C16G	GH16	C32G(ϕ62)	GH32S
C20G	GH20	C32G(ϕ68)	GH32

TYPE	Min. Gripping Length (mm)	TYPE	Min. Gripping Length (mm)
C12,C12A	45	C25	65
C16	50	C32	75
C20	55	C42	85
C22	55	C50	85

③ **After lightly tightening by hand, tighten further by NIKKEN spanner until Chuck Ring contacts with the face of Chuck Body.**
A spanner is optional accessory for NC TOOLING, please order separately if necessary.
For High Speed Milling Chucks, please do some operation as above by **GH Handle**.
Wipe all dust and oil from the external of Chuck Ring and the internal of the GH Handle to tighten/loosen surely.

Changable Lever



④ For **IT**(ISO) / **CAT** taper, please be careful to check the dimension "D" with your machine.

The dimension of "D" of some models are greater than the specification of your machine.

⑤ When removing the cutter from the chuck, please make sure that the nose ring is loosened enough to remove the cutter, then loosen completely.

⑥ **NIKKEN all type of milling chucks including standard one can be transfed into Centre Through Jet Coolant types by CCK Collet & CKFN Nut. For direct chucking, CKFN-D nut to fix on the cutter shank can be used. (e.g. CKFN32-32D)**

⑦ When using **CCK32-16,20,25** Collets with **CKFN32T** Front Nut, please set the rear slits of the Collet to the same location of the slots of the Milling Chuck.



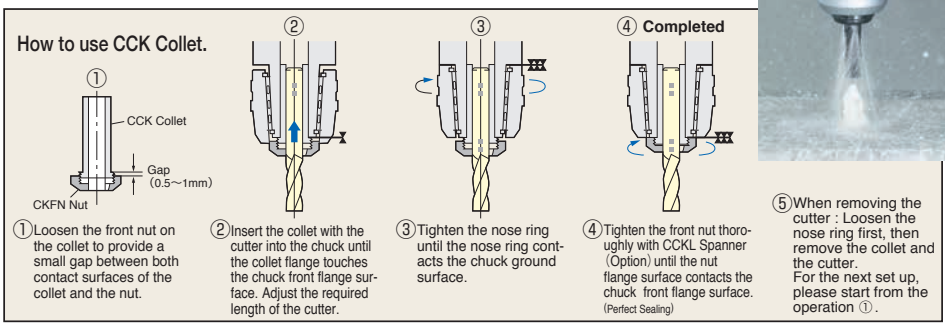

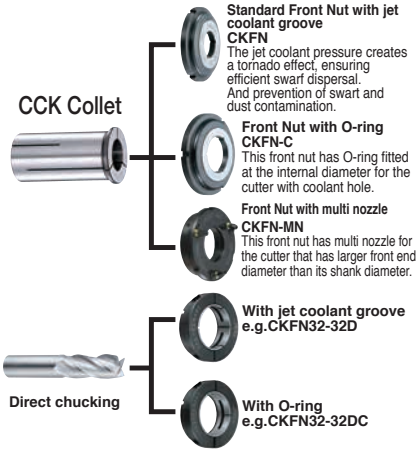

⑧ Centre Through Coolant / Flange Through Coolant type Milling Chuck
- **Can be used, but better improvement can be found with CCK collet & CKFN nut.**
- Direct Chucking
  When a shank of End Mill is longer than ℓ_1, a Stopper is not required. When a shank of End Mill is shorter than ℓ_1, a Stopper must be used.
  A Stopper is optional accessory, please order separately if necessary.

OPTIONAL ACCESSORY "STOPPER"



CHUCK	STOPPER	H1	D	D1	ℓ1	G	B
C20C,C20F	9MC20	42～47	20	15	58	M10	5
C25C,C25F	9MC25	46～55	25	15	61		
C32C,C32F	9MC32	45～60	32	24	67(70)	M16	8
C42 ,C42F	9MC42	50～70	42	24	74	M20	

( ) : **C32F**
How to remove a stopper is ;
- Remove an adjusting bolt by using a hexagon wrench. (B dimension)
- Remove a stopper body by using a bolt. (G dimension)

- **Quatation fee of the repair is always necessary whether repair or not.**

This manual is for basic instruction and information for safety use of our product. Please contact with us for the further details.
Please note that we could not take a responsibility of the accidental damage on our product which is modified the specifications by the customer without our approval.
Specifications are subject to change without notice.

SLIM CHUCK INSTRUCTION MANUAL

NIKKEN

Caution
This is the precision tool, tighten the nut with the suitable tightening torque !

—Clamp the cutter shank as long as possible.
—Tighten the nut with the suitable tightening torque listed below. **If the torque is exceeded, it may cause the breakage of a collet or a chuck itself.**
—**For the spanner or GH handle with torque adjustment, the lowest torque is set, when shiping. Please adjust the torque according to the table below.**
—Tighten the nut slowly by the torque wrench. When the torque limiter is worked (a sound click), stop tightening immediately.Do not tighten with the torque over the torque limiter.

Style	Cutter Dia. ~φ3mm	φ4~φ6mm	φ8~φ10mm	φ12mm~
SK 6	10~20	20~30		
SK10	20~25	30~40	35~45	
SK13			40~50	45~50
SK16	30~40	40~50	55~65	65~75
SK20		50~60	60~70	80~90
SK25			70~85	90~100

(Nm)



When a sound click is heard, stop tightening immediately.

Explanation of the Code No. of Slim Chuck Nut

e.g. SKN - 10 B J (GH)

- None / (GH) : SK standard nut for GH Handle
- None / J : J type nut
- None / B : TiN bearing nut / K : TiN bearing nut Shining edition *1
- Style : 6, 6W, 10, 13, 16, 20, 25 / 6 : Nut dia.=18mm, 6W : Nut dia.=19.5mm
- SKN : SK standard / MDSKN : MAJOR DREAM HOLDER

Chucking

—**Please use NIKKEN spanner**

①Always ensure that there is no damage on the internal bore of the chuck, the internal & external of the collet,spanner,spanner catcher, and the Cutting tool shank.
②**Wipe all dust from internal bore of chuck, inside and outside of collet, inside of nut and shank of cutter. Clean minute dust inside slot grooves of collet and inside of nut by air blow. Please apply a small amount of clean oil(e.g. machine tool sliding surface lubricant)to the internal taper and the external thread of the chuck body. Do not paste the oil into the internal of the collet(gripping portion). We will recommend to use J type nut to prevend swarf and dust contermination.** Set **SK** Collet onto **SK** Nut.
③Code No. of Collet Extractor : **SKR-6, SKR-10, SKR-16, SKR-25**
Note : Only for SK10~SK25 without using Collet Extractor.
④Screw **SK** Nut into Slim Chuck spindle.

—**Do not insert the SK Collet alone into Slim Chuck spindle.**

⑤Insert cutting tool shank into **SK** Collet.

—Protection must be used to grip cutter teeth.
—Use a proper **SK** Collet to grip a cutter shank.
Standard SK Collet, except listed in Table 1 gripping range is 0.5mm per diameter.
—Use **"A and AC" type SK Collet** to grip a cutter with End Mill shank. **Gripping range of "A and AC" type SK Collet is h8.**
AC Type SK Collect requires a shank length longer than the inner diameter straight length. If it is short, the coolant will not stop.
—Clamp as much of the shank of cutter as possible. If the clamping length of shank is too short it might cause damage to the cutter or Collet, or damage to the chuck itself.
(The suitable inserting length from the nut surface = cutter dia.× over 4~5 times. Please insert 6mm more for the J type nut.)
—**Do not clamp without a cutter.**
—**In case of heavy duty milling of the chuck larger or equal to SK16, the followings are recommended.**
・Remove the oil from the Collet completely.

⑥After tightening the **SK** Nut by hand, tighten further by NIKKEN spanner.
—Always ensure that the slim chuck is set up on the proper fixture, e.g. NIKKEN tool clamper **TCL-GH**, when the nut is tightened.

—In case of length adjustment of cutting tool, an adjustment screw is required. If the bottom of the cutter shank touches the screw, gripping torque will be reduced. **Therefore please leave a small space between screw and cutter shank when adjusting length, then tighten SK Nut.**
—**For high speed application, please test before the practical use and confirm the no deflection, vibration and unusual sound.**
—**When removing the cutter, the cutter may pop out. Be very careful when**

For **SK10~SK25** without using Collet Extractor

Only for **SK6** with using Collet Extractor

Code No.	Chucking D
SK 6-0.8	0.7 ~0.8
SK 6-1	0.9 ~1.0
SK 6-1.25	1.15~1.25
SK 6-1.5	1.3 ~1.5
SK 6-1.75	1.55~1.75
SK 6-2	1.8 ~2.0
SK 6-2.25	2.05~2.25
SK 6-2.5	2.3 ~2.5
SK 6-2.75	2.55~2.75
SK 6-3	2.8 ~3.0
SK10-2	1.75~2.0
SK10-2.25	2.0 ~2.25
SK10-2.5	2.25~2.5
SK10-2.75	2.5 ~2.75
SK10-3	2.75~3.0
SK13-3	2.75~3.0
SK16-3	2.75~3.0

Table 1 Gripping Range

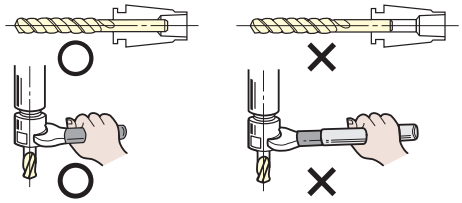

Slim Chuck for synchronized tapping holder

SK6 type Slim Chuck is not suitable for synchronized tapping holder.
Please use **SK10** or bigger Slim Chuck for synchronized tapping holder.
Please use **"A" type SK Collet** to grip a tap with End mill shank **e.g. OSG**.

How to preset boring diameter

MIN.dial readout : ZMAC32-V & above is 0.01mm on diameter : ZMAC25-V & below is 0.02mm on diameter (ZMAC25-V & above is Subscale : Φ0.005)

① Loosen Lock Screw before turning of dial ring. Preset boring diameter by turning dial ring with attached spanner.
② Adjustment always has to be done in clockwise (+ direction) , and if you go beyond the required graduation, rewind the dial ring half a turn and readjust.
③ Tighten Lock Screw after adjusting.
④ To adjust the boring diameter within each boring range. Boring range is described on this instruction manual. Boring with its over size range causes reduction of double contact effect.

e.g. To Make Larger φ0.035

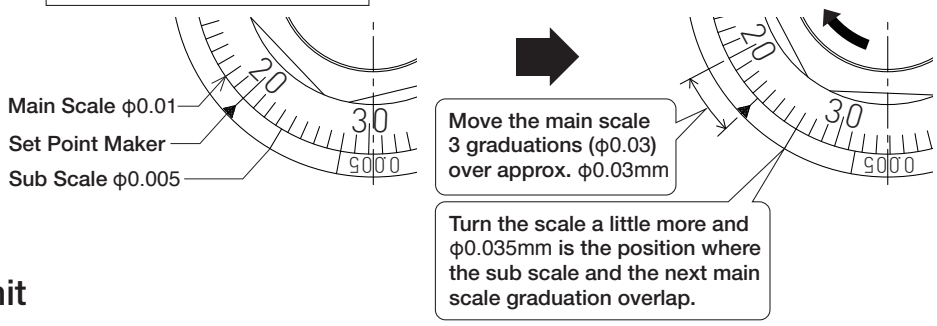

How to exchange the Unit

Removal
① Loosen Lock Screw of boring unit.
② Take out three Unit Mounting Bolts.
③ Press a Cartridge , make the space of about 2mm between Dial-ring and boring head body.
④ Turn the Dial-ring clockwise by Adjust Handle to unscrew.
⑤ After remove the Dial-ring part and take out the Cartridge.

Setting
① Insert a Cartridge in boring head body.
② Install a Dial-ring.(Turn counterclockwise)
③ Adjust a gap to 2mm between the Cartridge and Boring head body ,and push the Dial-ring part into the Cartridge.
④ Put a Dial-ring`s Unit at the home position by Adjust Handle.
⑤ Tighten three Unit Mounting Bolts.

How to exchange Cartridge Heads

① For ZMAC42-V type and larger heads, each Cartridge is made up of 2 parts(Cartridge Head and Cartridge Shaft), therefore it's possible to exchange Cartridge Heads.
② Adjust the diameter to just a little bit bigger tan Min. Diameter of the Head.
③ Then, loosen the Head Clamp Bolt to remove the Cartridge Head.
④ Insert new Cartridge Head into the shaft, then tighten the Head Clamp Bolt temporary.
⑤ Loosen the Side Lock Bolt.
⑥ Turn the Dial Ring 0.2～0.3 mm to the minus direction.
⑦ Tighten the bolt by pushing the Cartridge Head strongly into the shoulder of Boring Head. This is very important to keep Shoulder Contact !
⑧ Then, tighten the bolt completely.



Modular Connection

Connection system is the Face Contact System by drawing into with the bolt, which top shape is gentle taper.
① Insert a Head by adjusting the position of a hole.
② Tighten the bolt temporary, then loosen slightly.
③ Tighten the bolt again by moving a head clockwise and counterclockwise. This operation is to centralize the each other.
④ Then, tighten the bolt completely until face contact.



Problems and Check Points on Boring Operation

Trouble	Work Condition	Hole to be bored	Inserts	Boring Bar	Cutting condition
Vibrations	·Check the shape of the work and the rigidity of the work clamping.	·Check if the stock removal is adequate.	·Choose the smaller Nose R insert.	·Too much extended length. ·Check the condition of the machine spindle and Taper shank of the boring bar.	·Check if the cutting speed and the feed is too much. ·Check the coolant volume and splash direction.
Poor surface finish	·Check the shape of the work and the rigidity of the work clamping.	·Check if the stock removal is adequate.	·Check the grade of the insert. ·Check the Nose R.	·Check the condition of the machine spindle and Taper shank of the boring bar.	·Vibration?. ·Check if Built-up edge is made. ·Check if the cutting condition is adequate. ·Check the coolant volume and splash direction.
Poor roundness	·Check the shape of the work and the rigidity of the work clamping. ·Is there any intermittent part in the bore?	·Check if the stock removal is adequate. ·Check if the pre-boring hole is adequate.		·Check the balance of the Boring Bar. ·Check the condition of the machine spindle and Taper shank of the boring bar.	·Check if the cutting condition is adequate. ·Check the coolant volume and splash direction.
Unstable finish size	·Is there any intermittent part in the bore?	·Check if the stock removal is adequate. ·Check if the pre-boring hole is adequate.	·Check the grade of the insert.	·Check the condition of the machine spindle and Taper shank of the boring bar.	·Check if the cutting condition is adequate. ·Check if Built-up edge is made. ·Check the coolant volume and splash direction.
Bell-mouth			·Check if the break-in cutting is done. ·Check the grade of the insert.		·Check the coolant volume and splash direction.
Scratches and damage in the bore	·Is any transmission of the impact at work change on the machine with APC.	·Check if the pre-boring hole is adequate.	·Check if any damage on the insert cutting edge.		·Check if Built-up edge is made. ·Check the coolant volume and splash direction.

BALANCE CUT BORING BAR INSTRUCTION MANUAL

NIKKEN

How to preset boring diameter

Preset boring diameter on Tool Presetter according to the following procedure;

① Loosen Cartridge Clamping Bolts on both sides first and tighten them slightly.
② While checking the cutting edge position on the presetter. please spread the cartridge with an L-wrench and adjust it to the desired machining dimensions (e.g., φ50 mm)
③ Flip the holder 180° and align the cartridge cutting edge on the opposite side with the desired machining dimensions as in②.
④ Ensure that the two cartridge cutting edges have the same dimensions.
⑤ Tighten Cartridge Clamp Bolts on both sides completely.

After fixing the cartridge, do not adjust the diameter. center pin could be broken.
The indicator of each 1mm on the cartridge body is the indicator for adjusting the diameter as a guide line.
Please measure the diameter on the tool presetter after adjusting the diameter.
Please also use "D-SETTER", which allows simple diameter adjustment of the boring head alone.

Modular Connection

Connection system is the Face Contact System by drawing into with the bolt, which top shape is gentle taper.

① Insert a Head by adjusting the position of a hole.
② Tighten the bolt temporary, then loosen slightly.
③ Tighten the bolt again by moving a Head clockwise and counterclockwise.
This operation is to centralize the each other.
④ Then, tighten the bolt completely until face contact.



DJ HEAD INSTRUCTION MANUAL

NIKKEN

Setting of DJ Boring Bar

⚠ Select a boring bar that is suitable for the required diameter and depth from the DJ Boring Bit list. Set the Boring Bit into the head so that the insert faces the location line on the head (opposite side to the dial ring). Always ensure that this procedure is carried out otherwise the desired finish will not be obtainable and the set-up will be DANGEROUS. Following this operation, tighten the set screws for Boring Bit on the opposite side of the dial ring.When new **DJ3** head is used for the centre through coolant ;
① Please push the bit once until to touch the bottom. ② Then, pull it up about 0.5mm. ③ Lock it by side lock bolt.

Adjusting The Boring Dialmeter

Min. Dial Readout (in dia.) Main scale : 0.01mm, Sub scale : 0.005mm, One revolution in dia. : 0.8mm

Operation Of the Dial Ring

The direction of the dial ring adjustment has been modified for ease to use. CW direction : + direction increases the boring diameter.



⚠ ① Before adjusting the diameter, always ensure that the locking screw for adjustment has been loosened.
② To ensure accuracy when adjusting the boring diameter, always rotate the dial ring in the same direction (+direction) . If the desired diameter has been passed, wind off the dial by approximately 0.2mm and re-adjust.
③ Always tighten the locking screw after the adjustment has been completed.

Modular Connection

Connection system is the Face Contact System by drawing into with the bolt, which top shape is gentle taper.

★To be supplied oil through Greasenipple regularly.
① Insert a Head by adjusting the position of a hole.
② Tighten the bolt temporary, then loosen slightly.
③ Tighten the bolt again by moving a head clockwise and counterclockwise.
This operation is to centralize the each other.
④ Then, tighten the bolt completely until face contact.

⚠
- Please confirm that the insert chip and the other parts are clamped properly.
And please never use other than the proper insert chip and parts, otherwise the danger that it is injured by the dropping and/or flying parts will occur during cutting.
- In case that the usage is mistaken, or the operating condition is unsuitable, it will be injured by causing breakage and scattering of a tool. Please use it within the range of the recommended conditions with a safety cover, an eye shield, etc.
- In case that It is used by high-speed spindle, If dynamic balance is not maintained, therer is a danger that It is injured by damaging tool by deflection or vibration. Please be sure to make a test run and confirm of no deflection, vibration and unusual sound.
- **Quatation fee of the repair is always necessary whether repair or not.**

NIKKEN WORLD WIDE SALES BRANCH

There are overseas Sales Branches in 12 countries. Each sales branch has stocks for toolings and CNC Rotary Tables, and service engineers look after the maintenance and service operation of our products. In the other region, e.g. East-South Asia, Ozaena, South America, Africa, etc., there are some distributors. At the production line in abroad, as there are many requirements for special tools and CNC Rotary Table to suit the special specifications, please ask us or distributors for spare tools and maintenance parts in advance.

LYNDEX-NIKKEN (U.S.A.)

NIKKEN EUROPE & NIKKEN U.K (UK)

HERRAMIENTAS LYNDEX-NIKKEN (MEXICO)


NIKKEN SCANDINAVIA (SWEDEN)


NIKKEN DEUTSCHLAND (GERMANY)

PROCOMO-NIKKEN (FRANCE)


KOREA NIKKEN (KOREA)


VEGA INTERNATIONAL (ITALY)

OLASA (SPAIN)


CUTTING TOOL (SPAIN)


NIKKEN TURKEY (TURKEY)


NIKKEN CHINA (CHINA)


SIAM NIKKEN (THAILAND)

NIKKEN ASIA (SINGAPORE)

NIKKEN INDONESIA (INDONESIA)

★**U.S.A**
CA, CT, IL, NC, TX, WA

LYNDEX-NIKKEN
1468 Armour Boulevard,
Mundelein, ILLINOIS 60060
Tel.+1-847-367-4800 Fax.+1-847-367-4815

MEXICO
(From 2014.09)

HERRAMIENTAS LYNDEX-NIKKEN S.A.de C.V.
Av. Hercules #401-13, Fracc. Poligono 3
Santa Rosa Jauregui, Queretaro 76220
Tel.+52-55-8421-8421

★**FRANCE**

PROCOMO-NIKKEN S.A.S
6, avenue du 1er Mai-Z.A.E.Les Glaises 91127
Palaiseau Cedex
Tel.+33-(0)-1-69.19.17.35 Fax.+33-(0)-1-69.30.64.68

★**UK**

NIKKEN KOSAKUSHO EUROPE LTD.
Advanced Manufacturing Park, Brindley Way,
Rotherham S60 5FS
Tel.+44-(0)-1709-366306 Fax.+44-(0)-1709-376683

★**GERMANY**

NIKKEN DEUTSCHLAND GMBH
CARL-ZEISS-STRASSE 11 NEU-ULM 89231
Tel.+49-731-963397-0 Fax.+49-731-963397-60

★**ITALY**

VEGA INTERNATIONAL TOOLS S.P.A
Via Asti N·9 10026-Santena(TORINO)
Tel.+39-011-9497911 Fax.+39-011-9456380

SCANDINAVIA
SWEDEN

NIKKEN SCANDINAVIA AB
Bultgatan 13b, 44240 Kungalv
Tel.+46-(0)-303-440-600 Fax.+46-(0)-303-58177

★**SPAIN & PORTUGAL**

CUTTING TOOL S.L (TOOLING)
PORTUETXE 16, BARRIO IGARRA
E-20018 DONOSTIA-SAN SEBASTIAN
Tel.+34-(0)-902-820090 Fax.+34-(0)-902-820099
UTILLAJES OLASA,S.L. (CNC ROTARY TABLE)
Tel.+34-(0)-943-107177

★**TURKEY**

NIKKEN KESICI TAKIMLAR SAN. VE ULUSLARARASI TIC. A. S
E5 Uzeri Kucukyali Yanyol Irmak Sok.
Kucukyali Sanayi Sitesi A Blok No:5 Maltepe 34852 Istanbul
Tel.+90-(0)-216-518-1010 Fax.+90-(0)-216-366-1414

★**KOREA**

KOREA NIKKEN LTD.
90B-11L, Namdong Industrial Complex, 170, Namdong-Daero,
Namdong-Gu, Incheon, Korea 405-819
Tel.+82-(0)-32-763-4461 Fax.+82-(0)-32-763-4464

★**P.R.CHINA**

SHANGHAI ZHONG YAN TRADING CO., LTD.
Room 321, Building 5, No. 456 Hongcao Road,
Xuhui District, Shanghai CHINA
Tel.+86-(0)-216210-2506 Fax.+86-(0)-216210-2083

★**SINGAPORE**

NIKKEN KOSAKUSHO ASIA PTE, LTD.
186,Woodlands Industrial Park E5 #04-01
M Singapore 757515
Tel.+65-6362-7980 Fax.+65-6362-7980

THAILAND

SIAM NIKKEN Co., LTD.
127 Moo5 Gauwungsai-Bangturie Road Tambon Tanokkard
Ampher Muangnakhonpathom Nakhonpathom 73000 Thailand
Tel.+66(02)178-0503 Fax.+66(02)178-0504

★**INDONESIA**

PT.NIKKEN KOSAKUSHO INDONESIA
JALAN BIZPARK 3 JABABEKA INNOVATION CENTER A NO.16,KEL.
MEKARMUKTI, KEC. CIKARANG UTARA, KAB. BEKASI PROP. JAWA BARAT
TEL:+62-(0)21-5702071 MAIL:zefry.i@nikken-kosakusho.co.jp

NIKKEN CHINA

New Nikken facility was opened at Zhao Hua Road, Shanghai on 2004 JAN due to the Chinese business expansion. The standard items of NC tooling & CNC rotary table and each important spare parts are stocked for quick delivery.

You can access to Nikken China with Chinese, Japanese or English. Not only Chinese catalogue but also Chinese instruction manual are provided for Chinese domestic market. Our office has the show room to see and touch our products, and our presentation will be done more practically. Technical seminar of Nikken is also opened at user factory side.

Chinese engineer well trained in Japan is engaged in the service of our products. Different types of the NC controller for the CNC rotary table are provided for the trial running after repair. The most important spare parts are stocked. It is possible to stock the special spare parts of the custom-made tooling or CNC rotary table for further discussion. Please consider to make a contract of“Nikken Rotary Table Overseas Warantee Contract”for the CNC rotary table delivered to China.

The sales of nikken products through Internet is not started in China. For after service and the further maintenance, please purchase Nikken products through authorized distributors.

LYNDEX-NIKKEN (NIKKEN USA)

As North America's leading supplier of machine tool accessories, LYNDEX-NIKKEN is a wholly-owned subsidiary of NIKKEN Kosakusho Works., Ltd. - Japan. Backed by over a half century of experience, LYNDEX-NIKKEN sets the standard for high quality and high technology with a complete line of superior toolholders and machine tool accessories. From one source you can expect the best of both worlds: Extreme Quality and Advanced Technology.

LYNDEX-NIKKEN has a team of dedicated application and engineering staff available to advise you on your application and support our entire product line throughout the U.S., Canada, Mexico and South America. Our regional managers in Chicago, Los Angeles, Boston, Charlotte, Dallas and Seattle support our 1,000 plus distributors with machine tool accessories expertise.
LYNDEX-NIKKEN provides expert process and product consultation for even the most demanding applications with full on-demand field support and ongoing training.

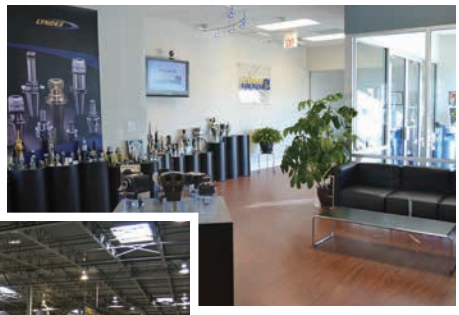

North American Facility

The LYNDEX-NIKKEN North American headquarters is centrally located near Chicago Illinois. Our 50,000 sg ft. facility warehouses an inventory of over 12,000 machine tool accessories stocked for fast delivery. Over 95% of orders are shipped out same day. Our extensive inventory of products includes:

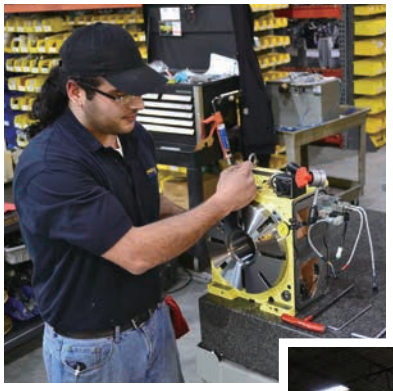

Products

- Rotary Tables - NIKKEN's complete line of CNC Rotary Tables are known worldwide for their wear-resistance, rigidity and high-speed rotation. NIKKEN rotary tables are built to provide high accuracy, increased production and a trouble-free long life.

- Advanced Toolholders - Maximize the potential of your machine tools with LYNDEX-NIKKEN's advanced toolholders.

- Standard Toolholders - LYNDEX-NIKKEN's complete range of quality-driven toolholding solutions are designed to meet your strictest requirements.

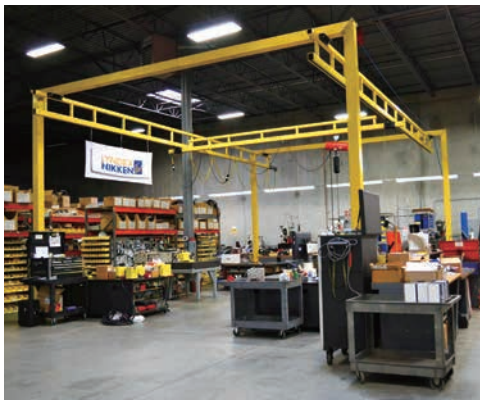

- Presetters - Our full line of Presetters are full-featured for optimum accuracy in tooling setup, measurement and inspection.

Service & Support

- Dedicated application and engineering support staff
- Support for entire product line spans the U.S., Canada, Mexico and South America
- On-demand field support and ongoing training
- Customer service and technical support staff
- Expert process and product consultation for even the most demanding applications
- Cutting trials and testing
- Service, repair and custom configuration completed on-site
- Attention to high-tech application demands, including high-speed and balanced toolholding solutions

NIKKEN EUROPE（NIKKEN UK）

The NIKKEN Euro Centre based in the UK was opened in 1999; from here we sell, distribute and support all products to our subsidiaries and dealers in over 20 countries around Europe. At the NIKKEN Euro Centre we take great pride in the consistent delivery of the four founding principles of our business: **Absolute Integrity, Uncompromising Quality, Unflinching Support,** and above all **"Total Commitment" to our customers.**

NICE (NIKKEN Innovation Center Europe) is established in AMRC park at the end of 2015, and user support of the difficulty cut materials processing for plane in particular, energy industry is enriched.

Product Inventory

NIKKEN Euro Centre facilities has a warehouse space of 13,000m^2. which holds over 50,000 individual items covering a range of some 4,000 product lines, including the latest generation of Single & Multi Axis CNC Rotary tables, thus making it the largest stock of NIKKEN products in Europe.

Our Technical Support and Training Section provides our existing customers and potential customers access to:

- A Multimedia based training facility that ensures our customers, through comprehensive training, will realize the full productivity potential of their application.
- A wealth of engineering expertise covering all aspects of application set-up, optimization and implementation that is available for the full life of the NIKKEN product.

Our machining centre equipped with Testing Facilities enables us to:

- Research, develop and optimize all of our tooling systems.
- Demonstrate to our potential customers the advantages of using both NIKKEN Tooling and CNC Rotary Tables in their applications.

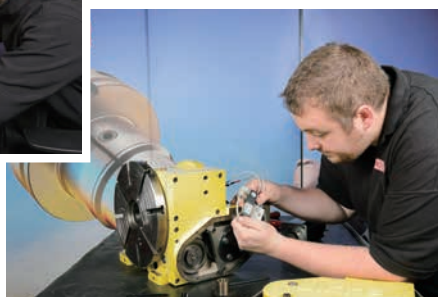

Our Service Department specializes in:

- Providing on-site inspections prior to rotary table repairs and refurbishment by our own NIKKEN trained service engineers.
- Providing tooling and rotary tables optimized to seamlessly integrate into any application.

NIKKEN DEUTSCHLAND (NIKKEN GERMANY)

Nikken Deutschland GmbH, a wholly owned subsidiary in Germany of NIKKEN Kosakusho Works, was established in 2003 to take over the sales activities of the previous distributor. In the beginning based in Russelsheim, which is a town made famous by the manufacturing complex of Opel, the company was located about 15 minutes away by car from Frankfurt airport. Germany has ranked at the top of the machine tool industry for many years, and is also the supply source of machine tools that are fuelling the significant expansion now taking place in Eastern Europe. Nikken Deutschland GmbH had its base at the centre of the huge market of Germany and Eastern Europe, and continues to broaden the range of the company's sales operations from NEU-ULM now.

NIKKEN has achieved some impressive successes in Germany with its CNC rotary tables and tool holders thanks to a long sales history of the company's sales activities. A sales force consisting mainly of German personnel stands on the front line of this activity to address the sales and servicing needs of the entire country. More specifically, the company provides technical advice, repairs, aftersales support and other services to end users, distributors and machine dealers.

To enable speedy delivery of standard items in the German market and of popular products compliant with European standards, Nikken Deutschland GmbH works closely Nikken Euro Centre to keep a full stock at its disposal. The company uses the most appropriate type of delivery in each case, including parcel post, DHL, door-to-door service and flash shipment, to meet the demands of customers.

The sales territory of Nikken Deutschland GmbH spans the vast area of eastern Europe and covers such countries as the Czech Republic, Slovakia, Austria, Poland, Hungary, Romania and Bulgaria, all countries in which Japanese companies are rapidly expanding their business. The service is not limited to sales, but engineers make on-site adjustments, repairs and service calls as well.

Nikken Deutschland GmbH has participated in and contributed to many trade shows and exhibitions held in Germany, including the EMO show, METAF, AMB and EURO MOULD. The company's fully furnished showroom is a Mecca of information to the constant stream of visitors who can inspect products and examples of machining, as well as receive application advice and technical training. They can handle NIKKEN's products for themselves, learn about the construction and capability of the CNC rotary tables, and learn about the accuracy and other features of NIKKEN's products.

A complete support organisation is in place to ensure that advice is relayed promptly by telephone and other rapid communication media, that repairs or delivery of tool holders and CNC rotary tables are carried out promptly with all due diligence, and that emergency service calls are responded to rapidly.

To make it possible to support all types of motors and controllers for NIKKEN's CNC rotary tables, the company has set up trial run equipment that accommodates many different motors, and offers a full range of accessories including tailstocks, support tables, scroll chucks and collet chucks adapted to the CNC rotary tables. The fact that NIKKEN's CNC rotary tables are endowed with outstanding durability and that a complete support service is provided instil confidence in users that the equipment will give outstanding service in the years ahead.

PROCOMO-NIKKEN (NIKKEN FRANCE)

Procomo France S.A.S was established 30 years ago with the avowed intent to deliver the high-accuracy and high-quality tool holders and CNC rotary tables as well as related services, applications and after-sales servicing, into the hands of engineers in France. A major milestone in the company's history was marked in 2006 with the change of the company name to PROCOMO-NIKKEN, and the company took on a new lease of life as NIKKEN's wholly owned subsidiary in France.

In 2005, PROCOMO-NIKKEN embarked on a complete renovation of its buildings and facilities in order to make it possible for users to gain hands-on experience of NIKKEN's products in a bright and comfortable environment.

In the meeting room, which is fitted out with all the latest multimedia technology, technical seminars are regularly held so that attendees will come away with a clear understanding of NIKKEN's products and technology. The showroom is where videos of cutting operations are screened, and visitors can actually handle some of NIKKEN's products in this room as well. The machining centre, which is used for cutting trials, enables visitors to identify what makes NIKKEN's products different from those of other companies and to judge how impressive are the machining accuracy and advanced cutting capabilities of NIKKEN's products. As the top tool holder manufacturer, NIKKEN believes is that once customers have their own personal experience of the low machining noise, attractive-looking cut surfaces and uniform discharge of chips, they will be convinced that they can completely trust in and depend on the expertise and capabilities of the company.

The stocks of a large number of standard products are always on hand, enabling the products that customers need to be delivered in the shortest possible time. The NIKKEN Euro Centre and PROCOMO-NIKKEN retain constant and close contact; together they take on the challenge of how to machine products in a more rationalized manner, in a shorter time and to a higher accuracy so that France's engineers can meet every need of the French marketplace.

NIKKEN has already earned an enviable reputation in the global marketplace for the high accuracy and outstanding wear resistance of the company's CNC rotary tables. PROCOMO-NIKKEN has a team of five engineers dedicated full-time to providing users with application support prior to placing orders for tool holders and CNC rotary tables and to carrying out the preparation for shipment, education and training programs, maintenance and repairs, and servicing. This support network delivers a wide range of services, while willingly taking up the challenge of coming to grips with new applications.